

The background features a series of overlapping geometric shapes in various shades of gray and white. On the left side, there are several diagonal lines and rectangular blocks that create a sense of depth and movement. On the right side, there are horizontal bars and a large, solid gray area. The overall design is clean, modern, and minimalist.

# WAC LIGHTING

2017 JUNE NEW PRODUCT SUPPLEMENT

# 3.5" OCULUX LED RECESSED

New PC Trim & Haze/White Finish













TITLE 24  
CALIFORNIA







**Power:** 11W  
**Comparable to:** 75W MR16  
**Input:** 120V or 277V  
**Rated Life:** 50,000 hours

- IC-rated Remodel and New Construction
- Airtight in New Construction
- Shallow housing under 4" depth
- Cutout 4 1/4"
- Single spot light source
- Ceiling thickness: 1/2" - 1"
- ETL&cETL wet location listed
- ELV or TRIAC or 0-10V dimming compatible

Trims (Order Housing Separately)	Model	Beam	Max Lumens	Max CBCP	Color Temp	Finish
  <p><b>R3BRD</b> Round Open Reflector Wet Location Listed 40° visual cutoff</p>		S 15° N 25° F 50°	970	5132	<b>927</b> 2700K <b>930</b> 3000K	<b>HZWT</b> Haze/White <b>BN</b> Brushed Nickel <b>WT</b> White
<p>New PC Trim</p>   <p><b>R3BRDP</b> Dead Front* Open Reflector Wet Location Listed 40° visual cutoff</p>		S 15° N 25° F 50°	955	4819	<b>927</b> 2700K <b>930</b> 3000K	<b>WT</b> White
*Conforms to local code Dead Front requirements						
  <p><b>R3BRA</b> Round 0 - 35° Adjustable 48° visual cutoff</p>		S 15° N 25° F 50°	985	4712	<b>927</b> 2700K <b>930</b> 3000K	<b>BN</b> Brushed Nickel <b>WT</b> White
  <p><b>R3BSD</b> Square Open Reflector Wet Location Listed 35° visual cutoff</p>		S 15° N 25° F 50°	930	4710	<b>927</b> 2700K <b>930</b> 3000K	<b>HZWT</b> Haze/White <b>BN</b> Brushed Nickel <b>WT</b> White
  <p><b>R3BSA</b> Square 0 - 35° Adjustable 48° visual cutoff</p>		S 15° N 25° F 50°	985	4712	<b>927</b> 2700K <b>930</b> 3000K	<b>BN</b> Brushed Nickel <b>WT</b> White

Example: **R3BRD-S927-WT**

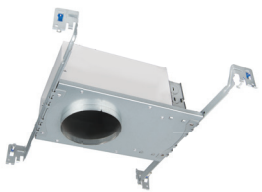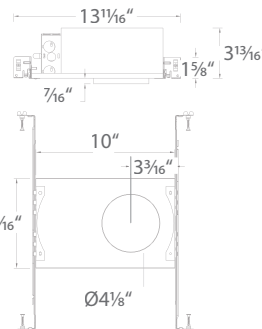Housings (Required) - Order separately from trims

	Model	Input	Dimming	Notes
<p>New Construction</p>   <p>12 1/2" max 24 1/2" max</p>	<b>R3BNICA-10</b> IC-Rated, Airtight	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth
	<b>R3BNICA-10U</b> IC-Rated, Airtight	120V - 277V	<b>120V</b> 100% - 5% TRIAC, ELV, 0-10V <b>277V</b> 100% - 1% 0-10V	Allows adjustment in any direction when used with adjustable trims Ceiling thickness: 1/2" - 1"
<p>Remodel</p>   <p>11 max"</p>	<b>R3BBRT-10</b> IC Rated	120V	100% - 5% TRIAC, ELV, 0-10V	4 1/4" plenum depth Allows adjustment in any direction when used with adjustable trims Ceiling thickness: 1/2" - 1"

# 2" OCULUX LED RECESSED


New Haze/White Finish




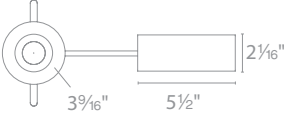

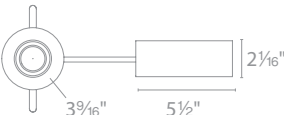

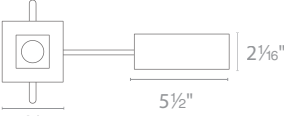

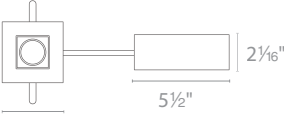
TITLE 24  
CALIFORNIA

**Power:** 9W  
**Comparable to:** 50W MR16  
**Input:** 120V  
**Rated Life:** 50,000 hours

- Cutout: 3<sup>15</sup>/<sub>16</sub>"
- Single spot light source
- Ceiling thickness: ½" - 1"
- ETL&cETL wet location listed
- Sold as new construction, may be reconfigured in the field for remodel
- ELV or TRIAC or 0-10V dimming compatible

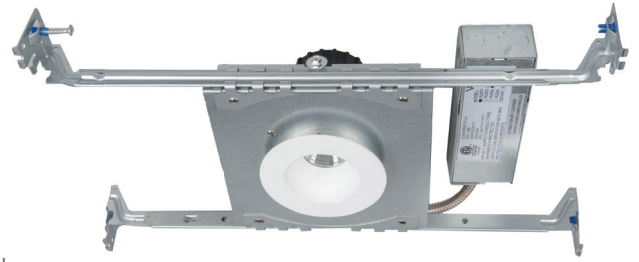

**All-in-one unit, ready to install right out of box  
IC-rated and airtight**


	Model	Beam	Max Lumens	Max CBCP	Color Temp	Finish
  <p><b>R2BRD</b> Round Open Reflector 35° visual cutoff</p>		<b>N</b> 25° <b>F</b> 45°	680	2490	<b>927</b> 2700K <b>930</b> 3000K	<b>HZWT</b> Haze/White <b>BN</b> Brushed Nickel <b>WT</b> White
  <p><b>R2BRA</b> Round 0 - 35° Adjustable 45° visual cutoff</p>		<b>S</b> 15° <b>N</b> 25° <b>F</b> 45°	685	3245	<b>927</b> 2700K <b>930</b> 3000K	<b>BN</b> Brushed Nickel <b>WT</b> White
  <p><b>R2BSD</b> Square Open Reflector 35° visual cutoff</p>		<b>N</b> 25° <b>F</b> 45°	700	2462	<b>927</b> 2700K <b>930</b> 3000K	<b>HZWT</b> Haze/White <b>BN</b> Brushed Nickel <b>WT</b> White
  <p><b>R2BSA</b> Square 0 - 35° Adjustable 45° visual cutoff</p>		<b>S</b> 15° <b>N</b> 25° <b>F</b> 45°	685	3245	<b>927</b> 2700K <b>930</b> 3000K	<b>BN</b> Brushed Nickel <b>WT</b> White

Example: **R2BRD-N930-WT**

## INTEGRAL HOUSING AND TRIM: BOTH NEW CONSTRUCTION & REMODEL


### NEW CONSTRUCTION CONFIGURATION

IC-Rated, Airtight

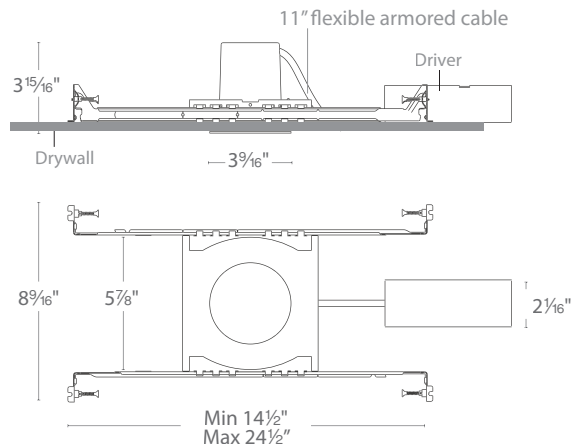

### REMODEL CONFIGURATION

IC-Rated, Airtight

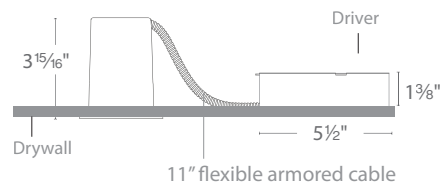



OCULUX  
LED TRACK







## OCULUX LED

**Power:** 11W  
**Delivered Lumens:** Up to 890  
**CBCP:** Up to 4972  
**Comparable to:** 65W MR16  
**Dimming:** 100% - 10% ELV, TRIAC  
**Input:** 120V  
**Rated Life:** 50,000 hours

**• 3 beam angle options included:**

- 50° beam film pre-installed, interchangeable 30° film supplied, remove film for 17° spot beam
- Integral driver and high output COB LED
- Outperforms halogen 65W MR16
- 350° horizontal and 90° vertical aiming


	System	Model	Beam	Lumens	CBCP	Color Temp	CRI	Finish
	<b>H</b> H Track	<b>7011</b>	17°	890	4972	<b>930</b> 3000K	90	<b>BK</b> Black
	<b>L</b> L Track		30°	855	1961			<b>DB</b> Dark Bronze
	<b>J</b> J/J2 Track		50°	830	789			<b>WT</b> White

Example: **H-7011-930-BK**

### REPLACEMENT OPTICS

30°	Narrow Flood Film	<b>FILM-16-N</b>
50°	Flood Film	<b>FILM-16-F</b>

### Interchangeable beam options:

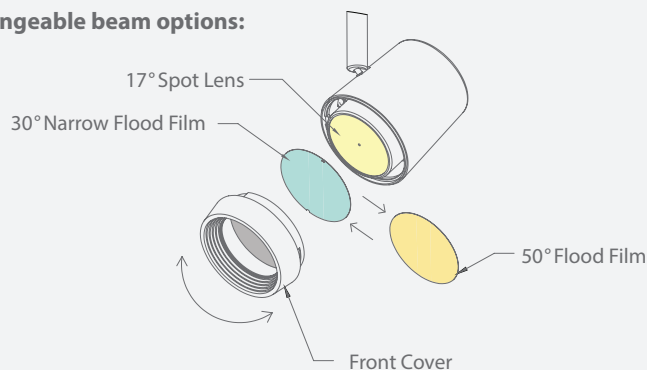

## SILO X10 LED





### New Brushed Brass Finish

Power: 10W  
 Delivered Lumens: Up to 790  
 CBCP: Up to 2575  
 Comparable to: 65W MR16  
 Dimming: 100% - 5% ELV  
 Input: 120V  
 Rated Life: 50,000 hours

- Field replaceable TIR lens for beam control (35° installed and 25° included in the box)
- Die-cast aluminum construction in a small, and clean design
- Performance luminaire with integral LED and driver



System	Model	Color Temp	CRI	Beam	Lumens	CBCP	Finish
 <p>7 1/8" 2" 5"</p>	<b>H</b> H Track	<b>2010-930</b> 3000K	90	25°	790	2575	<b>BR</b> Brushed Brass
	<b>L</b> L Track			35°	790	1545	<b>BK</b> Black
	<b>J</b> J/J2 Track						<b>BN</b> Brushed Nickel
							<b>WT</b> White



New!

Example: **H-2010-930-BR**

Accommodates one lens accessory or one glare control accessory

### LENS ACCESSORIES

Amber	<b>LENS-11-AMB</b>	Yellow	<b>LENS-11-YEL</b>
Blue	<b>LENS-11-BLU</b>	Frosted	<b>LENS-11-FR</b>
Green	<b>LENS-11-GRN</b>	Spread	<b>LENS-11-SPR</b>
Red	<b>LENS-11-RED</b>	Beam Elongating	<b>LENS-11-BEL</b>

### GLARE CONTROL ACCESSORIES

Cross Louver	<b>LENS-11P-CRL-BK</b>	Snoot	<b>LENS-11-SNOOT-BK</b>
	<b>LENS-11P-CRL-BN</b>		<b>LENS-11-SNOOT-BN</b>
	<b>LENS-11P-CRL-WT</b>		<b>LENS-11-SNOOT-WT</b>


## SILO X20 LED

### New Brushed Brass Finish

Power: 20W  
 Delivered Lumens: Up to 1080  
 CBCP: Up to 6840  
 Comparable to: 75W MR16  
 Dimming: 100% - 5% ELV  
 Input: 120V  
 Rated Life: 50,000 hours

- Continuously adjustable beam angles from 15° to 50°
- Die-cast aluminum construction with rotatable front face
- Performance luminaire with integral LED and driver



System	Model	Color Temp	CRI	Beam	Lumens	CBCP	Finish
 <p>7 1/8" 2 1/16" 6"</p>	<b>H</b> H Track	<b>2020-930</b> 3000K	90	15°	785	6840	<b>BR</b> Brushed Brass
	<b>L</b> L Track			50°	1080	1295	<b>BK</b> Black
	<b>J</b> J/J2 Track						<b>BN</b> Brushed Nickel
							<b>WT</b> White



New!

Example: **L-2020-930-BR**

Accommodates one lens accessory and one glare control accessory

### LENS ACCESSORIES

Amber	<b>LENS-16-AMB</b>
Blue	<b>LENS-16-BLU</b>
Green	<b>LENS-16-GRN</b>
Red	<b>LENS-16-RED</b>
Yellow	<b>LENS-16-YEL</b>
Frosted	<b>LENS-16-FR</b>
Spread	<b>LENS-16-SPR</b>
Beam Elongating	<b>LENS-16-BEL</b>

### GLARE CONTROL ACCESSORIES

Cross Louver	<b>LENS-16P-CRL-BK</b>
	<b>LENS-16P-CRL-BN</b>
	<b>LENS-16P-CRL-WT</b>
Snoot	<b>LENS-16-SNOOT-BK</b>
	<b>LENS-16-SNOOT-BN</b>
	<b>LENS-16-SNOOT-WT</b>
Honeycomb Louver	<b>LENS-16-HCL</b>


### FRAMING PROJECTOR ACCESSORIES

Framing Projector	<b>FP-K-BK</b>
	<b>FP-K-WT</b>





Adjustable between 15° - 45°

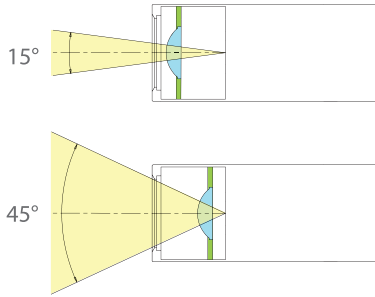

Beam alignment indicator



Optional Focusing  
Framing Projector  
Accessory **FP-K**

- Dual adjustable optical lenses precision focus light for crisp illumination
- Adjustable framing shims create a feature accenting, rectangular pattern of illumination



without  
Framing Projector



with  
Framing Projector



## PALOMA LED 4023 ADJUSTABLE BEAM

TITLE 24  
CALIFORNIA

**Power:** 22W  
**Delivered Lumens:** Up to 1355  
**Input:** 120V, 277V  
**Comparable to:** 20W HID  
**Dimming:** 100%-5% ELV  
**Rated Life:** 50,000 hours

### Museum-quality LED luminaire with adjustable beam angle

- Continuously adjustable beam angle between 15° - 45°
- Die-cast aluminum construction with rotatable front face
- Stealth armature with 365° horizontal rotation and 90° vertical aiming
- Patents Pending
- UL & cUL Listed

System		Model	Color Temp	CRI	Beam	Lumens Up to	CBCP Up to	Finish	
	<b>WTK</b> <i>W Track 120V</i>	<b>4023</b>	<b>827</b> 2700K	85	15° 45°	945 1355	5405 2010	<b>BK</b> <i>Black</i> <b>PT</b> <i>Platinum</i> <b>WT</b> <i>White</i>	
	<b>WHK</b> <i>W Track 277V</i>		<b>830</b> 3000K	85					
			<b>835</b> 3500K	85					
			<b>840</b> 4000K	85					
			<b>927</b> 2700K	90					
			<b>930</b> 3000K	90					

Example: **WTK-4023-930-BK**

Accommodates one lens accessory and one glare control accessory

### LENS ACCESSORIES

Amber	<b>LENS-16-AMB</b>
Blue	<b>LENS-16-BLU</b>
Green	<b>LENS-16-GRN</b>
Red	<b>LENS-16-RED</b>
Yellow	<b>LENS-16-YEL</b>
Frosted	<b>LENS-16-FR</b>
Spread	<b>LENS-16-SPR</b>
Beam Elongating	<b>LENS-16-BEL</b>

### GLARE CONTROL ACCESSORIES

Cross Louver	<b>LENS-16P-CRL-BK</b> <b>LENS-16P-CRL-PT</b> <b>LENS-16P-CRL-WT</b>
Snoot	<b>LENS-16-SNOOT-BK</b> <b>LENS-16-SNOOT-PT</b> <b>LENS-16-SNOOT-WT</b>
Honeycomb Louver	<b>LENS-16-HCL</b>

### FRAMING PROJECTOR ACCESSORIES


Framing Projector **FP-K-BK**  
**FP-K-WT**

Also available  
in Monopoint





Driver hidden in W Track


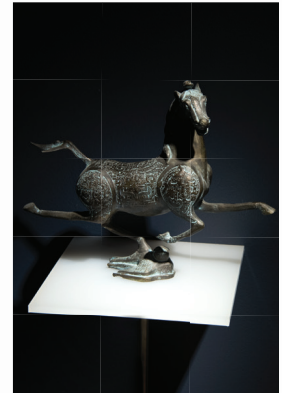


Accent illumination with one **WTK-6010U** fixture

## LUCIO 6010 LED

**Power:** 10W  
**Delivered Lumens:** Up to 985  
**Comparable to:** 75W MR16  
**Dimming:** 100% - 5% ELV  
**Input:** 120V, 277V  
**Rated Life:** 50,000 hours

- Accommodates 1 lens and 1 glare control accessory
- 365° horizontal aiming and 90° indexed vertical aiming
- Integral selector to choose between independently controllable track circuits
- CBCP intensive ultra spot, 6010U
- Asymmetrical beam distribution, 6010A

Track	Model	Color Temp	CRI	Lumens Up to	CBCP Up to	Finish
<div><p><b>WTK/WHK-6010-U,A</b></p></div> <div><p><b>WTK/WHK-6010-S,N,F</b></p></div>	<div><b>WTK</b> 120V</div> <div><b>WHK</b> 277V</div>	<div><b>6010</b></div>	<div><b>U</b> 6°</div> <div><b>S</b> 18°</div> <div><b>N</b> 25°</div> <div><b>F</b> 35°</div> <div><b>A</b> ASY</div>	<div><b>827</b> 2700K 85</div> <div><b>830</b> 3000K 85</div> <div><b>835</b> 3500K 85</div> <div><b>840</b> 4000K 85</div> <div><b>927</b> 2700K 90</div> <div><b>930</b> 3000K 90</div>	<div>985</div> <div>39,695</div>	<div><b>BK</b> Black</div> <div><b>PT</b> Platinum</div> <div><b>WT</b> White</div>

Example: **WTK-6010A-930-WT**

Accommodates one lens accessory and one glare control accessory

### LENS ACCESSORIES

Amber	<b>LENS-16-AMB</b>	Yellow	<b>LENS-16-YEL</b>
Blue	<b>LENS-16-BLU</b>	Frosted	<b>LENS-16-FR</b>
Green	<b>LENS-16-GRN</b>	Spread	<b>LENS-16-SPR</b>
Red	<b>LENS-16-RED</b>	Beam Elongating	<b>LENS-16-BEL</b>


### GLARE CONTROL ACCESSORIES

Cross Louver	<b>LENS-16P-CRL-BK</b>	Snoot	<b>LENS-16-SNOOT-BK</b>
	<b>LENS-16P-CRL-PT</b>		<b>LENS-16-SNOOT-PT</b>
	<b>LENS-16P-CRL-WT</b>		<b>LENS-16-SNOOT-WT</b>





Driver hidden in W Track

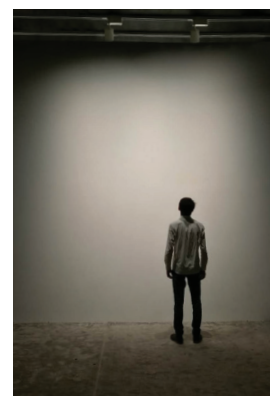

Wall illuminated with two  
**WTK-6022A** fixtures

## LUCIO 6022 LED

**Power:** 22W  
**Delivered Lumens:** Up to 1890  
**Comparable to:** 39W HID  
**Dimming:** 100% - 5% ELV  
**Input:** 120V, 277V  
**Rated Life:** 50,000 hours

- Accommodates 1 lens and 1 glare control accessory
- 365° horizontal aiming and 90° indexed vertical aiming
- Integral selector to choose between independently controllable track circuits
- CBCP intensive ultra spot, 6022U
- Asymmetrical beam distribution, 6022A

Track	Model	Color Temp	CRI	Lumens Up to	CBCP Up to	Finish
	<b>WTK</b> 120V <b>WHK</b> 277V <b>6022</b>	<b>U</b> 8°	<b>827</b> 2700K 85	1890	35,930	<b>BK</b> Black <b>PT</b> Platinum <b>WT</b> White
		<b>S</b> 12°	<b>830</b> 3000K 85			
		<b>N</b> 20°	<b>835</b> 3500K 85			
		<b>F</b> 35°	<b>840</b> 4000K 85			
		<b>A</b> ASY	<b>927</b> 2700K 90			
			<b>930</b> 3000K 90			

Example: **WTK-6022U-827-PT**

Accommodates one lens accessory and one glare control accessory

### LENS ACCESSORIES

Amber	<b>LENS-25-AMB</b>	Yellow	<b>LENS-25-YEL</b>
Blue	<b>LENS-25-BLU</b>	Frosted	<b>LENS-25-FR</b>
Green	<b>LENS-25-GRN</b>	Spread	<b>LENS-25-SPR</b>
Red	<b>LENS-25-RED</b>	Beam Elongating	<b>LENS-25-BEL</b>

### GLARE CONTROL ACCESSORIES

Cross Louver	<b>LENS-25P-CRL-BK</b>	Snoot	<b>LENS-25-SNOOT-BK</b>
	<b>LENS-25P-CRL-PT</b>		<b>LENS-25-SNOOT-PT</b>
	<b>LENS-25P-CRL-WT</b>		<b>LENS-25-SNOOT-WT</b>



# FLEXLINE AC LED INDOOR STRIP

- Power:** 5W/ft  
**Lumen:** 500/ft  
**CRI:** 95  
**Dimming:** 100%-10% ELV  
**Input:** 120V  
**Rated Life:** 50,000 hours

- Ultra thin profile at 5/8" W x 3/8" H
  - Optimized connectors to maximize consistency across light connections
  - Four mounting options provided for different surfaces and applications
  - 150 ft max run
  - UV resistant
  - Per UL safety standards, line voltage strip is not field cuttable
  - Modular design available in various lengths to adapt to field conditions
  - Suitable for indoor use

Model		Length	Color Temp	Lumens/ft	Watts/ft	Color
	<b>LED-HVT</b>	<b>6</b> 6 inches <b>01</b> 1 foot <b>05</b> 5 feet <b>10</b> 10 feet <b>20</b> 20 feet <b>50</b> 50 feet	<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K	480 500 495	5W/ft	<b>WT</b> White

Example: **LED-HVT-10-30WT**




FLEXLINE  
INSTALLED IN COVE APPLICATION












Actual size shown ( $\frac{5}{8}$ " W), up to 50 feet.

## REQUIRED

Type	Model			
Lead Wire		<b>LED-HVT-P6-WT</b> <b>LED-HVT-P10-WT</b>	6 feet 10 feet	Lead wires with plug to power LED strip. Includes fuse and surge protection.

## INDOOR ACCESSORIES



Type	Model			
Joiner Cable		<b>LED-HVT-IC1-WT</b> <b>LED-HVT-IC6-WT</b> <b>LED-HVT-IC10-WT</b>	1 foot 6 feet 10 feet	Connects LED strip sections.
L Connector		<b>LED-HVT-L-WT</b>		"L" connector has male and female connectors and is used to create 90° right angles.
T Connector		<b>LED-HVT-T-WT</b>		Connects three tape sections.
Mounting Clip		<b>LED-HVT-CL1</b>	10 pcs	Secures on both edges. 2 clips per ft are recommended for straight runs. Mounting screws included.
Mounting Clip		<b>LED-HVT-CL2</b>	10 pcs	Secures on one edge. 2 clips per ft are recommended for straight runs. Mounting screws included.
Mounting Clip		<b>LED-HVT-CL3</b>	10 pcs	Secures from the underside. 2 clips per ft are recommended for straight runs. Mounting screws included.
Mounting Clip		<b>LED-HVT-CL4</b>	10 pcs	Secures two rows of LED strip from the underside. 2 clips per ft are recommended for straight runs. Mounting screws included.

# 120V/277V RECTANGULAR STEP & WALL LIGHTS



**Input:** 120V, 277V  
**Brightness:** Up to 40 lm  
**CRI:** 90  
**Dimming:** 100% - 10% ELV (120V only)  
**Rated Life:** 50,000 hours

- Diffuse tempered glass provides even illumination
- Die Cast Aluminum construction with abrasion resistant powder coat finish or marine grade Stainless Steel option available
- Title 24 Compliant (120V only)





Mounts Vertically or Horizontally

Voltage	Power	Model	Color Temp	Finishes
120V	3.5W	<b>WL-LED130-C</b>	3000K	<b>BK</b> Black on AL <b>BZ</b> Bronze on AL <b>SS</b> Stainless Steel <b>WT</b> White on AL
		<b>WL-LED130-AM</b>	Amber	
277V	3W	<b>WL-LED130F-C</b>	3000K	
		<b>WL-LED130F-AM</b>	Amber	

Example: **WL-LED130-C-SS**

**Input:** 120V, 277V  
**Brightness:** Up to 36 lm  
**CRI:** 90  
**Dimming:** 100% - 10% ELV (120V only)  
**Rated Life:** 50,000 hours

- Louvered design offers shielded illumination
- Die Cast Aluminum construction with abrasion resistant powder coat finish
- Title 24 Compliant (120V only)



Voltage	Power	Model	Color Temp	Finishes
120V	3.5W	<b>WL-LED120-C</b>	3000K	<b>BK</b> Black on AL <b>BZ</b> Bronze on AL <b>WT</b> White on AL
		<b>WL-LED120-AM</b>	Amber	
277V	3W	<b>WL-LED120F-C</b>	3000K	
		<b>WL-LED120F-AM</b>	Amber	

Example: **WL-LED120-C-BZ**

AL - Aluminum

Voltage	Power	Model	Color Temp	Finishes
120V	3.5W	<b>WL-LED220-C</b>	3000K	<b>BK</b> Black on AL <b>BZ</b> Bronze on AL <b>WT</b> White on AL
		<b>WL-LED220-AM</b>	Amber	
277V	3W	<b>WL-LED220F-C</b>	3000K	
		<b>WL-LED220F-AM</b>	Amber	



Example: **WL-LED220-C-BZ**



# 120V/277V RECTANGULAR STEP & WALL LIGHTS

**Input:** 120V, 277V  
**Brightness:** Up to 4 lm  
**CRI:** 90  
**Dimming:** 100% - 10% ELV (120V only)  
**Rated Life:** 50,000 hours

- Fluid decorative profile with full cut-off illumination
- Die Cast Aluminum construction with abrasion resistant powder coat finish or plated Brushed Nickel finish
- Title 24 Compliant (120V only)



Voltage	Power	Model	Color Temp	Finishes
120V	3.5W	<b>WL-LED110-C</b>	3000K	<b>BK</b> Black on AL
		<b>WL-LED110-AM</b>	Amber	<b>BN*</b> Brushed Nickel
277V	3W	<b>WL-LED110F-C</b>	3000K	<b>BZ</b> Bronze on AL
		<b>WL-LED110F-AM</b>	Amber	<b>WT</b> White on AL

Example: **WL-LED110-C-WT**


\*BN Finish is not warranted for contact with harsh chemicals or exterior installations.

Voltage	Power	Model	Color Temp	Finishes
120V	3.5W	<b>WL-LED210-C</b>	3000K	<b>BK</b> Black on AL
		<b>WL-LED210-AM</b>	Amber	<b>BN*</b> Brushed Nickel
277V	3W	<b>WL-LED210F-C</b>	3000K	<b>BZ</b> Bronze on AL
		<b>WL-LED210F-AM</b>	Amber	<b>WT</b> White on AL

Example: **WL-LED210-C-BK**

**Input:** 120V, 277V  
**Brightness:** Up to 3 lm  
**CRI:** 90  
**Dimming:** 100% - 10% ELV (120V only)  
**Rated Life:** 50,000 hours

- Geometric design with downward illumination
- Die Cast Aluminum construction with abrasion resistant powder coat finish
- Title 24 Compliant (120V only)



Voltage	Power	Model	Color Temp	Finishes
120V	3.5W	<b>WL-LED140-C</b>	3000K	<b>BK</b> Black on AL
		<b>WL-LED140-AM</b>	Amber	<b>BZ</b> Bronze on AL
277V	3W	<b>WL-LED140F-C</b>	3000K	<b>WT</b> White on AL
		<b>WL-LED140F-AM</b>	Amber	

Example: **WL-LED140-C-BK**

AL - Aluminum

Magnetized design for easy installation and maintenance.



IP66 rated self contained fixture with various face plates.  
 Fits into a switch box or a 2" x 4" Junction Box with minimum inside dimensions of 3"L x 2"W x 2.5"D

# STEP LIGHTS LED LANDSCAPE



- Corrosion resistant aluminum alloy, or cast stainless steel construction
- Fits into 2" x 4" Junction Box with minimum inside dimensions of 3"L x 2"W x 2.5"D

**Input:** 9 - 15VAC  
**Power:** 2W 3.1VA  
**Brightness:** Up to 38 lm  
**CRI:** 90+  
**Rated Life:** 60,000 hours

- IP66 rated, Protected against high-pressure water jets
- 100 - 10% MLV dimming
- Landscape transformer required (sold separately)

Magnetized design for easy installation and maintenance. IP66 rated self contained fixture with various face plates.



		Model	Color Temp	Finishes
		<b>4071-27</b> <b>4071-30</b> <b>4071-AM</b>	2700K 3000K Amber	<b>BK</b> Black on Aluminum <b>BZ</b> Bronze on Aluminum <b>WT</b> White on Aluminum <b>SS</b> Stainless Steel
		<b>4051-27</b> <b>4051-30</b> <b>4051-AM</b>	2700K 3000K Amber	<b>BK</b> Black on Aluminum <b>BZ</b> Bronze on Aluminum <b>WT</b> White on Aluminum
		<b>4061-27</b> <b>4061-30</b> <b>4061-AM</b>	2700K 3000K Amber	<b>BK</b> Black on Aluminum <b>BZ</b> Bronze on Aluminum <b>WT</b> White on Aluminum
		<b>4031-27</b> <b>4031-30</b> <b>4031-AM</b>	2700K 3000K Amber	<b>BK</b> Black on Aluminum <b>BZ</b> Bronze on Aluminum <b>WT</b> White on Aluminum
		<b>4041-27</b> <b>4041-30</b> <b>4041-AM</b>	2700K 3000K Amber	<b>BK</b> Black on Aluminum <b>BZ</b> Bronze on Aluminum <b>WT</b> White on Aluminum
		<b>4091-27</b> <b>4091-30</b> <b>4091-AM</b>	2700K 3000K Amber	<b>BK</b> Black on Aluminum <b>BZ</b> Bronze on Aluminum <b>WT</b> White on Aluminum

Example: **4071-27SS**

Transformer Required (sold separately)






Model	
<b>9075-TRN-SS</b>	75W Max Dimensions: 13.97" L x 5.35"W x 5.63"H
<b>9150-TRN-SS</b>	150W Max Dimensions: 18.90" L x 6.69"W x 6.30"H
<b>9300-TRN-SS</b>	300W Max Dimensions: 18.90" L x 6.69"W x 6.30"H
<b>9600-TRN-SS</b>	600W Max (2 x 300W outputs) Dimensions: 14.49" L x 10.08"W x 5.94"H

# 120V/277V RECTANGULAR STEP & WALL LIGHTS

New Graphite Finish

TITLE 24  
CALIFORNIA

IP66

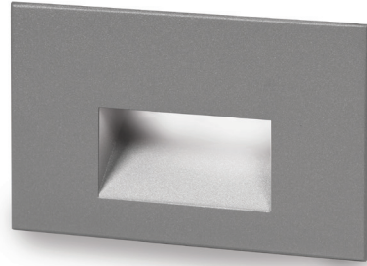

- |                                 |   |                     |
|---------------------------------|---|---------------------|
| <b>Input:</b> 120V, 277V        | • Available in die-cast brass and 316 marine grade stainless steel      | • No driver needed  |
| <b>Power:</b> 3.5W              | • Fits into 2"×4" J-Box with minimum inside dimensions of 3"×2"×2"      | • No heat radiation |
| <b>Lumens:</b> Up to 65         | • IP66, wet location rated for indoor and outdoor installations*        | • ELV dimming       |
| <b>CRI:</b> 90                  | • 5 year WAC warranty (lifetime warranty for brass and stainless steel) |                     |
| <b>Rated Life:</b> 54,000 hours | • Title 24 Compliant (120V only)  |                     |

System			Color			Finish		
WL-LED100	120V	Horizontal Scoop	C	White	3000K (CCT)	BBR**	Bronze on Brass	
			AM	Amber	610nm (Peak)			
WL-LED100 WL-LED100F	120V	Horizontal Scoop	C	White	3000K (CCT)	GH	Graphite on Aluminum	New!
					BK	Black on Aluminum		
	277V				BN*	Brushed Nickel		
					BZ	Bronze on Aluminum		
					SS	Stainless Steel		
			BL	Blue	450nm (Peak)	WT	White on Aluminum	
WL-LED200 WL-LED200F	120V	Vertical Scoop	C	White	3000K (CCT)	GH	Graphite on Aluminum	New!
					BK	Black on Aluminum		
					BN*	Brushed Nickel		
	277V				BZ	Bronze on Aluminum		
					SS	Stainless Steel		
			BL	Blue	450nm (Peak)	WT	White on Aluminum	

Example: **WL-LED100-C-GH**


\*BN Finish is not warrantied for contact with harsh chemicals or exterior installations.

Use Brass or Stainless Steel Step and Wall Lights for harsh outdoor environments.


\*\***BBR** finish is not available in 277V option and is not Title 24 Compliant.

## Spacing Recommendations for Optimal Light Distribution


Corridors / Hallways



Stairs - Wall Mount



Stairs - Step Mount



Mount in center of stair as close to the upper tread as possible. For best results use one light per step for steps narrower than 5 feet



# WAC LIGHTING

Responsible Lighting®

Many LED luminaire designs within contain patent pending features.  
WAC Lighting will not hesitate to enforce its intellectual property rights through injunctive relief  
and seek further relief through damages if it has reason to believe the patents are being infringed upon.

[waclighting.com](http://waclighting.com) 1-800-318-8032

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. Please refer to our website for the latest product specifications. Copyright 2017