






We address the need for a complete line of decorative lighting for all types of dwellings based on LED technology. WAC Lighting is a second-generation family-owned and operated lighting company with a reputation for quality spanning over 30 years. dweLED represents a progressive offering of decorative luminaires designed to integrate within spaces ranging from multi-family, residential and hospitality to commercial and healthcare.


dweLED collections are complete with transitional styles and modern designs, offered with 2700K, 3000K, and 3500K white light LEDs. Key features including ADA compliance, Universal Dimming (ELV, 0-10), Universal Voltage, and IP rated Wet Location certifications are amongst the options found within these pages. If your needs require something special, we welcome you to consult with us and take advantage of the custom capabilities of a true manufacturing.

With over 100 engineers on staff across 4 factories in the US and China, we put creative and forward-thinking minds behind solving your most challenging lighting needs with new technologies. All designs are then thoroughly tested in our internationally recognized NVLAP, UL, and ETL certified testing laboratories for safety, durability and robust long term performance beyond required standards.

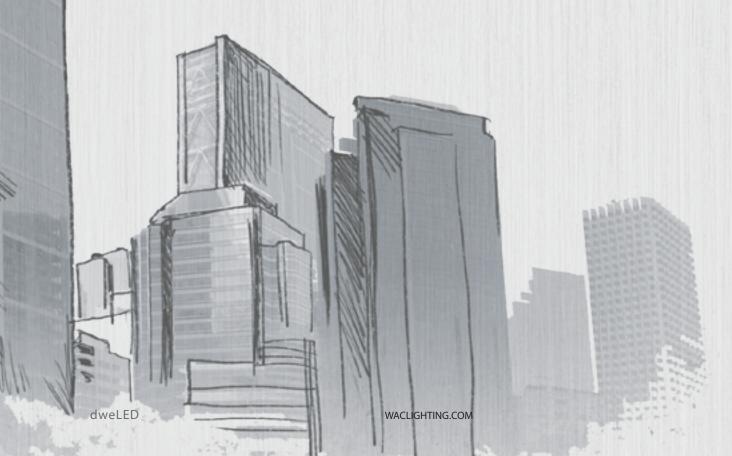


## dweLED by WAC Lighting

LED Pendants + Chandeliers · · · · · · 4 - 43
LED Ceiling Mounts · · · · · · · 44 - 63
LED Sconces + Bath 64 - 113
LED Sconces + Swing Arms ·········· 114 - 145
LED Outdoor 146 - 177

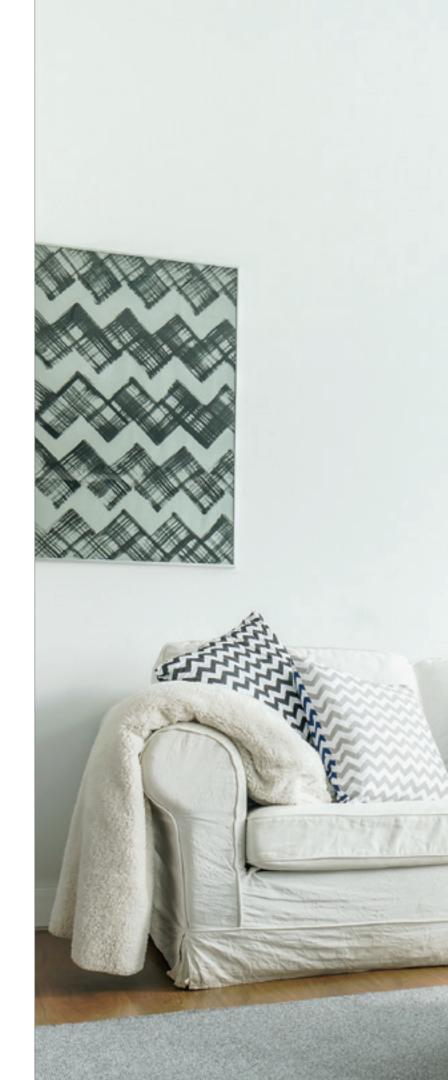



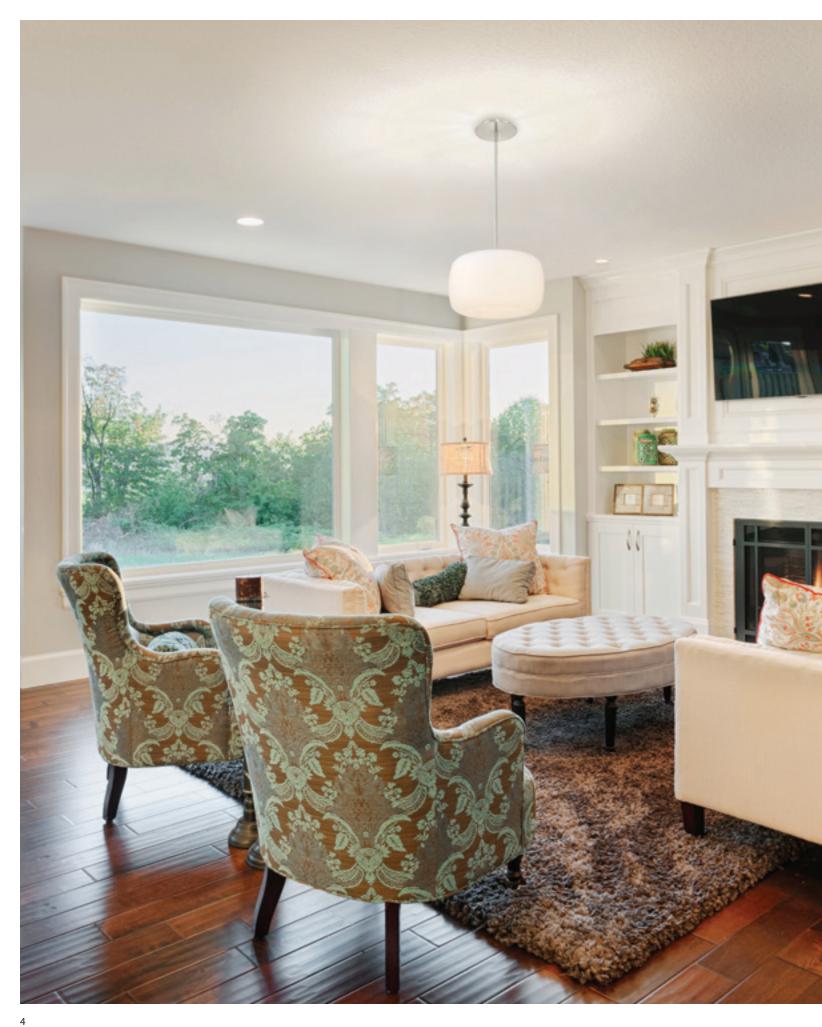




## LED Pendants + Chandeliers

Generations of design trends are more forgiving of clean proportions than ornate decorations, but good lighting design is always a welcomed constant.

This is the guiding principle behind our dweLED offering of LED Pendants and Chandeliers. Stunning additions to commercial offices or kitchen islands, dweLED pendants have been specified into hundreds of designs. Custom engineered modules with perfectly spaced LED arrays ensure even illumination for an immaculate impression. Universal Dimming (ELV or 0-10V) and Universal Voltage (120V-220V-277V) are standard features in many of these technology-stacked designs to accommodate both residential and commercial installations.

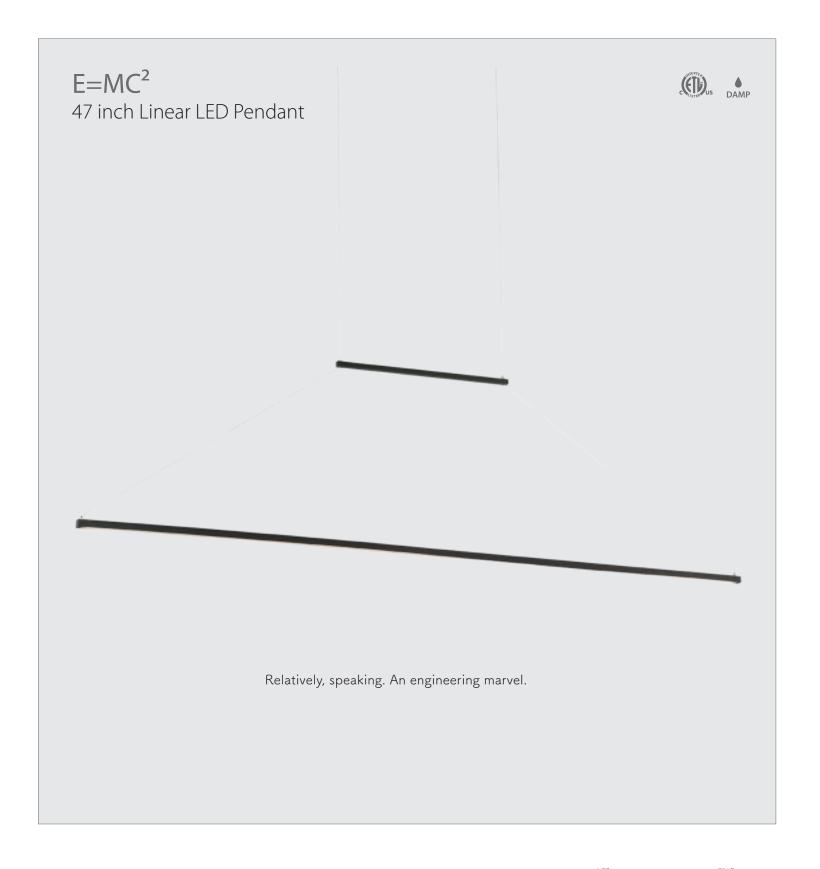

 Color Temp:
 3000K

 CRI:
 90

 Dimming:
 100% - 10% ELV

 Rated Life:
 36,000 hours

 Input:
 120 - 277V

 $\bullet$  Impossibly tiny at just a half inch tall by a half inch wide


• Adjustable leveler provides offers custom positioning


 $\bullet \ Solid \ aluminum \ construction$ 

• Driver located in a standard 4" junction box

• Cable suspension carrying low voltage may be field shortened

• Universal driver (120V-220V-277V)




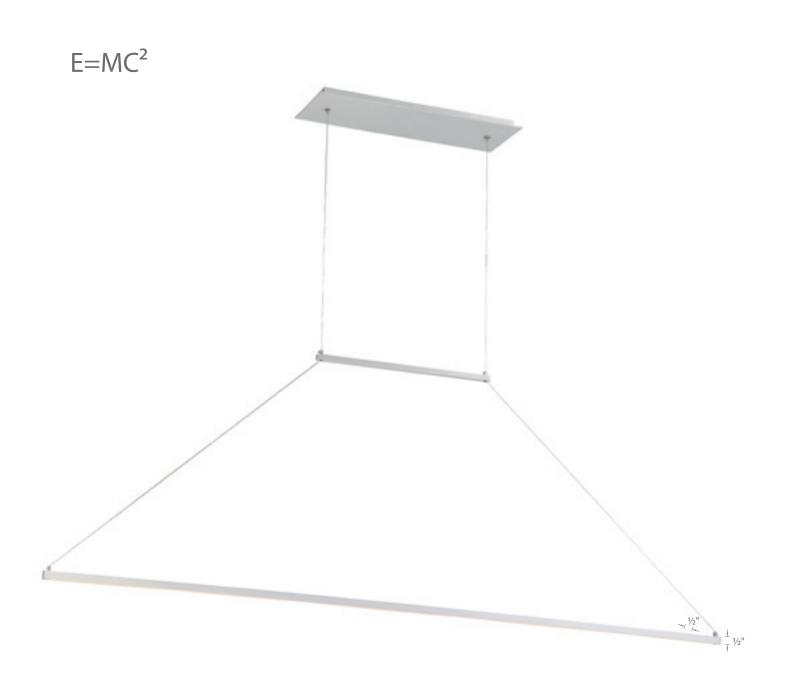

	Watt	LED Lumens	Delivered Lumens	Finish
PD-45747	30W	1770	1190	AL Brushed Aluminum BK Brushed Black

WACLIGHTING.COM

Example: PD-45747-AL

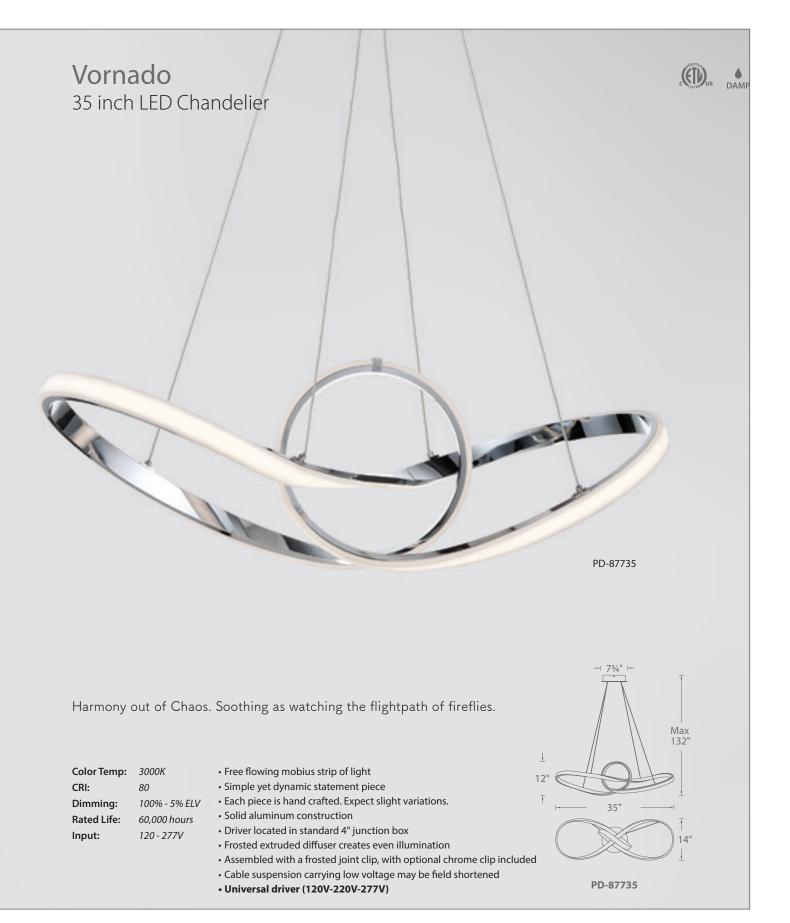


		Watt	Delivered Lumens	Finish	
PD-87735	35"	52W	3550	CH Chrome	

Example: PD-87735-CH





Harmony out of Chaos. Soothing as watching the flightpath of fireflies.

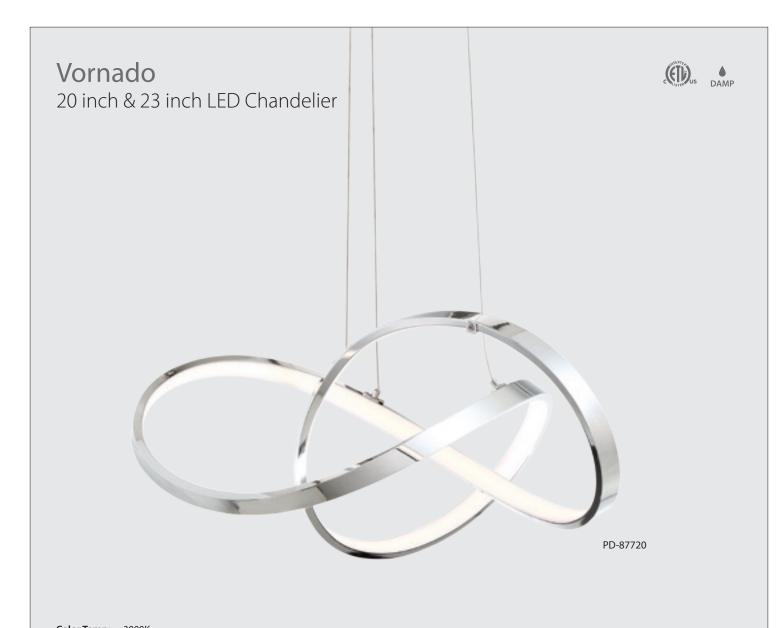

 Color Temp:
 3000K

 CRI:
 80

 Dimming:
 100% - 5% ELV


 Rated Life:
 60,000 hours

 Input:
 120 - 277V

- Free flowing mobius strip of light
- Simple yet dynamic statement piece
- Each piece is hand crafted. Expect slight variations.
- Solid aluminum construction
- Driver located in standard 4" junction box
- Frosted extruded diffuser creates even illumination
- $\bullet \ {\it Assembled with a frosted joint clip, with optional chrome clip included}\\$
- Cable suspension carrying low voltage may be field shortened
- PD-87720 is Title 24 compliant
- Universal driver (120V-220V-277V)







10"

Max 131"

11

PD-87720

\* As pictured on page 9

		Watt	Delivered Lumens	Finish
PD-87720	20"	30.5W	2075	CH Chrome
PD-87723	23"	52W	3110	Ch Chrome

Example: PD-87720-CH



		Watt	LED Lumens	Delivered Lumens	Fini	sh
PD-33718	18"	22.5W	1495	940		
PD-33732	32"	88W	6340	4435	AL	Brushed Aluminum
PD-33743	43"	128W	11115	7300		

Example: PD-33732-AL

dweLED







Wishful lighting.


Luminous linear luminaire with beautiful brushed metal finishes.

**Color Temp:** *3000K* **CRI:** *90* 

**Dimming:** 100% - 10% ELV **Rated Life:** 54,000 hours

**Input:** 120V (277V special order)

- Ultra thin pendant for the discerning minimalist
- Solid aluminum construction
- Frosted diffuser provides even illumination
- Cable suspension carrying low voltage may be field shortened
- Transformer located inside the canopy
- Brushed and anodized metal finishes




15

	Watt	LED Lumens	Delivered Lumens	Finis	sh
PD-22754	56W	3095	2535		Brushed Aluminum Brushed Black


Example: PD-22754-AL

For 277V, add an "F" before the finish: **PD-22754F-AL** 

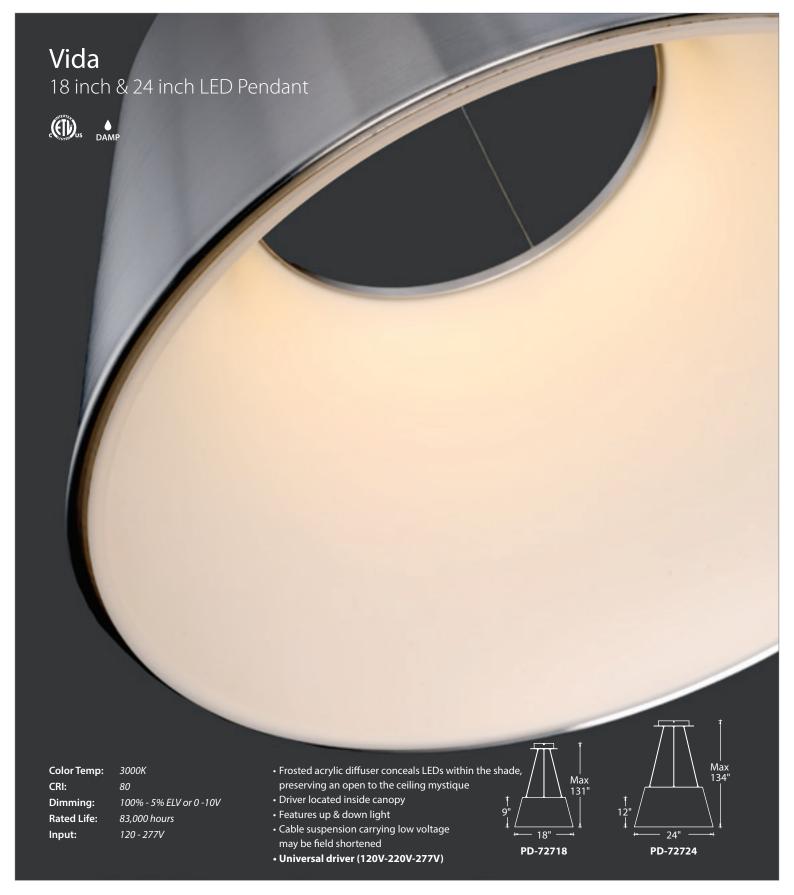

		Watt	LED Lumens	Delivered Lumens	Finish
PD-72718	18"	33.5W	2450	1755	AL Brushed Aluminum
PD-72724	24"	43W	3235	2385	AL DIUSTICA AIAITIITATTI

Example: PD-72718-AL

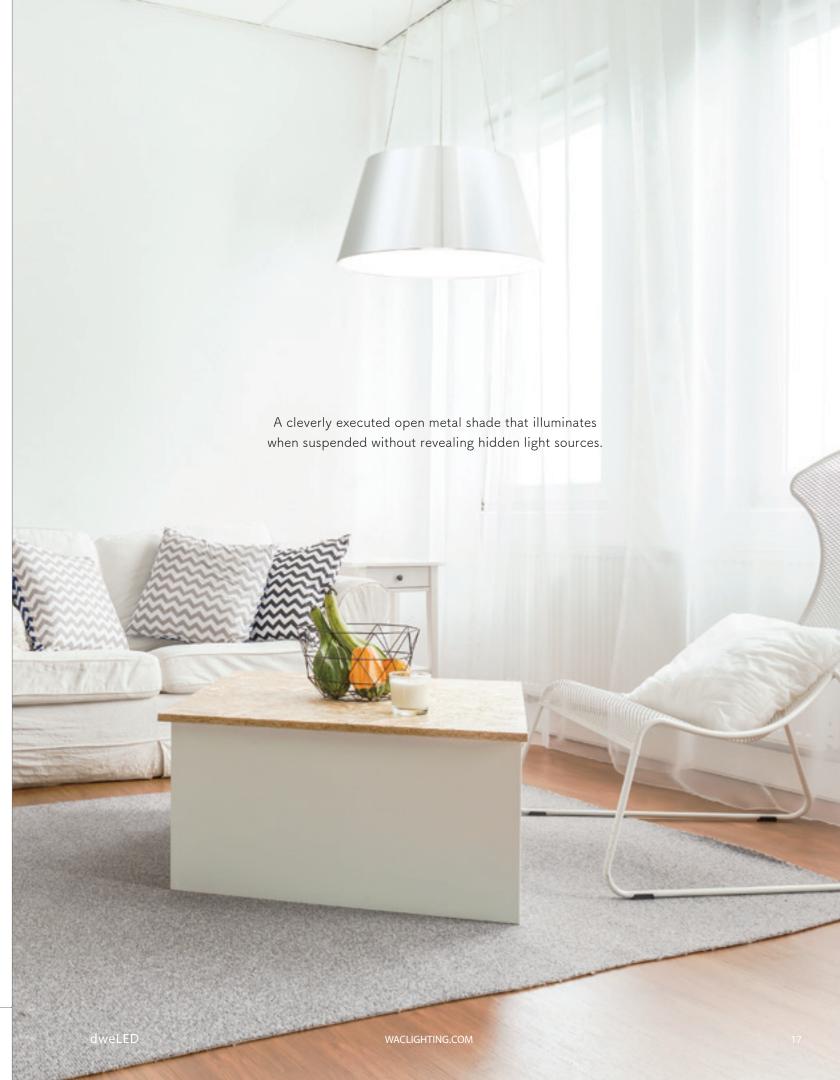






**Color Temp:** *3000K* **CRI:** *90* 

 Dimming:
 100% - 0% ELV

 Rated Life:
 36,000 hours

 Input:
 120 - 277V


- Uniquely versatile fixture capable of transforming before your eyes
- Side lit acrylic diffuser with discretely hidden LEDs.
- Downrods can be removed to mount as a ceiling fixture or wall sconce
- Driver located in standard 4" junction box
- 10' of wire included to extend pendant up to a total of 120" max, three 12" and one 6" downrods included (additional downrods available)
- Universal driver (120V-220V-277V)



19

		Watt	Delivered Lumens	Finish	
FM-21720	20"	20W	1315	<b>AL</b> Brushed Aluminum	
FM-21728	28"	30W	1720	AL Diastica Adminiant	


Example: FM-21720-AL

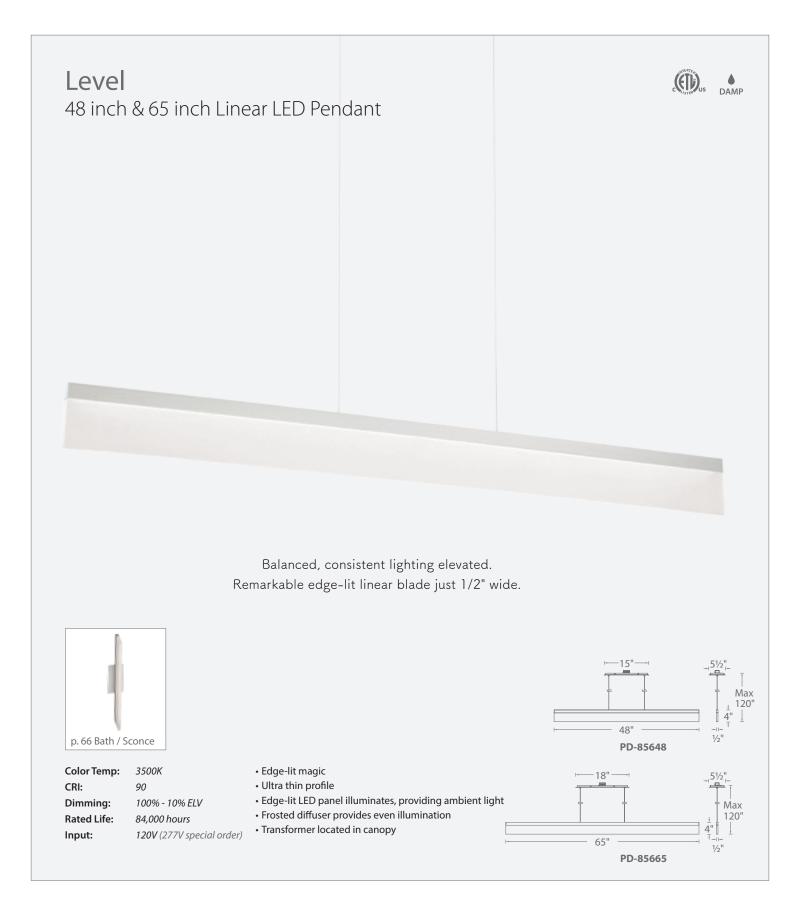

		Watt	LED Lumens	Delivered Lumens	Finish
PD-85648	48"	35W	1620	1565	Ol Prush and Alumainauma
PD-85665	65"	45W	2100	2015	AL Brushed Aluminum

Example: PD-85648-AL

For 277V, add an "F" before the finish: **PD-85665F-AL** 

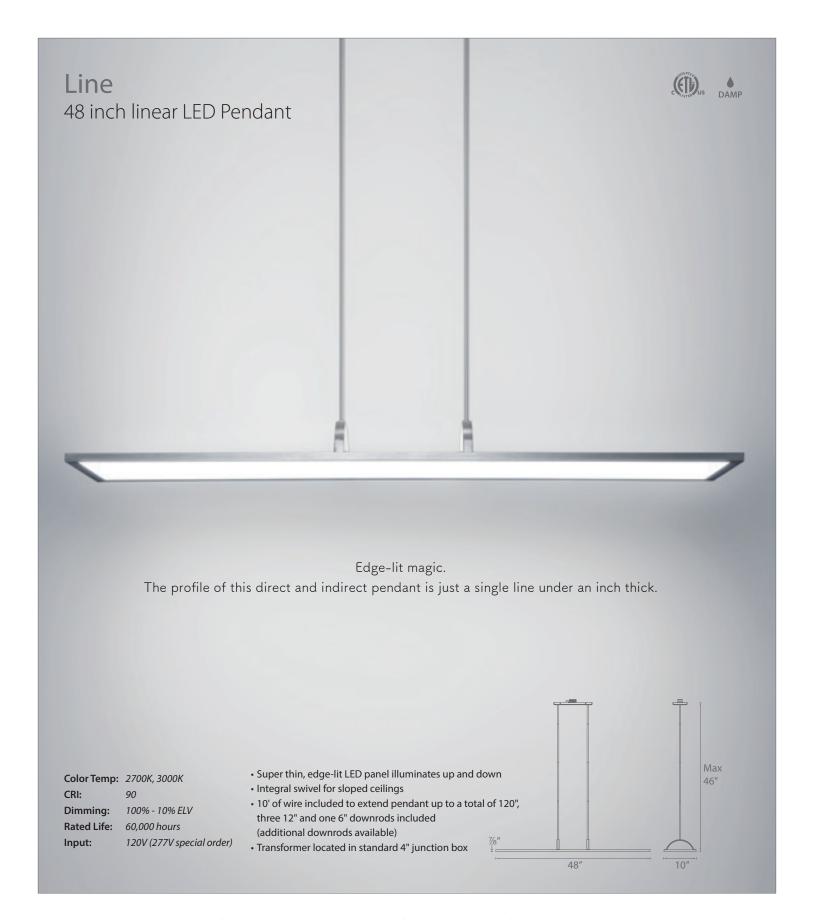

	Color Temp	Watt	LED Lumens	Delivered Lumens	Fini	sh	
PD-51148-27 PD-51148-30	2700K 3000K	48W 48W	4017 4435	2770 3055	AL	Brushed Aluminum	

Example: PD-51148-27-AL

For 277V, add an "F" before the color temperature: PD-51148F-27-AL







Spectacular halo of direct and indirect light from an impossible form

Color Temp: CRI:

3000K

Dimming: Rated Life:

100% - 0% ELV 44,000 hours

Input:

120 - 277V

• Edge-lit magic

• Ultra thin 1/2" thick edge-lit disc


• Edge-lit panel illuminates up & down

• Driver located inside canopy

• Universal driver (120V-220V-277V)







PD-31735

		Watt	Delivered Lumens	Finish
PD-31727	27"	60W	2615	<b>TT</b> Titanium
PD-31735	35"	90W	4740	11 manum

Example: PD-31735-TT







Swivels to adjust light in any direction as inspired by vanity mirrors.

	Watt	Delivered Lumens	Finish
PD-60723	28W	1895	TT Titanium

Example: PD-60723-TT



		Watt	LED Lumens	Delivered Lumens	Finish	
PD-26611	11"	15W	1187	858	SN Satin Nickel	
PD-26616	16"	20W	1769	1363	SN Satiri Nickei	

Example: PD-26616-SN

26

For 2700K add "-27"; 3500K add "-35" before the finish: **PD-26616-27-SN** 



PD-83720 16W 1000 810	
<b>PD-83720</b> 16W 1000 810	PN Polished Nickel

Example: PD-83720-PN

27



	Watt	LED Lumens	Delivered Lumens	Finish		
PD-64713	15.5W	960	810	BN/OP BN/CH	Brushed Nickel / Opal Brushed Nickel / Chrome	

WACLIGHTING.COM

Example: PD-64713-BN/CH



## Flair 14 inch LED Pendant





TITLE 24
CALIFORNIA



**Color Temp:** *2700K* **CRI:** *90* 

**Dimming:** 100% - 10% ELV **Rated Life:** 60,000 hours

**Input:** 120V (277V special order)

- $\bullet \ \mathsf{Spun} \ \mathsf{metal} \ \mathsf{housing} \ \mathsf{with} \ \mathsf{mouth} \ \mathsf{blown} \ \mathsf{etched} \ \mathsf{triplex} \ \mathsf{glass} \ \mathsf{diffuser}$
- Integral swivel for sloped ceilings
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available)
- Driver located in standard 4" junction box

	Watt	LED Lumens	Delivered Lumens	Finish
PD-52214	14W	906	435	BN Brushed Nickel

Example: PD-52214-BN

For 277V, add an "F" before the finish: **PD-52214F-BN** 






	Watt	LED Lumens	Delivered Lumens	Finish
PD-51712	12W	882	420	BN Brushed Nickel BR Brushed Brass

Example: PD-51712-BN

For 277V, add an "F" before the finish: **PD-51712F-BN** 

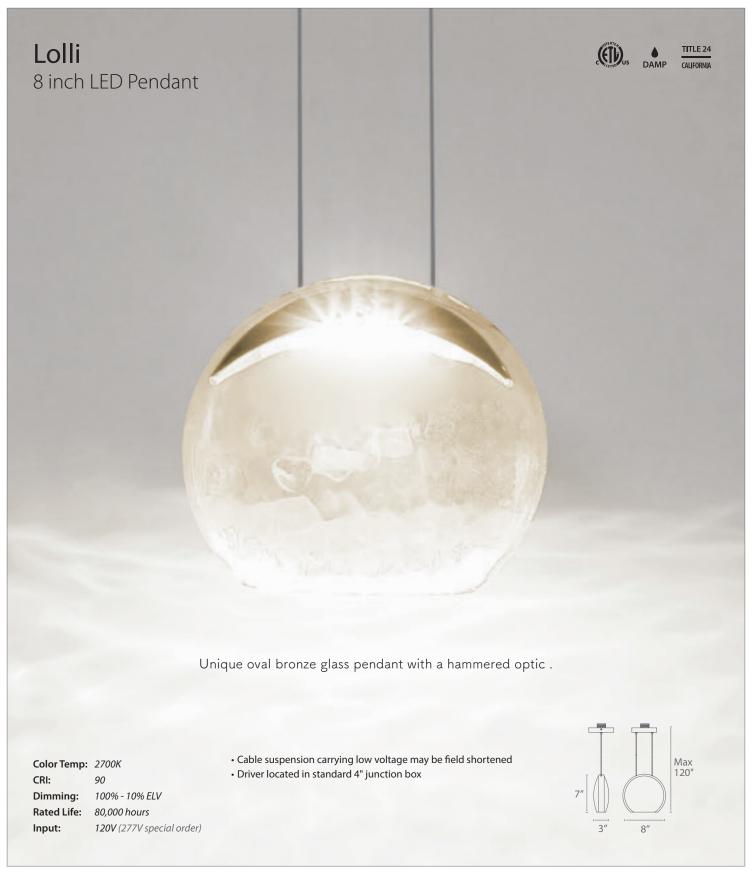

	Watt	LED Lumens	Delivered Lumens	Finish
PD-52008	6.5W	284	165	CH Chrome

Example: PD-52008-CH

For 277V, add an "F" before the finish: **PD-52008F-CH** 

33



	Watt	LED Lumens	Delivered Lumens	Finish	
PD-51915	14W	906	735	BN Brushed Nickel	

Example: PD-51915-BN



	Watt	LED Lumens	Delivered Lumens	Finis	า	
PD-51814	14W	906	845	BN	Brushed Nickel	

Example: PD-51814-BN




		Watt	LED Lumens	Delivered Lumens	Finish	
PD-36710	10"	9.5W	820	725	<b>BN</b> Brushed Nickel	
PD-36714	14"	18W	1620	1520	BN Brasilea Mickel	

Example: PD-36710-BN

For 277V, add an "F" before the finish: **PD-36710F-BN** 



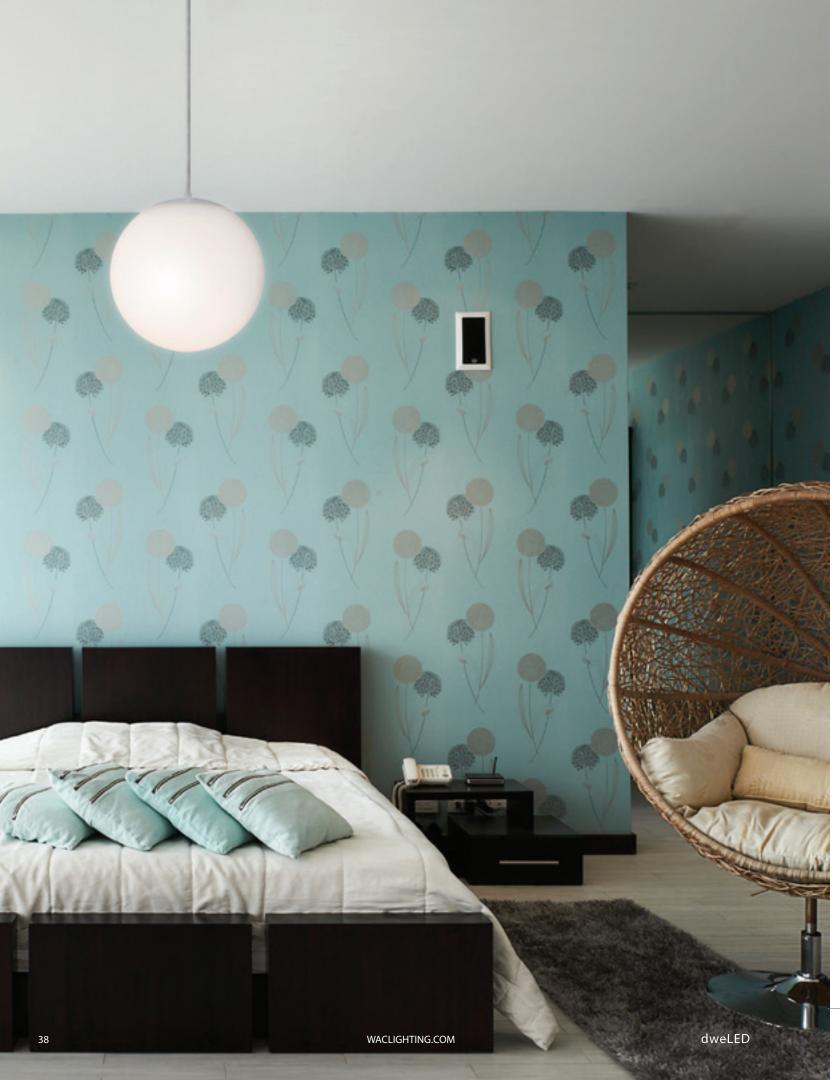



		Watt	LED Lumens	Delivered Lumens	Finish
PD-52310	10"	14W	906	685	BN Brushed Nickel
PD-52313	13"	14W	906	715	WT White

Example: PD-52310-BN

For 2700K add "-27"; 3500K add "-35" before the finish: PD-52310-27-BN









Urban chic sophistication. Luminous fabric shade pendant.


Color Temp: 2700K CRI:

40

Rated Life:

100% - 10% ELV Dimming: 50,000 hours Input: 120V

- Urban elegance & LED illumination softened with a fabric shade
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available)
- No transformer or driver required



		Watt	LED Lumens	Delivered Lumens	Finish
PD-13714	14"	31W	2405	2205	
PD-13720	20"	36W	2405	2360	BN Brushed Nickel
PD-13726	26"	41W	3000	2825	

Example: PD-13720-BN

#### Manhattan





14 inch, 20 inch & 26 inch LED Close-to-Ceiling Mount






Color Temp: 2700K

CRI: 90

Dimming: 100% - 10% ELV


Rated Life: 50,000 hours

Input: 120V



• Urban elegance & LED illumination softened with a fabric shade

• No transformer or driver required



FM-13114

		Watt	LED	Lumens	Finish
14"	FM-13114	31W	2405	2205	
20"	FM-13120	36W	2405	2360	BN Brushed Nickel
26"	FM-13126	39W	3000	2825	





A great compass always leads you home. Distinctive decorative complement indoors and out.

		Watt	LED Lumens	Delivered Lumens	Finish
F	PD-W33620	35W	3200	1890	AL Brushed Aluminum BZ Bronze

Example: **PD-W33620-BZ** 

For 277V, add an "F" before the finish: **PD-W33620F-BZ** 





## LED Ceiling Mounts

dweLED Ceiling Mount luminaires are designed to integrate within a variety of spaces ranging from residential and multifamily to commercial and healthcare. These well-engineered luminaires are cleanly finished with no visible hardware, offering a glare-free superbly low-profile quality that is defining of good LED luminaire design. dweLED Ceiling Mount luminaires maximize application versatility with a full range of light outputs and sizes from 6" to 28" in addition to dimming and input voltage options. Expect ample and even illumination across a range of applications, from general illumination in offices to functional lighting with excellent color rendering for walk-in closets.

#### **Planets**











Cosmically proportioned decorative ceiling-mount luminaires

Color Temp: 3500K CRI:

Dimming: 100% - 10% ELV

Rated Life: 63,000 hours Input: 120 - 277V

- Large diameter makes a great addition to large rooms or high-ceiling applications
- Low-profile fixture with maximum illumination
- Extruded aluminum trim with no visible hardware
- Driver located inside the fixture
- Mount as a ceiling fixture or wall sconce
- Silk-screened glass diffuser with a white ceramic glaze
- Universal driver (120V-220V-277V)





FM-16622





#### Elektron



20 inch & 28 inch LED Pendant & Close-to-Ceiling Mount



Travelling at the speed of light


**Color Temp:** *3000K* **CRI:** *90* 

 Dimming:
 100% - 0% ELV

 Rated Life:
 36,000 hours

 Input:
 120 - 277V

- Uniquely versatile fixture capable of transforming from pendant to ceiling mount
- Side lit acrylic diffuser to add an even ring of light to any space
- Mount as a ceiling fixture or wall sconce
- Driver located in standard 4" junction box
- 10' of wire included, may be converted to a pendant with threaded downrods: three 12" and one 6" downrods included (additional downrods available)
- Universal driver (120V-220V-277V)



		Watt	Delivered Lumens	Finisl	h
FM-21720	20"	20W	1315	AL	Brushed Aluminum
FM-21728	28"	30W	1720	\	brashea maninam

Example: FM-21720-AL

#### Geos



6 inch, 10 inch, 15 inch & 22 inch LED Ceiling Mount

Simple shapes with hi-tech soul.



Color Temp: 2700K, 3000K

CRI: 9

**Dimming:** 100% - 10% ELV **Rated Life:** 70,000 hours

Input: 120V (277V special order)

• Edge-lit magic

- Super thin, edge-lit LED panel at less than an inch thick
- Great for closets and hallways
- Die-cast aluminum construction
- Wall or ceiling mount with twist-lock mechanism
- Transformer located in outlet box






			Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
0	6"	FM-4606-27 FM-4606-30	2700K 3000K	8W 8W	551 608	270 300	<b>TT</b> Titanium
	10"	FM-4610-27 FM-4610-30	2700K 3000K	12.5W 12.5W	964 1064	545 600	WT White

Example: **FM-4610-27-WT** 

50

For 277V, add an "F" before the color temperature: FM-4610F-27-WT

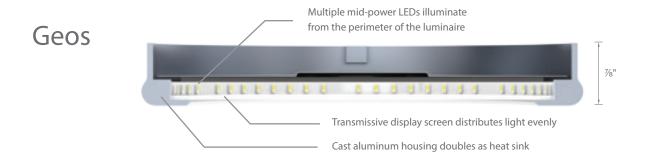



#### Slice







9 inch , 11 inch & 15 inch LED Ceiling Mount + Wall Mount



Clean design of simple shapes with etched water-clear solid glass for robust illumination.





Color Temp: 2700K, 3000K


CRI: 90

**Dimming:** 100% - 10% ELV Rated Life: 36,000 hours

Input: 120V (277V special order)

- Etched ¾" thick pressed glass diffuser with interior ceramic glaze
- Mount as a ceiling fixture or wall sconce
- No transformer or driver required
- Wet location listed for indoor applications



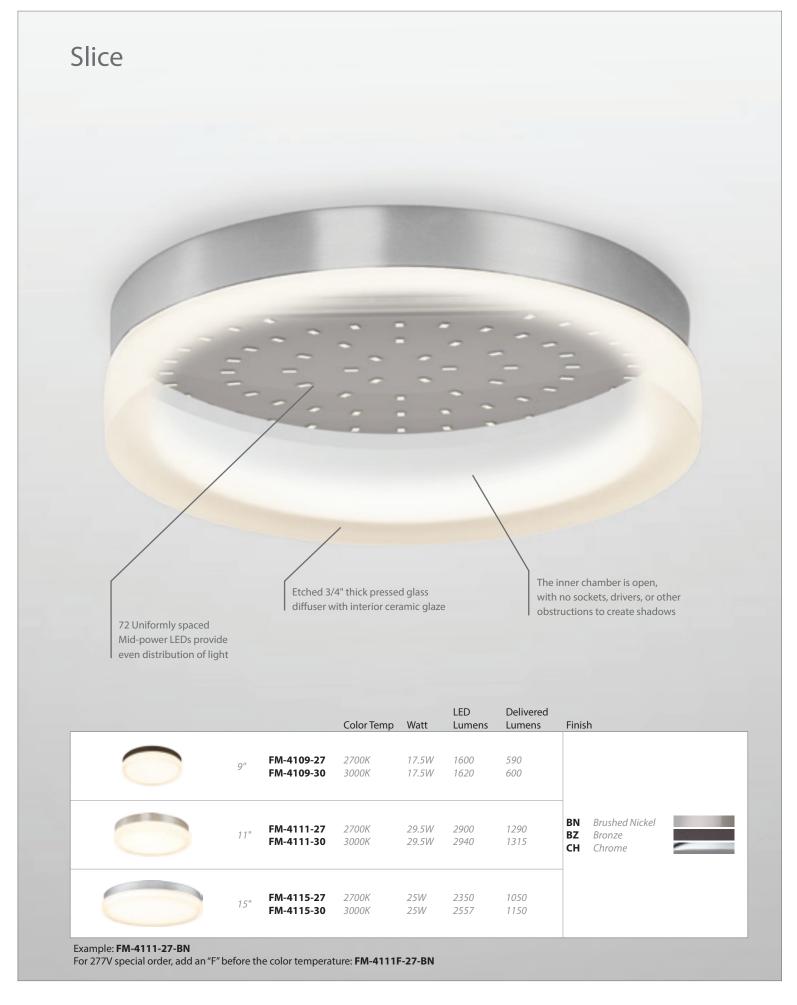

#### Dice







TITLE 24
CALIFORNIA

6 inch , 9 inch , 12 inch &  $14 \times 5$  inch LED Ceiling Mount + Wall Mount





Color Temp: 2700K, 3000K

CRI: 90

**Dimming:** 100% - 10% ELV **Rated Life:** 36,000 hours

**Input:** 120V (277V special order)

- $\bullet$  Etched  $\mbox{\em 3}\!\!\!/\!\!\!/$  thick pressed glass diffuser with interior ceramic glaze
- FM-4006, FM-4009, FM-4012 are wet location listed for indoor applications
- FM-4006, FM-4009, FM-4012 are Title 24 compliant
- Mount as a ceiling fixture or wall sconce
- No transformer or driver required



M-4006



FM-4009



FM-4012



FM-4014

#### Dice



		Color Temp	Watt	LED Lumens	Delivered Lumens	Finis	sh	
6"	FM-4006-27 FM-4006-30	2700K 3000K	17.5W 17.5W	1550 1565	808 820			
9"	FM-4009-27 FM-4009-30	2700K 3000K	25W 25W	2300 2325	1240 1265	BN BZ CH	Brushed Nickel Bronze Chrome	
12"	FM-4012-27 FM-4012-30	2700K 3000K	25W 25W	1990 2200	890 985			
14" x 5"	FM-4014-27 FM-4014-30	2700K 3000K	31W 31W	1323 1356	610 640	BN	Brushed Nickel	_

Example: FM-4009-30-BN

For 277V special order, add an "F" before the color temperature: **FM-4006F-27-BN** 

# Meridien 14 inch LED Ceiling Mount











Longitude of lumens. The epitome of uptown chic.



**Color Temp:** *3000K* **CRI:** *90* 

Input:

56

Dimming: 100% - 0% ELV

Rated Life: 53,000 hours


120 - 277V

- Classic look with a modern upgrade
- Mount as a ceiling fixture or a wall sconce
- Driver located in standard 4" junction box
- $\bullet \ \, \text{Silk-screened glass with a white ceramic glazed center and water clear edge} \\$

LED

Delivered

• Universal driver (120V-220V-277V)



		Watt	Lumens	Lumens	Finish
14"	FM-57614	22.5W	1660	1145	BN Brushed Nickel

Example: FM-57614-BN

#### Vie 14 inch LED Ceiling Mount













p. 112 Bath



Color Temp: 2700K (3000K / 3500K special order)


CRI: 9

**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours

**Input:** 120V (277V special order)

A complete collection of contemporary sconces and bath.

- Vie adds a luxurious look to modern spaces
- Etched opal triplex glass provides even illumination
- Unblemished plate finishes
- Multiple LED array eliminates socket shadows
- No transformer or driver required



57

		Watt	Lumens	Lumens	Finish
14"	FM-4313	30W	2620	1545	BN Brushed Nickel CH Chrome

Example: **FM-4313-CH**For 277V, add an "F" before the finish: **FM-4313F-CH**For 3000K add "-30"; 3500K add "-35" before the finish: **FM-4313-30-CH** 

#### **Niveous** 6 inch & 9 inch LED Ceiling + Wall Mount













The perfect sphere.

Color Temp: 3000K (2700K / 3500K special order)

CRI: 90

**Dimming:** 100% - 10% ELV **Rated Life:** 45,000 hours

**Input:** 120V (277V special order)

• Spheres of pure light

• Mouth blown etched triplex opal glass diffuser provides even illumination

LED

Delivered

Solid aluminum construction

• Mount as a ceiling fixture or wall sconce

• Listed for use in closets

• No transformer or driver required

6"



FM-W52306

FM-W52309

		Watt	Lumens	Lumens	Finish
6"	FM-W52306	9.5W	800	680	<b>WT</b> White
9"	FM-W52309	18W	1600	1428	W. Wille

Example: FM-W52306-WT

58

For 277V, add an "F" before the finish: **FM-W52306F-WT** 

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-W52306-35-WT** 



# **Astoria**13 inch LED Ceiling Mount











Classically elegant. A beautiful complement

Color Temp: 2700K (3000K / 3500K special order)

**CRI:** 90

**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours


**Input:** 120V (277V special order)

 $\bullet$  The latest LED light engines inside a retro-style housing.

LED

Delivered

- Etched white glass diffuser
- Multiple LED array for uniform illumination
- No transformer or driver required



	Watt	Lumens	Lumens	Finish
FM-7013	30.5W	2620	1110	BB Burnished Brass BO Brushed Bronze

Example: FM-7013-BB

60

For 277V, add an "F" before the finish: FM-7013F-BB

For 3000K add "-30"; 3500K add "-35" before the finish: **FM-7013-30-BB** 




### Bristol











Illuminating Conventional Wisdom

2700K (3000K / 3500K special order) Color Temp:

CRI:

100% - 10% Dimming: 80,000 hours Rated Life:

120V (277V special order) Input:


• An exquisite traditional design with a modern upgrade

• Mouth blown triplex opal glass provides even illumination

Delivered

• Multiple LED array eliminates socket shadows

• No transformer or driver required



	Watt	Lumens	Lumens	Finish
FM-7113	30W	2620	990	AN Antique Nickel

Example: FM-7113-AN

62

For 277V, add an "F" before the finish: FM-7113F-AN

For 3000K add "-30"; 3500K add "-35" before the finish: FM-7113-30-AN

#### Compass



















p. 42 Pendant



Color Temp: 3000K

100% - 10% ELV Dimming: Rated Life: 45,000 hours

Input: 120V • Mouth blown etched triplex opal glass

- diffuser provides even illumination
- Solid aluminum construction
- Mount as a ceiling fixture or wall sconce
- Listed for use in closets
- No transformer or driver required




Delivered

Lumens

Distinctive decorative complement indoors and out.



Finish



FM-W33616

63

12"	FM-W33612	19W	1647	1147	AL	Brushed Aluminum	
16"	FM-W33616	35W	3112	1668			


Watt

LED

Lumens

Example: FM-W33616-BZ



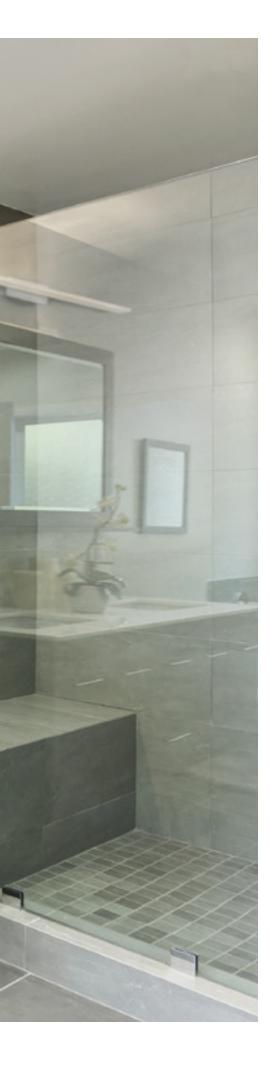

### LED Sconces + Bath

Focused on timeless silhouettes, scaled-up metalwork and enduring finishes, these luminaires feature a tightly engineered fit and finish to coordinate seamlessly with upscale hardware and fixtures. Baths are ideal places to demonstrate illumination performance from proprietary LED technology where color quality and brightness requirements are the greatest. dweLED sconces and bath designs are trained on clean looks with ample illumination in color temperatures best suited for the intended space. Within these pages, you will find certain styles designed for warm white 2700K light, some for neutral white 3000K light, and others for bright white 3500K light. For an optimal lighting design, we recommend specifying luminaires in 2700K, 3000K, or 3500K based on the color palette and intended use of the designed spaces.



19 inch, 25 inch & 37 inch LED Bath

(ETV)



Balanced, consistent lighting elevated.

p. 20 Pendant

**Color Temp:** *3500K* **CRI:** *90* 

**Dimming:** 100% - 10% ELV **Rated Life:** 85,000 hours

Input:

120 - 277V


 $\bullet$  Remarkable edge-lit linear blade just ½" wide

• Frosted diffuser provides even illumination

- Mount vertically or horizontally
- Adjustable backplate
- Conversion plate for 4" junction box included
- $\bullet$  Driver located in standard 2" x 4" junction box
- WS-85618 is ADA compliant, low profile design

WACLIGHTING.COM

• Universal driver (120V-220V-277V)





		Watt	LED Lumens	Delivered Lumens	Finish
WS-85618	19"	15.5W	1300	865	
WS-85624	25"	20.5W	1735	1255	AL Brushed Alumimum
WS-85636	37"	30W	2561	1800	

Example: WS-85618-AL

#### Reflection

23 inch, 29 inch & 39 inch LED Bath



**Color Temp:** *3500K* **CRI:** *90* 

 Dimming:
 100% - 5% ELV

 Rated Life:
 46,000 hours

 Input:
 120 - 277V

- Edge-lit magic
- Ultra low profile design
- Mount vertically or horizontally
- Frosted acrylic diffuser provides even illumination
- WS-59639 features ELV or 0-10V dimming
- Driver located in standard 4" junction box
- Universal driver (120V-220V-277V)





# Theory 25 inch & 32 inch LED Bath







 Color Temp:
 3500K

 CRI:
 90

 Dimming (120V):
 100% - 0% ELV

70

 Rated Life:
 44,000 hours

 Input:
 120 - 277V

• Solid die-cast body with a perfect nickel finish

• Mount vertically or horizontally

• Driver located inside the fixture

• Side-lit acrylic diffuser provides unique no-glare illumination

• Universal driver (120V-220V-277V)

# Theory

Bold statement created from a single concept.





	Length	Watt	Delivered Lumens	Finish
WS-42725 WS-42732		15.5W 22W	1085 1555	BN Brushed Nickel

Example: WS-42725-BN



27 inch & 36 inch LED Bath





**Color Temp:** *3500K* **CRI:** *90* 


 Dimming:
 100% - 10% ELV

 Rated Life:
 42,000 hours

Input: 120V

- Curved triplex opal glass diffuser provides even illumination
- Solid aluminum construction
- Conversion plate for 4" junction box included
- Mount vertically or horizontally over standard 2" x 4" junction box
- Minimal mounting hardware for easy installation
- No transformer or driver required




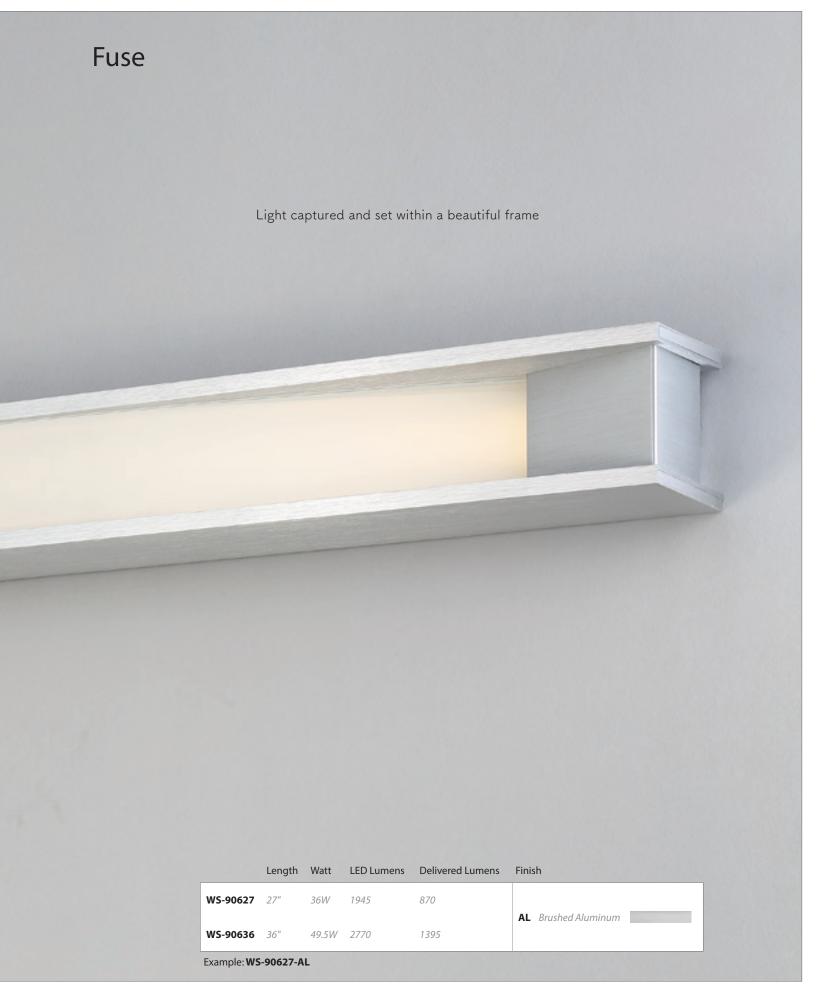

#### Brink





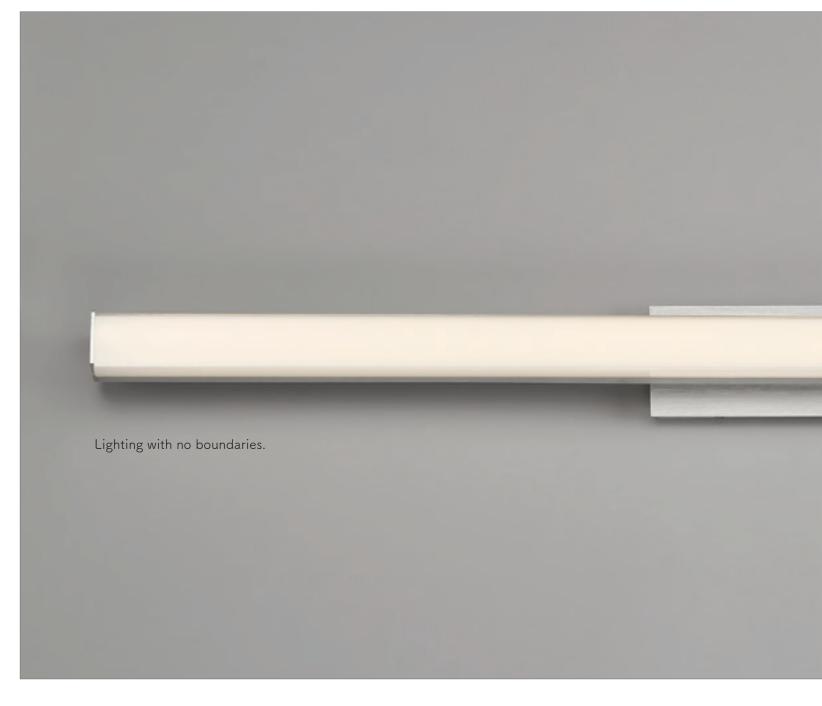

**Color Temp:** 2700K, 3000K, 3500K

CRI: 90


100% - 5% ELV Dimming: Rated Life: 85,000 hours 120 - 277V Input:

· Modern, sleek, clean


- Ultra low profile design
- Co-extruded clear and white acrylic provides substance, luminosity and optical efficacy
- Mount vertically or horizontally
- Driver located in standard 2" x 4" junction box
- Conversion plate for 4" junction box included

WACLIGHTING.COM

- Adjustable backplate
- Universal driver (120V-220V-277V)



## Brink

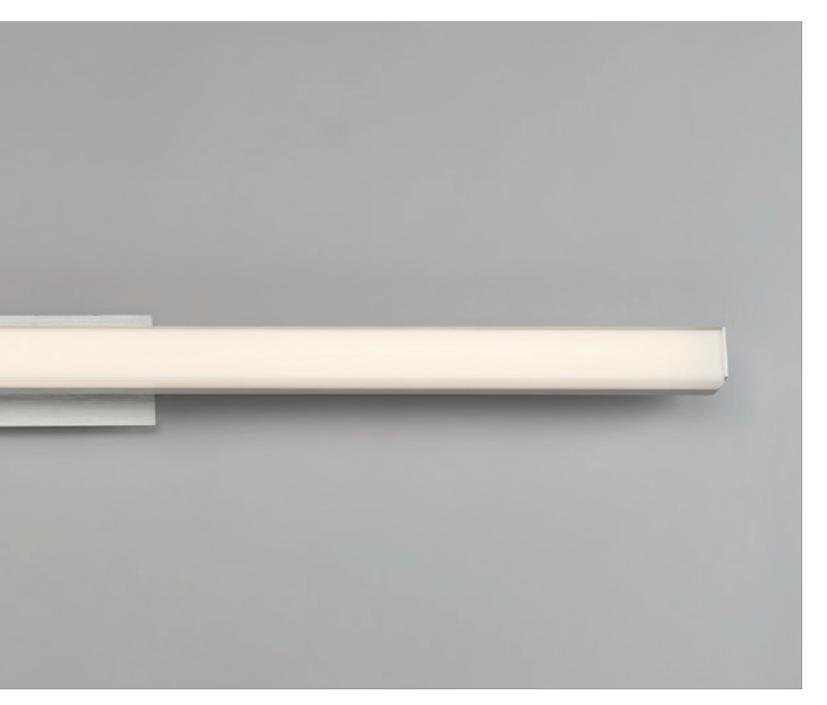

		Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
	WS-77618-27	2700K	15.5W	1155	910	
18"	WS-77618-30	3000K	15.5W	1225	1015	
	WS-77618-35	3500K	15.5W	1330	1115	
	WS-77624-27	2700K	20.5W	1595	1330	
24"	WS-77624-30	3000K	20.5W	1720	1440	AL Brushed Alumimum
	WS-77624-35	3500K	20.5W	1785	1510	
	WS-77636-27	2700K	30W	2365	1985	
36"	WS-77636-30	3000K	30W	2445	2095	
	WS-77636-35	3500K	30W	2561	2180	

Example: WS-77618-30-AL



76

CLISTED US DAMP ADA

WS-63724

WS-63736



# Cliffhanger





14 inch, 24 inch & 37 inch LED Bath



Cutting edge lighting on a new platform.



**Color Temp:** 3000K **CRI:** 90

 Dimming:
 100% - 10% ELV

 Rated Life:
 35,000 hours

 Input:
 120 - 277V

- Up & down light
- $\bullet$  Fixture may be rotated 180° when mounting
- Frosted acrylic diffuser provides even illumination
- Driver located in standard 4" junction box
- 45° miter edge for a sleek, clean look
- $\bullet \ \mathsf{WS}\text{-}26714, \mathsf{WS}\text{-}26724 \ \mathsf{are} \ \mathsf{CECTitle} \ \mathsf{24} \ \mathsf{compliant}$
- Universal driver (120V-220V-277V)









		Watt	Delivered Lumens	Finish
WS-26714	14"	7.5W	355	
WS-26724	24"	15W	775	AL Brushed Aluminum
WS-26737	37"	21.5W	1120	

Example: WS-26714-AL

## Line





18 inch, 24 inch & 36 inch LED Bath



The magic of edge-lit technology.

Color Temp: 2700K, 3000K

**CRI:** 90

**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours

**Input:** 120V (277V special order)

• Edge-lit magic


 $\bullet$  Super thin  $1\!\!/_{\!2}"$  edge-lit LED panel

• An original WAC Lighting engineered design

• Rotatable panel can create indirect, up light, task light and down light

• Mount vertically or horizontally with 330° adjustment


• Transformer located in standard 4" junction box







		Watt	Color Temp	LED Lumens	Delivered Lumens	Finis	sh
WS-6718-27 WS-6718-30	18"	11.8W 11.8W	2700K 3000K	609 667	425 464		
WS-6724-27 WS-6724-30	24"	16W 15.8W	2700K 3000K	827 912	626 675	AL	Brushed Aluminum
WS-6736-27 WS-6736-30	36"	22.1W 22.3W	2700K 3000K	1217 1333	903 987		


Example: **WS-6724-30-AL**For 277V, add an "F" before the color temperature: **WS-6724F-30-AL** 





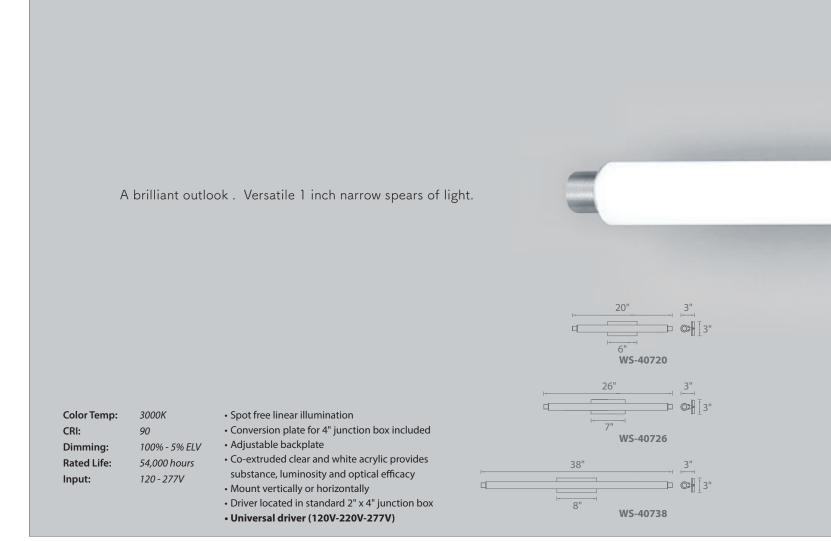

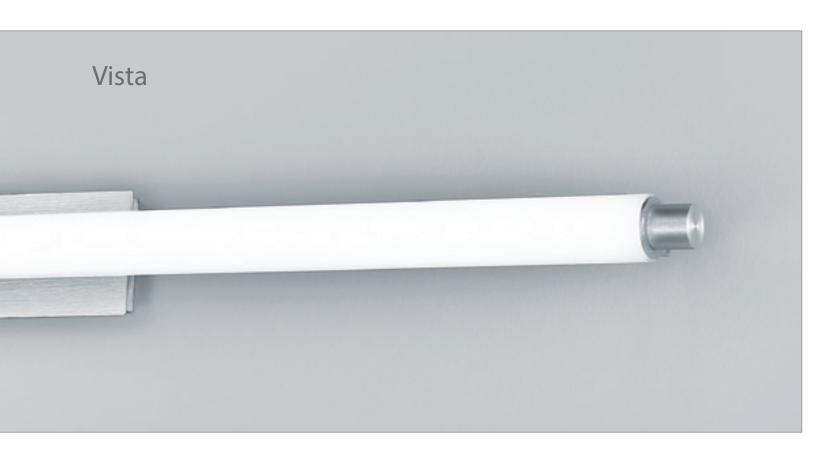

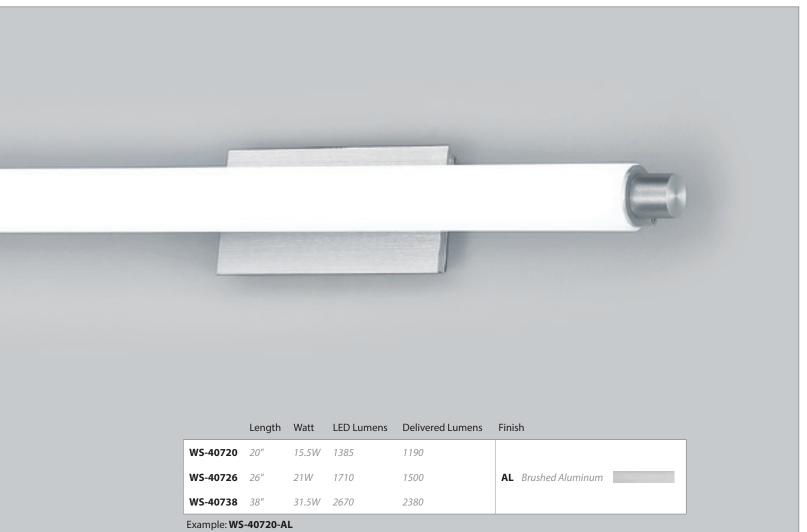

## Meridien

9 inch & 20 inch LED Bath















**Color Temp:** *3000K* **CRI:** *90* 


Dimming: 100% - 0% ELV
Rated Life: 50,000 hours


Input: 120V

• Silk-screened glass with a white ceramic glazed center and water clear edge

• Mount vertically only

• No transformer or driver required





Length	Watt	LED Lumens	Delivered Lumens	Finish
--------	------	------------	------------------	--------


WS-57609	9"	9.5W	665	540	<b>BN</b> Brushed Nickel	
WS-57620	20"	22W	1595	1220	<b>BIN</b> Brusrieu Nickei	

Example: WS-57609-BN







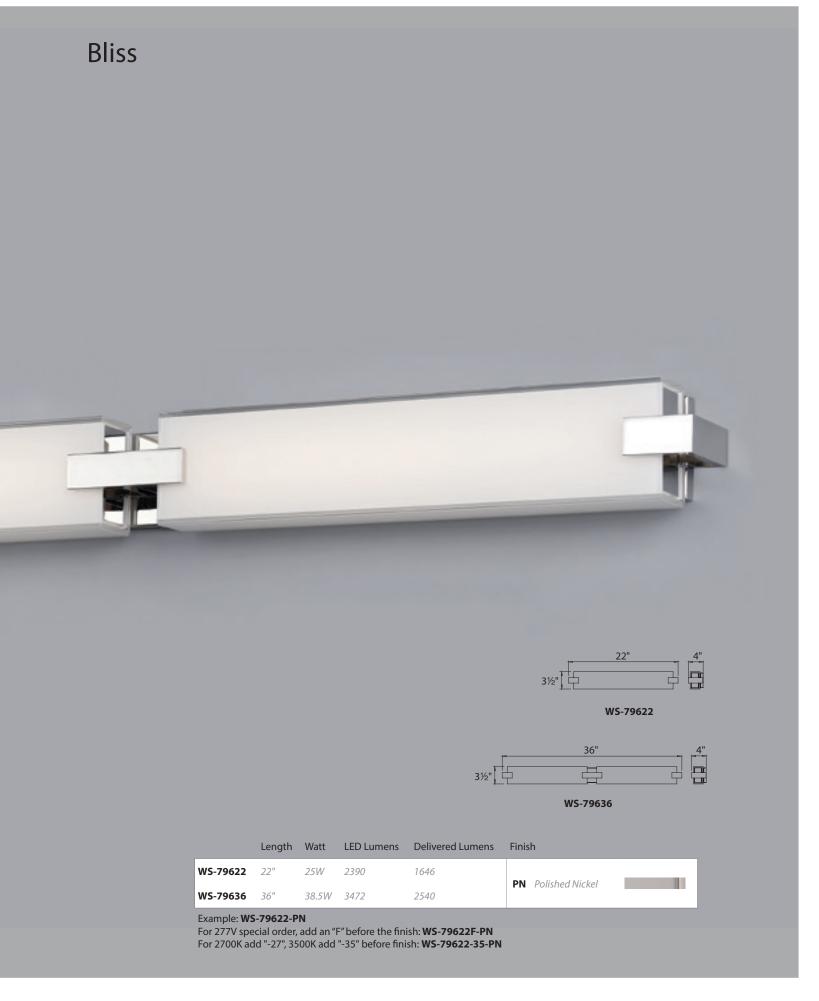

# Compass









### 11 inch, 22 inch & 33 inch LED Bath



p. 42 Pendant



p. 63 Ceiling







A great compass always leads you home.

Color Temp: 3000K

CRI: 90

100% - 10% ELV Dimming: Rated Life: 45,000 hours

Input: 120V • Solid aluminum construction

• Etched triplex opal glass diffuser provides even illumination

• Mounts to standard 4" junction box

• No transformer or driver required

		WS-2	1622
ļ-	33"		31/2"
			5"
		WS-2	1633

			Watt	LED Lumens	Delivered Lumens	Finish
WS-21	1611	1 Light	12W	900	495	
WS-21	1622	2 Lights	24W	1840	1055	AL Brushed Aluminum
WS-21	1633	3 Lights	35.5W	2665	1675	

Example: WS-21622-AL



### Dice







## 24 inch, 35 inch & 46 inch LED Bath









Color Temp: 3000K

CRI: 90
Dimming: 100% - 10% ELV

Rated Life: 45,000 hours Input: 120V


• Clean look, simple and timeless

• Mouth blown etched triplex opal glass diffuser provides even illumination

• Mount vertically or horizontally over standard 2" x 4" junction box

• Conversion plate for 4" junction box included

 $\bullet \ \ No \ transformer \ or \ driver \ required$ 



	Watt	LED Lumens	Delivered Lumens	Finish
<b>WS-20624</b> 2 Lights	24W	1972	1247	
<b>WS-20635</b> 3 Lights	36W	2898	1672	BN Brushed Nickel
<b>WS-20646</b> 4 Lights	48W	3850	2507	

Example: WS-20624-BN



## Pillar







5 inch Sconce, 12 inch & 22 inch LED Bath



Modern design with cylinders and hidden functional downlights for bath

**Color Temp:** *3000K* **CRI:** *90* 

92

• Slim cylinders create an elegant clean addition to any space

CRI: 90

• Mouth blown etched triplex opal glass diffuser provides even illumination

**Dimming:** 100% - 10% ELV


Luminaire may be rotated 180° when mounting
Up & down light


 Rated Life:
 70,000 hours

 Input:
 120-277V

Driver located in standard 4" junction box
Universal driver (120V-220V-277V)

# Pillar









	LED	Delivered	F:
vvatt	Lumens	Lumens	Finish

		wate	Lamens	Lamens		311
WS-76608	1 Light	8W	468	422		
WS-76612	2 Lights	15W	949	804	SN	Satin Nickel
WS-76622	3 Lights	22W	1335	1110		

Example: WS-76622-SN



### Horizon

#### 18 inch & 26 inch LED Bath











**Color Temp:** *3000K* **CRI:** *90* 

Dimming: 100% - 10% ELV

Rated Life: 44,000 hours Input: 120V

• Curved silk-screened glass with a white ceramic glazed center and water clear edge

No transformer or driver required

	Length	Watt	LED Lumens	Delivered Lumens	Finish	
WS-58618 WS-58626			1805 2920	590 900	CH Chrome	

WS-58618

WS-58618

WS-58626

Example: WS-58618-CH

# Horizon



Captivating beauty just beyond reach



## Rondelle





5 inch Sconce, 14 inch & 24 inch LED Bath



Color Temp: 3000K

CRI:

Dimming: 100% - 10% ELV

Rated Life: 60,000 hours

Input: 120V (277V special order) • Solid glass shade


• Driver located in standard 4" junction box

• WS-42505 is CEC Title 24 Compliant

		Watt	LED Lumens	Delivered Lumens	Finis	sh
WS-42505	1 Light	8.5W	230	220		
WS-42514	2 Lights	16W	518	490	PN	Polished Nickel
WS-42524	3 Lights	24.5W	865	805		

Example: WS-42505-PN

For 277V special order, add an "F" before the finish: **WS-42524F-PN** 



## Rondelle



Inspired by collectible antique pole-top glass insulators, now illuminated as nostalgic lighting fixtures.

#### **Bristol**

#### 15 inch Sconce, 20 inch & 28 inch LED Bath or Sconce











Illuminating Conventional Wisdom.

Handsome traditional styling upgraded with modern LED technology.



Color Temp: 2700K

CRI: 90

 Dimming:
 100% – 10%

 Rated Life:
 80,000 hours

Input:

120V

• Modern technology, traditional design


• Mouth blown etched triplex glass with soft square edges

• Cast metal end caps and matching rectangular back plate

• Mount vertically or horizontally to standard 4" junction box

• No transformer or driver required

# Bristol





	Length	Watt	LED Lumens	Delivered Lumens	Finish
WS-7115	15"	19W	1462	990	
WS-7120	20"	25.5W	1845	1345	AN Antique Nickel
WS-7128	28"	37.5W	2925	1935	

Example: WS-7120-AN





## **Ashton**















Example: WS-39513-PN

For 277V special order, add an "F" before the finish: **WS-39513F-PN** For 3000K add "-30", 3500K add "-35" before finish: **WS-39513-35-PN** 

## Dunhill 20 inch & 26 inch LED Bath or Sconce









Classic design never goes out of style.

CRI:

Dimming: 100% - 10% ELV Rated Life: 50,000 hours

Input: 120V (277V special order)

- **Color Temp:** 2700K (3000K/3500K special order) Clean line of light with an energized personality
  - Etched triplex opal glass diffuser provides even illumination
  - Mount vertically or horizontally
  - Conversion plate for 4" junction box included
  - Transformer located in standard 2" x 4" junction box



#### Elementum

13 inch, 22 inch & 30 inch LED Bath or Sconce



True chemistry between light and style.

Color Temp: 2700K (3000K / 3500K special order)

**CRI:** 90

104

**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours

**Input:** 120V (277V special order)

- IP65 wet location rated
- A streamlined luminaire sealed to meet healthcare facility requirements
- Etched triplex opal glass provides even illumination
- Mount vertically or horizontally on a standard 4" junction box
- No transformer or driver required














# Elementum





		Watt	LED Lumens	Delivered Lumens	Finis	h	
WS-7213	13"	15.5W	1118	730			
WS-7222	22"	30.5W	2236	1505	BN CH	Brushed Nickel Chrome	
WS-7230	30"	39.5W	2925	1955			

Example: WS-7222-CH

For 277V, add an "F" before the finish: **WS-7222F-CH**For 3000K add "-30"; 3500K add "-35" before the finish: **WS-7222-30-CH** 

## Soho







### 11 inch, 17 inch & 23 inch LED Bath or Sconce



**Color Temp:** 2700K (3000K/3500K special order) • Rounded glass to give a unique appeal to a

CRI: 90

**Dimming:** 100% - 10% ELV

Rated Life: 50,000 hours

Input: 120V (277V special order)


 Rounded glass to give a unique appeal to a tried and true look

• Etched triplex opal glass provides even illumination

Mount vertically or horizontally

• Conversion plate for 4" junction box included

 $\bullet$  Transformer located in standard 2" x 4" junction box



		Watt	LED Lumens	Delivered Lumens	Finish	
WS-6111	11"	16W	700	520		
WS-6117	17"	25W	1170	860	BN Brushed Nickel CH Chrome	
WS-6123	23"	33.5W	1597	1245		

Example: WS-6117-BN

For 277V special order, add an "F" before the finish: **WS-6117F-BN** For 3000K add "-30", 3500K add "-35" before finish: **WS-6117-35-PN** 

#### Soho



Urban chic for luxury baths.

#### Svelte















Color Temp: 2700K (3000K / 3500K special order)


CRI: 90

108

**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours

**Input:** 120V (277V special order)

- Gracefully slender at 3 inches in width
- 5mm thick mitered glass with ceramic glaze
- Mount vertically or horizontally to standard 2" x 4" junction box
- $\bullet \ No \ transformer \ or \ driver \ required$
- Conversion plate for 4" junction box included





#### Kube

#### C (STEP) US



#### 5 inch Sconce, 12 inch & 22 inch LED Bath





**Color Temp:** *2700K* **CRI:** *90* 

Dimming: 100% - 10% ELV Rated Life: 60,000 hours

Input: 120V

• Acid etched solid blocks of water clear glass

 $\bullet \ \mathsf{Each} \ \mathsf{light} \ \mathsf{also} \ \mathsf{contains} \ \mathsf{a} \ \mathsf{powerful} \ \mathsf{task} \ \mathsf{downlight} \\$ 

 Driver located in standard 4" junction box with minimum inside dimensions of 3½" x 3½" x 1½"

• ADA compliant for WS-44505


• 277V option available for WS-44505 & WS-44512 (special order)

• WS-44522 has Universal Driver (120V-220V-277V)

		Watt	LED Lumens	Delivered Lumens	Finish
WS-44505*	1 Light	18W	675	605	
WS-44512*	2 Lights	32W	1554	1355	CH Chrome
WS-44522	3 Lights	47.5W	2346	2210	

Example: WS-44505-CH

\*For 277V special order, add an "F" before the finish: **WS-44505F-CH** 



WS-44522



Frosty solid etched glass cubes illuminate enchantingly.

#### Vie










18 inch, 24 inch & 36 inch LED Bath or Sconce

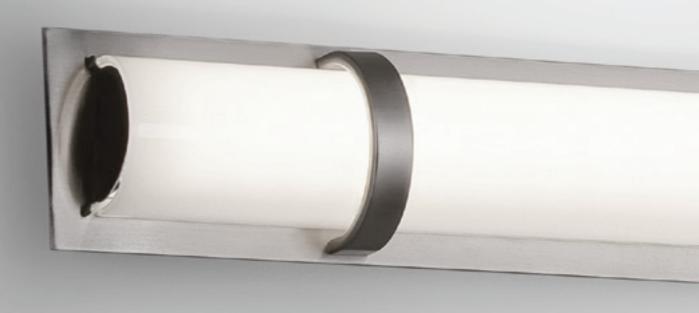



p. 57 Ceiling



A complete collection of contemporary sconces and bath.

**Color Temp:** 2700K (3000K / 3500K special order) • Sleek elegance for narrow applications

CRI:

**Dimming:** 100% - 10% ELV Rated Life: 80,000 hours

Input: 120V (277V special order)

- 3 inch wide format
- Silk-screened glass with a white ceramic glazed interior
- Mount vertically or horizontally to a standard 2" x 4" junction box
- Conversion plate for 4 inch junction box included
- No transformer or driver required







### LED Sconces + Swing arms

dweLED sconces are available in a variety of styles and sizes to complement current architectural interiors, from hospitality to upscale residential.

Beautiful ambient illumination from sconces can help define the perimeters of a space while also adding a flattering layer of light at the face level to occupants in the room that is unachievable from overhead lighting. The soft glow of dweLED sconces will create an ambience while the clean designs add visual interest to any room or hallway. Within this section, you will find a timeless variety of generously proportioned wall sconces that also meet ADA requirements. Certain designs also offer universal voltage input or 277V and emergency battery-backup special order options. This opens opportunities for dweLED sconces to add refinement to public spaces while providing important functional service.



		Watt	LED Lumens	<b>Delivered Lumens</b>	Finis	h	
WS-12713	13"	5.5W	415	70			
WS-12718	18"	10.5W	830	140	PN	Polished Nickel	
WS-12724	24"	10.5W	830	160			

Example: WS-12718-PN

For 277V, add an "F" before the finish: WS-12718F-PN



	Watt	LED Lumens	Delivered Lumens	Finish
WS-12712	16W	772	559	PN Polished Nickel

Example: WS-12712-PN

## **Bric**7 inch LED Sconce









Luminary building block.



**Color Temp:** 3000K (2700K / 3500K special order)

CRI: 90

**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours

**Input:** 120V (277V special order)

• Concealed hardware for a finished look at any viewing angle

 $\bullet$  Sconce may be rotated 180° when mounting

 Mounts on a 2" x 4" horizontal junction box or approved wiring compartment within fixture

• Conversion plate for 4" junction box included

• Replaceable LED module

• No transformer or driver required



	Watt	LED Lumens	Delivered Lumens	Finish
WS-11807	9W	800	660	BN Brushed Nickel WT White BO Brushed Bronze

Example: WS-11807-BN

For 277V special order, add an "F" before the finish: **WS-11807F-BN** For 2700K add "-27"; 3500K add "-35" before the finish: **WS-11807-27-BN** 







WACLIGHTING.COM

Example: WS-25612-WT

For emergency battery, add -EM after the finish: WS-25612-WT-EM For 2700K add "-27"; 3500K add "-35" before the finish: WS-25612-27-WT

# Float 12 inch & 18 inch LED Sconce











Color Temp: 3000K (2700K / 3500K special order)

CRI: 9


 Dimming:
 100% - 10% ELV

 Rated Life:
 85,000 hours

 Input:
 120-277V

An uplifting beacon of light.

- Water clear mitered glass with a silk-screened white ceramic glazed interior
- Mount vertically or horizontally
- Driver located in standard 4" junction box
- Magnetic end cap (no exposed mounting screws)
- Universal driver (120V-220V-277V)



		Watt	LED Lumens	Delivered Lumens	Finish
WS-7312	12"	15W	1125	615	BN Brushed Nickel
WS-7318	18"	20.5W	1555	890	CH Chrome

Example: WS-7318-BN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-7312-27-BN** 



	Watt	LED Lumens	Delivered Lumens	Finish
WS-14610	17.5W	775	555	BN Brushed Nickel

WACLIGHTING.COM

Example: WS-14610-BN

#### Link 14 inch LED Sconce









Lovely as a single sconce or installed in multiples as an interconnected display.

Color Temp: 3000K

CRI:

Dimming: 100% - 10% ELV

Rated Life: 38,000 hours Input:

120 - 277V

• Silk-screened glass diffuser with a white ceramic glaze

• Mount vertically or horizontally

• Conversion plate for 4" junction box included

• Driver located in a standard 2" x 4" junction box


• Universal driver (120V-220V-277V)

	Watt	LED Lumens	Delivered Lumens	Finish
WS-10614	20.5W	985	380	BN Brushed Nickel


WACLIGHTING.COM

Example: WS-10614-BN



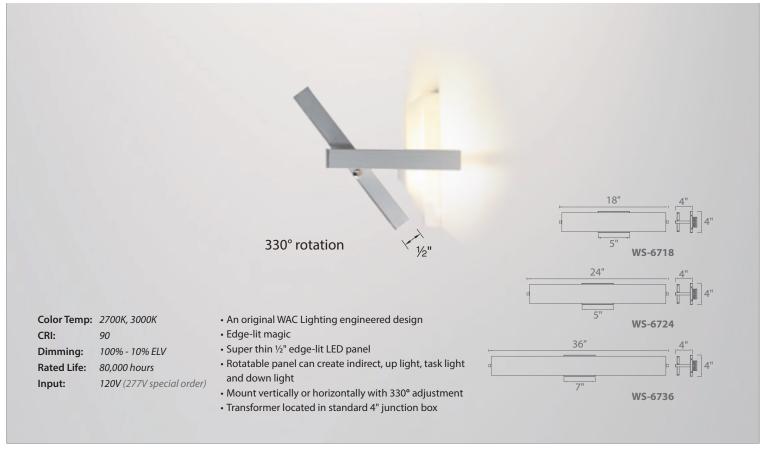

WACLIGHTING.COM

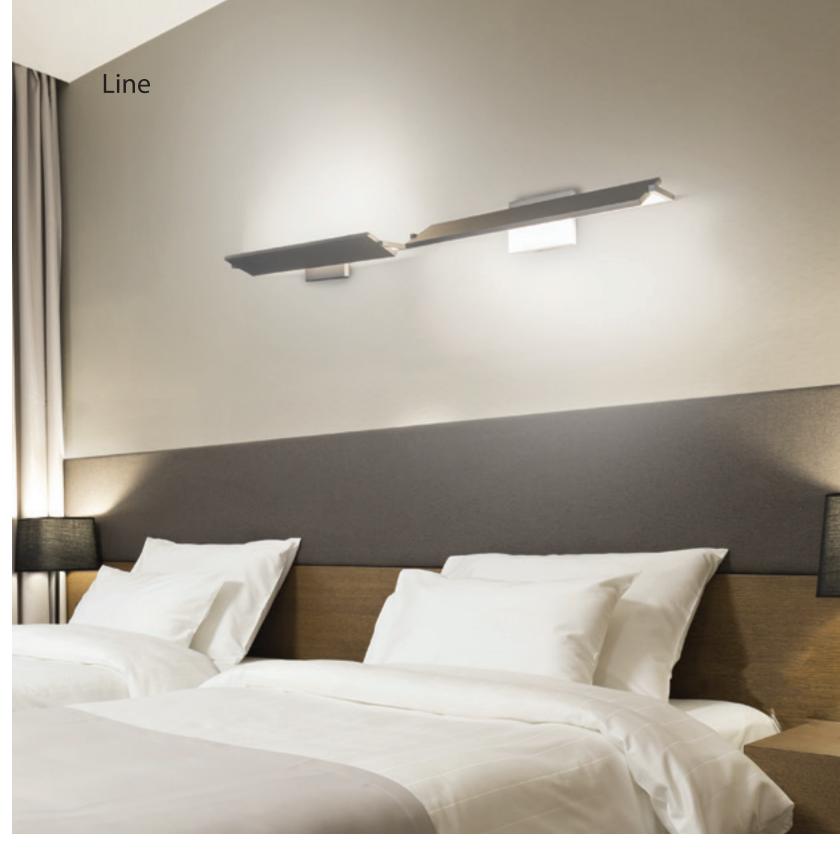

		Watt	Color Temp	LED Lumens	Delivered Lumens	Finish
WS-6718-27 WS-6718-30	18"	11.8W 11.8W	2700K 3000K	609 667	425 464	
WS-6724-27 WS-6724-30	24"	16W 15.8W	2700K 3000K	827 912	626 675	AL Brushed Aluminum
WS-6736-27 WS-6736-30	36"	22.1W 22.3W	2700K 3000K	1217 1333	903 987	

Example: **WS-6724-30-AL**For 277V, add an "F" before the color temperature: **WS-6724F-30-AL** 

#### Elementum















WS-7213 WS-7222 WS-7230

		Watt	LED Lumens	Delivered Lumens	Finis	h	
WS-7213	13"	15.5W	1118	730			
WS-7222	22"	30.5W	2236	1505	BN CH	Brushed Nickel Chrome	
WS-7230	30"	39.5W	2925	1955			

Example: WS-7222-CH

CRI:

Input:

Dimming: Rated Life:

• IP 65 wet location listed

• A streamlined luminaire sealed to meet healthcare facility requirements

• No transformer or driver required

• Etched triplex opal glass provides even illumination • Mount vertically or horizontally on a standard 4" junction box

For 277V, add an "F" before the finish: **WS-7222F-CH** 

For 3000K add "-30"; 3500K add "-35" before the finish: **WS-7222-30-CH** 



True chemistry between light and style

#### Vie

#### 14 inch & 20 inch LED Sconce
















Color Temp: 2700K (3000K / 3500K special order)


CRI: 90

**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours

**Input:** 120V (277V special order)

- Classic architectural look perfect for any space
- Water clear bent glass with a white ceramic glazed interior
- Mount vertically or horizontally on a standard 4" junction box
- Conversion plate for 4 inch junction box included
- No transformer or driver required







		Watt	LED Lumens	Delivered Lumens	Finis	h	
WS-6614	14"	18.5W	1462	755	BN	Brushed Nickel	
WS-6620	20"	24.5W	1845	1040	СН	Chrome	

Example: WS-6614-BN

For 277V, add an "F" before the finish: **WS-6614F-BN**For 3000K add "-30"; 3500K add "-35" before the finish: **WS-6614-30-BN** 



	Watt	LED Lumens	Delivered Lumens	Finish
WS-49618	11W	708	424	SN Satin Nickel

Example: WS-49618-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-49618-35-SN** 


#### Havana









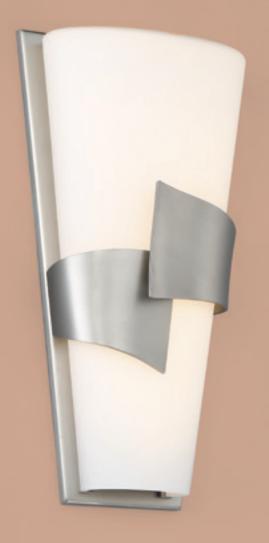

Wrapped in a warm embrace and reminiscent of yesteryear.

**Color Temp:** 3000K (2700K / 3500K special order) • Heavy gauge hand-formed nickel-plated metal work


CRI:

Dimming: 100% - 10% ELV Rated Life: 85,000 hours Input: 120-277V

• Mouth blown etched triplex opal glass diffuser provides even illumination

• Driver located in standard 4" junction box

• Universal driver (120V-220V-277V)





	Watt	LED Lumens	Delivered Lumens	Finish
WS-47617	16W	967	522	SN Satin Nickel

Example: WS-47617-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-47617-27-SN** 



	Watt	LED Lumens	Delivered Lumens	Finish
WS-40615	20W	1482	887	SN Satin Nickel

Example: WS-40615-SN

For 2700K add "-27"; 3500K add "-35" before the finish:  $\mathbf{WS-40615-27-SN}$ 



	Watt	LED Lumens	Delivered Lumens	Finish
WS-43613	16W	1134	761	SN Satin Nickel

Example: WS-43613-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-43613-27-SN** 

## Prohibition 20 inch LED Sconce









Modern for today while nostalgic of a different time

**Color Temp:** *3000K* (2700K / 3500K special order)

CRI: 90

 Dimming:
 100% - 10% ELV

 Rated Life:
 55,000 hours

 Input:
 120-277V

- Art deco inspired contemporary design updated with LED technology
- Mouth blown etched triplex opal glass diffuser provides even illumination
- Heavy gauge nickel plated hardware
- Driver located in standard 4" junction box
- Universal driver (120V-220V-277V)

6"	4"	
		10"

	Watt	LED Lumens	Delivered Lumens	Finis	sh
WS-45620	18W	1377	817	SN	Satin Nickel

Example: WS-45620-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-45620-27-SN** 



	Watt	LED Lumens	Delivered Lumens	Finish
WS-41618	15.5W	1207	870	SN Satin Nickel

Example: WS-41618-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-41618-27-SN** 



	Watt	LED Lumens	Delivered Lumens	Finish
WS-87618	25W	1625	1165	SN Satin Nickel

WACLIGHTING.COM

Example: WS-87618-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-87618-27-SN** 

#### Coco











The Elegant Feminine.

**Color Temp:** 3000K (2700K / 3500K special order)

CRI: 90

**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours

**Input:** 120-277V


• Art deco inspired contemporary design

• Mouth blown etched triplex opal glass diffuser provides even illumination

• Heavy gauge nickel plated hardware

• Driver located in standard 4" junction box

• Universal driver (120V-220V-277V)



	Watt	LED Lumens	Delivered Lumens	Finish
WS-46609	21W	1377	873	SN Satin Nickel

Example: WS-46609-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-46609-27-SN** 

#### Stella









8 inch, 12 inch & 17 inch LED Sconce



Classy and versatile pocket sconce





WS-13212

Color Temp: 3000K (2700K / 3500K special order)

**Dimming:** 100% - 10% ELV Rated Life: 80,000 hours

120V (277V special order) Input:

• Water clear bent glass with a silk-screened white ceramic glazed interior

- Heavy gauge nickel plated hardware
- Etched glass diffuser top and bottom
- No transformer or driver required

6"	3"	17"
WS-1	13217	

		Watt	LED Lumens	Delivered Lumens	Finis	h	
WS-13208	8"	9.5W	727	335			
WS-13212	12"	15.5W	1118	495	BN	Brushed Nickel	
WS-13217	17"	25.5W	1845	895			

WACLIGHTING.COM

Example: WS-13217-BN

For 277V, add an "F" before the finish: WS-13217F-BN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-13217-27-BN** 



	Watt	LED Lumens	Delivered Lumens	Finish	
WS-32621	15.5W	1030	557	BN Brushed Nickel	

Example: WS-32621-BN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-32621-27-BN** 



	Watt	LED Lumens	Delivered Lumens	Finish
WS-42618	20W	1476	827	SN Satin Nickel

WACLIGHTING.COM

Example: WS-42618-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-42618-27-SN** 



	Watt	LED Lumens	Delivered Lumens	Finish	
WS-12517	20.5W	1132	515	<b>BN</b> Brushed Nickel	

Example: WS-12517-BN

For 277V, add an "F" before the finish: WS-12517F-BN

#### Manhattan






14 inch, 20 inch & 26 inch LED Close to Ceiling Mount



Luminous fabric shade



FM-13114



Color Temp: 2700K

CRI:

90

Dimming: 100% - 10% ELV Rated Life: 50,000 hours

Input:

120V

• Trimless fabric shade illuminates evenly

• Etched acrylic diffuser below with no visible hardware

• Mounts to a standard 4" junction box

• No transformer or driver required



		Watt	LED Lumens	Delivered Lumens	Finish
FM-13114	14"	31W	2405	2205	
FM-13120	20"	36W	2405	2360	BN Brushed Nickel
FM-13126	26"	39W	3000	2825	

WACLIGHTING.COM

Example: WS-13114-BN



			Watt	LED Lumens	Delivered Lumens	Finish
[1]	7"	WS-13107	6W	284	110	
	15"	WS-13115	10.5W	566	250	BN Brushed Nickel BR Brushed Brass BO Brushed Bronze PN Polished Nickel
	22"	WS-13122	15.5W	851	365	


Example: WS-13107-PN

For 277V, add an "F" before the finish: WS-13107F-PN



Rated Life: 30,000 hours Input: 100-240V

- Two 12 inch cord covers included for portable installation
- Mounts to standard 4" junction box when hard-wired
- Driver located inside fixture



		Watt	LED Lumens	Delivered Lumens	Finish
Left	BL-1021L	8.5W	489	315	BZ Bronze
Right	BL-1021R	8.5W	489	315	<b>TT</b> Titanium

Example: BL-1021L-BZ

### Stretch LED Swing Arm





Customizable, functional aesthetic for integration with all interior furnishing styles.



Color Temp: 3000K

CRI: 85

**Dimming:** 100% - 10% (integral dimmer)

Rated Life: 30,000 hours Input: 120V

• A contemporary utilitarian design

• Flexible, yet fixable rubber tube for directing light

 $\bullet$  Two 12 inch cord covers included for portable installation when hard-wired

Mounts on standard 2" x 4" vertical junction box
Conversion plate for 4" junction box included

• Fingertip touch dimming on back plate

• Integral driver



	Watt	LED Lumens	Delivered Lumens	Finish				
BL-1630	7.5W	489	260	BK Black WT White				


Example: BL-1630-WT





# LED Outdoor

dweLED outdoor wall sconces add light and style to building exteriors, often serving more than one function. The right outdoor selection is both functional and decorative in providing comfortable nighttime illumination while also adding visual interest to the building envelope. Designed for ambient lighting and architectural complement, dweLED outdoor luminaires are equipped with specifically engineered, energy efficient LEDs to accent architectural surfaces for dramatic visual intrigue while delivering safety illumination of pathways and entrances. Clean designs maintain a timeless architectural aesthetic that reflects the dweLED brand while thoughtful engineering and quality construction delivers lasting robust performance.

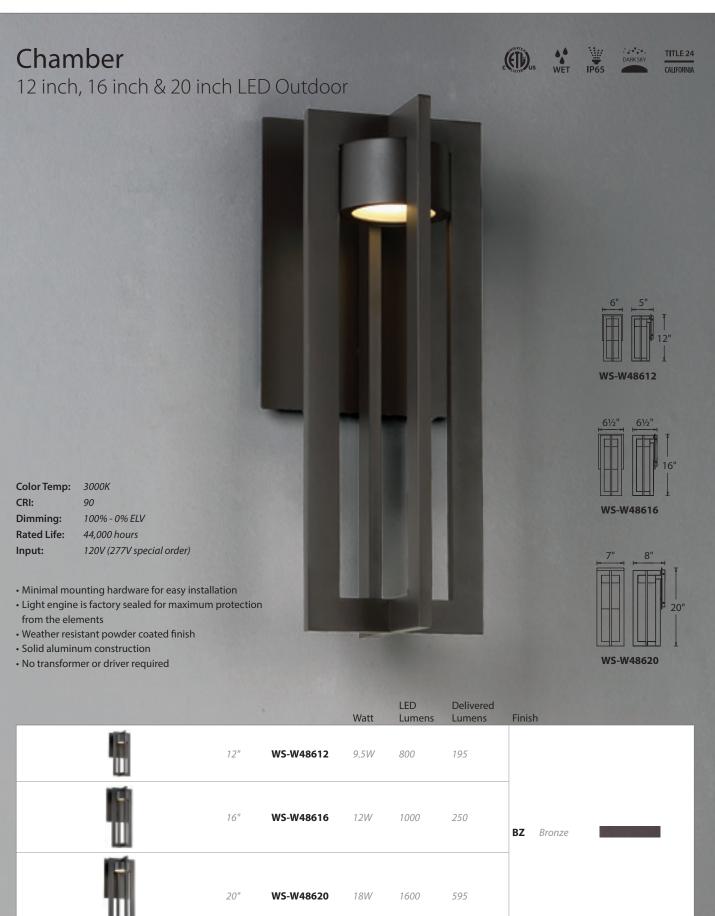

# Chamber


16 inch LED Outdoor Pendant









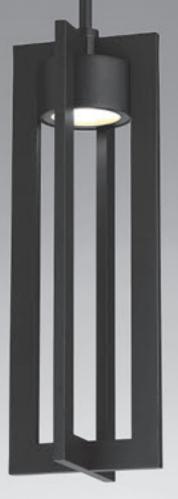

Shine a light on the soul within



Color Temp:

3000K

CRI:

90

Dimming:

100% - 10% ELV 44,000 hours

Rated Life: Input:

120V (277V special order)

- Hang Straight Swivel
- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- Weather resistant powder coated finish
- Solid aluminum construction
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available)
- No transformer or driver required


	Watt	LED Lumens	Delivered Lumens	Finish
PD-W48616	12W	1000	295	BZ Bronze

Example: PD-W48616-BZ

For 277V special order, add an "F" before the finish: **PD-W48616F-BZ** 



# Chamber 20 inch LED Outdoor Post Lantern Shine a light on the soul within p. 148 Outdoor Sconce p. 149 Outdoor Pendant Color Temp: 3000K CRI: Dimming: 100% - 10% ELV Rated Life: 44,000 hours 120V (277V special order) Input: • Mounts on a 3" maximum diameter post (not included) • Minimal mounting hardware for easy installation • Light engine is factory sealed for maximum protection from the elements 20" • Weather resistant powder coated finish • Solid aluminum construction • No transformer or driver required LED Delivered Lumens Lumens Finish



Example: **PM-W48620-BZ** For 277V special order, add an "F" before the finish: **PM-W48620F-BZ** 

## Oberon











#### 14 inch & 20 inch LED Outdoor



A timeless contemporary guardian


**Color Temp:** *3500K* **CRI:** *90* 


Dimming: 100% - 10% ELV Rated Life: 54,000 hours

Input: 120V (277V special order)

• Modern elegance brought to your backyard

- Bent opal glass provides even illumination
- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Mount horizontally or vertically
- Solid aluminum construction
- No transformer or driver required





WS-W45714

WS-W45720

		Watt	Lumens	Lumens	Finish
14"	WS-W45714	19.5W	1865	685	
20"	WS-W45720	19.5W	1900	745	- <b>BK</b> Black

LED

Delivered

Example: WS-W45714-BK

For 277V, add an "F" before the finish: WS-W45720F-BK

### Funnel











#### 12 inch & 17 inch LED Outdoor



Virtuosic composition of light and form.


Color Temp: 3000K

152

**Dimming:** 100% - 10% ELV or 0-10V

Rated Life: 75,000 hours Input: 120 - 277V

- Up & down light
- Light engine is factory sealed for maximum protection from the elements
- Weather resistant powder coated finish
- Die-cast aluminum construction
- Mount vertically or horizontally (WS-W37617)
- Driver located inside the fixture
- Universal driver (120V-220V-277V)





### Mod

#### 6 inch LED Outdoor
















Modernistic and always in fashion. A clean asymmetrical downlight.

Color Temp: 3000K CRI:

Dimming: 100% - 10% ELV

Rated Life: 70,000 hours Input: 120-277V

• Low profile with effective path illumination


• Weather-resistant powder coated finish

• Light engine is factory sealed for maximum protection from the elements

• Diecast aluminum construction

• Luminaire may be rotated 180° when mounting

• Driver located inside the fixture



1500	Watt	Lumens	Lumens	Finish
WS-W65607	15W	1165	850	BZ Bronze GH Graphite

Example: WS-W65607-BZ

## Over-Under













Playful indirect sconce with nostalgic contemporary appeal.

Color Temp: 3000K

CRI: 90

Dimming: 100% - 5% ELV

Rated Life:

46,000 hours

Input: 120V


• COB shooting from below upwards into the reflector

• Powerful LED light source providing soft indirect light

• High reflectance white reflector ensures effective delivery of lumens to a path or an area

• Die-cast aluminum

• No transformer or driver required





Watt Lumens Lumens Finish	
WS-W20709 15.5W 600 435 BZ Bronze	•

LED

Delivered

Example: WS-W20709-BZ

# Vertigo









12 inch & 16 inch LED Outdoor



Spellbinding style with a mid-century modern touch.


**Color Temp:** *3000K* **CRI:** *90* 


Dimming: 100% - 5% ELV
Rated Life: 54,000 hours

Input: 120V

• Weather-resistant powder coated finish

- Light engine is factory sealed for maximum protection from the elements
- Replacement glass available
- Solid aluminum construction
- Mouth blown etched triplex glass
- No transformer or driver required





WS-W34712

Delivered

WS-W34714

		Watt	Lumens	Lumens	Finish
12"	WS-W34712	12W	700	600	
16"	WS-W34714	12W	755	725	BK Black

Example: WS-W34712-BK

For 277V, add an "F" before the finish: WS-W34712F-BK


#### Gaia














Mid-century modern refined.

Color Temp: 3000K

100% - 0% ELV Dimming: Rated Life: 44,000 hours Input: 120V

- Black and white have never looked so good together
- Light engine is factory sealed for maximum protection from the elements
- Replacement glass available
- Weather-resistant powder coated finish
- Mouth blown etched triplex opal glass
- No transformer or driver required



Delivered

WS-W32714

			Watt	Lumens	Lumens	Finish
	12"	WS-W32712	9.5W	625	495	— <b>BK</b> Black
	14"	WS-W32714	12W	755	635	<b>DR</b> Blück
Evample: WS-W32714-RK						


## Hurricane













Color Temp: 3000K

CRI: 90

100% - 5% ELV


Dimming: Rated Life: 54,000 hours


Input:

120V

A modern interpretation of a familiar icon representing a refuge

- Light engine is factory sealed for maximum protection from the elements
- Sconce may be rotated 180° when mounting
- Solid aluminum construction
- Replacement glasses available
- Mouth blown etched triplex glass
- No transformer or driver required





WS-W38714

WS-W38710

Delivered

			Watt	Lumens	Lumens	Finish
	10"	WS-W38710	11.5W	700	500	
	14"	WS-W38714	12.5W	750	500	— <b>BK</b> Black
Evample: WC W29710 PV						

LED

### Abode













A Humble Way of Light


**Color Temp:** *3000K* **CRI:** *90* 

Dimming: 100% - 5% ELV Rated Life: 44,000 hours

Input: 120V (277V option available)

• Bright, but diffused illumination makes for a perfect porch light

- Spun aluminum shield
- Replacement glass available
- Light engine is factory sealed for maximum protection from elements
- Weather resistant powder coat finish
- Mouth blown etched triplex glass diffuser provides even illumination
- No transformer or driver required





WS-W48700

Delivered

		Watt	Lumens	Lumens	Finish
9"	WS-W48709	9.5W	530	310	DK Olask
11"	WS-W48711	12W	650	420	BK Black

Example: WS-W48709-BK

For 277V, add an "F" before the finish: WS-W48709F-BK

### Zealous











10 inch & 14 inch LED Outdoor




Fervently passionate but with solemn restraint.

Color Temp: 3000K CRI: 90

100% - 5% ELV Dimming: Rated Life: 44,000 hours

120V (277V special order) Input:

- Front hood provides excellent cut off for a discrete but functional path light
- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Solid aluminum construction
- No transformer or driver required



			Watt	LED Lumens	Delivered Lumens	Finish
	10"	WS-W53610	9.5W	700	330	
	14"	WS-W53614	12W	840	365	■ <b>BZ</b> Bronze <b>GH</b> Graphite
Example: WS-W53610-BZ						

For 277V, add an "F" before the finish: WS-W53614F-BZ

#### Icon


#### 14 inch LED Outdoor













Color Temp: 3000K CRI: Dimming: 100% - 5% ELV

54,000 hours Rated Life:


Input: 120 - 277V • Simple shape, simple idea, infinite applications

• Shielded light source for great low-glare illumination

• Driver located inside the fixture

• Up & down light

• Universal driver (120V-220V-277V)



		Watt	Lumens	Lumens	Finish
	WS-W54614	11W	845	455	AL Brushed Aluminum BZ Bronze
Example: WS-W54614-B7					

Delivered


### Mesh













Mesmerizing movement when viewed in transition

Color Temp: 3000K

Dimming: Rated Life: 100% - 0% ELV

Input:

CRI:

44,000 hours

• Solid heavy gauge aluminum mesh

creates an optical illusion

- Weather resistant powder coated finish
- 120V (277V special order) Light engine factory sealed for maximum protection from the elements
  - No transformer or driver required







010220		
-0		

WS-W43709

4.5W

55

85

Finish

7W

Watt

310

600

800

LED

Lumens

Delivered

Lumens



**BZ** Bronze



15"

WS-W43715

WS-W43712

9.5W

125

Example: WS-W43709-BZ

For 277V, add an "F" before the finish: WS-W43709F-BZ

### Nest
















#### A harmonious blend of Modern with Arts & Crafts

 Color Temp:
 3000K

 CRI:
 90


Dimming: 100% - 5% ELV
Rated Life: 54,000 hours
Input: 120V

- Extruded aluminum louvers create a dramatic pattern of light to generate interest
- Solid aluminum construction
- Light engine is factory sealed for maximum protection from the elements
- Weather resistant powder coated finish
- No transformer or driver required





	LED	Delivered	
Watt	Lumens	Lumens	Finish

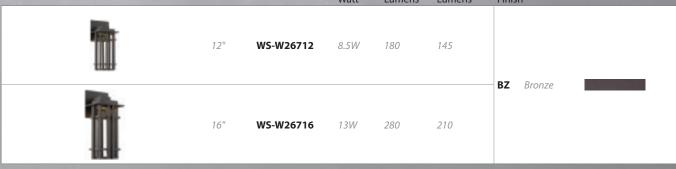

Example: WS-W26712-BZ


# Steampunk













**Color Temp:** *3000K* **CRI:** *90* 

**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours


**Input:** 120V (277V special order)

• Clear hammered seeded mouth blown glass creates dramatic pattern of light


• Die-cast Aluminum Construction

• Weather resistant powder coated finishes

• No transformer or driver required



Delivered



			Watt	Lumens	Lumens	Finish		
9	9"	WS-W24509	10W	624	365	BZ	Bronze	_
1	13"	WS-W24513	10W	657	440		Graphite	

LED

Example: WS-W24513-BZ

For 277V special order, add an "F" before the finish: WS-W24513F-BZ



### Spa 16 inch & 22 inch LED Outdoor













Dazzling. Shimmering. Sparkle of light.


Color Temp: 3000K CRI:

Dimming: 100% - 0% ELV Rated Life: 54,000 hours

Input: 120V

- Hand poured pane of art glass creates beautiful, dramatic patterns of light
- Weather resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Solid aluminum construction





• No transformer or	ariver required	Watt	LED Lumens	Delivered Lumens	Finish	
16"	WS-W41716	12.5W	375	185		
22"	WS-W41722	12.5W	365	180	<b>BZ</b> Bronze	

Example: WS-W41716-BZ

166

#### Tao

#### 12 inch & 18 inch LED Outdoor















Architecturally harmonious form.

**Color Temp:** *3000K* **CRI:** *90* 

Dimming: 100% - 10% ELV
Rated Life: 80,000 hours
Input: 120V (277V special order)

- Silver crystal glass window adds visual interest
- Gravity cast aluminum housing
- Minimal mounting hardware for easy installation
- Downlight adds functional path lighting
- Weather resistant powder coated finish
- No transformer or driver required





WS-W5318

Length		Watt	LED Lumens	Delivered Lumens	Finish
12"	WS-W5312	11W	830	220	
18″	WS-W5318	15W	1218	250	BZ Bronze

Example: WS-W5318-BZ

For 277V, add an "F" before the finish: WS-W5318F-BZ


## Sodor













Color Temp: 3000K

CRI: 90


 Dimming:
 100% - 5% ELV


 Rated Life:
 54,000 hours

 Input:
 120V

Steamworks inspired contemporary approach to a traditional lantern.

- Weather resistant powder coated finishes
- · Heavy aluminum shade provides great glare cutoff
- Light engine is factory sealed for maximum protection from the elements
- Die-cast aluminum construction
- No transformer or driver required





WS-W15708	

		Watt	LED Lumens	Delivered Lumens	Finish
8"	WS-W15708	9W	750	315	BZ Bronze
10"	WS-W15710	11.5W	1200	560	GH Graphite

Example: WS-W15708-GH

### Folsom











#### 10 inch & 14 inch LED Outdoor Sconce



Breakout structural design with clean modern elegance.


**Color Temp:** *3000K* **CRI:** *90* 


**Dimming:** 100% - 10% ELV **Rated Life:** 50,000 hours

**Input:** 120V (277V special order)

• UV rated acrylic

- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Solid aluminum construction
- Mount vertically or horizontally
- No transformer or driver required





		Watt	Lumens	Lumens	Finish	
10"	WS-W23610	6.5W	630	120		
14"	WS-W23614	12W	965	120	BZ Bronze GH Graphite	

LED

Delivered

Example: WS-W23610-GH

For 277V special order, add an "F" before the finish:  $\mathbf{WS\text{-}W23610F\text{-}GH}$ 

#### Axis





















**Color Temp:** *3000K* **CRI:** *90* 


Dimming: 100% - 10% ELV Rated Life: 54,000 hours

Input: 120V (277V special order)

- Mouth blown etched triplex opal glass diffuser provides even illumination
- Mount as wall mount or ceiling mount
- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements

WS-W50611

- Solid aluminum construction
- No transformer or driver required



WS-W50607

1155

Delivered

LED

1640





WS-W50611

			vvacc	Lamens	Lamens	1 1111311
0	7"	WS-W50607	9.5W	820	605	
400						<b>TT</b> Titanium

Example: WS-W50607-TT

For 277V, add an "F" before the finish: WS-W50607F-TT

11"

18W

### Latitude

10 inch, 14 inch & 20 inch LED Outdoor













Classic architectural lighting forms offered in complementary sizes

Color Temp: 3000K CRI: 90

Dimming: 100% - 0% ELV Rated Life: 44,000 hours

Input: 120V (277V special order) • Classic architectural look that pairs well with a multitude of commercial applications

- Weather resistant powder coated finishes • Light engine factory sealed for maximum
- protection from the elements
- Solid aluminum construction
- Etched triplex opal glass diffuser provides even illumination


• No transformer or driver required



Delivered

LED





WS-W52620

			Watt	Lumens	Lumens	Finish
	10"	WS-W52610	12W	765	415	
E	14"	WS-W52614	17.5W	1255	735	BZ Bronze TT Titanium
	20"	WS-W52620	19W	1220	790	

Example: WS-W52610-TT

For 277V, add an "F" before the finish: **WS-W52620F-TT** 

# Uno













#### 15 inch LED Outdoor



This is The One.

Color Temp: 3000K CRI: 90

Dimming: 100% - 10% ELV Rated Life: 80,000 hours

Input: 120V (277V special order)

- In a class of its own
- The unique illuminating element on the face indirectly reflects light back towards the viewer in an intriguing dimensional character

Delivered

- May be rotated 180° during mounting
- Solid aluminum construction
- Weather resistant powder coated finishes

LED


• No transformer or driver required


5"	+ + 4"	
		15"
/	1 1	

	Watt	Lumens	Lumens	Finish
WS-W5915	15W	1234	875	BZ Bronze GH Graphite WT White
Francis WC WEGGE WT				

Example: WS-W5915-WT

For 277V, add an "F" before the finish: **WS-W5915F-WT** 

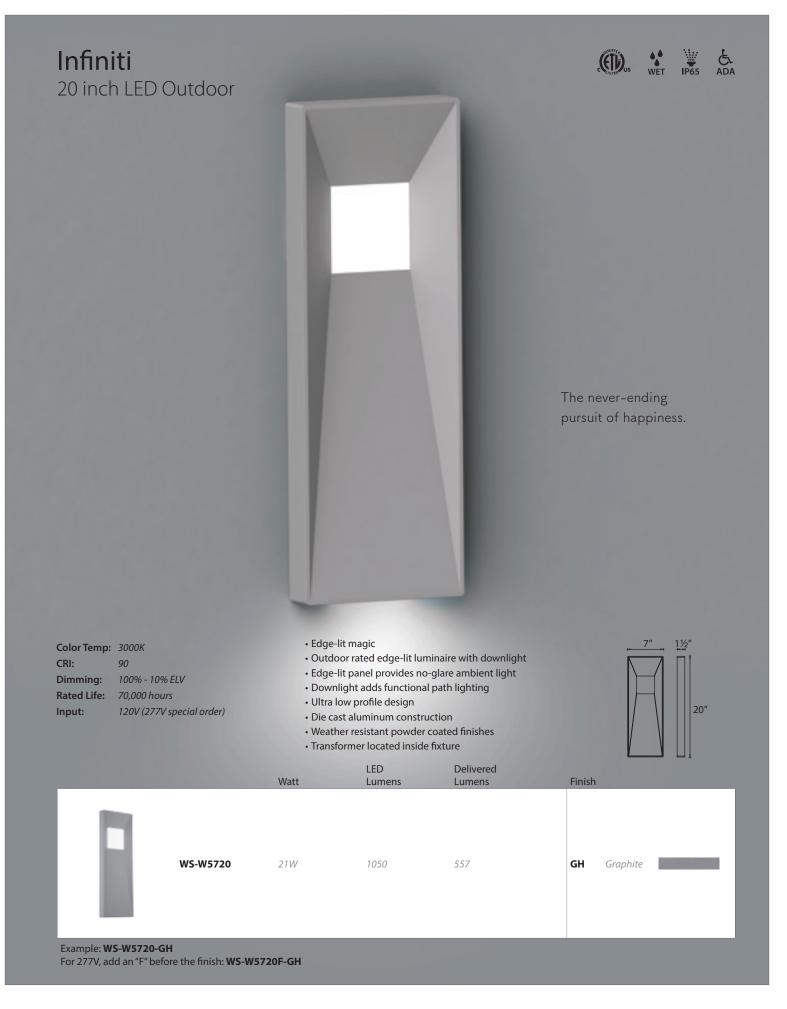

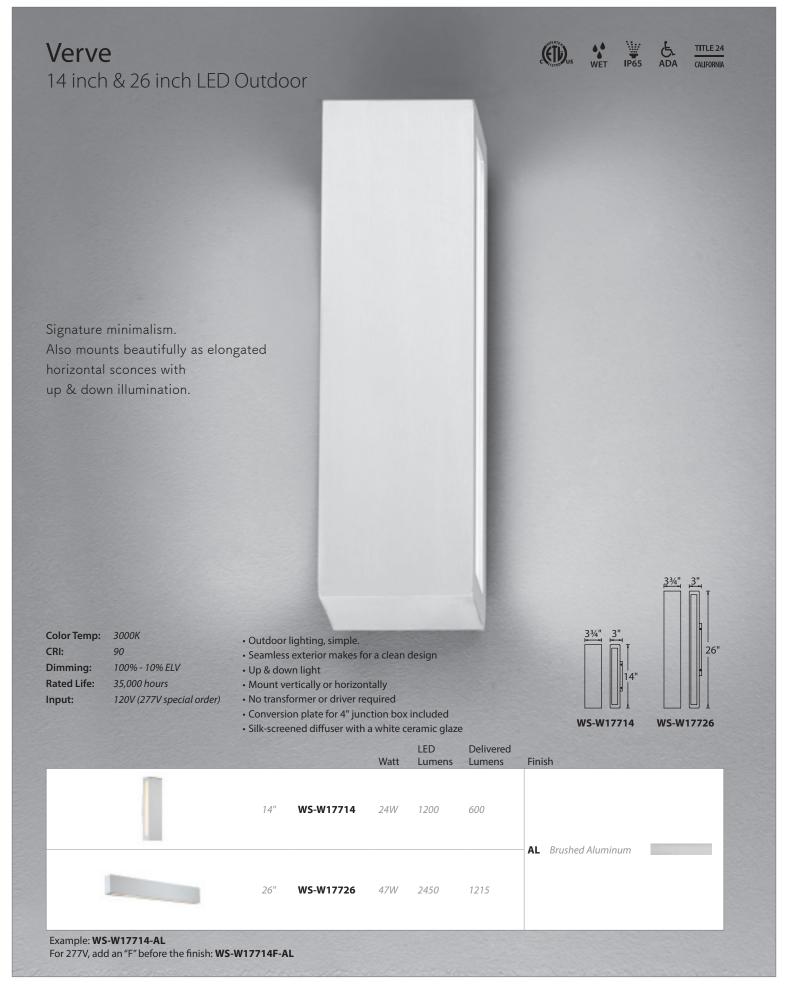



# Janus









Cleverly contemporary minimalistic silhouette.





**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours

Input: 120V (277V special order)

- Open frame silhouetted indirect LED sconce
- Indirect light for comfortable illumination
- Backlit design for less glare
- Mounted vertically or horizontally
- Solid aluminum construction
- Weather resistant powder coat finishes
- No transformer or driver required







		Watt	LED Lumens	Delivered Lumens	Finish
12"	WS-W5812	15W	1234	340	
17"	WS-W5817	19W	1615	605	BZ Bronze GH Graphite
22"	WS-W5822	30W	2468	960	

Example: WS-W5812-GH

For 277V, add an "F" before the finish: WS-W5812F-GH

## Caliber











10 inch & 14 inch LED Outdoor



#### Light Projection Tuned with Precision

 Color Temp:
 3000K

 CRI:
 90

 Dimming:
 100% - 10% ELV

72,000 hours

120 - 277V


**Rated Life** 


Input:

• Discrete cylinder with minimal mounting hardware

• Up & down light

- Light engine is factory sealed for maximum protection from the elements
- Can be mounted vertically or horizontally
- Solid aluminum construction
- Driver located in standard 4" junction box
- Universal driver (120V-220V-277V)





WS-W36610

WS-W36614

			Watt	LED Lumens	Delivered Lumens	Finish
4	10"	WS-W36610	11W	735	485	AL Brushed Aluminum
4	14"	WS-W36614	21W	1500	1080	BK Black

#### **Numerical Index**

BL-1021L144	PD-W24513	165
BL-1021R144	PD-W33620	43
BL-1630145	PD-W48616	149
	PM-W48620	
F		
	W	
FM-400655	<b></b>	
FM-400955	WS-6111	106
FM-401255	WS-6117	
FM-401455	WS-6123	
FM-410953	WS-6614	
FM-411153	WS-6618	
FM-411553		
FM-431357	WS-6620	
	WS-6624	
FM-460650	WS-6636	113
FM-461050	WS-6718	8
FM-461551	WS-6724	8
FM-462251	WS-6736	8
FM-701360	WS-7115	99
FM-711362	WS-7120	90
FM-1311441, 61, 142	WS-7128	
FM-1312041, 61, 142	WS-7213	
FM-1312641, 61, 142	WS-7222	
FM-1661747	WS-7222 WS-7230	
FM-1662247		,
FM-2172019, 49	WS-7312	
FM-21728	WS-7316	
•	WS-7318	
FM-5761456	WS-7322	109
FM-W33612	WS-7334	
FM-W33616	WS-10614	123
FM-W5230658	WS-11807	118
FM-W5230958	WS-12517	14
	WS-12712	117
	WS-12713	
	WS-12718	
P	WS-12724	
	WS-13107	
PD-1371440		
PD-1372040	WS-13115	
PD-1372640	WS-13122	
PD-2275415	WS-13208	
PD-2661126	WS-13212	
PD-2661626	WS-13217	
PD-3172722	WS-14610	122
PD-3173522	WS-20624	
PD-3371812	WS-20635	90
PD-3373212	WS-20646	90
PD-3374312	WS-21611	88
PD-3671036	WS-21622	
PD-3671436	WS-21633	
	WS-25612	
PD-45747	WS-26714	
PD-5114821	WS-26724	
PD-5171232		
PD-5181435	WS-26737	
PD-5191534	WS-32621	
PD-5200833	WS-39513	
PD-5221430	WS-39522	
PD-5231039	WS-40520	103
PD-52313	WS-40526	103
PD-6072325	WS-40615	132
PD-64713	WS-40720	83
	WS-40726	
PD-72718	WS-40738	
PD-72724	WS-41618	
PD-8372027	WS-42505	
PD-8564820		
PD-8566520	WS-42514	
PD-8772011	WS-42524	
PD-8772311	WS-42618	
PD-877358	WS-42725	7

WS-42732 .	71
WS-43613 .	133
	110
WS-44512 .	110
WS-44522 .	110
WS-45620 .	134
	137
	131
	130
	84
	84
	85
	85
	94
	94 69
	69
	69
	77
	75
WS-77624 .	75
WS-77636 .	75
WS-79622 .	87
WS-79636 .	87
WS-87618 .	136
	73
	73
WS-W5312	167
	167
WS-W5720	173
WS-W5812	176
WS-W5817 WS-W5822	176
WS-W3913	
WS-W15700	
WS-W13714	
WS-W17726	
WS-W20709	
WS-W23610	)169
WS-W23614	ł169
WS-W24509	9164
WS-W24513	
WS-W26712	2163
WS-W26716	
WS-W29718	
WS-W29724	
WS-W32712	
WS-W32714 WS-W34712	
WS-W34714 WS-W36610	
WS-W36614	
WS-W37612	
WS-W37617	
WS-W38710	)158
WS-W38714	ł158
WS-W41716	5166
WS-W41722	2166
WS-W43709	
WS-W43712	
WS-W43715	
WS-W45714	
WS-W45720	
WS-W48612	
WS-W48616	
WS-W48620 WS-W48709	
WS-W48709	
WS-W50607	

WS-W50611	 59, 170
WS-W52610	 171
WS-W52614	 171
WS-W52620	 171
WS-W53610	 160
WS-W53614	 160
WS-W54614	 161
WS-W65607	154

#### **Alphabetical Index**

Α		ı	S	
ABODE	150	ICON161	SLICE	52
			SODOR	
ASHTON		ILLUSION22		
ASTORIA		INFINITI173	SOHO	
AVIATOR			SPA	
AXIS	59, 170		STEAMPUNK	
		J	STELLA	138
			STRETCH	145
В		JANUS176	STRIP	76
			SVELTE	108
BLISS	86			
BLOK	120	K		
BRIC	118		Т	
BRINK	74	KISS35		
BRISTOL	62, 98	KUBE110	TAO	167
			THEORY	70
			TURBO	122
С		L		
CALIBER	177	LACED139	U	
CHAMBER		LATITUDE171	•	
CHICAGO		LEVEL20, 66	UNO	172
CLIFFHANGER		LINE21, 80, 124	0110	
COCO		LINK123		
COMPASS		LOLLI33		
CORBUSIER		LOLLI33	V	
			V	
CORSO	12		\/ANHT\/	2.4
		М	VANITY	
_			VERTIGO	
D		MALLOW36	VERVE	
		MANHATTAN 40, 61,142	VIDA	
	27	MERIDIEN56, 84	VIE	
DELANO		MESH162	VISTA	
DICE	54, 90	MOD154	VOLO	15
DUNHILL	102	MODERNE 132	VORNADO	8 , 11
DYNAMO	28	MYTHICAL116, 117		
-		N	Z	
E		N	7F A L OLLIC	160
F MC2		NECT 162	ZEALOUS	160
E=MC2		NEST163		
ELEKTRON		NIVEOUS39, 58		
ELEMENTUM				
ELLIPTIC				
EMPIRE	135	0		
		OBERON151		
F		OVER-UNDER155		
FLAIR	30			
FLIP	144	P		
FLOAT	121			
FOLSOM	169	PALAIS130		
FUNNEL	152	PANORAMA175		
FUSE	72	PILLAR92		
		PLANETS46		
		PROHIBITION134		
G				
GAIA	157	R		
	50			
		REFLECTION68		
		RONDELLE96		
н		ROCKET32		
		NOCKET32		
HAVANA	121			
HORIZON	94 158			
DURKIL AINE	158			

#### Headquarters

Tel: 800.526.2588 Fax: 800.526.2585

#### **East Coast Factory**

44 Harbor Park Dr Port Washington, NY 11050

#### **Central Factory**

1600 Distribution Ct, Lithia Springs, GA 30122

#### **West Coast Factory**

1750 Archibald Ave Ontario, CA 91761

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program.

Copyright 2017

