

# 3.5"OCULUX LED RECESSED



11W Power: Comparable to: 75W MR16 Input: 120V or 277V Rated Life: 50,000 hours

- IC-rated Remodel and New Construction
- Airtight in New Construction
- Shallow housing under 4" depth
- Cutout 41/4"
- Single spot light source
- Ceiling thickness: ½" 1"
- ETL&cETL listed
- ELV or TRIAC or 0-10V dimming compatible



Trims (Order Housing Se	parately)	Model	Веа	ım	Max Lumens	Max CBCP	Colo	т Тетр	Finish	'n	
	4" 35/8"	R3BRD Round Open Reflector Wet Location Listed 40° visual cutoff	S N F	15° 25° 50°	955	4881	927 930	2700K 3000K		Brushed Nickel White	
	4" 35%" - 31/4" - 43/4" - 1	R3BRA Round 0 - 35° Adjustable Damp Location Listed 48° visual cutoff	S N F	15° 25° 50°	985	4712	927 930	2700K 3000K		Brushed Nickel White	
	4" 35/8"	R3BSD Square Open Reflector Wet Location Listed 35° visual cutoff	S N F	15° 25° 50°	930	4710	927 930	2700K 3000K		Brushed Nickel White	
	4" 35/8"	<b>R3BSA</b> Square 0 - 35° Adjustable Damp Location Listed 48° visual cutoff	S N F	15° 25° 50°	985	4712	927 930	2700K 3000K		Brushed Nickel White	

ousings (Required) - Order sepa	rately from trims	Model	Input	Dimming	Notes
New Construction	13 <sup>1</sup> / <sub>16</sub> "  13 <sup>1</sup> / <sub>16</sub> "  10"  10"  10"	R3BNICA-10 IC-Rated, Airtight	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth
	14½" min 24½" max 67/16" Ø4½"	<b>R3BNICA-10U</b> IC-Rated, Airtight	120V - 277V	120V 277V 100% - 5% 100% - 1% TRIAC, ELV, 0-10V 0-10V	any direction when used with adjustable trims  Ceiling thickness: ½"-1"
Remodel	—11max"————————————————————————————————————	R3BBRT-10 IC Rated	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth Allows adjustment in any direction when used with adjustable trims
	T				Ceiling thickness: ½"-1"

# 2" OCULUX LED RECESSED



Power: 9W
Comparable to: 50W MR16
Input: 120V
Rated Life: 50,000 hours

- IC-rated Remodel and New Construction
- Airtight in New Construction
- Shallow housing under 4" depth
- Cutout: 31/16"
- Single spot light source
- Ceiling thickness: ½" 1"
- ETL&cETL listed
- Sold as new construction, may be reconfigured in the field for remodel
- ELV or TRIAC or 0-10V dimming compatible



All-in-one unit, ready to install right out of box IC-rated and airtight


		Model	Веа		Max Lumens	Max	Colo	or Temp	Finisi	h	
39/16" 53/	21/16"	R2BRD Round Open Reflector Wet Location Listed 35° visual cutoff	N F	25° 45°	680	2437	927	2700K 3000K	BN	Brushed Nickel White	
3%16" 51/	21/16"	<b>R2BRA</b> Round 0 - 35° Adjustable Damp Location Listed 45° visual cutoff	S N F	15° 25° 45°	685	3245		2700K 3000K		Brushed Nickel White	
3%16"	2½6"	<b>R2BSD</b> Square Open Reflector Wet Location Listed 35° visual cutoff	N F	25° 45°	700	2316	927 930	2700K 3000K		Brushed Nickel White	
3%6"	21/16"	<b>R2BSA</b> Square 0-35° Adjustable Damp Location Listed 45° visual cutoff	S N F	15° 25° 45°	685	3245		2700K 3000K		Brushed Nickel White	

Example: R2BRD-N930-WT

#### INTEGRAL HOUSING AND TRIM: BOTH NEW CONSTRUCTION & REMODEL

#### **NEW CONSTRUCTION CONFIGURATION**


IC-Rated, Airtight



#### REMODEL CONFIGURATION

IC-Rated, Airtight





# I CAN'T BELIEVE IT'S NOT RECESSED LED FUNCTIONAL CEILING LIGHT











Input: 120V CRI: 90

**Dimming:** 100% - 10% ELV, 100%-5% TRIAC

Rated Life: 54,000 hours

- Imitates a traditional 6" Line voltage recessed downlight with an R30 light bulb
- Install over a standard 4" junction box
- ADA compliant

- Opaque acrylic diffuser
- Multiple LED array for uniform illumination
- 120VAC no driver needed

		Watt	Color Temp	LED Lumens	Delivered Lumens	Finish	
1½"							
Ø7½"	FM-616-930-WT	16W	3000K	1150	1050	White	
7/8"							

Example: FM-616-930-WT











**Dimming:** 100% - 5% ELV, 100%-5% TRIAC

Input: 120V Rated Life: 35,000 hours

- ADA compliant
- Wall or Ceiling Mount
- Translucent acrylic diffuser
- Multiple LED array for uniform illumination
- 120VAC no driver needed




Install over a 4" junction box or pancake box



Retrofit over a 4", 5" or 6" recessed can

	Model	Wattage	Color Te	emp	LED Lumen	Delivered Lumen	CRI		Finish	
5 <sup>7</sup> 8" [11/8"	FM-304	12W	930	3000K	670	570	90	BN BZ WT	Brushed nickel Bronze White	Fits over a 4" recessed can or direct wire to a 4" junction box or pancake box
7%"	FM-306	15W	930 940	3000K 4000K	985 1165	840 905	90 90	BN BZ WT	Brushed nickel Bronze White	Fits over a 5" to 6" recessed can or direct wire to a 4" junction box or pancake box
174	FM-306	15W	930JB	3000K	985	840	90	WT	White	Direct mount to 4" junction box or pancake box









Simple shapes with hi-tech soul.



**Color Temp:** *2700K, 3000K* 

**CRI:** 90

Dimming: 100% - 10% ELV Rated Life: 70,000 hours

Input: 120V (277V special order)

• Edge-lit magic

- Super thin, edge-lit LED panel at less than an inch thick
- Great for closets and hallways
- Die-cast aluminum construction
- Wall or ceiling mount with twist-lock mechanism
- Transformer located in outlet box


6"	7/8"
	þ
FM-46	06



		Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
6"	1-4606-27 1-4606-30	2700K 3000K	8W 8W	551 608	270 300	<b>TT</b> Titanium
770"	1-4610-27 1-4610-30	2700K 3000K	12.5W 12.5W	964 1064	545 600	WT White

Example: FM-4610-27-WT

For 277V, add an "F" before the color temperature: FM-4610F-27-WT

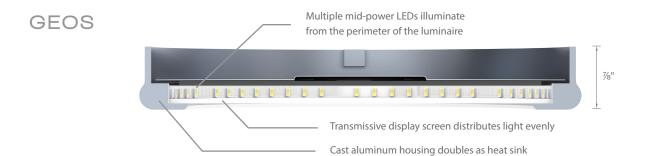




6

# GLO LED FUNCTIONAL CEILING AND WALL



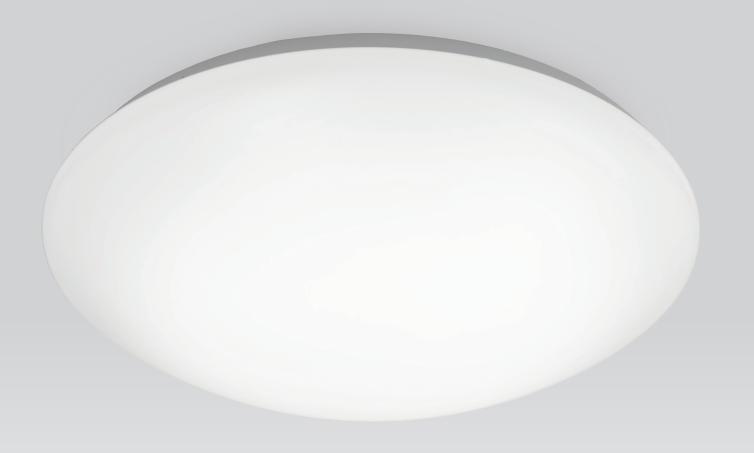

Input: 120V CRI: 85

**Dimming:** 100% - 10% ELV **Rated Life:** 50,000 hours

- ADA compliant for FM-211 & FM-214
- Wall or Ceiling Mount
- Translucent acrylic diffuser
- Multiple LED array for uniform illumination
- 120VAC no driver needed
- Direct mounts to all junction boxes

		Watt	Color Temp	LED Lumens	Delivered Lumens	Finish
1134"	FM-211	15W	<b>27</b> 2700k <b>35</b> 3500k		985 1035	
14¼" [4"	FM-214	24W	<b>27</b> 2700k <b>35</b> 3500k		1395 1510	<b>WT</b> White
16½"	FM-216	33.5W	27 2700k 35 3500k		2060 2150	

Example: FM-214-35-WT

7

# BLO LED FUNCTIONAL CEILING AND WALL







Input: 120V CRI: 85

**Dimming:** 100% - 10% ELV Rated Life: 50,000 hours

• ADA compliant

- Wall or Ceiling Mount
- Translucent acrylic diffuser
- Multiple LED array for uniform illumination
- 120VAC no driver needed

		Watt	Color Temp	LED Lumens	Delivered Lumens	Finish
13%"	FM-113	22W	27 2700K 35 3500K	1695 1770	1395 1510	
145%"   334"	FM-115	33W	<b>27</b> 2700K <b>35</b> 3500K	2475 2595	2060 2150	WT White

Example: FM-115-35-WT


# **BRINK**

#### 18 INCH & 24 INCH & 36 INCH LED BATH







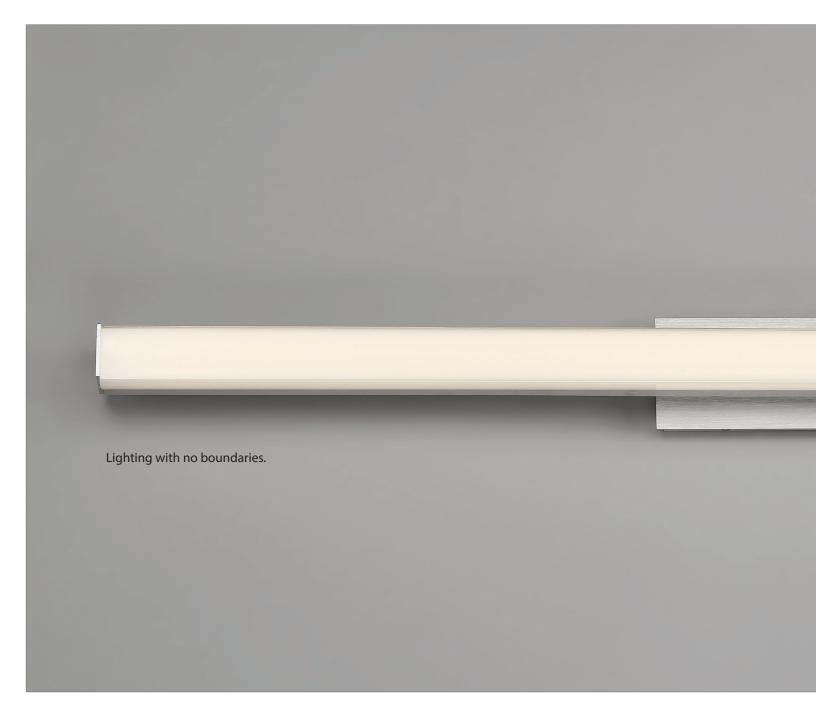



Color Temp: 2700K, 3000K, 3500K

CRI:

Dimming: 100% - 5% ELV Rated Life: 85,000 hours Input: 120 - 277V

- · Modern, sleek, clean
- Ultra low profile design
- Co-extruded clear and white acrylic provides substance, luminosity and optical efficacy
- Mount vertically or horizontally
- Driver located in standard 2" x 4" junction box
- Conversion plate for 4" junction box included
- Adjustable backplate
- Universal driver (120V-220V-277V)



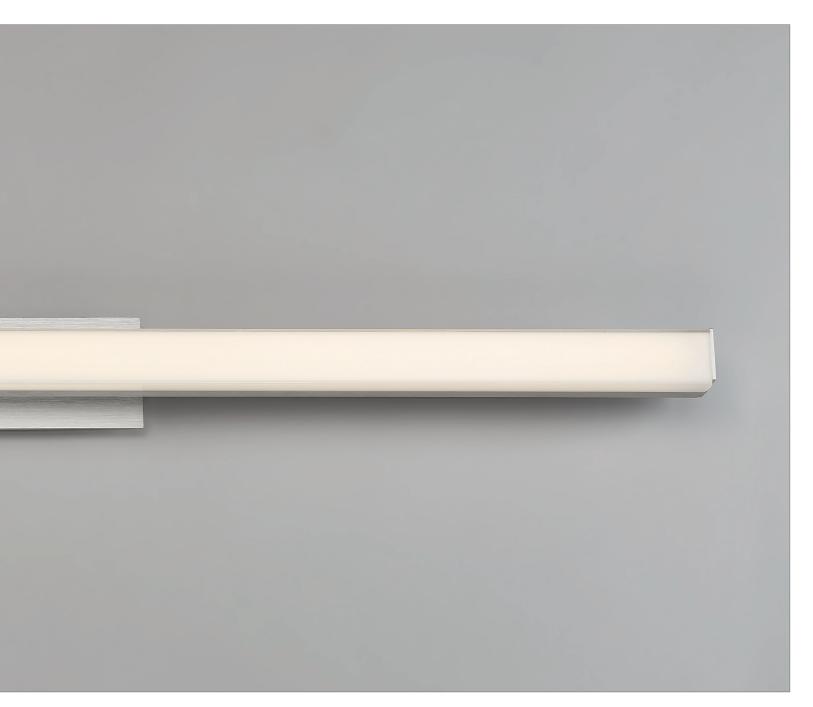

		Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
	WS-77618-27	2700K	15.5W	1155	910	
18"	WS-77618-30	3000K	15.5W	1225	1015	
	WS-77618-35	3500K	15.5W	1330	1115	
	WS-77624-27	2700K	20.5W	1595	1330	
24"	WS-77624-30	3000K	20.5W	1720	1440	AL Brushed Alumimum
	WS-77624-35	3500K	20.5W	1785	1510	
	WS-77636-27	2700K	30W	2365	1985	
36"	WS-77636-30	3000K	30W	2445	2095	
	WS-77636-35	3500K	30W	2561	2180	

Example: **WS-77618-30-AL** 

# VISTA 20 INCH, 26 INCH & 38 INCH LED BATH









A brilliant outlook. Versatile 1 inch narrow spears of light.



Color Temp: CRI:


Input:


3000K 90


100% - 5% ELV Dimming: Rated Life: 54,000 hours

120 - 277V

- Spot free linear illumination
- Conversion plate for 4" junction box included
- Adjustable backplate
- Co-extruded clear and white acrylic provides substance, luminosity and optical efficacy
- Mount vertically or horizontally
- Driver located in standard 2" x 4" junction box
- Universal driver (120V-220V-277V)



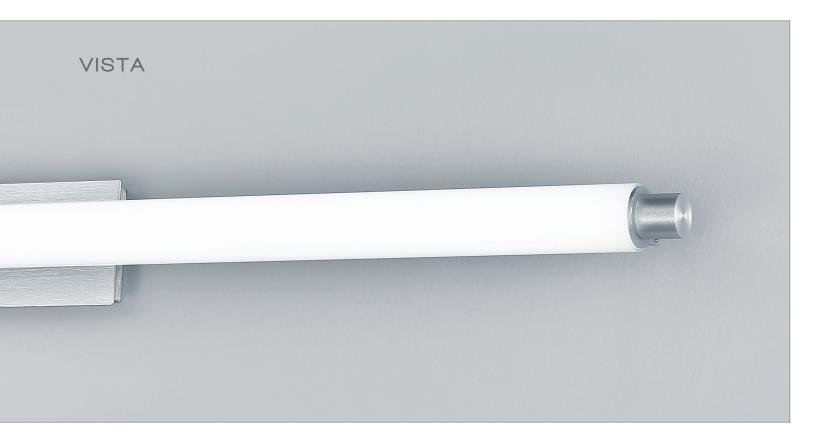

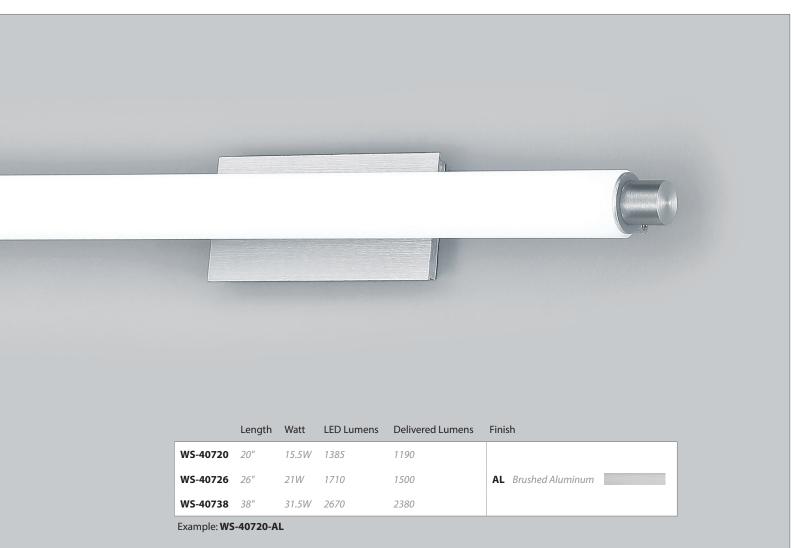





Wall or Ceiling Mount, Suitable for Closet

Input:

CRI:

85

**Dimming:** 100% - 10% ELV **Rated Life:** 35,000 hours

ADA compliant

Suitable for installation over bulkhead in closets

Damp location rated

- Translucent acrylic diffuser
- Multiple LED array for uniform illumination
- 120VAC no driver needed

-		Watt	Colo	r Temp	LED Lumens	Delivered Lumens	Finish
<u>24"</u> 13"	WS-224	20.5W	27 35	2700K 3500K	1670 1870	1190 1340	
36" 13"	WS-236	31W	27 35	2700K 3500K	2570 2865	1785 2005	WT White
48"	WS-248	40.5W	27 35	2700K 3500K	3280 3555	2325 2685	










Lighting with no boundaries.



**Color Temp:** 2700K, 3000K, 3500K

CRI:

Dimming: 100% - 10% ELV

54,000 hours Rated Life:

Input:

120 - 277V

• Modern, sleek, clean

• Co-extruded clear and white acrylic provides substance, luminosity and optical efficacy

- Mounts vertically or horizontally
- Listed for use in closets


- Driver located in standard 2" x 4" junction box
- Conversion plate for 4" junction box included
- Adjustable backplate
- Universal driver (120V-220V-277V)

		Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
WS-63718-27		2700K	15W	1185	900	
WS-63718-30	18"	3000K	15W	1425	1100	
WS-63718-35		3500K	15W	1500	1200	
WS-63724-27		2700K	19.5W	1645	1390	
WS-63724-30	24"	3000K	19.5W	1875	1490	AL Brushed Alumimum
WS-63724-35		3500K	19.5W	1975	1640	
WS-63736-27		2700K	28.5W	2660	2275	
WS-63736-30	36"	3000K	28.5W	2855	2330	
WS-63736-35		3500K	28.5W	3020	2405	

Example: **WS-63718-35-AL** 

# LED90 EDGE LIT BUTTON LIGHT





Surface mounted

 Power:
 24V, 5W

 CRI:
 90

 ELV Dimming:
 100% – 5%

Rated Life: 100,000 hours


**Cutout:** 3¼" for recessed applications

Model	Color Temp	Lumens	Finish	
HR-LED90-27 HR-LED90-30	2700K 3000K	200 200	BK BN DB WT	Black Brushed Nickel Dark Bronze White

Example: HR-LED90-30-BN

Includes 6 foot lead wire





Recessed

- Can be surface or recessed mounted
- Super thin profile at ½"
- Edge-lit LEDs reduce glare and assure even light distribution
- Anti-microbial white paint









#### CLASS 2 ENCLOSED ELECTRONIC TRANSFORMERS (REQUIRED)

	Model	Output	Input	Dimming	Min Load	Max Fixture Run	L	W	Н	
of the control of the	EN-2460-RB2	24V, 60W	120V	ELV	1W	7	61/2"	15/8″	11/4"	
	EN-24100-RB2	24V, 96W 24V,96W	120V 120V-277V	ELV 0-10V	1W 1W	10	6½" 12%"	15/8" 3½"	1¼" 2"	Fits through small openings
	EN-24100-277-RB2-T	_				10				
c(ll) us	EN-2460-P-AR	24V, 60W	120V	Yes	1W	7	23/4"	15/8″	13/4"	Plug-in power supply with on/off switch and 6' detachable cord
	MTB-01 Multiple terminal box	easily wire		Itiple output	connect					nal block is used to llation without the use

- $\bullet \ \ Secondary\ wiring\ for\ Class\ 2\ transformers\ does\ not\ require\ conduit\ sheathed\ cable\ or\ clamp\ wiring\ techniques$
- Intrinsically safe, Class 2 transformers permit no greater than a 5 amp current to be drawn
- Non-metallic sheathed cable may be used for secondary wiring in walls and ceilings
- $\bullet \ \ \textit{Power consumption may vary depending on the efficiency of the power supply being used}$

# BUTTON LIGHTS 24V LED



#### **Recessed or Surface Mount with 24V transformer**

Power: 24V, 4.8W CRI: 85


**Lumens:** 180 (round), 155 (square) **Dimming:** 100% – 10% ELV dimming

Compares To: 20W Xenon Bi-pin Rated Life: 70,000 hours

**Color Temp:** 2700K, 3000K **Cutout:** 2\%" for recessed applications





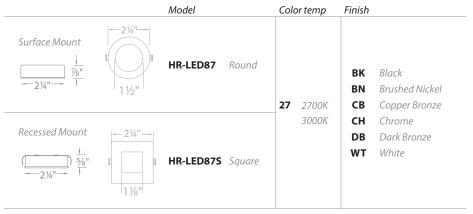


Example: HR-LED87S-WT Includes 6 foot lead wire

#### **CLASS 2 ELECTRONIC TRANSFORMERS (REQUIRED)**

1W minimum load

- Plug-in power supply with on/off toggle switch and 6' detachable cord
- 1W minimum load

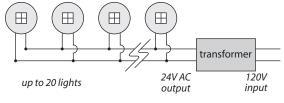

Minimizes wiring back to transformer

	Туре	Model	Input	Output	Dimming	Power Up To	Dimensions
		EN-2460-RB2	— 120V	24V AC/60W	ELV	12 × LED87	6½" x 15/8" x 1¼"
A STATE OF THE STA	Remote	EN-24100-RB2	1200	24V AC/96W	ELV	20×LED87	6½" x 15/8" x 1¼"
		EN-24100-277-RB2-T	120V-277V	24V AC/96W	0-10V	20 X LED87	125/8" x 31/4" x 2"
	Plug-In	EN-2460-P-AR	120V	24V AC/60W		12×LED87	2 3/4" x 1 5/8" x 1 3/4"
	MTB-01 Multiple ter	rminal box	31/4" L x 13/4	"W x 7%"H			

#### **Retrofit Housing**



Use to replace HR-88 and HR-86 using existing wiring and cutout, LEDme® Button light not included.

Model #	Finisl	h				
	BK	Black				
	BN	Brushed Nickel				
HR-LED-COV	CB	Copper Bronze				
HK-LED-COV	CH	Chrome				
	DB	Dark Bronze				
	WT	White				
Example: <b>HR-LED-COV-BK</b>						

#### Frosted Lens Accessory

Softens light and reduces glare for square or round

Model #

LENS-13-FR



- May be hard-wired with 120V power or used with a plug-in power cord
- Subsequent fixtures may be powered with an "I" Connector or Interconnect Cable carrying 120V
- May be individually switched and/or wired to a wall box switch/dimmer



Power Cord

Model			Length
BA-PC6	WT	White	6'
DA-PC0	BK	Black	O






#### "I" Connector

Max Fixture Run				
6				

Interconnection for seamless end to end transitions. **Each light bar includes one.** 



#### Interconnect Cable

Model	Length	Max Fixture Run		
BA-IC12	12"	4	wT	White
BA-IC24	24"	4	BK	vvnite Black
BA-IC36	36"	3	DK	Віаск

Example: BA-IC12-WT

Links two light bars using a single power connection.

# DUO AC-LED COLOR OPTION LIGHT BARS





Color Temp: 2

2700K and 3000K

CRI: 90+

**Dimming:** 100% – 10% smooth and

continuous ELV and TRIAC dimming

Rated Life: 54,000 hours


• Uniform Light

- 120VAC no driver needed
- Diffused light source reduces glare
- 1 inch Profile

- Multiple knock outs for ease of wiring
- Extruded aluminum construction for optimal thermal management
- Romex® connectors included
- One "I" connector included with each luminaire



Example: BA-ACLED12-27/30AL

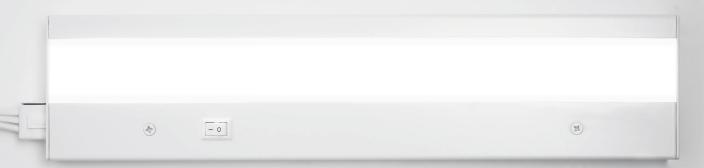

# LIGHT BARS LEDme® PRO

**Color Temp:** 2700K, 3000K

CRI: 90+

**Dimming:** 100% – 10% smooth and continuous ELV dimming

Rated Life: 90,000 hours

- Uniform Light
- Energy Star® Rated
- CEC Title24 Compliant
- 120VAC no driver needed
- Diffused light source reduces glare
- 1 inch Profile
- Extruded aluminum construction for optimal thermal management

18

- Multiple knock outs for ease of wiring
- ELV dimming

		Model	Length	Watt	Lumens	Color Temp	Finish
	23/4"	BA-ACLED8 BA-ACLED12 BA-ACLED18 BA-ACLED24 BA-ACLED30	8" 12" 18" 24" 30"	5.5W 8.0W 10.0W 15.0W 17.0W	365 450 705	<b>927</b> 2700K <b>930</b> 3000K	BZ Bronze AL Brushed Aluminum WT White

Example: BA-ACLED12-927-WT

21/5"





4W/ft Power:

Lumens: Up to 330 lm / ft

CRI: 90

Rated Life: 80,000 hours

**TAPE SELECTIONS** 

- Specially rated for installation in the storage area of a clothes closet
- UV stabilized protective coating protects LEDs and circuitry for long term use in damp locations
- May field cut every 6 inches at the end of a run
- Includes an end cap
- Max run length of 25 feet



System	Colo	r Temp	Length		Qty	Finish	1	System	Colo	r Temp	Finish	
LED-TX24	22 27 30 35 45	2200K 2700K 3000K 3500K 4500K	6IN 1 5 1-40	6 inches 1 foot 5 feet 1 foot	1 1 1 40	WT	White	LED-TX24	22 27 30 35 45	2200K 2700K 3000K 3500K 4500K	5L-WT	White

Example: LED-TX2435-6IN-WT

**COMPATIBLE CLASS 2 POWER SUPPLY (REQUIRED)** 

#### Example: LED-TX2435-5L-WT

Each "L" connector consumes 2 Watts Includes one male to male connector

and End cap.

Type		Model	Input	Output	Dimming	
Remote	The state of the s	EN-2460-RB2-T EN-24100-RB2-T	120VAC 120VAC	24VAC / 60W 24VAC / 96W	ELV ELV	Includes a 6 foot lead wire
Remote		EN-24100-277-RB2-T	120 - 277VAC	24VDC/96W	0-10V	Includes a 6 foot lead wire
Plug-in		EN-2460-P-AR-T EN-24100-P-AR-T	120VAC 120VAC	24VAC / 60W 24VAC / 96W		Includes a 6 foot lead wire

#### **ALUMINUM CHANNELS** COMPATIABLE WITH ALL DAMP RATED INVISILED TAPE SYSTEMS



LED-T-CH Aluminum Channel LED-T-CH-EC Additional End Caps

5 feet 2 pcs

Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette



45° Angled Aluminum Channel Additional End Caps

LED-T-CH2 5 feet LED-T-CH2-EC 2 pcs

Includes a diffuser, two end caps, and ten screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette Diffused light from InvisiLED tape



Deep Aluminum Channel Additional End Caps

LED-T-CH1 LED-T-CH1-EC

5 feet 2 pcs

Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette Eliminate visible hot spots



Fixed Angle LED-T-CL3-PT Channel Clip

Adjustable Channel Clip

LED-T-CL2-PT

Includes 2 pieces, 4 screws. Use to mount Aluminum Channel, Deep Aluminum Channel, 45° Angled Aluminum Channel






































Power: 3W/ft


Lumens: Up to 215 lm / ft

CRI: 85

Rated Life: 50,000 hours

- Specially rated for installation in the storage area of a clothes closet
- Designed for bright cove or task lighting
- UV stabilized protective coating protects LEDs and circuitry for long term use in damp locations
- May field cut every 2 inches at the end of a run
- Includes an end cap
- Maximum run length of 33 feet





#### **TAPE SELECTIONS**

#### "L" CONNECTOR

System	Colo	or Temp	Length		Qty	Finish	System	Color Temp	Finish
LED-T24	W P 35 C	2700K 3000K 3500K 4500K	2IN 2IN-10 1 5 1-40	2 inches 2 inches 1 foot 5 feet 1 foot	1 10 1 1 40	WT White	LED-T24	W 2700h P 3000h 35 3500h C 4500h	3L-WT White

Example: LED-T24W-1-40-WT


3500k no 2IN-10

#### Example: LED-T24W-3L-WT

Each "L" connector consumes 1.2 Watts Includes one male to male connector and End cap.

#### **COMPATIBLE CLASS 2 POWER SUPPLY (REQUIRED)**

Туре		Model	Input	Output	Dimming	
Remote	William and the second	EN-2460-RB2-T EN-24100-RB2-T	120VAC 120VAC	24VAC / 60W 24VAC / 96W	ELV ELV	Includes a 6 foot lead wire
Remote		EN-24100-277-RB2-T	120 - 277VAC	24VDC/96W	0-10V	Includes a 6 foot lead wire
Plug-in		EN-2460-P-AR-T EN-24100-P-AR-T	120VAC 120VAC	24VAC / 60W 24VAC / 96W		Includes a 6 foot lead wire

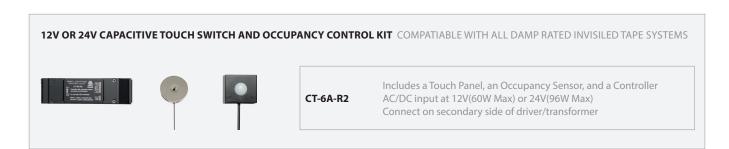



Power: 2W/ft

Lumens: Up to 150 lm / ft

**CRI:** 85

Rated Life: 50,000 hours

- Specially rated for installation in the storage area of a clothes closet
- UV stabilized protective coating protects LEDs and circuitry for long term use in damp locations
- May field cut every 2 inches at the end of a run
- Includes an end cap
- Max run length of 40 feet per power supply

#### **TAPE SELECTIONS**

System	Color Temp	Length	Qty	Finish
LED-T24	27L 2700K 30L 3000K	2IN     2 inches       2IN10     2 inches       1     1 foot       5     5 feet       1-40     1 foot		<b>WT</b> White

Example: **LED-T2427L-5-WT** 



#### "L" CONNECTOR

21

System	Color Temp	Finish	
LED-T24	<b>27L</b> 2700K <b>30L</b> 3000K	3L-WT	White

Example: LED-T2427L-3L-WT

Each "L" connector consumes 0.7 Watts Includes one male to male connector and End cap.



#### **COMPATIBLE CLASS 2 POWER SUPPLY (REQUIRED)**

Туре	Model	Input	Output	Dimming	
Remote	EN-2460-RB2-T EN-24100-RB2-T	120VAC 120VAC	24VAC/60W 24VAC/96W	ELV ELV	Includes a 6 foot lead wire
Remote	EN-24100-277-RB2-T	120 - 277VAC	24VDC/96W	0-10V	Includes a 6 foot lead wire
Plug-in	EN-2460-P-AR-T EN-24100-P-AR-T	120VAC 120VAC	24VAC/60W 24VAC/96W		Includes a 6 foot lead wire

### INDOOR ALUMINUM CHANNELS

#### COMPATIABLE WITH ALL DAMP RATED INVISILED TAPE SYSTEMS



Aluminum Channel Additional End Caps LED-T-CH LED-T-CH-EC 5 feet 2 pcs

Diffuses light from InvisiLED tape Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, LITE



Deep Aluminum Channel Additional End Cap LED-T-CH1 LED-T-CH1-EC 5 feet 2 pcs

Eliminates visible hot spots Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, LITE



Includes a diffuser, two end caps, and ten screws Compatible with Pro, Pro2, LITE



Installed with 45° Angled Aluminum Channel in toe kick and Pro 3 InvisiLED®



Fixed Angle Channel Clip



Adjustable Channel Clip

Includes 2 pieces, 4 screws. Use to mount Aluminum Channel, Deep Aluminum Channel, 45° Angled Aluminum Channel

# INDOOR MOUNTING ACCESSORIES



1/2"

**Aluminum Retrofit Channel** 

**LED-T-RC** 3 feet

Clear Channel LED-TO24-CH5

5 feet

Can be bent to create fixed curves or used as a glare shield Compatible with Pro, Pro2, LITE



Clip For surfaces that are difficult to adhere

LED-T-CL

10 pcs 10 Screws Includes a diffuser, two end caps, and five screws Provides a clean mounting surface for 3M adhesive



Curve Clip Secures on one edge

LED-T-CL1

10 pcs 10 Screws

Clips to hold indoor InvisiLED tapes sections Compatible with Pro, Pro2, LITE

# INDOOR CONTROLLERS

Conveniently install an secondary side of power supply for adding senior friendly low voltage lighting to furniture and toe kicks



Capacitive Touch Switch and Occupancy Control Kit


CT-6A-R2

Includes a Touch Panel, an Occupancy Sensor, and a Controller.
Compatible with WAC low voltage LED (12V or 24V) undercabinet products

# INDOOR ELECTRICAL ACCESSORIES

	In Wall Rated Extension Cable	LED-TC-WEXT-144 LED-TC-WEXT-144-WT	Black White	12 ft 12 ft
	Extends distance between a hard wired power supply	LED-TC-WEXT-240	Black	20 ft
	or a wiring box to a tape section.	LED-TC-WEXT-240-WT	White	20 ft
all all	In Wall Rated Joiner Cable	LED-TC-WIC-144	Black	12 ft
		LED-TC-WIC-144-WT	White	12 ft
	Connects tape sections. 2 female ends.	LED-TC-WIC-240	Black	20 ft
~ <b>~</b>	1 male to male connector included	LED-TC-WIC-240-WT	White	20 ft
		LED-TC-P-2	Black	2 ft
A Miles	Lead Wire	LED-TC-P-2-WT	White	2 ft
31		LED-TC-P-12	Black	12 ft
	Alternative lengths for plug-in power supplies	LED-TC-P-12-WT	White	12 ft
	Extension Cable	LED-TC-EXT-144	Black	
	Extends distance between a hard wired power supply	LED-TC-EXT-144-WT	White	12 ft
	or a wiring box to a tape section			
**	Low Voltage Wiring Box With Feed	LED-TC-B-2	Black	L: 1½ in
	Neatly houses connectos for up to	LED-TC-B-2 LED-TC-B-2-WT	White	W: 3/4 in
	two wires with 12" female feed	LED-TC-B-2-WT	vviite	H: 7⁄8 in
	two wires with 12 Ternale feed			
13	Low Voltage Wiring Box			L: 1½ in
0 0 0		LED-T-B		W: 3/4 in
	Neatly houses connections for up to two wires			H: % in
	Wiring Box With Switch			L: 6¼ in
191		TB-S		W:15/8 in
	Use when spanning a large gap in a system layout without leaving exposed wiring. Optional switch included			H: 1¼ in

Compatible with Pro, Pro2, LITE

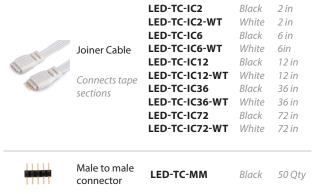

Compatible with Pro, Pro2, LITE Change directionality of tape runs and reuse cut ends of tape.



Compatible with Pro, Pro2, LITE









Ceiling Mounted **360°** Horizontal Rotation **90°** Vertical Aiming

Input: 120V CRI: 85

Dimming: 100% - 10% ELV Rated Life: 50,000 hours

- Waterproof breathable technology to maintain stable atmospheric pressure free from condensation
- Factory-Sealed LED Light Engine
- Die-cast Aluminum Construction

- 120V Direct Wire No Driver Needed
- 1/2"Threaded Heavy Duty Mounting Arm
- Photo/Motion Sensor Sold Separately
- Free from condensation



Shown with Round Canopy Box includes Two Canopies for use with Surface Mount or Recessed Junction Boxes

	Power	Comparable	Color Temp	Delivered Lumens	Finish
⊕	35.5W	100W HID	<b>30</b> 3000K <b>50</b> 5000K	2450 2730	ABZ Architectural Bronze AGH Architectural Graphite AWT Architectural White

Example: WP-LED335-30-aGH







# Endurance™ LED FLOOD LIGHTS







#### SINGLE SPOT



Input: 120V CRI: 85

Dimming: 100% - 10% ELV Rated Life: 39,000 hours

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire no driver needed
- Photo/motion sensor sold seperately

	Power	Comparable	Color	r Temp	Delivered Lumens	Finish		
₩P-LED415	15W	75W Halogen	30 50	3000K 5000K	965 1030	ABZ AGH AWT	Architectural Bronze Architectural Graphite Architectural White	

**Example: WP-LED415-30-AWT** 

#### MOTION SENSOR (120V) available in 3 complementary colors



MS-120-BZ Bronze
MS-120-GY Gray
MS-120-WT White



#### PHOTOSENSOR (120V) available in 3 complementary colors



 PC-120-BZ
 Bronze

 PC-120-GY
 Gray

 PC-120-WT
 White











Input: 120V CRI: 85

Dimming: 100% - 10% ELV Rated Life: 39,000 hours

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire no driver needed
- Photo/motion sensor sold seperately

	Power	Comparable	Color	r Тетр	Delivered Lumens	Finish		
WP-LED430  Max 12½"  Max 6½"	30W	2 x 75W Halogen	30 50	3000K 5000K	965 x2 1030 x2	ABZ AGH AWT	Architectural Bronze Architectural Graphite Architectural White	

Example: WP-LED430-30-aBZ

# **MOTION SENSOR** (120V) available in 3 complementary colors







**Input:** 120V-277V

CRI: 85

**Dimming:** 100% - 10% ELV or 0-10V

Rated Life: 100,000 hours

- Factory-Sealed LED Light Engine
- Die-cast Aluminum Construction
- 20° Forward Throw Illumination
- Built-in Level For Easy Adjustment
- Photo/Motion Sensor Sold Separately

	Power	Comparable	Delivered Lumens	Color	Гетр	Finish		
734" WP-LED119 WP-LED127 WP-LED135	19W 27W 35W	39W HID 70W HID 100W HID	1460 2135 2825	30 50	3000K 5000K	ABZ AGH AWT	Architectural Bronze Architectural Graphite Architectural White	

Example: WP-LED127-30-aWT

#### MOTION SENSOR (120V) available in 3 complementary colors













Mounts in any orientation For direct and indirect illumination



Includes box sleeve For use with surface mount junction boxes

**Input:** 120V-277V

CRI: 85

**Dimming:** 100% - 10% ELV or 0-10V

Rated Life: 100,000 hours

- Factory-Sealed LED Light Engine
- Die-cast Aluminum Construction
- 20° Forward Throw Illumination
- Built-in Level For Easy Adjustment
- Photo/Motion Sensor Sold Separately

Max Delivered

Power Comparable Lumens Color Temp Finish

WP-LED219 19W 39W HID 1435 30 3000K 50 5000K AGH Architectural Bronze AGH Architectural Graphite AWT Architectural White

#### Example: WP-LED219-30-aBZ

#### MOTION SENSOR (120V) available in 3 complementary colors





# RUBIX LED EXTERIOR







Color Temp: 3000K

100% - 10% ELV or 0-10V Dimming:

CRI: 90 **Rated Life:** 70,000 hours

#### SINGLE LIGHT WALL MOUNT







Beam:

Wattage: 16W

Lumens: 750 • Mounts up or down • Die-cast aluminum construction

Input: 120-277V

	Model		Finish
<u>5"</u> 6½"			Brushed Aluminum Black
5"	WS-W2504	BZ GH	Bronze Graphite White

Example: WS-W2504-BZ

#### **DOUBLE LIGHT WALL MOUNT**



Beam: 86°

30W

• Die-cast aluminum construction

Finish

Black

Bronze

White

Graphite

Brushed Aluminum

Wattage: Lumens: 1400 Input: 120-277V

> Model ΑL -61/2" BK WS-W2505 BZGH WT

Example: WS-W2505-AL

### SINGLE LIGHT WALL MOUNT



86° Beam:

· Mounts up or down

Wattage: 16W

• Die-cast aluminum construction

Lumens: 805 120-277V Input:

Model		Finish
 WS-W2509	BK E BZ E GH	

Example: WS-W2509-WT

# **DOUBLE LIGHT WALL MOUNT**





Beam: 233°

• Die-cast aluminum construction

30W Wattage: Lumens: 1385 120-277V Input:

	Model	Finish
10"	WS-W2510	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White

Example: WS-W2510-BK









Color Temp: 3000K 100% - 10% ELV or 0-10V Dimming:

CRI: 90 Rated Life: 70,000 hours

#### **CEILING MOUNT**



Beam: 86°

Wattage:

16W

750 Lumens: Input: 120-277V · Ceiling mount

• Die-cast aluminum construction

Model		Finish
	AL	Brushed Aluminum
	BK	Black
FM-W2505	BZ	Bronze
	GH	Graphite
	WT	White

Example: FM-W2505-WT

5"

#### **CEILING MOUNT**



Beam:

Input:

95°

· Ceiling mount

Wattage: 30W Lumens:

1875

• Die-cast aluminum construction

120-277V

Model		Finish
FM-W2510	BK BZ GH	Brushed Aluminum Black Bronze Graphite White
	euc.	AL BK FM-W2510 BZ GH

Example: FM-W2510-BZ

# SCOOP LED EXTERIOR SINGLE LIGHT WALL MOUNT

· Mounts up or down

• Die-cast aluminum construction











Beam:

Wattage: 16W 805 Lumens:

Input: 120-277V 3000K Color Temp: CRI:

100% - 10% ELV or 0-10V Dimming:

Rated Life: 70,000 hours

	Model		Finish
10" 3%" 5½"	WS-W20506	BK BZ	Brushed Aluminum Black Bronze Graphite

Example: WS-W20506-BK

















100% - 10% ELV or 0-10V Color Temp: 3000K Dimming: CRI: 90 Rated Life: 70,000 hours

#### 4" SINGLE LIGHT WALL MOUNT





Beam: 33°

· Mounts up or down

Wattage: 16W • Die-cast aluminum construction

Lumens: 800 Input: 120-277V

	Model		Finish
4½" 1½"	WS-W2605	BK BZ GH	Brushed Aluminum Black Bronze Graphite White

Example: WS-W2605-AL

#### SINGLE LIGHT WALL MOUNT









70° Beam:

· Mounts up or down

Wattage: 16W • Die-cast aluminum construction

Lumens: 825 120-277V Input:

Model	Finish
10" 3%" WS-W2609	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White

Example: WS-W2609-BK

#### 4" DOUBLE LIGHT WALL MOUNT



Beam: 33° Wattage: 30W

Lumens: 1750

120-277V Input:

• Die-cast aluminum construction

	Model	Finish
4½" 1½"	WS-W2604	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White

Example: WS-W2604-BZ

#### **DOUBLE LIGHT WALL MOUNT**





Beam: 294° • Die-cast aluminum construction

30W Wattage: Lumens: 1525 120-277V Input:

		Model		Finish
10"	3%"		AL	Brushed Aluminum
10	378		BK	Black
	53/8"	WS-W2610	BZ	Bronze
			GH	Graphite
			WT	White

Example: WS-W2610-WT

### TUBE LED EXTERIOR







**Color Temp:** 3000K **Dimming:** 100% - 10% ELV or 0-10V

Rated Life:

70,000 hours

#### 4" CEILING MOUNT

90





CRI:

Beam: 33°

Ceiling mount

Wattage: 16W

• Die-cast aluminum construction

**Lumens:** 800 • Dark Sky Friendly

Input: 120-277V

M	odel Finish
5"   5"   FM-V	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White

Example: FM-W2605-WT

#### **CEILING MOUNT**



ENERGY STAR DARK SK

**Beam:** 91°

Ceiling mount

Wattage: 30W

• Die-cast aluminum construction

Lumens: 1740 Input: 120-277V

	Model		Finish
12"	FM-W2612	AL BK BZ GH WT	Brushed Aluminum Black Bronze Graphite White

Example: FM-W2612-GH

#### PENDANT MOUNT



**Beam:** 33° • Die-cast aluminum construction

Wattage: 16W • Hang straight swivel

Lumens: 800 • Three 12" and one 6" down rods included

Input: 120-277V • Dark Sky Friendly



Example: PD-W2605-BK

# STEP LIGHTS LED LANDSCAPE





1838 listed (12V) **US** 1598 listed (120V)

#### CIRCLE AND SQUARE STEP LIGHTS

- Solid stainless steel construction
- Includes a spring clip for wall or step applications
- 6' lead wire






					Model	
23/4"	31/4"	Circle 2041	Input Power Brightness Color Temp CRI Rated Life	9-15VAC 4.1W / 6.6VA 50 lm 3000 K 85 70,000 hours	2041-30SS 2041-30BS	Stainless Steel Bronzed Stainless Steel
23/4"	31/4"	Square 2061	Input Power Brightness Color Temp CRI Rated Life	9-15VAC 4.1W / 6.6VA 50 lm 3000 K 85 70,000 hours	2061-30SS 2061-30BS	Stainless Steel Bronzed Stainless Steel

#### **RECTANGLE STEP LIGHTS**

Solid Die-cast brass, corrosion resistant aluminum alloy, or cast stainless steel construction

	12V	120V
Input	9 - 15VAC	110 - 120VAC
Power	2W 3.1VA	3.5W
Brightness	Up to 38 lm	Up to 65 lm
CRI	90+	90+
Rated Life	60,000 hours	54,000 hours

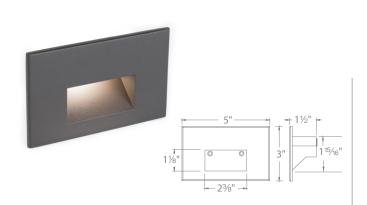


Voltage	Model	Color Temp	Finish	es
12V	4011-27 4011-30 4011-AM	2700K 3000K Amber	BBR BZ BK	Bronze on Brass*** Bronze on Aluminum Black on Aluminum
120V**	WL-LED100-C- WL-LED100-AM-	3000K Amber	WT SS*	White on Aluminum Cast Stainless Steel

#### Example: 4011-30BZ

 $\hbox{\it *Cast Stainless Steel finish is only available in 3000K and Amber Colors.}$ 





Voltage	Model	Color Temp	Finishes
12V	4021-27 4021-30 4021-AM	2700K 3000K Amber	BZ Bronze on Aluminum BK Black on Aluminum
120V**	WL-LED200-C- WL-LED200-AM-	3000K Amber	WT White on Aluminum SS* Cast Stainless Steel

Example: 4021-AMBK

<sup>\*\*</sup>Available in 277V; Example: WL-LED100F-C-WT

<sup>\*\*\*</sup> Bronze on Brass is only available in 12V, 120V.









WL-5105 Opal

Input: 120V CRI:

Dimming: 100% - 10% ELV Rated Life: 80,000 hours

90

WL-5205 Louver

Input: 120V CRI: 90

100% - 10% ELV Dimming: Rated Life: 80,000 hours



- Factory-Sealed LED Light Engine
- Die-cast Aluminum Construction
- 120V Direct Wire No Driver Needed
- $\bullet \ \ \text{Easily retrofit most existing incandescent brick light installations with this maintenance free LED upgrade}\\$

	Power	Max Delivered Lumens	Color Temp	Finish
9½" 4" 23%"  \$\int 25\%" 33\%"  WL-5105-30 Opal	5.5W	110	3000K	ABZ Architectural Bronze ABK Architectural Black AGH Architectural Graphite AWT Architectural White
4" 4½" WL-5205-30 Louver	5.5W	45	3000K	ABZ Architectural Bronze ABK Architectural Black AGH Architectural Graphite AWT Architectural White

# MINI ACCENT LED LANDSCAPE










Continuously Adjustable **Brightness Control** 



#### 12V

Integral Brightness Control Adjustable beam angle 10° to 50° One Fixture replaces all older halogen landscape accent light.

> Transformer Required (order separately)

Power Brightness Beam Angle 10° to 50° CRI 85

Input 9-15VAC 1W to 7W / 2VA -10.5VA 45 lm to 365 lm Rated Life 70,000 hours

Mounting stake (12V), Detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V)

2700K Warm White

**5111-27BZ** Bronze on Aluminum **5111-27BBR** Bronze on Brass

3000K Pure White

**5111-30BZ** Bronze on Aluminum **5111-30BBR** Bronze on Brass



#### Accessories

Accessories							
5" Long Shroud	5111-LSHR-BZ 5111-LSHR-BBR		Bronze on Aluminum Bronze on Brass		Reduce glare. Ideal for downlighting application		
Additional Stake	9000-ST9-BK		Bronze		Durable PC stake		
Surface Mount Flange/Stake	5000-SCP-BZ 5000-SCP-BBR	Bronze on Aluminum Bronze on Brass		num	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box		
Guardian Mount	9000-SP9-BZ		Stainless Steel		Stainless Steel		Heavy duty stainless steel spike to position fixture Formed from a single piece of metal
Gutter Mount Bracket	5000-GM-BZ		Stainless Steel		Stainless Steel universal mounting bracket for gutter mounting fixture		
Tree Mount Junction Box	5000-TCP-BZ		Bronze on Aluminum		Bronze on Aluminum box with Stainless steel mounting screws. Two ½" NPT threaded holes		
Optics	LENS-16-AMB LENS-16-GRN LENS-16-RED LENS-16-BLU	Amber Green Red Blue	LENS-16-FR LENS-16-SPR LENS-16-BEL	Frosted Spread Elongating	Enhances saturation of florals and foliage		
Extension Rods	5000-X04-BZ 5000-X08-BZ 5000-X12-BZ	4 in 8 in 12 in	5000-X18-BZ 5000-X24-BZ	18 in 24 in	Extends distance between Accent light and Surface Mount Canopy, Stake, or Tree Mount box		
Rod L-Coupler	5000-LCO-BZ		Bronze				



#### 12V

Integral Brightness Control Adjustable beam angle Directional aim with +/- 20° Tilt

Input 9-15VAC Power 2W to 12W / 2-17VA Brightness 70 lm to 505 lm Beam Angle | 15° to 60° CRI 85 Rated Life 55,000 hours

2700K Warm White

**5031-27BBR** | Bronze on Brass


**5031-27BZ** | Bronze on Aluminum

3000K Pure White

5031-30BZ 5031-30BBR

Bronze on Aluminum Bronze on Brass





6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

#### 120V

Integral Brightness Control Adjustable beam angle

Input | 110V - 120VAC Power 3W to 11.5W Brightness 65 lm to 515 lm Beam Angle | 15° to 60° CRI 85 Rated Life 45,000 hours

3000K Pure White

**5032-30BZ** Bronze on Aluminum Bronze on Brass 5032-30BBR

#### Accessories

5030-GRD-BZ Bronze on Aluminum Rock Guard Protects the fixture surface 5030-GRD-BBR Bronze on Brass LENS-25-AMB Amber LENS-25-GRN Green LENS-25-RED Red Enhances saturation of florals and foliage LENS-25-BLU Blue LENS-25-FR Frosted LENS-25-HCL Honeycomb Louver Reduces glare Shown with temporary dense For installation in concrete 5030-PIP-PVC Concrete Pour Kit Five 1/2" NPT threaded holes, PC foam cap

# WALL WASH LED LANDSCAPE





1838 listed (12V) **us** 1598 listed (120V)

#### 12V

Integral Brightness Control Transformer Required (order separately)

Power Brightness Beam Angle CRI

Input 9-15VAC 2W to 16W / 2 - 23VA 190 lm to 980 lm 15° upward (50° by 80°) Rated Life 70,000 hours

2700K

Warm White

5021-27BZ


Bronze on Aluminum **5021-27BBR** Bronze on Brass

3000K

Pure White

**5021-30BZ** Bronze on Aluminum **5021-30BBR** Bronze on Brass





Mounting stake (12V), 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

#### 120V

Integral Brightness Control

110V - 120VAC Input 3.5W to 14.5W Power 95 lm to 855 lm Brightness Beam Angle 15° upward (50° by 80°) CRI Rated Life 45,000 hours

3000K Pure White

5022-30BZ

Bronze on Aluminum **5022-30BBR** Bronze on Brass

#### Accessories

Additional Stake	9000-ST9-BK		Bronze		Durable PC stake
Surface Mount Flange/Stake	5000-SCP-BZ 5000-SCP-BBR		Bronze on Aluminum Bronze on Brass		Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount	9000-SP9-BZ		Stainless Steel		Heavy duty stainless steel spike to position fixture Formed from a single piece of metal
Gutter Mount Bracket	5000-GM-BZ		Stainless Steel		Stainless Steel universal mounting bracket for gutter mounting fixture
Power Stake	9000-RPT-BK		Black		Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box.
Tree Mount Junction Box	5000-TCP-BZ		Bronze on Aluminum		Bronze on Aluminum box with Stainless steel mounting screws. Two ½" NPT threaded holes
Optics	LENS-2X4-AMB LENS-2X4-GRN LENS-2X4-RED	Amber Green Red	LENS-2X4-BLU LENS-2X4-FR LENS-2X4-SPR	Blue Frosted Spread	Enhances saturation of florals and foliage and turtle friendly
Extension Rods	5000-X04-BZ 5000-X08-BZ 5000-X12-BZ	4 in 8 in 12 in	5000-X18-BZ 5000-X24-BZ	18 in 24 in	Extends distance between Accent light and Surface Mount Canopy, Stake, or Tree Mount box
Rod L-Coupler	5000-LCO-BZ		Bronze		

# TRANSFORMER LED LANDSCAPE





- IP65 Rated
- 12V to 15V taps
- Knock outs for power and photosenser connections
- 3-prong outlet for timer
- Outdoor rated stainless steel transformer contains an outdoor rated 3-prong plug for power



Model	
9075-TRN-SS	75W Max Dimensions: 13.97" L x 5.35"W x 5.63"H
9150-TRN-SS	<i>150W Max</i> Dimensions: 18.90" L x 6.69"W x 6.30"H
9300-TRN-SS	<i>300W Max</i> Dimensions: 18.90" L x 6.69"W x 6.30"H
9600-TRN-SS	600W Max ( 2 x 300W outputs) Dimensions: 14.49" L x 10.08"W x 5.94"H

#### ACCESSORIES LED LANDSCAPE

Mechanical Timer		9000-MTI-WT	White	Connect within the transformer
Photosensor		9000-PCH-GY	1000VA Max	Attached directly to the transformer
Photosensor - Remote		9000-PCR-GY	1000VA Max	If transformer is located in a shady spot, this photosensor has a 10 foot cord and a stainless steel bracket to secure in a sunny area
Direct Burial Water proof Wire Nuts		9020-WNT-BK		Silicone filled wire nut with gasket (Pack of 20pcs)
12V Direct Burial Outdoor Cable	Q.	9100-12G-BK 9250-12G-BK 9500-12G-BK	100 feet 12 gauge 250 feet 12 gauge 500 feet 12 gauge	

# MOUNTING & GLARE CONTROL ACCESSORIES LED LANDSCAPE



6"Long Shroud For 5011/5012 Accent	5010-LSHR-BZ 5010-LSHR-BBR	Reduce glare. Ideal for downlighting application
5"Long Shroud For 5111 Accent	5111-LSHR-BZ 5111-LSHR-BBR	Reduce glare. Ideal for downlighting application
Tree Mount Junction Box	5000-TCP-BZ	Bronze on Aluminum box with Stainless steel mounting screws. Two ½" NPT threaded holes
Surface Mount Flange/Stake	5000-SCP-BZ 5000-SCP-BBR	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount	9000-SP9-BZ	Heavy duty stainless steel spike to position fixture. Formed from a single piece of metal
Gutter Mount Bracket	5000-GM-BZ	Stainless Steel universal mounting bracket for gutter mounting fixture

