

#### 3.5"OCULUX LED RECESSED





## 4 CONTERTER

#### Now available in Haze White trims

Power: 11W Comparable to: 75W MR16

**Input:** 120V or 277V **Rated Life:** 50,000 hours

• IC-rated remodel and new construction

Airtight in new construction

• Shallow housing under 4" depth

• Cutout: 41/4"

• Single LED module for high-performance illumination without hot spots

• Ceiling thickness: ½"-1"

• ELV or TRIAC or 0-10V dimming compatible



Trims (Order Housing S	eparately)	Model	Веа	m	Max Lumens	Max CBCP	Colo	r Temp	Finish		
	4" 35%" 3¼"   4¾"	R3BRD  Round  Open Reflector  Wet Location Listed  40° visual cutoff	S N F	15° 25° 50°	970	5132		2700K 3000K	HZWT BN WT	Haze/White Brushed Nickel White	N
*Conforms to local so	Ne $4"$ $35/8"$ $-1$ $31/4"$ $-1$ $-1$ $43/4"$ $-1$ and the Dead Front requirements	R3BRDP  Polycarbonate Trim Face* Open Reflector Wet Location Listed 40° visual cutoff	S N F	15° 25° 50°	1025	2985	927 930	2700K 3000K	wt	White	
Comornis to locar co	T T F	22224									
	4" 35/8" 31/4" 43/4"	<b>R3BRA</b> Round 0 - 35° Adjustable 48° visual cutoff	S N F	15° 25° 50°	985	4712	927 930	2700K 3000K	BN WT	Brushed Nickel White	
	4" 35%"	R3BSD Square Open Reflector Wet Location Listed 35° visual cutoff	S N F	15° 25° 50°	930	4710	1 -	2700K 3000K	HZWT BN WT	Haze/White Brushed Nickel White	N
	4" 35%" ————————————————————————————————————	R3BSA Square 0 - 35° Adjustable 48° visual cutoff	S N F	15° 25° 50°	985	4712	927 930	2700K 3000K	BN WT	Brushed Nickel White	

	0 - 35° Adjustable  211/ <sub>16</sub> " -  48° visual cutoff  43'4"	25° 985 47 50°	930	0 3000K WT Whit	re
Example: R3BRD-S927-WT					
Housings (Required) - Order se	parately from trims	Model	Input	Dimming	Notes
New Construction	13 <sup>11</sup> / <sub>16</sub> "  11 <sup>1</sup> / <sub>2</sub> 6"  10"  10"  13 <sup>3</sup> / <sub>16</sub> "	R3BNICA-10 IC-Rated, Airtight	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth  Allows adjustment in
	12½" max 6½6" Ø4½"	R3BNICA-10U IC-Rated, Airtight	120V - 277V	<b>120V 277V</b> 100% - 5% 100% - 1% TRIAC, ELV, 0-10V 0-10V	- any direction when used with adjustable trims  Ceiling thickness: ½"−1"
Remodel	2½" — 4½" — 4½"	R3BBRT-10 IC-Rated	120V	100% - 5% TRIAC, ELV, 0-10V	4¼" plenum depth  Allows adjustment in any direction when used with adjustable trims  Ceiling thickness: ½"-1"

#### 2" OCULUX LED RECESSED









#### Now available in Haze White trims

 Power:
 9W

 Comparable to:
 50W MR16

 Input:
 120V

Rated Life: 50,000 hours

- Sold as new construction, may be reconfigured in the field for remodel use
- Cutout: 31/16"
- Single LED module for high-performance illumination without hot spots
- Ceiling thickness: ½"-1"
- ELV or TRIAC or 0-10V dimming compatible

All-in-one unit, ready to install right out of box

	Model	Beam	Max Lumens	Max CBCP	Color Temp	Finish	
3%6" 5½"	<b>R2BRD</b> Round  Open Reflector  Wet location listed  35° visual cutoff	N 25° F 45°	680	2490	927 2700K 930 3000K	HZWT Haze/White BN Brushed Nickel WT White	New!
3%6" 5½"	<b>R2BRA</b> Round 0 - 35° Adjustable 45° visual cutoff	S 15° N 25° F 45°	685	3245	927 2700K 930 3000K	BN Brushed Nickel WT White	
3%6" 2½"	<b>R2BSD</b> Square Open Reflector Wet location listed 35° visual cutoff	N 25° F 45°	700	2462	927 2700K 930 3000K	HZWT Haze/White BN Brushed Nickel WT White	New!
39/16"	<b>R2BSA</b> Square 0 - 35° Adjustable 45° visual cutoff	S 15° N 25° F 45°	685	3245	927 2700K 930 3000K	BN Brushed Nickel WT White	
E DODDD Nose WT							

Example: R2BRD-N930-WT

**NEW CONSTRUCTION CONFIGURATION** 

#### INTEGRAL HOUSING AND TRIM: BOTH NEW CONSTRUCTION & REMODEL


IC-Rated, Airtight

11" flexible armored cable


Driver

Drywall

-3%6"—

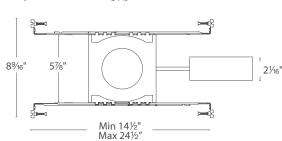

# **REMODEL CONFIGURATION** *IC-Rated, Airtight*

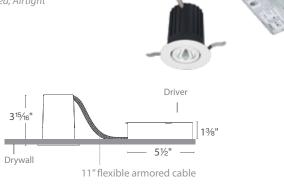


# I CAN'T BELIEVE IT'S NOT RECESSED LED FUNCTIONAL CEILING LIGHT









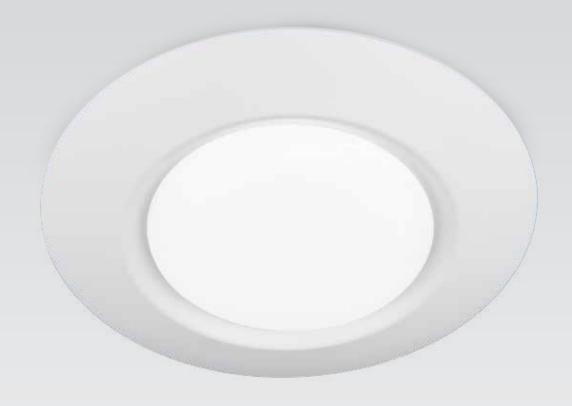

Input: 120V CRI: 90

**Dimming:** 100% - 10% ELV, 100%-5% TRIAC

Rated Life: 54,000 hours

- Imitates a traditional 6" Line voltage recessed downlight with an R30 light bulb
- To be used in a 4/0 Junction Box or a 3/0-4/0 Junction Box
- ADA compliant

- Opaque acrylic diffuser
- Multiple LED array for uniform illumination
- 120VAC no driver needed

		Watt	Color Temp	LED Lumens	Delivered Lumens	Finish
1½"						
5%"						
Ø7½"	FM-616G2-930-WT	16W	3000K	1150	1050	White
76"						

Example: FM-616G2-930-WT











**Dimming:** 100% - 5% ELV, 100%-5% TRIAC

Input: 120V Rated Life: 35,000 hours

- ADA compliant
- Wall or Ceiling Mount
- Translucent acrylic diffuser
- Multiple LED array for uniform illumination
- 120VAC no driver needed



Install over a 4" junction box or pancake box



Retrofit over a 4", 5" or 6" recessed can

	Model	Wattage	Color Te	emp	LED Lumen	Delivered Lumen	CRI	1	Finish	
58"   11%"	FM-304	12W	930	3000K	835	650	90	BN BZ WT	Brushed nickel Bronze White	Fits over a 4" recessed can or direct wire to a 4" junction box or pancake box
73%"	FM-306	15W	930 940	3000K 4000K	1010 1235	865 906	90 90	BN BZ WT	Brushed nickel Bronze White	Fits over a 5" to 6" recessed can or direct wire to a 4" junction box or pancake box
1 1/4	FM-306	15W	930JB	3000K	1010	865	90	wT	White	Direct mount to 4" junction box or pancake box



#### ROUND & SQUARE

#### LED FUNCTIONAL CEILING OR WALL LUMINAIRE











Input: 120V CRI: 90

Dimming: 100% - 10% ELV, 100%-5% TRIAC

Rated Life: 50,000 hours

- ADA compliant
- Opaque acrylic diffuser spreads light from multiple LED array for uniform illumination
- Specially rated for installation in the storage area of a clothes closet
- Installs over a 3", 4" or 3/0 4/0 hybrid junction box

	Model	Wattage	Max Lumen	Color Temp	CRI	Finish		
7" 1½" 2½" 2½"	<b>FM-07RN</b> Round	15W	1050					
11" 10" 12¼"	<b>FM-11RN</b> Round	20W	1525	930 3000K 935 3500K	90 90	BN BZ WT	Brushed Nickel Bronze White	
15/6" 15" 15" 3"	<b>FM-15RN</b> Round	28W	2550					
6" 1½" 2½"	<b>FM-075Q</b> Square	15W	1100			BN	Brushed Nickel	
10" 1½" 1½" 1½" 1½" 1½" 1½" 1½" 1½" 1½" 1½	<b>FM-11SQ</b> Square	20W	1650	930 3000K 935 3500K	90 90	BZ WT	Bronze White	

#### GLO LED FUNCTIONAL CEILING AND WALL







Input:

120V

CRI:

85

**Dimming:** 100% - 10% ELV

Rated Life: 50,000 hours

- ADA compliant for FM-211 & FM-214
- Wall or Ceiling Mount
- Translucent acrylic diffuser
- Multiple LED array for uniform illumination
- 120VAC no driver needed

		Watt	Color Temp	LED Lumens	Delivered Lumens	Finish
1134"	FM-211	15W	<b>27</b> 2700k <b>35</b> 3500k		985 1035	
141/4"	FM-214	24W	<b>27</b> 2700k <b>35</b> 3500k		1395 1510	<b>WT</b> White
16½"	FM-216	33.5W	<b>27</b> 2700k <b>35</b> 3500k		2060 2150	

Example: FM-214-35-WT





8



Input: CRI:

120V 85

**Dimming:** 100% - 10% ELV

Rated Life: 50,000 hours

• ADA compliant

• Wall or Ceiling Mount

• Translucent acrylic diffuser

• Multiple LED array for uniform illumination

• 120VAC - no driver needed

		Watt	Colo	r Temp	LED Lumens	Delivered Lumens	Finish
	FM-113	22W	27 35	2700K 3500K	1695 1770	1395 1510	
145%"   334"	FM-115	33W	27 35	2700K 3500K	2475 2595	2060 2150	- WT White

Example: FM-115-35-WT





Wall or Ceiling Mount, Suitable for Closet

Input: 120V CRI: 85

Dimming: 100% - 10% ELV

Rated Life: 35,000 hours

ADA compliant

• Suitable for installation over bulkhead in closets

• Damp location rated

- Translucent acrylic diffuser
- Multiple LED array for uniform illumination
- 120VAC no driver needed

		Watt	Colo	r Тетр	LED Lumens	Delivered Lumens	Finish
<u>24" —</u> 13"	WS-224	20.5W	27 35	2700K 3500K	1670 1870	1190 1340	
36" 3"	WS-236	31W	27 35	2700K 3500K	2570 2865	1785 2005	WT White
48"   3"	WS-248	40.5W	27 35	2700K 3500K	3280 3555	2325 2685	

Example: WS-236-35-WT










Lighting with no boundaries.



Color Temp: 2700K, 3000K, 3500K

CRI:

Dimming: 100% - 10% ELV

Rated Life: 54,000 hours

120 - 277V Input:

• Modern, sleek, clean

• Co-extruded clear and white acrylic provides substance, luminosity and optical efficacy

• Mounts vertically or horizontally

• Listed for use in closets

• Conversion plate for 4" junction box included

Adjustable backplate

• 2.76" x 1.26" x 1.18" Universal driver (120V-220V-277V) installs within a junction box

		Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
WS-63718-27		2700K	15W	1185	900	
WS-63718-30	18"	3000K	15W	1425	1100	
WS-63718-35		3500K	15W	1500	1200	
WS-63724-27		2700K	19.5W	1645	1390	
WS-63724-30	24"	3000K	19.5W	1875	1490	AL Brushed Alumimum
WS-63724-35		3500K	19.5W	1975	1640	
WS-63736-27		2700K	28.5W	2660	2275	
WS-63736-30	36"	3000K	28.5W	2855	2330	
WS-63736-35		3500K	28.5W	3020	2405	

Example: WS-63718-35-AL

### Brink

# 12", 18", 24" and 36" LED Bath & Sconce Now available in brushed brass



Color Temp: 2700K, 3000K, 3500K

CRI:

11

Dimming: 100%-5% ELV Rated Life: 85,000 hours Input: 120-277V

• Co-extruded acrylic diffuser


• Conversion plate for 4" junction box included

• Can be mounted vertically, horizontally or at an angle


• Adjustable backplate

• 2.76" x 1.26" x 1.18" Universal Driver (120V-220V-277V) installs within junction box

• ADA compliant






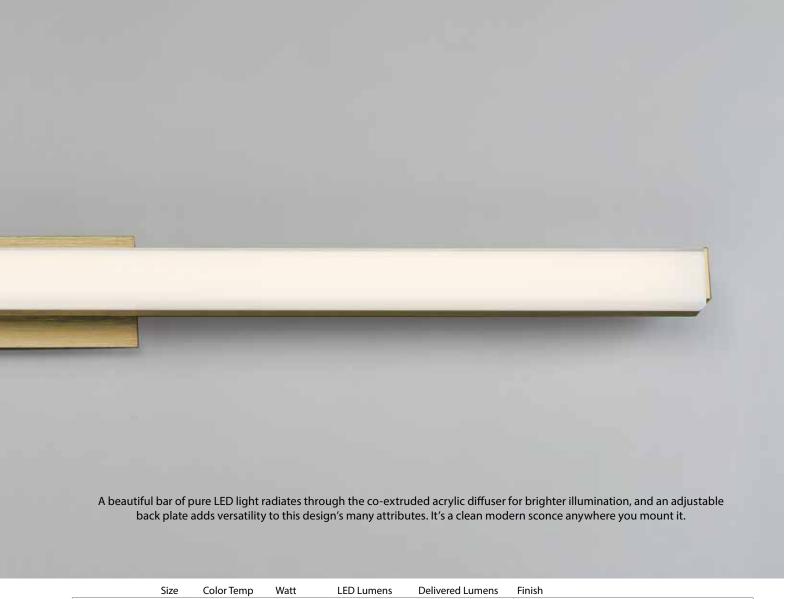

	Size	Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
WS-77612-27 WS-77612-35	12"	2700K 3500K	10W 10W	863 935	741 803	
WS-77618-27 WS-77618-35	18"	2700K 3500K	15W 15W	1155 1330	910 1115	AL Brushed Aluminum
WS-77624-27 WS-77624-35	24"	2700K 3500K	20W 20W	1595 1785	1330 1510	The brushed Additional
WS-77636-27 WS-77636-35	36"	2700K 3500K	30W 30W	2365 2561	1985 2180	
WS-77612-30 WS-77618-30 WS-77624-30 WS-77636-30	12" 18" 24" 36"	3000K	10W 15W 20W 30W	905 1225 1720 2445	767 1015 1440 2095	AL Brushed Aluminum BR Brushed Brass New!

Example: WS-77636-30-BR

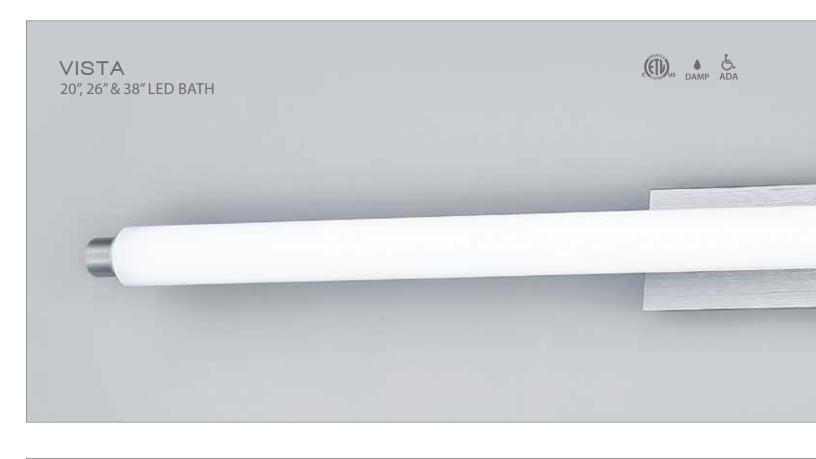

A brilliant outlook . Versatile 1 inch narrow spears of light.

Color Temp: CRI: 3000K 90

 Dimming:
 100% - 5% ELV

 Rated Life:
 54,000 hours

 Input:
 120 - 277V

• Spot free linear illumination


• Conversion plate for 4" junction box included


• Adjustable backplate


 Co-extruded clear and white acrylic provides substance, luminosity and optical efficacy

• Mount vertically or horizontally

• 2.76" x 1.26" x 1.18" Universal Driver (120V-220V-277V) installs within junction box



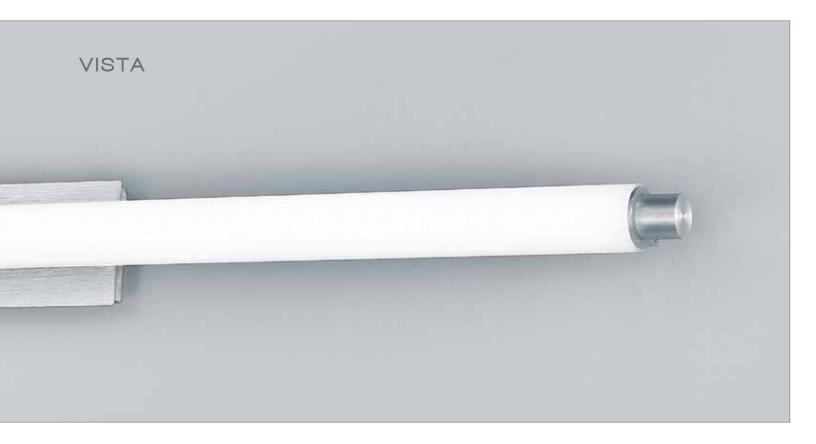

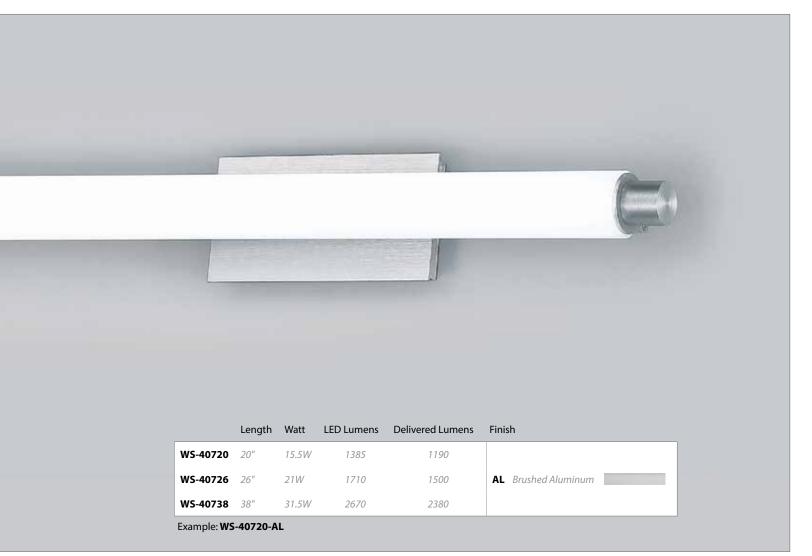

14

#### H TRACK SYSTEMS


Description:Single circuit H TrackPower per Circuit:120V, 1920W maxOperating Current:Rated 20A max

#### TRACK SECTIONS

HT H Track   4 4'   B 6 6'   V	BK Black BN Brushed Nickel WT White DB Dark Bronze	120V 3-wire track
--------------------------------	--	-------------------

#### Example: **HT6-BK**

Each section includes two matching end caps.



QUICK CONNECT ADAPTER	Model		Finish	Description
Quick Connect Adapter	EN-HQ50A	R HTrack	BK Black BN Brushed Nickel WT White DB Dark Bronze	Use to easily connect any Quick Connect pendant or fixture. Min.Load: 1W Max Load: 50W
TRACK SUSPENSION	Model Le	ength	Finish	Description
All Track Suspension Kit	SK 18		BK Black BN Brushed Nickel WT White DB Dark Bronze	Extends track from ceiling. Includes track bracket, rod and ceiling canopy.
Suspension Kit Extender	R 24	<b>4</b> 24" <b>48</b> 48" <b>72</b> 72"	BK Black BN Brushed Nickel WT White DB Dark Bronze	Use with Rod Coupler (RI) to further extend track from ceiling.
Sloped Ceiling Adapter	SK14		BK Black BN Brushed Nickel WT White DB Dark Bronze	Use with suspension kits to accommodate sloped ceilings. Max capacity: 7A, 800W, 120V
Rod Coupler	RI		BK Black BN Brushed Nickel WT White DB Dark Bronze	Join two rods for suspensions longer than 48".
Suspension Adjustment Collar kit	SK05 In	cludes two collars	BK Black BN Brushed Nickel WT White DB Dark Bronze	Used when suspension rod is field cut to custom lengths. One kit of two required for each rod.
Low Voltage Track Head Extension	X 1:	<b>2</b> 12" <b>36</b> 36"	BK Black BN Brushed Nickel WT White DB Dark Bronze	Extends low voltage track heads from track. Specify extension, fixture and finish. Only available as complete unit. Custom order Example: X18-HHT-809-WT
Line Voltage Track Head Extension	H 18		BK Black BN Brushed Nickel WT White DB Dark Bronze	Extends H System line voltage track heads.
Wall Mount Suspension Bracket	<b>TBKT</b> 18	8"	BK Black BN Brushed Nickel WT White DB Dark Bronze	Extends track 24" from wall. Use two per 4' length, three per 8' length.

Example: **SK24-BK** 

ACCESSORIES		Model	Finisi	h		Description
Live End Connector	1	HLE	BK BN WT DB	Black Brushed Nickel White Dark Bronze	4¼"×1¾"×¾"	Use for direct wiring through ceiling. A canopy plate is requires when using with a standard junction box.
Live End BX Connector		HBXLE	BK BN WT DB	Black Brushed Nickel White Dark Bronze	6"×1¾"×1¼"	Use with surface mounted BX or non-metallic sheathed cable. Also provides through the ceiling connection.
"I" Power Connector		HI-PWR	BK BN WT DB	Black Brushed Nickel White Dark Bronze	6¾"×1¾8"×¾"	Power entry point at the connection of 2 tracks.
"L" Connector Left		HL-LEFT	BK BN	Black Brushed Nickel	2 <sup>3</sup> / <sub>4</sub> " × 2 <sup>3</sup> / <sub>4</sub> " × <sup>3</sup> / <sub>4</sub> "	Use to join 2 track sections to make power feedable 90° left polarity turns.
"L" Connector Right		HL-RIGHT	DB	White	2 <sup>3</sup> / <sub>4</sub> " × 2 <sup>3</sup> / <sub>4</sub> " × <sup>3</sup> / <sub>4</sub> "	Use to join 2 track sections to make power feedable 90° right polarity turns.
"T" Connector		нт	BK BN WT DB	Black Brushed Nickel White Dark Bronze	4"×2¾"×¾"	Use to join 3 track sections. "T" Connector with opposite polarity can be custom ordered.
"X" Connector		нх	BK BN WT DB	Black Brushed Nickel White Dark Bronze	41/8" × 41/8" × 3/4"	Use to join 4 track sections. Power feedable.
"I" Connector		н	BK BN WT DB	Black Brushed Nickel White Dark Bronze	3"×1%"×¾"	Use to join two sections of track with electrical continuity.
"I" Dead End Connector	1	HI-DEC	BK BN WT DB	Black Brushed Nickel White Dark Bronze	3"×1%"×¾"	Joins two sections of track without electrical continuity.
Flexible Track Connector	6	HFLX	BK BN WT DB	Black Brushed Nickel White Dark Bronze	9¾"×1¾8"×¾"	Connects two track sections at variable angles. Use as a transition from wall-to-wall, wall-to- ceiling, or ceiling-to-ceiling. Power feedable.
Suspension Loop		H-LOOP	BK BN WT DB	Black Brushed Nickel White Dark Bronze	1%"×1%"×3"	3 inch electrical loop accepts chain hung fixtures up to 35lbs. Contains compartment for electrical connections.
15' Cord, Male Plug 15' Cord, Male Plug w/Switch		HCORD	BK WT	Black White	15'	Maximum capacity: 7A, 800W, 120V.
T-Bar Drop Ceiling Attachment	6	T-BARCLIP		Chrome	1½"×1¼"	Attaches track to T-bar drop ceilings. Use two for 2 foot or 4 foot tracks, three for 6 foot or 8 foot tracks.
Monopoint Canopy Adapter	-	НМР	BK BN WT DB	Black Brushed Nickel White Dark Bronze	5%"×5%"	Mount a single H system track fixture to a junction box. When used with a low voltage track head the transformer box will protrude off of the face of the monopoint.
Canopy Plate		СР	BK BN WT DB	Black Brushed Nickel White Dark Bronze	4½"×4½"	Covers a standard 4 inch junction box. Use with any powerable connectors.
Floating Canopy Connector	In	HFC	BK BN WT DB	Black Brushed Nickel White Dark Bronze	4½"×4½"×1½"	Connects to octagon box. Allows track to be powered anywhere along the length of the track

16





#### SILO X10 LED

 Power:
 10W

 Delivered Lumens:
 Up to 790

 CBCP:
 Up to 2575

 Comparable to:
 65W MR16

 Dimming:
 100% - 5% ELV

Input: 120V Rated Life: 50,000 hours

- Field replaceable TIR lens for beam control (35° installed and 25° included in the box)
- Die-cast aluminum construction in a small, and clean design
- $\bullet\,$  Performance luminaire with integral LED and driver

	Syster	n	Model	Color Temp	CRI	Beam	Lumens	CBCP	Finish
71/2"	н	H Track	2010-930	3000K	90	25° 35°	790 790	2575 1545	BR Brushed Brass BK Black BN Brushed Nickel DB Dark Bronze WT White

Example: H-2010-930-BR

LENS ACCE	SSORIES			GLARE CONT	ROL ACCESSORIES		
Amber	LENS-11-AMB	Yellow	LENS-11-YEL				
Blue	LENS-11-BLU	Frosted	LENS-11-FR	Cuana Launian	LENS-11P-CRL-BK LENS-11P-CRL-BN LENS-11P-CRL-WT	Connet	LENS-11-SNOOT-BK LENS-11-SNOOT-BN LENS-11-SNOOT-WT
Green	LENS-11-GRN	Spread	LENS-11-SPR	Cross Louver		Snoot	
Red	LENS-11-RED	Beam Elongating	LENS-11-BEL		LLN3-11F-CRL-W1		LLINS-11-SINOO1-W1







18



#### OCULUX LED

 Power:
 11W

 Delivered Lumens:
 Up to 890

 CBCP:
 Up to 4972

 Comparable to:
 65W MR16

**Dimming:** 100% - 10% ELV, TRIAC

Input: 120V
Rated Life: 50,000 hours

- Three beam angle options included (see diagram below):
- 50° optic pre-installed, easily removable
- 30° optic interchangeable component
- 17° without additional optic.
- Integral driver and high output COB LED
- Outperforms halogen 65W MR16
- 350° horizontal and 90° vertical aiming

Sys	stem	Model	Beam	Lumens	CBCP	Color Te	emp	CRI	Finish	ı	
6%" H	H Track	7011	17° 30° 50°	890 855 830	4972 1961 789	930	3000K	90	BK BN DB WT	Black Brushed Nickel Dark Bronze White	

Example: **H-7011-930-DB** 

# REPLACEMENT OPTICS 17° Spot Lens 17° Spot Lens 30° Narrow Flood Optic 50° Flood FILM-16-F

#### LED90 EDGE LIT BUTTON LIGHT





Surface mounted

 Power:
 24V, 5W


 CRI:
 90

 ELV Dimming:
 100% – 5%

 Rated Life:
 100,000 hours

**Cutout:** 3¼" for recessed applications






Recessed

- Can be surface or recessed mounted
- Super thin profile at ½"
- Edge-lit LEDs reduce glare and assure even light distribution
- Anti-microbial white paint

Model	Color Temp	Lumens	Finish	
HR-LED90-27 HR-LED90-30	2700K 3000K	200 200	BK BN DB WT	Black Brushed Nickel Dark Bronze White

Example: **HR-LED90-30-BN** *Includes 6 foot lead wire* 



#### CLASS 2 ENCLOSED ELECTRONIC TRANSFORMERS (REQUIRED)

	Model	Output	Input	Dimming	Min Load	Max Fixture Run	L	W	Н	
c (U) us	EN-2460-RB2	24V, 60W	120V	ELV	1W	7	6½"	15/8″	11/4"	First I
	EN-24100-RB2	24V, 96W 24V,96W	120V 120V-277V	ELV 0-10V	1 W 1 W	10	6½" 125%"	Fits through sma		
	EN-24100-277-RB2-T	_				10				
c(U) us	EN-2460-P-AR	24V, 60W	120V	Yes	1W	7	23/4"	15/8″	13/4″	Plug-in power supply with on/off switch and 6' detachable cord
	MTB-01 Multiple terminal box	easily wire		tiple output	connect					nal block is used to llation without the use

- Secondary wiring for Class 2 transformers does not require conduit sheathed cable or clamp wiring techniques
- Intrinsically safe, Class 2 transformers permit no greater than a 5 amp current to be drawn
- Non-metallic sheathed cable may be used for secondary wiring in walls and ceilings
- $\bullet \ \ \textit{Power consumption may vary depending on the efficiency of the power supply being used}$

# BUTTON LIGHTS 24V LED



#### **Recessed or Surface Mount with 24V transformer**

Power: 24V, 4.8W CRI: 85


**Lumens:** 180 (round), 155 (square) **Dimming:** 100% – 10% ELV dimming

Compares To: 20W Xenon Bi-pin Rated Life: 70,000 hours

**Color Temp:** 2700K, 3000K **Cutout:** 2\%" for recessed applications





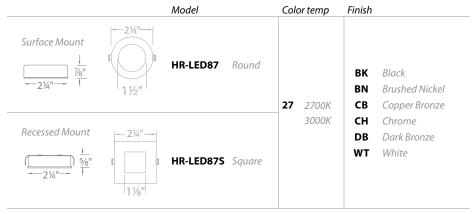


Example: HR-LED87S-WT Includes 6 foot lead wire

#### **CLASS 2 ELECTRONIC TRANSFORMERS (REQUIRED)**

1W minimum load

- Plug-in power supply with on/off toggle switch and 6' detachable cord
- 1W minimum load

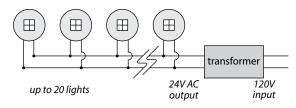

Minimizes wiring back to transformer

	Туре	Model	Input	Output	Dimming	Power Up To	Dimensions
		EN-2460-RB2	— 120V	24V AC/60W	ELV	12×LED87	6½"x 15/8" x 1¼"
The state of	Remote	EN-24100-RB2	— 120V	24V AC/96W	ELV	20 × LED87	6½"x 15/8" x 1¼"
		EN-24100-277-RB2-T	120V-277V	24V AC/96W	0-10V	20 X LED87	125/8" x 31/4" x 2"
*	Plug-In	EN-2460-P-AR	120V	24V AC/60W		12 × LED87	2 3/4" x 1 5/8" x 1 3/4"
	MTB-01 Multiple ter	rminal box	31/4" L x 13/4	"W x 7%"H			

#### **Retrofit Housing**



Use to replace HR-88 and HR-86 using existing wiring and cutout, LEDme® Button light not included.

Model #	Finish	1
	BK	Black
	BN	Brushed Nickel
HR-LED-COV	СВ	Copper Bronze
HK-LED-COV	CH	Chrome
	DB	Dark Bronze
	WT	White

Example: HR-LED-COV-BK

#### Frosted Lens Accessory

Softens light and reduces glare for square or round

Model #


LENS-13-FR

# DUO AC-LED COLOR OPTION


LIGHT BARS

Minimal space between luminaires

#### Brushed Aluminum Finish

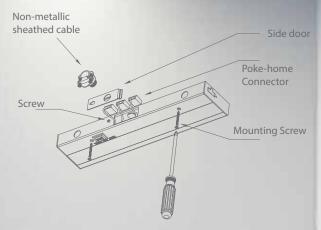

Side wiring door and captive mounting screws for installation ease



Using a 98% efficient reflector, light from the LED sources inside the housing diffuse inside the mixing chamber in order to create evenly distributed illumination. Patent Pending

#### DUO AC-LED COLOR OPTION LIGHT BARS





Now available in 36" and 42" lengths



**Color Temp:** 2700K and 3000K

**CRI:** 90+

**Dimming:** 100% – 10% smooth and

continuous ELV and TRIAC dimming


Rated Life: 54,000 hours

- Extruded aluminum construction for optimal thermal management
- Diffused light source reduces glare and creates uniform illumination
- Captive screws for easy installation
- Multiple knock outs for ease of wiring
- Thin 1" profile
- 120VAC—no driver needed
- Non-metallic sheathed cable connectors included
- One "I" connector included with each luminaire

		Model	Length	Watt	Lumens	Color Temp	Finish
	1"	BA-ACLED8-27/30	8"	6.0W	330		
8" to 42"	-   - '-	BA-ACLED12-27/30	12"	8.0W	475		
		BA-ACLED18-27/30	18"	10.0W	545	2700K	<b>BZ</b> Bronze
	23/4" .	BA-ACLED24-27/30	24"	15.0W	930	and	<b>AL</b> Brushed Aluminum
○ [14] ○		BA-ACLED30-27/30	30"	17.5W	1095	3000K	<b>WT</b> White
100	1 1	New! BA-ACLED36-27/30	36"	19.5W	1305		
		New! BA-ACLED42-27/30	42"	22.5W	1445		

Example: BA-ACLED12-27/30AL

- May be hard-wired with 120V power or used with a plug-in power cord
- Subsequent fixtures may be powered with an "I" Connector or Interconnect Cable carrying 120V
- May be individually switched and/or wired to a wall box switch/dimmer



#### **Power Cord**

Model			Length
BA-PC6	WT	White	6'
BA-PC6	BK	Black	0






"I" Connector

Model	Max Fixture Run
BA-I-WT	6
Interconnection	for seamless and to and

Interconnection for seamless end to end transitions. **Each light bar includes one.** 



#### Interconnect Cable

Model	Length	Max Fixture Run		
BA-IC12	12"	4	wT	14//0:40
BA-IC24	24"	4		White
BA-IC36	36"	3	BK	Black

Example: BA-IC12-WT

Links two light bars using a single power connection.








Power: 4W/ft


**Lumens:** Up to 330 lm/ft

CRI: 90

Rated Life: 80,000 hours

- Specially rated for installation in the storage area of a clothes closet
- UV stabilized protective coating protects LEDs and circuitry for long term use in damp locations
- May field cut every 6 inches at the end of a run
- Includes an end cap
- Max run length of 25 feet





#### **TAPE SELECTIONS**

System	Color	Тетр	Length		Qty	Finish	
LED-TX24	22 27 30 35 45	2200K 2700K 3000K 3500K 4500K	6IN 1 5 1-40	6 inches 1 foot 5 feet 1 foot	1 1 1 40	wt	White

Example: LED-TX2435-6IN-WT

#### "L" CONNECTOR


System	Color Temp	Finish
LED-TX24	22 2200k 27 2700k 30 3000k 35 3500k 45 4500k	<b>5L-WT</b> White

#### Example: LED-TX2435-5L-WT

Each "L" connector consumes 2 Watts Includes one male to male connector and End cap.

# PRO INVISILED®






Power: 3W/ft


Lumens: Up to 215 lm / ft

CRI: 85

Rated Life: 50,000 hours

- Specially rated for installation in the storage area of a clothes closet
- Designed for bright cove or task lighting
- UV stabilized protective coating protects LEDs and circuitry for long term use in damp locations
- May field cut every 2 inches at the end of a run
- Includes an end cap
- Maximum run length of 33 feet





#### TAPE SELECTIONS

System	Color Temp	Length	Qty	Finish
LED-T24	W 2700K P 3000K 35 3500K C 4500K	2IN 2 inches 2IN-10 2 inches 1 1 foot 5 5 feet 1-40 1 foot	1 10 1 1 40	WT White

Example: LED-T24W-1-40-WT

3500k no 2IN-10

#### "L" CONNECTOR

System	Color Temp		Finish	
LED-T24	W P 35 C	2700K 3000K 3500K 4500K	3L-WT	White

#### Example: LED-T24W-3L-WT

Each "L" connector consumes 1.2 Watts

Includes one male to male connector and End cap.



#### **COMPATIBLE CLASS 2 POWER SUPPLY (REQUIRED)**

Туре		Model	Input	Output	Dimming	
Remote	E IN	EN-2460-RB2-T EN-24100-RB2-T	120VAC 120VAC	24VAC/60W 24VAC/96W	ELV ELV	Includes a 6 foot lead wire
Remote		EN-24100-277-RB2-T	120 - 277VAC	24VDC/96W	0-10V	Includes a 6 foot lead wire
Plug-in		EN-2460-P-AR-T EN-24100-P-AR-T	120VAC 120VAC	24VAC/60W 24VAC/96W		Includes a 6 foot lead wire

12V OR 24V CAPACITIVE TOUCH SWITCH AND OCCUPANCY CONTROL KIT COMPATIABLE WITH ALL DAMP RATED INVISILED TAPE SYSTEMS







CT-6A-R2

Includes a Touch Panel, an Occupancy Sensor, and a Controller AC/DC input at 12V(60W Max) or 24V(96W Max) Connect on secondary side of driver/transformer



Power: 2W/ft

Lumens: Up to 150 lm / ft

CRI: 85

Rated Life: 50,000 hours

- Specially rated for installation in the storage area of a clothes closet
- UV stabilized protective coating protects LEDs and circuitry for long term use in damp locations
- May field cut every 2 inches at the end of a run
- Includes an end cap
- Max run length of 40 feet per power supply

#### **TAPE SELECTIONS**

System	Color Temp	Length	Qty	Finish
LED-T24	27L 2700K 30L 3000K	2IN     2 inches       2IN10     2 inches       1     1 foot       5     5 feet       1-40     1 foot		<b>WT</b> White

Example: **LED-T2427L-5-WT** 




#### "L" CONNECTOR

System	Color Temp	Finish	
LED-T24	27L 2700K 30L 3000K	3L-WT	White

Example: LED-T2427L-3L-WT

Each "L" connector consumes 0.7 Watts Includes one male to male connector and End cap.

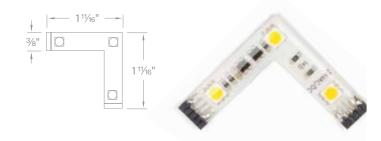

#### **COMPATIBLE CLASS 2 POWER SUPPLY (REQUIRED)**

Туре	Model	Input	Output	Dimming	
Remote	EN-2460-RB2-T EN-24100-RB2-T	120VAC 120VAC	24VAC/60W 24VAC/96W	ELV ELV	Includes a 6 foot lead wire
Remote	EN-24100-277-RB2-T	120 - 277VAC	24VDC/96W	0-10V	Includes a 6 foot lead wire
Plug-in	EN-2460-P-AR-T EN-24100-P-AR-T	120VAC 120VAC	24VAC / 60W 24VAC / 96W		Includes a 6 foot lead wire

#### INDOOR ALUMINUM CHANNELS

#### COMPATIABLE WITH ALL DAMP RATED INVISILED TAPE SYSTEMS



Aluminum Channel Additional End Caps LED-T-CH LED-T-CH-EC

5 feet 2 pcs

Diffuses light from InvisiLED tape Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, LITE



Deep Aluminum Channel Additional End Cap LED-T-CH1 LED-T-CH1-EC 5 feet 2 pcs

Eliminates visible hot spots Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, LITE



Includes a diffuser, two end caps, and ten screws Compatible with Pro, Pro2, LITE



Installed with 45° Angled Aluminum Channel in toe kick and Pro 3 InvisiLED®



Fixed Angle Channel Clip



Adjustable Channel Clip **LED-T-CL2-PT** 

Includes 2 pieces, 4 screws. Use to mount Aluminum Channel, Deep Aluminum Channel, 45° Angled Aluminum Channel

#### INDOOR MOUNTING ACCESSORIES

LED-T-CH2-EC



Additional End Caps

1/2"

2 pcs

**Aluminum Retrofit Channel** 

LED-T-RC 3 feet

Clear Channel

5 feet

Can be bent to create fixed curves or used as a glare shield Compatible with Pro, Pro2, LITE

Clip For surfaces that are difficult to adhere

LED-T-CL

10 pcs 10 Screws Includes a diffuser, two end caps, and five screws Provides a clean mounting surface for 3M adhesive



Curve Clip Secures on one edge

LED-TO24-CH5

LED-T-CL1

10 pcs 10 Screws

Clips to hold indoor InvisiLED tapes sections Compatible with Pro, Pro2, LITE

#### INDOOR CONTROLLERS

Conveniently install an secondary side of power supply for adding senior friendly low voltage lighting to furniture and toe kicks




Capacitive Touch Switch and Occupancy Control Kit CT-6A-R2

Includes a Touch Panel, an Occupancy Sensor, and a Controller. Compatible with WAC low voltage LED (12V or 24V) undercabinet products

#### INDOOR ELECTRICAL ACCESSORIES

	In Wall Rated Extension Cable	LED-TC-WEXT-144 LED-TC-WEXT-144-WT	Black White	12 ft 12 ft
	Extends distance between a hard wired power supply	LED-TC-WEXT-240	Black	20 ft
	or a wiring box to a tape section.	LED-TC-WEXT-240-WT	White	20 ft
all all	In Wall Rated Joiner Cable	LED-TC-WIC-144	Black	12 ft
		LED-TC-WIC-144-WT	White	12 ft
~~~	Connects tape sections. 2 female ends.	LED-TC-WIC-240	Black	20 ft
~	1 male to male connector included	LED-TC-WIC-240-WT	White	20 ft
III	1 1046	LED-TC-P-2	Black	2 ft
A Min	Lead Wire	LED-TC-P-2-WT	White	2 ft
The state of the s		LED-TC-P-12	Black	12 ft
	Alternative lengths for plug-in power supplies	LED-TC-P-12-WT	White	12 ft
	Extension Cable	LED-TC-EXT-144	Black	
	Extends distance between a hard wired power supply	LED-TC-EXT-144-WT Wh		12 ft
•	or a wiring box to a tape section			
	Low Voltage Wiring Box With Feed	LED-TC-B-2	Black	L: 1½ in
	Neatly houses connectos for up to	LED-TC-B-2-WT	White	W: ¾ in
	two wires with 12" female feed		vvince	H: 7/8 in
	Low Voltage Wiring Box			L: 1½ in
		LED-T-B		W: 3/4 in
	Neatly houses connections for up to two wires			H: 7/8 in
	Wiring Box With Switch			L: 6¼ in
100		TB-S		W:15/8 in
	Use when spanning a large gap in a system layout without leaving exposed wiring. Optional switch included			H: 1¼ in

Compatible with Pro, Pro2, LITE

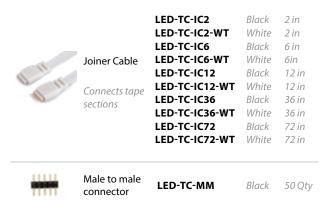

Compatible with Pro, Pro2, LITE Change directionality of tape runs and reuse cut ends of tape.

	3-Way "Y" Connector  Connects tape sections	LED-TC-Y LED-TC-Y-WT	Black White
X	4-Way "X" Connector	LED-TC-X LED-TC-X-WT	Black White
	"L" Connector	LED-TC-L LED-TC-L-WT	Black White
	End cap  1 cut and 1 male end cap	LED-TC-EC LED-TC-EC-WT	Black White


Compatible with Pro, Pro2, LITE



## Now available in a Higher Power Option and Architectural Black







**Dimming:** 100% - 10% ELV **Rated Life:** 54,000 hours

- Breathable waterproof technology and factory-sealed LED light engine ensures fixture can maintain stable atmospheric pressure and prevent condensation
- Die-cast aluminum construction

- 120V direct wire—no driver needed
- 1/2" threaded heavy-duty mounting arm
- Photo or motion sensor sold separately



Ceiling Mounted **360°** Horizontal Rotation **90°** Vertical Aiming



Shown with Round Canopy Box includes Two Canopies for use with Surface Mount or Recessed Junction Boxes



Shown in Architectural White Two different power options in one compact size.

			Power	Comparable	Color Temp	Delivered Lumens	Finish
434"	Flood	WP-LED335	35.5W	100W HID	<b>30</b> 3000K <b>50</b> 5000K	2450 2730	aBK Architectural Black aBZ Architectural Bronze
6" 47/8" New!	Flood Pro	WP-LED354	53W	150W HID	<b>35</b> 3500K	3445	aGH Architectural Graphite aWT Architectural White

MOTION SENSOR (120V) available in 3 complementary colors



MS-120-BZ Bronze
MS-120-GY Gray
MS-120-WT White



PHOTOSENSOR (120V) available in 3 complementary colors



PC-120-BZ Bronze
PC-120-GY Gray
PC-120-WT White



Example: WP-LED354-35-aWT













Input: 120V CRI: 85

**Dimming:** 100% - 10% ELV **Rated Life:** 39,000 hours

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire no driver needed
- Photo/motion sensor sold seperately

	Power	Comparable	Color	Тетр	Delivered Lumens	Finish		
₩P-LED415	15W	75W Halogen	30 50	3000K 5000K	965 1030	aBK aBZ aGH aWT	Architectural Black Architectural Bronze Architectural Graphite Architectural White	

**Example: WP-LED415-30-AWT** 

#### MOTION SENSOR (120V) available in 3 complementary colors



MS-120-BZ Bronze
MS-120-GY Gray
MS-120-WT White



#### PHOTOSENSOR (120V) available in 3 complementary colors



PC-120-BZ Bronze
PC-120-GY Gray
PC-120-WT White















Input: 120V CRI: 85

Dimming: 100% - 10% ELV Rated Life: 39,000 hours

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire no driver needed
- Photo/motion sensor sold seperately

	Power	Comparable	Color Temp	Delivered Lumens	Finish
Max 12½" WP-LED430	30W	2 x 75W Halogen	<b>30</b> 3000K <b>50</b> 5000K	965 x2 1030 x2	aBK Architectural Black aBZ Architectural Bronze aGH Architectural Graphite aWT Architectural White

Example: WP-LED430-30-aBZ

#### MOTION SENSOR (120V) available in 3 complementary colors



#### PHOTOSENSOR (120V) available in 3 complementary colors





**Input:** 120V-277V

CRI: 85

**Dimming:** 100% - 10% ELV or 0-10V

Rated Life: 100,000 hours

- Factory-Sealed LED Light Engine
- Die-cast Aluminum Construction
- 20° Forward Throw Illumination
- Built-in Level For Easy Adjustment
- Photo/Motion Sensor Sold Separately

	Power	Comparable	Max Delivered Lumens	Color T	- emp	Finish		
734" WP-LED119 WP-LED127 WP-LED135	19W 27W 35W	39W HID 70W HID 100W HID	1460 2135 2825	30 50	3000K 5000K	ABZ AGH AWT	Architectural Bronze Architectural Graphite Architectural White	

Example: WP-LED127-30-aWT

#### MOTION SENSOR (120V) available in 3 complementary colors



#### **PHOTOSENSOR** (120V) available in 3 complementary colors















Includes box sleeve For use with surface mount junction boxes

**Input:** 120V-277V

CRI: 85

**Dimming:** 100% - 10% ELV or 0-10V

Rated Life: 100,000 hours

- Factory-Sealed LED Light Engine
- Die-cast Aluminum Construction
- 20° Forward Throw Illumination
- Built-in Level For Easy Adjustment
- Photo/Motion Sensor Sold Separately

Max Delivered

Power Comparable Lumens Color Temp Finish

WP-LED219 19W 39W HID 1435 30 3000K For 5000K AGH Architectural Bronze AGH Architectural Graphite AWT Architectural White

Example: WP-LED219-30-aBZ

#### **MOTION SENSOR** (120V) available in 3 complementary colors



#### PHOTOSENSOR (120V) available in 3 complementary colors




#### RUBIX LED EXTERIOR









100% - 10% ELV or 0-10V Dimming:

CRI: 90 **Rated Life:** 70,000 hours

#### SINGLE LIGHT WALL MOUNT







Beam:

Wattage: 16W

• Die-cast aluminum construction

• Mounts up or down

Lumens: 750 Input: 120-277V

	Model	Finish	
5"— - 6½"—	WS-W2504	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White	

Example: WS-W2504-BZ

#### **DOUBLE LIGHT WALL MOUNT**



Beam: 86°

Wattage: 30W

1400

Lumens: Input: 120-277V • Die-cast aluminum construction

	Model		Finish
5"6½" 	WS-W2505	BK BZ	Brushed Aluminum Black Bronze Graphite
		WT	White

Example: WS-W2505-AL

#### SINGLE LIGHT WALL MOUNT



86° Beam:

· Mounts up or down

16W Wattage:

• Die-cast aluminum construction

Lumens: 805 120-277V Input:

Finish Model ΑL Brushed Aluminum 3%" 10" BK Black WS-W2509 ΒZ Bronze GH Graphite WΤ White

Example: WS-W2509-WT

#### **DOUBLE LIGHT WALL MOUNT**



E ADA

86° Beam:

• Die-cast aluminum construction

30W Wattage: Lumens: 1385 120-277V Input:

	Model	Finish
10" 3%" 53%	WS-W2510	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White

Example: WS-W2510-BK







Color Temp: 3000K Dimming: 100% - 10% ELV or 0-10V

Rated Life:

70,000 hours

#### **CEILING MOUNT**

90

CRI:



Beam: 86°

Input:

Wattage:

16W

120-277V

Lumens: 750

Model

· Ceiling mount

5"

FM-W2505

ΑL BK ΒZ GH

· Die-cast aluminum construction

Bronze Graphite WΤ White

Black

Finish

**Brushed Aluminum** 

Example: FM-W2505-WT

#### **CEILING MOUNT**



Beam:

Input:

95°

30W

· Ceiling mount

Model

Wattage: Lumens:

• Die-cast aluminum construction

1875 120-277V

FM-W2510

ΑL **Brushed Aluminum** BK Black

Finish

ΒZ Bronze Graphite GH WΤ White

Example: FM-W2510-BZ

10"

#### SCOOP LED EXTERIOR SINGLE LIGHT WALL MOUNT











Beam: Wattage: 16W


805 Lumens: Input: 120-277V 3000K Color Temp: CRI:

100% - 10% ELV or 0-10V Dimming:

**Rated Life:** 70,000 hours



· Die-cast aluminum construction



Example: WS-W20506-BK





90







Color Temp: 3000K Dimming: 100% - 10% ELV or 0-10V

**Rated Life:** 

#### 4" SINGLE LIGHT WALL MOUNT





CRI:

Beam: 33°

• Mounts up or down

Wattage: 16W

• Die-cast aluminum construction

70,000 hours

Lumens: 800 Input: 120-277V

	Model	Finish	
4½" 1½"	WS-W2605	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White	

Example: WS-W2605-AL

#### SINGLE LIGHT WALL MOUNT









Beam: 70°

• Mounts up or down

• Die-cast aluminum construction

Wattage: 16W

Lumens: 825 Input: 120-277V

Model Finish

10" 37%" WS-W2609 BK Black
BZ Bronze
GH Graphite
WT White

Example: WS-W2609-BK

#### 4" DOUBLE LIGHT WALL MOUNT



Beam: 33°

Wattage: 30W Lumens: 1750

Input: 120-277V

	Model		Finish
4½" 1½"	WS-W2604	BK BZ	Brushed Aluminum Black Bronze Graphite White

· Die-cast aluminum construction

Example: WS-W2604-BZ

#### **DOUBLE LIGHT WALL MOUNT**





**Beam:** 70° • Die-cast aluminum construction

**Wattage:** *30W* **Lumens:** *1525* 

Input: 120-277V

	Model	Finish	
10" 3%" 5%"	WS-W2610	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White	7

Example: WS-W2610-WT

#### TUBE LED EXTERIOR







36

Color Temp: 3000K 100% - 10% ELV or 0-10V Dimming:

Rated Life:

70,000 hours

#### 4" CEILING MOUNT

90



Lumens:

CRI:

Beam: 33° Ceiling mount

Wattage: 16W 800

• Die-cast aluminum construction · Dark Sky Friendly

Input: 120-277V

	Model Finish
5"   5"   FN	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White

Example: FM-W2605-WT

#### **CEILING MOUNT**



Beam: 91° Ceiling mount

Wattage: 30W • Die-cast aluminum construction

Lumens: 1740 120-277V Input:

	Model		Finish
12"	FM-W2612	AL BK BZ GH WT	Brushed Aluminum Black Bronze Graphite White

Example: FM-W2612-GH

#### PENDANT MOUNT



Beam: 33° • Die-cast aluminum construction

· Hang straight swivel Wattage: 16W

800 • Three 12" and one 6" down rods included Lumens:

Input: 120-277V • Dark Sky Friendly



Example: PD-W2605-BK

#### STEP LIGHTS LED LANDSCAPE





1838 listed (12V) 1598 listed (120V)

#### **CIRCLE AND SQUARE STEP LIGHTS**

- Solid stainless steel construction
- Includes a spring clip for wall or step applications
- 6' lead wire





					Model	
23/4"	31/4"	Circle 2041	Input Power Brightness Color Temp CRI Rated Life	9-15VAC 4.1W / 6.6VA 50 lm 3000 K 85 70,000 hours	2041-30SS 2041-30BS	Stainless Steel Bronzed Stainless Steel
23/4"	31/4"	Square 2061	Input Power Brightness Color Temp CRI Rated Life	9-15VAC 4.1W/6.6VA 50 lm 3000 K 85 70,000 hours	2061-30SS 2061-30BS	Stainless Steel Bronzed Stainless Steel

#### **RECTANGLE STEP LIGHTS**

Solid Die-cast brass, corrosion resistant aluminum alloy, or cast stainless steel construction

11/8"	3" 115/16"

Voltage	Model	Color Temp	Finishes
12V	4011-27 4011-30 4011-AM	2700K 3000K Amber	BBR Bronze on Brass*** BZ Bronze on Aluminum BK Black on Aluminum
120V**	WL-LED100-C- WL-LED100-AM-	3000K Amber	WT White on Aluminum SS* Cast Stainless Steel


#### Example: 4011-30BZ

\*Cast Stainless Steel finish is only available in 3000K and Amber Colors.
\*\*Available in 277V; Example: **WL-LED100F-C-WT** 

\*\*\* Bronze on Brass is not available in 277V.

	12V	120V
Input	9 - 15VAC	110 - 120VAC
Power	2W 3.1VA	3.5W
Brightness	Up to 38 lm	Up to 65 lm
CRI	90+	90+
Rated Life	60,000 hours	54,000 hours





Voltage	Model	Color Temp	Finishes
12V	4021-27 4021-30 4021-AM	2700K 3000K Amber	BZ Bronze on Aluminum BK Black on Aluminum
120V**	WL-LED200-C- WL-LED200-AM-	3000K Amber	WT White on Aluminum SS* Cast Stainless Steel

Example: 4021-AMBK









#### WL-5105

Opal

Input: 120V CRI: 90

**Dimming:** 100% - 10% ELV **Rated Life:** 80,000 hours

#### **WL-5205** Louver

Input: 120V CRI: 90

 Dimming:
 100% - 10% ELV

 Rated Life:
 80,000 hours



- Factory-Sealed LED Light Engine
- Die-cast Aluminum Construction
- 120V Direct Wire No Driver Needed
- $\bullet \ \ \text{Easily retrofit most existing incandescent brick light installations with this maintenance free LED upgrade}\\$

	Power	Max Delivered Lumens	Color Temp	Finish
9½" 4" 25%" 33%" WL-5105-30 Opal	5.5W	110	3000K	ABZ Architectural Bronze ABK Architectural Black AGH Architectural Graphite AWT Architectural White
9½" 4½" WL-5205-30 Louver	5.5W	45	3000K	ABZ Architectural Bronze ABK Architectural Black AGH Architectural Graphite AWT Architectural White

#### **ACCENT**


#### Now available in Black



New! 5011-30BK







Mounting stake and direct burial gel filled wire nuts Included

#### 12V

Integral brightness control
 Adjustable beam angle 10° to 60°
 One fixture replaces 35W to 75W halogen accent light
 New!
 Mew!
 Warm White
 Bronze on Aluminum
 Bronze on Brass
 Black on Aluminum

• Transformer required (sold separately)

**Input:** 9 - 15VAC

 Power:
 2W to 16W/2VA -23VA

 Lumens:
 190 lm to 1045 lm

 Beam Angle:
 10° to 60°

CRI: 85

Rated Life: 70,000 hours

3000K Pure White

**5011-30BZ** Bronze on Aluminum **5011-30BBR** Bronze on Brass

Black on Aluminum

120V Transformer Not Required

 Input:
 110V - 120VAC

 Power:
 3.5W to 14.5W

 Lumens:
 100 Im to 900 Im

 Beam Angle:
 15° to 60°

 CRI:
 85

Rated Life: 45,000 hours

3000K Pure White

5012-30BZ Bronze on Aluminum
5012-30BBR Bronze on Brass
8 Black on Aluminum

#### Accessories

10003301103								
6" Long Shroud	5010-LSHR-BK 5010-LSHR-BZ 5010-LSHR-BBF			Black Bronze on Aluminum Bronze on Brass		Reduce glare. Ideal for downlighting application		
Additional Stake	9000-ST9-BZ	9000-ST9-BZ		Bronze		Durable PC stake		
Surface Mount Flange/Stake	5000-SCP-BZ 5000-SCP-BBR			Bronze on Aluminum Bronze on Brass		Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box		
Guardian Mount	9000-SP9-BZ		Stainless Steel		Heavy duty stainless steel spike to position fixture Formed from a single piece of metal			
Gutter Mount Bracket	5000-GM-BZ	-BZ Stainless			Stainless Steel universal mounting bracket for gutter mounting fixture		ng bracket for gutter	
Power Stake	M6000-STAKE	Bronze			Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box.			
Tree Mount Junction Box	5000-TCP-BZ		Bronze on Aluminum		Bronze on Alum screws. Two ½" I		stainless steel mounting ples	
Optics	LENS-20-AMB LENS-20-GRN LENS-20-RED	Amber Green Red	LENS-20-BLU LENS-20-FR LENS-20-SPR	Blue Frosted Spread	LENS-20-BEL	Beam Elongating	Enhances saturation of florals and foliage	
Extension Rods	5000-X04-BZ 5000-X08-BZ 5000-X12-BZ	4 in 8 in 12 in	5000-X18-BZ 5000-X24-BZ	18 in 24 in	Extends distance Surface Mount (		nt light and r Tree Mount box	
Rod L-Coupler	5000-LCO-BZ		Bronze					



#### Now available in Black



#### 12V

- Integral brightness control
- Mounting stake and direct burial gel-filled wire nuts all included with 12V
- Transformer required (sold separately)

**Input:** 9-15VAC

 Power:
 2W to 16W/2 - 23VA

 Brightness:
 190 lm to 980 lm

 Beam Angle:
 15° upward (50° by 80°)

**CRI:** 85

Rated Life: 70,000 hours

2700K Warm White

**5021-27BZ** Bronze on Aluminum **5021-27BBR** Bronze on Brass


5021-27BK Black on Aluminum

3000K Pure White

**5021-30BZ** Bronze on Aluminum Bronze on Brass

5021-30BK Black on Aluminum Ne





120V Transformer Not Required

• Integral brightness control

 Input:
 110V - 120VAC

 Power:
 3.5W to 14.5W

 Brightness:
 95 Im to 855 Im

 Beam Angle:
 15° upward (50° by 80°)

**CRI:** 85

Rated Life: 45,000 hours

3000K Pure White

**5022-30BZ** Bronze on Aluminum Bronze on Brass

5022-30BK Black on Aluminum New!

#### Accessories For Wall Wash

Wall Wash LENS-2X4-AMB Amber
Optics LENS-2X4-GRN Green
LENS-2X4-RED Red
LENS-2X4-BLU Blue
LENS-2X4-FR Frosted
LENS-2X4-SPR Spread

#### Accessories For Mini Accent, Accent, Grand Accent, Mini Wall Wash and Wall Wash

Additional Stake	9000-ST9-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake	5000-SCP-BZ 5000-SCP-BBR	Bronze on Aluminun Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount	9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture Formed from a single plate of stainless steel
Gutter Mount Bracket	5000-GM-BZ	Stainless Steel	Stainless Steel universal bracket for mounting in gutter
Tree Mount Junction Box	5000-TCP-BZ	Bronze on Aluminun	Bronze on Aluminum box with Stainless steel mounting screws. Two ½" NPT threaded holes
Rod L-Coupler	5000-LCO-BZ	Bronze	
Extension Rods	5000-X08-BZ 5000-X12-BZ 5000-X18-BZ	4 in 8 in 12 in Bronze 18 in 24 in	Extends distance between light accent and Surface Mount Canopy, Stake, or Tree Mount box



#### 12V

Integral Brightness Control Adjustable beam angle Directional aim with +/- 20° Tilt

Input 9-15VAC
Power 2W to 12W / 2-17VA
Brightness 70 Im to 505 Im
Beam Angle 15° to 60°
CRI 85

2700K Warm White


Rated Life 55,000 hours

5031-27BZ Bronze on Aluminum Bronze on Brass

3000K Pure White

**5031-30BZ** Bronze on Aluminum **5031-30BBR** Bronze on Brass





6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

#### 120V

Integral Brightness Control Adjustable beam angle

Input Power Brightness Beam Angle CRI Rated Life Power Power ST 10V - 120VAC 3W to 11.5W 65 Im to 515 Im 15° to 60° 85 45,000 hours

3000K Pure White

**5032-30BZ** Bronze on Aluminum **5032-30BBR** Bronze on Brass

#### ACCESSORIES LED LANDSCAPE

5030-GRD-BZ Bronze on Aluminum Rock Guard Protects the fixture surface 5030-GRD-BBR Bronze on Brass LENS-25-AMB Amber LENS-25-GRN Green LENS-25-RED Red Enhances saturation of florals and foliage Optics LENS-25-BLU Blue LENS-25-FR Frosted LENS-25-HCL Honeycomb Louver Reduces glare Shown with temporary dense For installation in concrete 5030-PIP-PVC Concrete Pour Kit Five 1/2" NPT threaded holes, PC foam cap

#### TRANSFORMER LED LANDSCAPE





- IP65 Rated
- 12V to 15V taps
- Knock outs for power and photosenser connections
- 3-prong outlet for timer
- Outdoor rated stainless steel transformer contains an outdoor rated 3-prong plug for power



Model	
9075-TRN-SS	75W Max Dimensions: 13.97" L x 5.35"W x 5.63"H
9150-TRN-SS	<i>150W Max</i> Dimensions: 18.90" L x 6.69"W x 6.30"H
9300-TRN-SS	<i>300W Max</i> Dimensions: 18.90" L x 6.69"W x 6.30"H
9600-TRN-SS	600W Max ( 2 x 300W outputs) Dimensions: 14.49" L x 10.08"W x 5.94"H

#### ACCESSORIES LED LANDSCAPE

Mechanical Timer	0	9000-MTI-WT	White	Connect within the transformer		
Photosensor	3	9000-PCH-GY	1000VA Max	Attached directly to the transformer		
Photosensor - Remote		9000-PCR-GY	1000VA Max	If transformer is located in a shady spot, this photosensor has a 10 foot cord and a stainless steel bracket to secure in a sunny area		
Direct Burial Water proof Wire Nuts	4	9020-WNT-BK		Silicone filled wire nut with gasket (Pack of 20pcs)		
12V Direct Burial Outdoor Cable	£	9100-12G-BK   9250-12G-BK 9500-12G-BK	100 feet 12 gauge 250 feet 12 gauge 500 feet 12 gauge			

