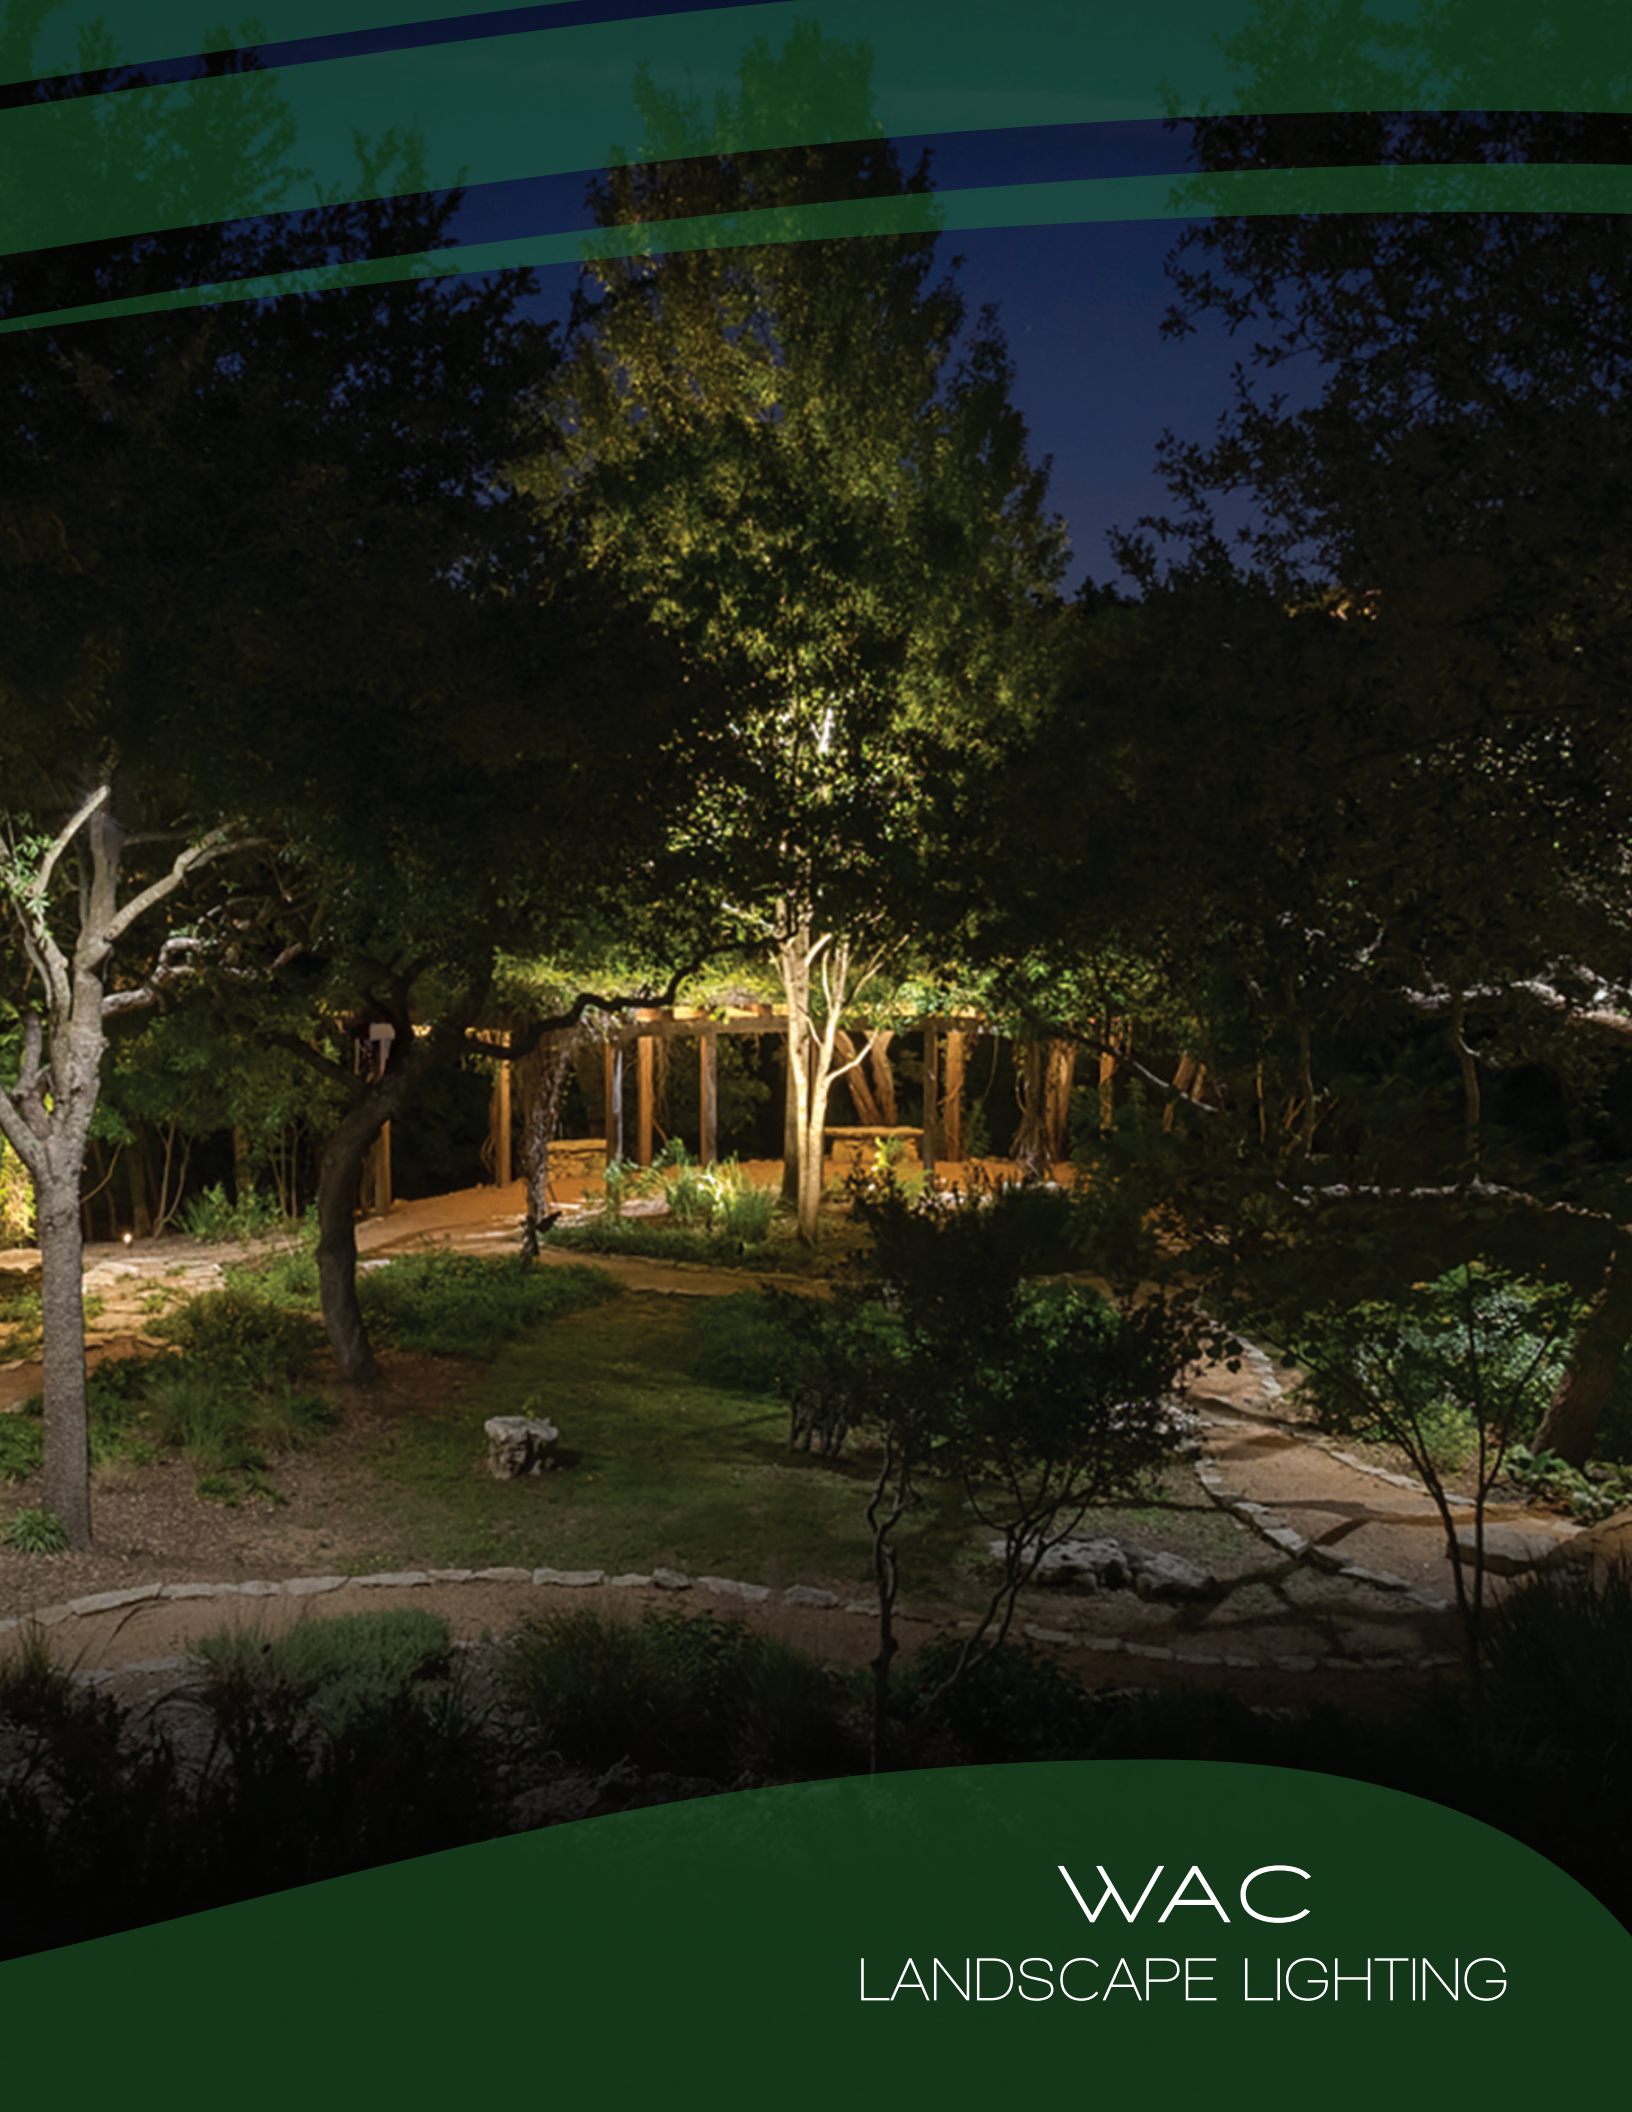


WAC
LANDSCAPE LIGHTING

ABOUT WAC LANDSCAPE LIGHTING

Dream it. Solve it. Make it.

WAC LIGHTING is a second generation family-owned and operated lighting company with a reputation for quality spanning 37 years. We have a history of inventing and making innovation widely available to the market through competitive pricing and reputable distribution partnerships.

Our choice has consistently been to operate at a higher level of responsibility, giving our customers the true benefits of a world class factory-direct relationship.

Headquartered in New York, we have factories in New York, California, Georgia, and use a dedicated factory in China to support a comprehensive research, design, engineering, electronics, fabrication, manufacturing, and testing operation worldwide.

WAC LANDSCAPE LIGHTING is an expansion of our lighting technology brand to offer ground-breaking patented solutions to the irrigation and green industry that address problems currently not addressed by other landscape lighting companies.

Table of Contents

12V LANDSCAPE LIGHTING

LED Grand Accent 5-6
LED Accent 7-8
LED Mini Accent 9-12
LED Interbeam 13-14
LED Adjustable Beam Wall Wash 15-16
LED Wall Wash 17-18
LED Mini Wall Wash 19-20
LED 3" In-Ground 21-24
LED ilumenight™ Color Changing 25-26
LED Underwater Spot 27-28
LED Submersible 2" Ingrounds 29-30
LED Recessed Ingrounds + Indicator 31-34
LED ESTRELLA Pendant Ceiling Light 35-36
LED Cylinder Wall Mount 37-38
LED Surface Mount Indicator 39-40
LED Hardscape 41-44
LED Path Lights 45-68
LED Bollards 69-80
12V LED Outdoor Tape Light 81-82
24V LED Outdoor Tape Light 83-88
LED Deck & Patio 89-90
LED Step Lights 91-96
Transformers/Accessories 97-98

120V EXTERIOR LED DIRECT WIRE LIGHTING

LED Landscape 99-100
LED Brick Lights 101-102
LED Flood Lights 103-108
LED Wall Packs 109-110
LED Decorative 111-114
Photometrics 115-125

Cover Photo: Vincent Landscapes, Inc.

WHAT HAVE WE DONE FOR YOU LATELY?

Our Newest Patented Inventions Solve Everyday Challenges


Adjustable Beam Wall Wash

BRIGHTNESS

Fixture lumen output range of 200lm to 1500lm can be accomplished. In wattage, this translates to a range from 3W to 25W of LED power. This is all accomplished with a screwdriver for brightness adjustment.

BEAM ANGLE


Architectural beam distributions from 3x4 to 4x5 to 5x6 proportions and everything in between.
Rotatable fixture head for vertical distribution
Always a uniform wide beam wash of light
NEMA 4X3: 60 degrees by 35 degrees
NEMA 5X4: 90 degrees by 60 degrees
NEMA 6X5: 120 degrees by 90 degrees

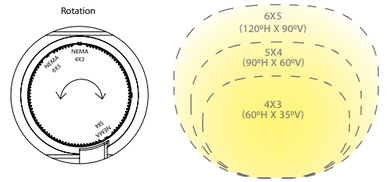

FLEXIBILITY/OPTIONS

Multiple OPTIONS for FLEXIBILITY:
Marine-grade Brass or Corrosion Resistant Aluminum Bronze or Black finishes.
2700K, 3000K, or 4000K
12V or 120V
Color lens & optical lens option
Tree mount, wall mount option
Suitable for use as a Wall Wash Light

Hardscape Quick Release



BRIGHTNESS

Fixture lumen output range of 10lm to 350lm can be accomplished. In wattage, this translates to a range from 0.5W to 8.5W of LED power. This is all accomplished with a screwdriver for brightness adjustment.



QUICK RELEASE SERVICEABILITY

Based on popular demand, our new patented invention allows for a watertight male/female connection at the fixture for ease of replacement after it is installed.



FLEXIBILITY/OPTIONS

Multiple OPTIONS for FLEXIBILITY:
Marine-grade Brass or Corrosion Resistant Aluminum Bronze, Graphite, or Sand finishes.
Select color temperature option : 2700K or 3000K
Removable stainless steel capstone bracket and rotating mounting clips included

Durability. Flexibility. Guaranteed.

Every WAC® Lighting fixture in our patented line of technology landscape products is thoroughly tested in our nationally recognized NVLAP, UL, and ETL certified laboratories for safety, durability, and robust long term performance even in the most rugged environments.

LED Life Expectancy

Rated life of LED lights is based on IES (Illuminating Engineering Society) L70 standard accelerated lifetime testing for how long they will operate until only 70% of the original light output remains.

c UL us Listed to UL 1838 standard (12V) | 1598 standard (120V)

DO YOU HAVE WHAT YOU NEED?

OURS | Just three continuously adjustable lights perfectly illuminate small to giant objects everytime.



Adjustable 10° to 50° beam
Power from 7W to 1W
Dim from 365 lumens to 45 lumens

Others are only available as low as 100 lumens, which may still be too bright for certain applications at night



Adjustable 10° to 60° beam
Power from 16W to 2W
Dim from 1045 lumens to 190 lumens


Covers most commonly needed accent lighting applications





Adjustable 15° to 60° beam
Power from 33W to 15W
Dim from 2000 lumens to 740 lumens

No other landscape accent light offers over 1000 lumens

OTHERS | Each light needs to be ordered specifically for fixed beam angles and set brightness levels.

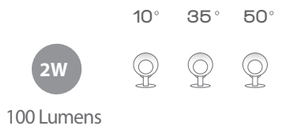

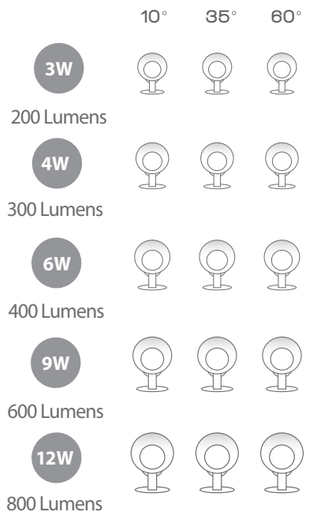

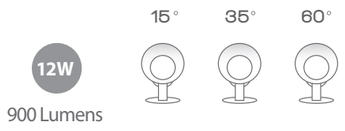

It's All About the DETAILS

Gone are the appearance of many glary LED dots.
Quality LED Illumination comparable to incandescent without the pain of a high electricity bill.





Continuously Adjustable Brightness Control

Easy Adjustability

Twist the collar to change beam angle. Use a flat or philips head screw driver to adjust brightness and lock aiming direction.


Materials That Mean Business

Unlike other brands of landscape lighting, we actually fabricate each component of each product using the best UV stabalized and corrosion resistant materials available to be able to confidently support a true 10 year warranty.

Marine Grade Diecast Stainless Steel
Bronze Finished Stainless Steel

Diecast Corrossion Resistant Aluminum Alloy
Robust Powdercoated Bronze and Black Finishes

Diecast or Machined Marine-Grade Brass
Bronze Finish

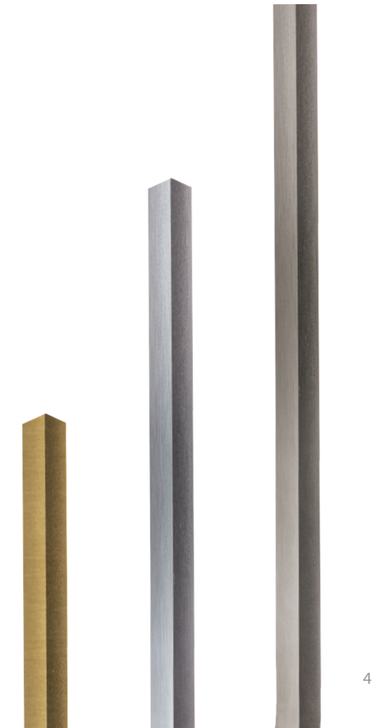

GRAND ACCENT LED LANDSCAPE

MOONLIGHTING EFFECT

Introducing the first landscape accent lights to deliver up to 2000 lumens of light output. When mounted high in trees and pointing downward, Grand Accent creates a beautiful moonlighting effect with a cool white light and superior lumen output.


- New 4000K color temperature option resembles moonlight
- Adjustable beam 15° to 60°
- Continuously adjustable lumen output 740–2000 lm
- Integral brightness control
- One fixture replaces 50W to 100W halogen accent light

GRAND ACCENT LED LANDSCAPE

PATENTED IP66 c UL us
1838 listed
1598 listed



See photometric data on pages 115-116

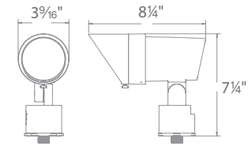

12V

Input Power	9 -15VAC 15W to 33W / 21VA -44VA
Brightness	740 lm to 2000 lm
Beam Angle	15° to 60°
CRI	85
Rated Life	45,000 hours

2700K	*Warm White*	
5211-27	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass
3000K	*Pure White*	
5211-30	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass
4000K	*Cool White*	
5211-40	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass

120V

Input Power	9 -15VAC 13W to 31W / 23VA -48VA
Brightness	780 lm to 2050 lm
Beam Angle	15° to 60°
CRI	85
Rated Life	45,000 hours

3000K	*Pure White*	
5212-30	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass
4000K	*Cool White*	
5212-40	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass

Accessories

5" Long Shroud	**5211-LSHR-BK** **5211-LSHR-BZ** **5211-LSHR-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Reduce glare; ideal for downlighting application*
Grand Accent Snoot	**5211-SNOOT-BK** **5211-SNOOT-BZ** **5211-SNOOT-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Reduce glare; ideal for downlighting application*
Mounting Stake	**9000-ST9-BZ** **9000-ST14-BZ**	*Bronze* *Bronze*	*9" Durable PC stake* *14" Durable PC stake*
Power Stake	**M6000-STAKE**	*Black*	*Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box.*
Surface Mount Flange/Stake	**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount	**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*
Gutter Mount Bracket	**5000-GM-BK** **5000-GM-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Stainless steel universal mounting bracket for gutter mounting fixture*
Tree Mount Junction Box	**5000-TCP-BK** **5000-TCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed*
	5000-TCL-BK **5000-TCL-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Large Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed*
Large Tree Mount Canopy Strap	**5000-TST-BK**	*Black on Steel/terylene*	*Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)*
	5000-STB-BK	*Black on Steel*	*Tree mount bracket only*
Extension Rods	**5000-X04-BZ,BK,BBR** *4 in* **5000-X08-BZ,BK,BBR** *8 in* **5000-X12-BZ,BK,BBR** *12 in*	**5000-X18-BZ,BK,BBR** *18 in* **5000-X24-BZ,BK,BBR** *24 in*	*Extends distance between Accent light and surface mount canopy, stake, or tree mount box*
Optics	**LENS-25-AMB** *Amber* **LENS-25-GRN** *Green* **LENS-25-RED** *Red*	**LENS-25-BLU** *Blue* **LENS-25-FR** *Frosted* **LENS-25-SPR** *Spread*	**5211-HCL** *Honeycomb Lens* **LENS-25-BEL** *Beam Elongating*

9" Mounting stake (12V),Detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included



ACCENT LED LANDSCAPE

PATENTED IP66 c UL us
1838 listed
1598 listed

12V

- Both fixture level dimming and circuit level dimming
- Dim each circuit from either the 12V or 120V side
- Adjustable beam angle 10° to 60°

Input	*9-15V*
Power	*1W to 18W/2VA-23VA*
Brightness	*50lm to 1160lm*
Beam Angle	*10° to 60°*
CRI	*85*
Rated Life	*70,000 hours*

5011-27	*2700K*	**BK**	*Black on Aluminum*
5011-30	*3000K*	**BZ**	*Bronze on Aluminum*
5011-40	*4000K*	**BBR**	*Bronze on Brass*

120V


- Both fixture level dimming and circuit level dimming
- Dim each circuit with a magnetic line voltage dimmer or control system
- Adjustable beam angle 15° to 60°
- Simple to retrofit existing line voltage systems or coordinate well with a new commercial landscape job

Input	*110V-120V*
Power	*3.5W to 14.5W*
Brightness	*100lm to 900lm*
Beam Angle	*15° to 60°*
CRI	*85*
Rated Life	*45,000 hours*

5012-30	*3000K*	**BK**	*Black on Aluminum*
		BZ	*Bronze on Aluminum*
		BBR	*Bronze on Brass*



See photometric data on pages 117-118



ilumenight™ *color changing accent lights*
See pages 25-26

Accessories

5" Long Shroud		**5010-LSHR-BK** **5010-LSHR-BZ** **5010-LSHR-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Reduce glare; ideal for downlighting application*
Grand Accent Snoot		**5010-SNOOT-BK** **5010-SNOOT-BZ** **5010-SNOOT-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Reduce glare; ideal for downlighting application*
Mounting Stake		**9000-ST9-BZ** **9000-ST14-BZ**	*Bronze* *Bronze*	*9" Durable PC stake* *14" Durable PC stake*
Power Stake		**M6000-STAKE**	*Black*	*Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box.*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*
Gutter Mount Bracket		**5000-GM-BK** **5000-GM-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Stainless steel universal mounting bracket for gutter mounting fixture*
Tree Mount Junction Box		**5000-TCP-BK** **5000-TCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed*
		**5000-TCL-BK** **5000-TCL-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Large Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed*
Large Tree Mount Canopy Strap		**5000-TST-BK**	*Black on Steel/terylene*	*Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)*
		5000-STB-BK	*Black on Steel*	*Tree mount bracket only*
Extension Rods		**5000-X04-BZ,BK,BBR** *4 in* **5000-X08-BZ,BK,BBR** *8 in* **5000-X12-BZ,BK,BBR** *12 in*	**5000-X18-BZ,BK,BBR** *18 in* **5000-X24-BZ,BK,BBR** *24 in*	*Extends distance between Accent light and surface mount canopy, stake, or tree mount box*
Optics		**LENS-20-AMB** *Amber* **LENS-20-GRN** *Green* **LENS-20-RED** *Red*	**LENS-20-BLU** *Blue* **LENS-20-FR** *Frosted* **LENS-20-SPR** *Spread*	**5011-HCL** *Honeycomb Lens* **LENS-20-BEL** *Beam Elongating*

9" Mounting stake (12V),Detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

MINI ACCENT LED LANDSCAPE

- Adjustable beam angle
- IP66 Rated, protected against high-pressure water jets
- Includes a detachable shroud
- Solid diecast brass or corrosion resistant aluminum
- Factory sealed water tight fixtures
- Constant output for 9V-15V input
- Can be used as an uplight or downlight
- 2700K or 3000K color temperature

- Continuously Adjustable Beam Angles Indexed at 10º, 25°, 40°, 50º

- Continuously Adjustable Brightness Control Indexed at 1W, 2W, 4W, 6W, 7W

MINI ACCENT LED LANDSCAPE

PATENTED IP66 c UL us *1838 listed*

12V

- Integral brightness control
- Adjustable beam angle 10° to 50°
- One fixture replaces all older halogen landscape accent light.


Transformer Required (order separately)

Input	9 -15VAC
Power	1W to 7W / 2VA -10.5VA
Brightness	45 lm to 365 lm
Beam Angle	10° to 50°
CRI	85
Rated Life	70,000 hours

2700K	*Warm White*	
5111-27	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass
3000K	*Pure White*	
5111-30	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass



See photometric data on page 119





Shown with gutter mount bracket accessory



Continuously adjustable brightness control



Single and Double stem mount available. See pages 11-12

Accessories

5" Long Shroud		**5111-LSHR-BK** **5111-LSHR-BZ** **5111-LSHR-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Reduce glare; ideal for downlighting application*
Grand Accent Snoot		**5111-SNOOT-BK** **5111-SNOOT-BZ** **5111-SNOOT-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Reduce glare; ideal for downlighting application*
Mounting Stake		**9000-ST9-BZ** **9000-ST14-BZ**	*Bronze* *Bronze*	*9" Durable PC stake* *14" Durable PC stake*
Power Stake		**M6000-STAKE**	*Black*	*Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box.*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*
Gutter Mount Bracket		**5000-GM-BK** **5000-GM-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Stainless steel universal mounting bracket for gutter mounting fixture*
Tree Mount Junction Box		**5000-TCP-BK** **5000-TCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed*
		**5000-TCL-BK** **5000-TCL-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Large Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed*
Large Tree Mount Canopy Strap		**5000-TST-BK**	*Black on Steel/terylene*	*Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)*
		5000-STB-BK	*Black on Steel*	*Tree mount bracket only*
Extension Rods		**5000-X04-BZ,BK,BBR** *4 in* **5000-X08-BZ,BK,BBR** *8 in* **5000-X12-BZ,BK,BBR** *12 in*	**5000-X18-BZ,BK,BBR** *18 in* **5000-X24-BZ,BK,BBR** *24 in*	*Extends distance between Accent light and surface mount canopy, stake, or tree mount box*
Optics		**LENS-16-AMB** *Amber* **LENS-16-GRN** *Green* **LENS-16-RED** *Red*	**LENS-16-BLU** *Blue* **LENS-16-FR** *Frosted* **LENS-16-SPR** *Spread*	**5111-HCL** *Honeycomb Lens* **LENS-25-BEL** *Beam Elongating*

9" Mounting stake (12V), detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V) included



MINI ACCENT LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input

MINI ACCENT LED PATH

PATENTED IP66 c UL us *1838 listed*

12V

- Includes 6", 12" and 24" extensions
- IP66 Rated, protected against high-pressure water jets
- 10˚-50˚ beam adjustability
- Continuously adjustable beam angles and brightness control
- Detachable shroud
- Constant output for 9V-15V input

Transformer Required (order separately)

	SINGLE	DOUBLE
Input	9-15VAC	9-15VAC
Power	1W to 7W/2VA-10.5VA	1W to 7W/2VA-10.5VA x2
Brightness	45lm to 365lm	45lm to 365ml x2
Color Temp	2700 & 3000k	2700 & 3000k
CRI	85	85
Rated Life	70,000 hours	70,000 hours

2700 & 3000K *Warm and Pure White*

Single

6111-27	**BZ**	Bronze on Aluminum
6111-30	**BBR**	Bronze on Brass

2700 & 3000K *Warm and Pure White*


Double

6211-27	**BZ**	Bronze on Aluminum
6211-30	**BBR**	Bronze on Brass


Example: 6111-30BBR

Guardian mount, *6 foot lead wire, and direct burial gel filled wire nuts included*

See photometric data on page 119

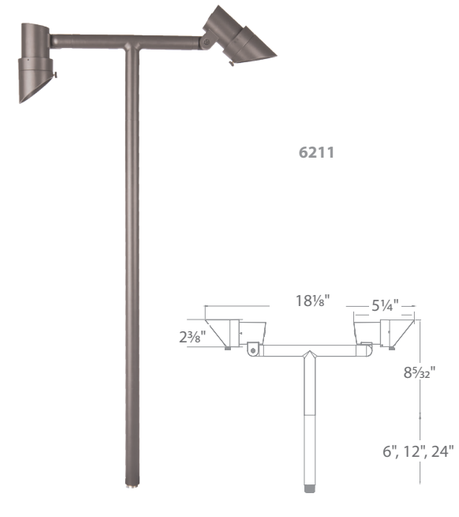

6211

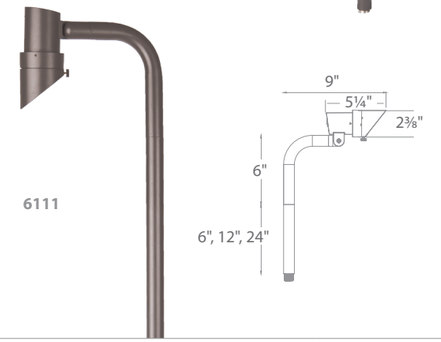

6111

Accessories

5" Long Shroud		**5111-LSHR-BK** **5111-LSHR-BZ** **5111-LSHR-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Reduce glare; ideal for downlighting apllication*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*



INTERBEAM LED LANDSCAPE

PATENTS PENDING IP66 c UL us 1838 listed


12V

- MLV Dimmable (remote MLV dimmer)
- Adjustable beam angle 20° to 60°
- One adjustable light replaces many fixed lights


Transformer Required (order separately)


Input	*9 -15VAC*
Power	*6W/7.7VA*
Brightness	*475lm*
Beam Angle	*20° to 60°*
CRI	*85*
Rated Life	*70,000 hours*





See photometric data on page 120





2700K	Warm White	
5311-27	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
3000K	Pure White	
5311-30	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum

Accessories

5" Long Shroud	**5111-LSHR-BK** **5111-LSHR-BZ**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Reduce glare; ideal for downlighting application*
Grand Accent Snoot	**5111-SNOOT-BK** **5111-SNOOT-BZ**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Reduce glare; ideal for downlighting application*
Mounting Stake	**9000-ST9-BZ** **9000-ST14-BZ**	*Bronze* *Bronze*	*9" Durable PC stake* *14" Durable PC stake*
Power Stake	**M6000-STAKE**	*Black*	*Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box.*
Surface Mount Flange/Stake	**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount	**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*
Gutter Mount Bracket	**5000-GM-BK** **5000-GM-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Stainless steel universal mounting bracket for gutter mounting fixture*
Tree Mount Junction Box	**5000-TCP-BK** **5000-TCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed*
	5000-TCL-BK **5000-TCL-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Large Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed*
Large Tree Mount Canopy Strap	**5000-TST-BK**	*Black on Steel/terylene*	*Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)*
	5000-STB-BK	*Black on Steel*	*Tree mount bracket only*
Extension Rods	**5000-X04-BZ,BK,BBR** *4 in* **5000-X08-BZ,BK,BBR** *8 in* **5000-X12-BZ,BK,BBR** *12 in*	**5000-X18-BZ,BK,BBR** *18 in* **5000-X24-BZ,BK,BBR** *24 in*	*Extends distance between Accent light and surface mount canopy, stake, or tree mount box*
Optics	**LENS-16-AMB** *Amber* **LENS-16-GRN** *Green* **LENS-16-RED** *Red*	**LENS-16-BLU** *Blue* **LENS-16-FR** *Frosted* **LENS-16-SPR** *Spread*	**5111-HCL** *Honeycomb Lens* **LENS-16-BEL** *Beam Elongating*

Mounting stake (12V), detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V) included

ADUSTABLE BEAM WALL WASH LED LANDSCAPE

WITH BEAM AND INTEGRAL BRIGHTNESS CONTROL

- Continuously adjustable NEMA beam distribution 3x4 (35˚x60˚), 4x5 (60˚x90˚), 5x6 (90˚x120˚)
- IP66 Rated, protected against powerful water jets
- Solid diecast brass or corrosion resistant aluminum alloy





Architectural beam distributions from 3x4 to 4x5 to 5x6 proportions and everything in between.
Always a uniform wide beam wash of light.



ADJUSTABLE BEAM WALL WASH LED LANDSCAPE

WITH BEAM AND INTEGRAL BRIGHTNESS CONTROL

PATENTED IP66 c UL us *1838 listed*

12V

- Continuously adjustable NEMA beam distribution 3x4 (35˚x60˚), 4x5 (60˚x90˚), 5x6 (90˚x120˚)
- Integral brightness control
- Rotatable fixture head for vertical distribution

Transformer Required (order separately)


120V

- Continuously adjustable NEMA beam distribution 3x4 (35˚x60˚), 4x5 (60˚x90˚), 5x6 (90˚x120˚)
- Integral brightness control
- Simple to retrofit existing line voltage systems or coordinate well with a new commercial landscape job



Input	9 -15VAC
Power	3W to 25W/4.4VA-27.8VA
Brightness	200 lm to 1500 lm
Beam Angle	Assorted NEMA distributions
CRI	85
Rated Life	70,000 hours

Input	110V - 120VAC
Power	3W to 25W
Brightness	200 lm to 1550 lm
Beam Angle	Assorted NEMA distributions
CRI	85
Rated Life	45,000 hours



5221-27 2700K	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass
5221-30 3000K	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass

5222-27 2700K	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass
5222-30 3000K	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass

Architectural beam distributions from 3x4 to 4x5 to 5x6 proportions and everything in between.

Always a uniform wide beam wash of light.

See photometric data on pages 125

Accessories

14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7-inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*
Gutter Mount Bracket		**5000-GM-BK** **5000-GM-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Stainless steel universal mounting bracket for gutter mounting fixture*
Tree Mount Junction Box		**5000-TCP-BK** **5000-TCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V listed*
		**5000-TCL-BK** **5000-TCL-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Large Aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V listed*
Large Tree Mount Canopy Strap		**5000-TST-BK**	*Black on Steel/terylene*	*Ratcheting device with strap for use with Tree Mount Junction Box (5000-TCL)*
		5000-STB-BK	*Black on Steel*	*Tree mount bracket only*
Optics		**LENS-3X5-AMB** *Amber* **LENS-3X5-GRN** *Green* **LENS-3X5-RED** *Red*	**LENS-3X5-BLU** *Blue* **LENS-3X5-FR** *Frosted* **LENS-3X5-SPR** *Spread*	**LENS-3X5-BEL** *Beam Elongating* **5221-HCL** *Honeycomb Lens*

14" Mounting stake (12V), detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

WALL WASH LED LANDSCAPE

- A uniform wide distribution wall wash from a small form factor
- IP66 Rated, protected against powerful water jets
- Solid diecast brass or corrosion resistant aluminum alloy
- Factory sealed water tight fixtures
- Constant output for 9V-15V, 110V - 120V inputs

- Even Coverage at 15° Upwards, 50° x 80°

- Continuously Adjustable Brightness Control Indexed at 2W, 4W, 8W, 13W, 16W

WALL WASH LED LANDSCAPE

PATENTED IP66 c UL us
1838 listed
1598 listed

12V

- Integral brightness control

Input Power	9 -15VAC
Brightness	2W to 16W / 2 - 23VA
Beam Angle	190 lm to 980 lm
CRI	15° upward (50° by 80°)
Rated Life	85
	70,000 hours

2700K *Warm White*

5021-27

BK	Black on Aluminum
BZ	Bronze on Aluminum
BBR	Bronze on Brass

3000K *Pure White*

5021-30

BK	Black on Aluminum
BZ	Bronze on Aluminum
BBR	Bronze on Brass

Transformer Required (order separately)

120V

- Integral brightness control

Input Power	110V - 120VAC
Brightness	3.5W to 14.5W
Beam Angle	95 lm to 855 lm
CRI	15° upward (50° by 80°)
Rated Life	85
	45,000 hours

3000K *Pure White*


5022-30

BK	Black on Aluminum
BZ	Bronze on Aluminum
BBR	Bronze on Brass

ilumenight™ *color changing accent lights* *See pages 25-26*



See photometric data on page 124



Accessories

Mounting Stake		**9000-ST9-BZ** **9000-ST14-BZ**	*Bronze* *Bronze*	*9" Durable PC stake* *14" Durable PC stake*
Power Stake		**M6000-STAKE**	*Black*	*Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*
Gutter Mount Bracket		**5000-GM-BZ** **5000-GM-BK**	*Stainless Steel* *Black on Aluminum*	*Stainless steel universal mounting bracket for gutter mounting fixture*
Tree Mount Junction Box		**5000-TCP-BK** **5000-TCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Aluminum box with Stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V Listed*
		**5000-TCL-BK** **5000-TCL-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Large Aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V Listed*
Large Tree Mount Canopy Strap		**5000-TST-BK**	*Black on Steel/terylene*	*Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)*
		5000-STB-BK	*Black on Steel*	*Tree mount bracket only*
Extension Rods		**5000-X04-BZ,BK,BBR** *4 in* **5000-X08-BZ,BK,BBR** *8 in* **5000-X12-BZ,BK,BBR** *12 in*	**5000-X18-BZ,BK,BBR** *18 in* **5000-X24-BZ,BK,BBR** *24 in*	*Extends distance between Accent light and surface mount canopy, stake, or tree mount box*
Rod L-Coupler		**5000-LCO-BK** **5000-LCO-BZ**	*Black* *Bronze*	
Wall Wash Optics		**LENS-2X4-AMB** *Amber* **LENS-2X4-GRN** *Green* **LENS-2X4-RED** *Red*	**LENS-2X4-BLU** *Blue* **LENS-2X4-FR** *Frosted* **LENS-2X4-SPR** *Spread*	**5021-HCL** *Honeycomb Lens*

9" Mounting stake (12V), 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included



MINI WALL WASH LED LANDSCAPE

WITH DUAL CCT AND INTEGRAL BRIGHTNESS CONTROL

- Select color temperature option
- IP66 Rated, protected against powerful water jets
- Solid diecast brass or corrosion resistant aluminum alloy

MINI WALL WASH LED LANDSCAPE
WITH DUAL CCT AND INTEGRAL BRIGHTNESS CONTROL

PATENTED IP66 c UL us *1838 listed*

12V

- Transformer required (order separately)
- Integral brightness control. Select color temperature option
- Mounting stake and direct burial gel-filled wire nuts all included


Input:	9 -15VAC
Power:	1W to 8W / 2-12VA
Lumens:	80 lm to 420 lm
Beam Angle:	Symmetrical (70° by 95°)
CRI:	85+
Rated Life:	60,000 hours
CCT:	2700K & 3000K Warm White & Pure White

2700 & 3000K *Warm and Pure White*

5121-27/30	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass



See photometric data on page 124



A uniform wide distribution wall wash from a small form factor

Accessories


Mounting Stake		**9000-ST9-BZ** **9000-ST14-BZ**		*Bronze*		*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**		*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*		*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**		*Stainless Steel*		*Heavy duty stainless steel spike to position fixture;*
Gutter Mount Bracket		**5000-GM-BK** **5000-GM-BZ**		*Black on Aluminum* *Bronze on Aluminum*		*Stainless steel universal mounting bracket for gutter mounting fixture*
Tree Mount Junction Box		**5000-TCP-BK** **5000-TCP-BZ**		*Black on Aluminum* *Bronze on Aluminum*		*Aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V Listed*
		**5000-TCL-BK** **5000-TCL-BZ**		*Black on Aluminum* *Bronze on Aluminum*		*Large Aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V Listed*
Large Tree Mount Canopy Strap		**5000-TST-BK**		*Black on Steel/terylene*		*Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)*
		5000-STB-BK		*Black on Steel*		*Tree mount bracket only*
Extension Rods		**5000-X04-BZ,BK,BBR** **5000-X08-BZ,BK,BBR** **5000-X12-BZ,BK,BBR**	*4 in* *8 in* *12 in*	**5000-X18-BZ,BK,BBR** **5000-X24-BZ,BK,BBR**	*18 in* *24 in*	*Extends distance between Accent light and surface mount canopy, stake, or tree mount box*
Optics		**LENS-2X3-AMB** **LENS-2X3-GRN** **LENS-2X3-RED**	*Amber* *Green* *Red*	**LENS-2X3-BLU** **LENS-2X3-FR** **LENS-2X3-SPR**	*Blue* *Frosted* *Spread*	**LENS-2X3-BEL** **5121-HCL**	*Beam Elongating Honeycomb Lens*

9" Mounting stake (12V), 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

3" INGROUND LED LANDSCAPE

- Tilt and adjust beam angles
- Integral brightness control
- IP67 Rated, protected from temporary immersion under water
- Drive over up to 4500lbs
- Solid diecast brass or corrosion resistant cast aluminum
- Available concrete pour kit
- Constant output for 9V-15V or 110V-120V inputs

3" Inground Features



Typical Inground

Most light output goes into the air, causing light pollution




Adjust Beam Angles

Presets at 15°, 30°, 45°, 60°




Adjustable WAC® Inground

Adjust the light to where you need it




Typical Inground

Most light output goes into the air, causing light pollution




Tilt and Aim

Up to 40° of adjustability preset at -20°, -10°, 0°, 10°, 20°



Adjustable WAC® Inground


Adjust the light to where you need it

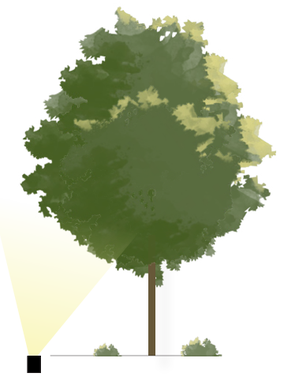



Control Brightness

Adjustable from 70 lm to 505 lm
Presets Comparable to
10W, 25W, 35W, 50W, 75W Halogen source

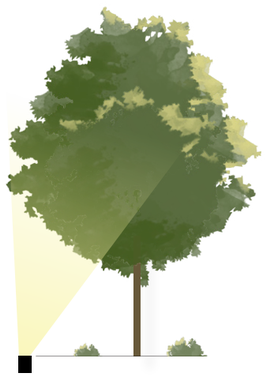



3" INGROUND LED LANDSCAPE

PATENTED IP67 c UL us

1838 listed
1598 listed

12V

- Integral brightness control
- Adjustable beam angle
- Directional aim with +/- 20° Tilt

Input	9-15VAC
Power	2W to 12W / 2-17VA
Brightness	70 lm to 505 lm
Beam Angle	15° to 60°
CRI	85
Rated Life	55,000 hours

2700K *Warm White*

5031-27

BZ Bronze on Aluminum
BBR Bronze on Brass

3000K *Pure White*

5031-30

BZ Bronze on Aluminum
BBR Bronze on Brass

120V

- Integral brightness control
- Adjustable beam angle

Input	110V - 120VAC
Power	3W to 11.5W
Brightness	65 lm to 515 lm
Beam Angle	15° to 60°
CRI	85
Rated Life	45,000 hours

3000K *Pure White*

5032-30


BZ Bronze on Aluminum
BBR Bronze on Brass


ilumenight™ *color changing accent lights*
See pages 25-26

Transformer Required (order separately)



See photometric data on pages 121-122





Accessories

Non-slip lens		**5030-NSLEN-CC**	*Clear/patterned*	*Slip resistant lens*
Rock Guard		**5030-GRD-BZ** **5030-GRD-BBR**	*Bronze on Aluminum* *Bronze on Brass*	*Protects the fixture surface*
Optics		**LENS-25-AMB** **LENS-25-GRN** **LENS-25-RED** **LENS-25-BLU** **LENS-25-FR** **LENS-25-HCL**	*Amber* *Green* *Red* *Blue* *Frosted* *Honeycomb Louver reduces glare*	*Enhances saturation of florals and foliage*
Concrete Pour Kit		**5030-PIP-PVC**	*Shown with temporary dense foam cap*	*For installation in concrete; five 1/2" NPT threaded holes, PC*

6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

ilumenight LED LANDSCAPE

ilumenight

c UL us


1838 listed

- Color changing
- App-controlled brightness
- IP66 Rated (Accent, Wall Wash), IP67 Rated (Inground)
- Solid die-cast brass
- Factory sealed water tight fixtures
- 6' lead wire
- Constant output for 9V-15V input

ACCENT 12V COLOR CHANGING

Color and brightness controlled with ilumenight™ mobile app





Input	9-15VAC
Power	0.5W to 14.5W / 1VA to 17VA
Brightness	Up to 355 lm
Beam Angle	15° to 60°
CRI	95+
Rated Life	45,000 hours

IP66

Model	*Finishes*
5011-CCBBR	*Bronze on Brass*
5011-CCBZ	*Bronze on Aluminum*


See page 8 for accessories

9" Mounting stake (12V), Detachable shroud, 6' lead wire and direct burial get filled wire nuts (12V)

WALL WASH 12V COLOR CHANGING

Color and brightness controlled with ilumenight™ mobile app





Input	9-15VAC
Power	0.5W to 14.5W / 1VA to 17VA
Brightness	Up to 430 lm
Beam Angle	15° upward (50° by 80°)
CRI	95+
Rated Life	45,000 hours

IP66


Model	*Finishes*
5021-CCBBR	*Bronze on Brass*


See page 18 for accessories

9" Mounting stake (12V), 6' lead wire and direct burial get filled wire nuts (12V)

3" INGROUND 12V COLOR CHANGING

Color and brightness controlled with ilumenight™ mobile app





Input	*9-15VAC*
Power	*0.5W to 14.5W / 1VA to 17VA*
Brightness	*Up to 250 lm*
Beam Angle	*15° to 60°*
CRI	*95+*
Rated Life	*45,000 hours*

IP67

Model	*Finishes*
5031-CCBBR	*Bronze on Brass*

See page 24 for accessories

6' lead wire and direct burial get filled wire nuts (12V)

MAKE IT COLORFUL

With ilumenight™ you can take your landscape from warm white to pure white to cool white, red to violet and every color in between all with the touch of a finger.

STEP 1 **Download free "ilumenight™ " app**

STEP 2 **Setup login**

STEP 3 **Command all of your ilumenight landscape fixtures at will**

ilumenight

Download on the App Store






IP68 c UL us *676 listed*


- Machined brass thumb screws
- Cast brass construction
- IP68 Rated, suitable for continuous immersion
- Under water in depths up to 3'
- Factory sealed water tight fixtures
- 30' long lead wire
- Limited lifetime warranty

Transformer Required (order separately)

Input	12-15VAC
Power	10W / 11.2VA
Brightness	780 lm
Beam Angle	60°
Color Temp	3000K Pure White
CRI	85
Rated Life	50,000 hours

5511-30 | **NB** Natural Brass







Accessories *Submersible luminaires*

Wall Wash Optics		**LENS-20-AMB** *Amber* **LENS-20-GRN** *Green* **LENS-20-RED** *Red*		**LENS-20-BLU** *Blue* **LENS-20-FR** *Frosted* **LENS-20-SPR** *Spread*		*Enhances saturation of florals and foliage and turtle friendly*
Direct Burial Waterproof Wire Nuts		**9020-WNT-BK**	*Silicone filled wire nut with gasket (Pack of 20pcs)*			

Detachable shroud and direct burial gel filled wire nuts (12V)



SUBMERSIBLE 2"INGROUND LED LANDSCAPE

- Constant output for 9V-15V input
- 100%-10% dimming - see specification sheet for list of tested dimmers
- May be used in conjunction with all WAC® Landscape Lighting products
- Includes a detachable stainless steel mounting bracket for use in or out of water

SUBMERSIBLE 2" INGROUND LED LANDSCAPE

IP68

c UL us
676 listed

- Solid stainless steel construction
- IP68 Rated, suitable for continuous immersion under water
- Factory sealed water tight fixtures
- 30' long lead wire

Transformer Required (order separately)

Input	9-15VAC
Power	4.1W / 6.6VA
Brightness	245 lm
Beam Angle	25°
Color Temp	3000K
CRI	85
Rated Life	70,000 hours

3000K	*Pure White*
2031-30	**SS** Stainless Steel



Included stainless steel easy mount accessory for use with underwater applications and above ground on any surface



Designed for underwater or wet application
30ft long lead wire



RECESSED INGROUNDS + INDICATOR LED LANDSCAPE

- IP68 Rated, suitable for continuous immersion under water
- Factory sealed water tight fixtures
- Solid stainless steel construction
- Options for use in outdoor downlight applications
- Constant output for 9V-15V input
- 100%-10% dimming - see specification sheet for list of tested dimmers
- Available concrete pour kit with 18" PVC pipe which can be field shortened

IP68 c UL us *1838 listed*

1" APERTURE


Input	9-15VAC	CRI	85
Power	1.9W / 3VA	Beam Angle	50°
Brightness	Up to 80 lm	Rated Life	70,000 hours
Color Temp	2700K Warm white, 3000K Pure white		

Transformer Required (order separately)



1" Slim Round


1011-27	2700K	**SS**	*Stainless Steel*
1011-30	3000K		





1" Round


1021-27	2700K	**SS**	*Stainless Steel*
1021-30	3000K		






1" Square


1051-27	2700K	**SS**	*Stainless Steel*
1051-30	3000K		






1" Scoop

1061-27	2700K	**BS**	*Bronze Stainless steel*
1061-30	3000K	**SS**	*Stainless Steel*




6' Lead Wire included




1" Shroud

1031-27	2700K	**BS**	*Bronze Stainless steel*
1031-30	3000K	**SS**	*Stainless Steel*




Optional spring clip accessory included



1" Louver

1041-27	2700K	**BS**	*Bronze Stainless steel*
1041-30	3000K	**SS**	*Stainless Steel*



Optional spring clip accessory included



1000-CON-PVC For installation in concrete. 18" PVC pipe included. Installs onto a 4"
1" Concrete Pour Kit outdoor rated junction box.



2" RECESSED INGROUNDS + INDICATOR LED LANDSCAPE

2" APERTURE

Input Power	9-15VAC 4.1W / 6.6VA	Color Temp CRI	2700K Warm white, 3000K Pure white 85
Brightness	Up to 245 lm	Rated Life	70,000 hours

Transformer Required (order separately)

Optional spring clip accessory included
6' Lead Wire included


IP68 c UL us
1838 listed



2" GROUND HOOD

Beam Angle: *Asymmetrical*

2081-27	2700K	**BS**	*Bronzed Stainless Steel*
2081-30	3000K	**SS**	*Stainless Steel*



Optional spring clip accessory included

- IP68 Rated, suitable for continuous immersion under water
- Factory sealed water tight fixtures
- Solid stainless steel construction
- Constant output for 9V-15V input
- 10%-100% dimming - see specification sheet for list of tested dimmers
- Available concrete pour kit with 18" PVC pipe which can be field shortened



2000-CON-PVC
2" Concrete Pour Kit

For installation in concrete. 18" PVC pipe included. Installs onto a 4" outdoor rated junction box.





2" Slim Round

2011-27	2700K	**BS**	*Bronzed Stainless Steel*
2011-30	3000K	**SS**	*Stainless Steel*

2" Slim Round with Honeycomb Louver


2012-27	2700K	**BS**	*Bronzed Stainless Steel*
2012-30	3000K	**SS**	*Stainless Steel*






2" Quad-Directional


2101-27	2700K	**BS**	*Bronzed Stainless Steel*
2101-30	3000K	**SS**	*Stainless Steel*





2" Scoop

2131-27	2700K	**BS**	*Bronzed Stainless Steel*
2131-30	3000K	**SS**	*Stainless Steel*




2" Round

2021-27	2700K	**BS**	*Bronzed Stainless Steel*
2021-30	3000K	**SS**	*Stainless Steel*

2" Round with Honeycomb Louver


2022-27	2700K	**BS**	*Bronzed Stainless Steel*
2022-30	3000K	**SS**	*Stainless Steel*






2" Single Direction


2091-27	2700K	**BS**	*Bronzed Stainless Steel*
2091-30	3000K	**SS**	*Stainless Steel*





2" Shroud

2111-27	2700K	**BS**	*Bronzed Stainless Steel*
2111-30	3000K	**SS**	*Stainless Steel*





2" Square

2051-27	2700K	**BS**	*Bronzed Stainless Steel*
2051-30	3000K	**SS**	*Stainless Steel*

2" Square with Honeycomb Louver


2051-27	2700K	**BS**	*Bronzed Stainless Steel*
2051-30	3000K	**SS**	*Stainless Steel*






2" Bi-Directional


2071-27	2700K	**BS**	*Bronzed Stainless Steel*
2071-30	3000K	**SS**	*Stainless Steel*





2" Louver

2121-27	2700K	**BS**	*Bronzed Stainless Steel*
2121-30	3000K	**SS**	*Stainless Steel*



ESTRELLA PENDANT CEILING LIGHT

New!

PENDANT/CEILING LIGHT LED LIGHT

12V New!

IP66 c UL us *1838 listed*

Input	9-15V
Power	1W to 7.5W / 2VA - 8VA
Brightness	45 lm to 380 lm
Color Temp	2700K / 3000K / 4000K
CRI	85
Rated Life	50,000 hours

Transformer Required (order separately)

3811-27/30/40	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum

6' Chain included

3821-27/30/40	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum

6' Chain included

3831-27/30/40	**BK**	Black on Aluminum
	BZ	Bronze on Aluminum
	WT	White on Aluminum

3821




3811




3831




3821



3811



3831





Select Warm White, Pure White, or Cool White (2700K, 3000K or 4000K)



Continuously Adjustable Beam Angles Indexed at 35°, 45°, 55°



Continuously adjustable brightness

Accessories

Optics		**LENS-11-AMB**	*Amber*	**LENS-11-BLU**	*Blue*
		LENS-11-GRN	*Green*	**LENS-11-FR**	*Frosted*
		LENS-11-RED	*Red*		

CYLINDER WALL MOUNT

New!

CYLINDER WALL MOUNT

12V New!


IP66 c UL us *1838 listed*

Input	9-15V
Power	7.5W / 9.0VA
Brightness	325 lm per light
Color Temp	2700K / 3000K / 4000K
CRI	85
Rated Life	50,000 hours


Transformer Required (order separately)

3611-27/30/40


BK	Black on Aluminum
BZ	Bronze on Aluminum
WT	White on Aluminum

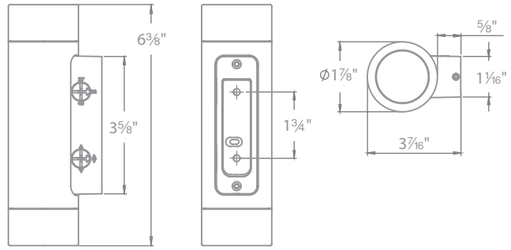



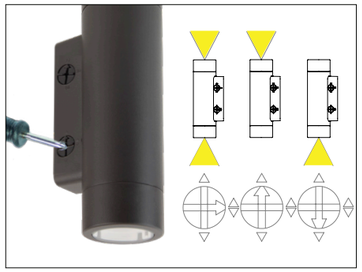

Select Up Light, Down Light or Both

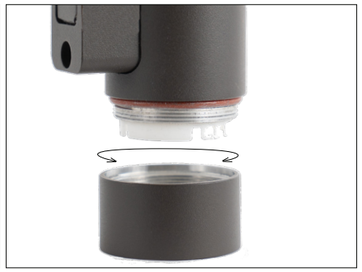

Continuously Adjustable Beam Angles Indexed at 35°, 45°, 55°



Select Warm White, Pure White, or Cool White (2700K, 3000K or 4000K)

Accessories

Optics		**LENS-11-AMB**	*Amber*	**LENS-11-BLU**	*Blue*
		LENS-11-GRN	*Green*	**LENS-11-FR**	*Frosted*
		LENS-11-RED	*Red*		



SURFACE MOUNT INDICATOR LED LIGHT

New!

SURFACE MOUNT INDICATOR LED LIGHT


New!

IP68 cULus *1838 listed*

2" APERTURE

Input	9-15V	CRI	90
Power	2.8W / 3.2VA	Rated Life	60,000 hours
Brightness	3.5 lm - 60 lm		
Color Temp	2700K / 3000K		


Transformer Required (order separately)
10' Lead Wire included





2541-27 2700K **2541-30** 3000K | **BS** *Bronzed Stainless Steel* **SS** *Stainless Steel*




2591-27 2700K **2591-30** 3000K | **BS** *Bronzed Stainless Steel* **SS** *Stainless Steel*









2511-27 2700K **2511-30** 3000K | **BS** *Bronzed Stainless Steel* **SS** *Stainless Steel*





2571-27 2700K **2571-30** 3000K | **BS** *Bronzed Stainless Steel* **SS** *Stainless Steel*



2501-27 2700K **2501-30** 3000K | **BS** *Bronzed Stainless Steel* **SS** *Stainless Steel*







HARDSCAPE LED LANDSCAPE

NEW WITH QUICK RELEASE LIGHT ENGINE, DUAL CCT AND INTEGRAL BRIGHTNESS CONTROL

IP66

c UL us

1838 listed




Select Warm White (2700K) or Pure White (3000K) light



PATENTED QUICK RELEASE

Based on popular demand, our new patented invention allows for a watertight male/female connection at the fixture for ease of replacement after it is installed



Continuously adjustable brightness



Removable stainless steel capstone bracket and rotating mounting clips included



HARDSCAPE LED LANDSCAPE

EASILY SERVICEABLE, SWITCH WARM TO PURE WHITE, AND ONBOARD DIMMING

PATENTED IP66

12V

- Quick Release connection at fixture to easily detach from capstone bracket after installation
- Integral Brightness control
- Select Color Temperature in the field
- Corrosion-resistant aluminum alloy
- Factory-sealed watertight fixture
- Transformer required (sold separately)
- Tightly spaced and diffused LEDs for even illumination
- 6′ lead wire and direct burial gel-filled wire nuts included

Input: *9-15V*
Beam Angle: *110°*
CRI: *85*
Rated Life: *70,000 hours*


See photometric data on page 123




7182-27/30 *18 inches*



7122-27/30 *12 inches*

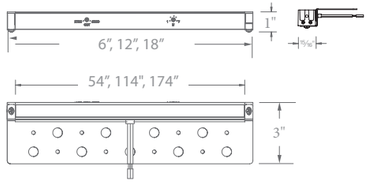

7062, 7122, 7182



7032*



7062-27/30 *6 inches*



7032* *3 inches*


Quick Release electrical attachment/detachment



Select Warm White or Pure White light (2700K or 3000K)



Removable stainless steel capstone bracket and rotating mounting clips included



Continuously adjustable brightness



Length	Model	Color Temp	Wattage	Max Lumens	Finishes	
*3″**	**7032-27** **7032-30**	*2700K Warm White** *3000K Pure White**	*1.5W, 2.6VA*	*50*	**BK** **BZ** **GH** **SD**	*Black on Aluminum* *Bronze on Aluminum* *Graphite on Aluminum* *Sand on Aluminum*
6″	**7062-27/30**	*2700K Warm White* *3000K Pure White*	*4.5W, 5.6VA*	*110*	**BK** **BZ** **BBR** **GH** **SD**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass* *Graphite on Aluminum* *Sand on Aluminum*
12″	**7122-27/30**	*2700K Warm White* *3000K Pure White*	*7.0W, 7.6VA*	*230*	**BK** **BZ** **BBR** **GH** **SD**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass* *Graphite on Aluminum* *Sand on Aluminum*
18″	**7182-27/30**	*2700K Warm White* *3000K Pure White*	*8.5W, 9.3VA*	*350*	**BK** **BZ** **GH** **SD**	*Black on Aluminum* *Bronze on Aluminum* *Graphite on Aluminum* *Sand on Aluminum*

Example: **7182-27/30SD**

**Due to its compact size, the 7032 is dedicated in either 2700K or 3000K.*

IP67 cULus *1838 listed*

12V


- Low profile and discreet
- 180º fully rotatable fixture aiming
- Lock desired position in place after adjustment
- Wide Flood Beam 110º x 80º
- Adjustable anti-glare shroud
- Designed for soft ground, wood floor and concrete
- Base mount, riser mount & extension mount
- Path & Accent applications

Transformer Required (order separately)



Input: *9-15V*
Power: *6.0W/8.6VA*
Brightness: *190lm*
Beam Angle: *110º x 80º*
CRI: *85*
Rated Life: *60,000 hours*

Model	Color	Finish	
6401-27	*2700K*	**BK**	*Black on Aluminum*
		BZ	*Bronze on Aluminum*
6401-30	*3000K*	**BK**	*Black on Aluminum*
		BZ	*Bronze on Aluminum*

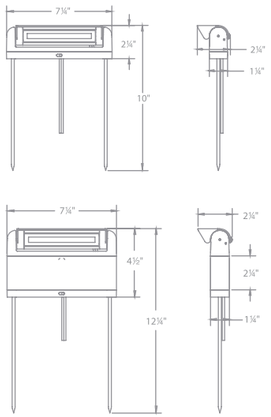



Optional riser attachment included



Extension mount included
(Order extension rods separately)

Accessories

9" Mounting Stake		**9000-ST9-BZ**		*Bronze*	*Durable PC stake*
Extension Rods		**5000-X04-BZ,BK** **5000-X08-BZ,BK** **5000-X12-BZ,BK** **5000-X18-BZ,BK** **5000-X24-BZ,BK**	*4 in* *8 in* *12 in* *18 in* *24 in*	*Black* *Bronze*	*Extends distance between Accent light and surface mount canopy, stake, or tree mount box*

Detachable shroud, 10' lead wire and direct burial gel filled wire nuts (12V).



TIKI LED AREA LIGHT

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Solid brass or corrosion resistant aluminum alloy
- Constant output for 9V-15V input

TIKI LED AREA LIGHT

IP66

1838 listed

- Sturdy side mount design works well in applications where directional illumination is desired
- Recommended spacing for installation:
  Residential: 7 to 9ft
  Commercial: 5 to 7ft

Input	9-15VAC
Power	6.5W / 9.5VA
Brightness	Up to 225 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

22"


6041-27	2700K	**BK**	*Black on Aluminum*
6041-30	3000K	**BZ**	*Bronze on Aluminum*
		BBR	*Bronze on Brass*

15"

6042-27	2700K	**BK**	*Black on Aluminum*
6042-30	3000K	**BZ**	*Bronze on Aluminum*

Example: 6041-30BBR

9" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

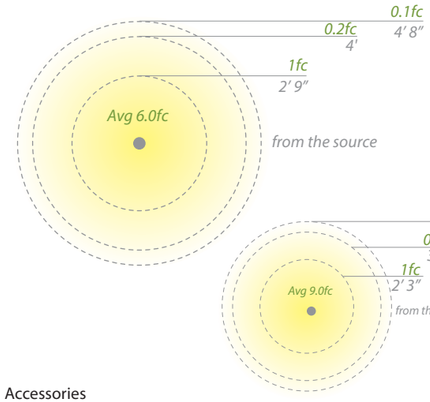





Accessories

9" Mounting Stake		**9000-ST9-BZ**	*Bronze*	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*



CANOPY LED AREA LIGHT

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Solid brass or corrosion resistant aluminum alloy
- Constant output for 9V-15V input

CANOPY LED AREA LIGHT

c UL us *1838 listed* IP66

- Sturdy side mount design works well in applications where directional illumination is desired
- Recommended spacing for installation:
  Residential: 7 to 9ft
  Commercial: 5 to 7ft

Input	*9-15V*
Power	*6.5W/9.5VA*
Brightness	*Up to 225 lm*
Color Temp	*2700 & 3000K*
CRI	*90*
Rated Life	*60,000 hours*

8" CAP

2700 & 3000K Warm and Pure White

6051-27 **6051-30**	**BK**	*Black on Aluminum*
	BZ	*Bronze on Aluminum*
	BBR	*Bronze on Brass*


6" CAP

2700 & 3000K Warm and Pure White


6053-27 **6053-30**	**BK**	*Black on Aluminum*
	BZ	*Bronze on Aluminum*
	BBR	*Bronze on Brass*

EXAMPLE: 6051-30BZ

Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

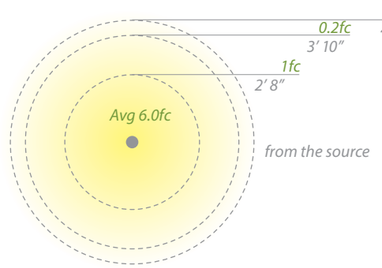



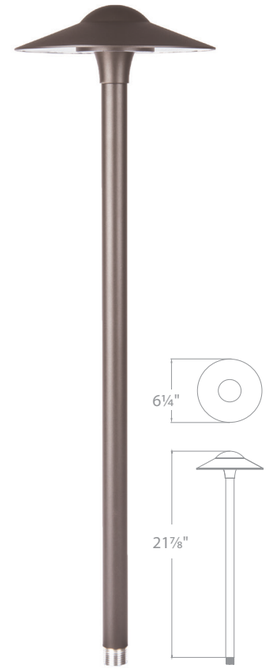

Accessories

9" Mounting Stake		**9000-ST9-BZ**	*Bronze*	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7-inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture; formed from a single piece of metal*

LEDGE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input

LEDGE LED PATH


IP66 c UL us

- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation:
  Residential: 8 to 10ft
  Commercial: 5 to 7ft
- Transformer Required (order separately)


Input	9-15VAC
Power	3.0W / 4.5VA
Brightness	Up to 105 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6081-27	2700K	**BK**	*Black on Aluminum*
6081-30	3000K	**BZ**	*Bronze on Aluminum*

Example: 6081-27BZ
14" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

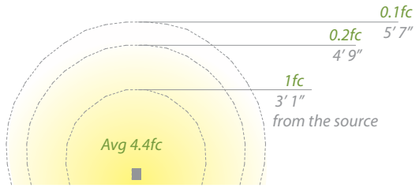





Accessories

9" Mounting Stake		**9000-ST9-BZ**	*Bronze*	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*

SLIDE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input

SLIDE LED PATH

IP66 c UL us

- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation:
  Residential: 9 to 11ft
  Commercial: 5 to 7ft
- Transformer Required (order separately)

Input	9-15VAC
Power	3.0W / 4.5VA
Brightness	Up to 95 lm
Color Temp	3000K
CRI	90
Rated Life	60,000 hours


3000K *Pure White*

6311- *Small*
6321- *Large*


BZ *Bronze on Aluminum*

14" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included






6311

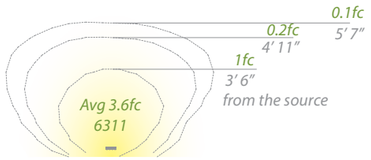


6311 *Small*
Residential: 7 to 9ft
Commercial: 4 to 6ft

6321 *Large*
Residential: 9 to 11ft
Commercial: 5 to 7ft





6321

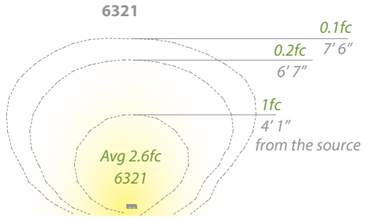

Accessories

9" Mounting Stake		**9000-ST9-BZ**	*Bronze*	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ** **5000-SCP-BBR**	*Black on Aluminum* *Bronze on Aluminum* *Bronze on Brass*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*



LINEAR LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input

IP66 c UL us


- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation :
  Residential: 7 to 9ft
  Commercial: 4 to 6ft
- Transformer Required (order separately)

Input	9-15VAC
Power	2.9W / 4.7VA
Brightness	Up to 95 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours


6021-27	2700K	**BK**	*Black on Aluminum*
6021-30	3000K	**BZ**	*Bronze on Aluminum*

Example: 6021-30BK

14" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

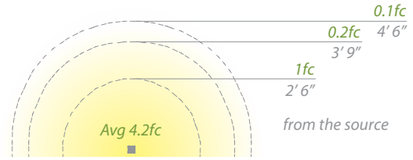



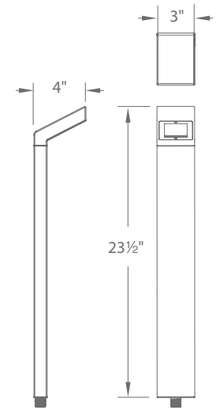

Accessories

9" Mounting Stake		**9000-ST9-BZ**	*Bronze*	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*

BALANCE SINGLE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input

BALANCE SINGLE LED PATH

IP66 c UL us


- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation :
  Residential: 11 to 13ft
  Commercial: 7 to 9ft
- Transformer Required (order separately)

Input	9-15VAC
Power	6.5W / 11.5VA
Brightness	Up to 275 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours


6061-27	2700K	**BK**	*Black on Aluminum*
6061-30	2700K	**BZ**	*Bronze on Aluminum*

Example: 6061-30BZ

9" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

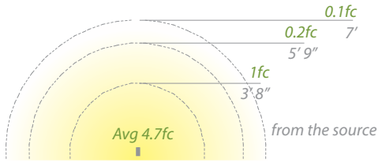





Accessories

9" Mounting Stake		**9000-ST9-BZ**	*Bronze*	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*



BALANCE DOUBLE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input

BALANCE DOUBLE LED PATH

IP66 c UL us


- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation :
  Residential: 11 to 13ft
  Commercial: 7 to 9ft
- Transformer Required (order separately)


Input	9-15VAC
Power	10W / 14VA
Brightness	Up to 375 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6071-27	2700K	**BK**	*Black on Aluminum*
6071-30	3000K	**BZ**	*Bronze on Aluminum*

Example: 6071-30BZ

9" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

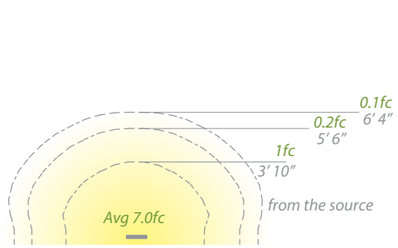

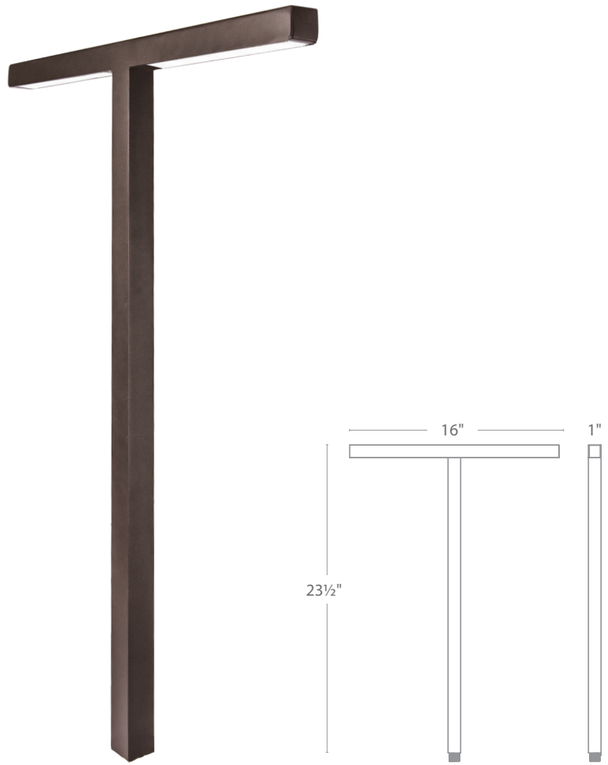

Accessories

9" Mounting Stake		**9000-ST9-BZ**	*Bronze*	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*

QUAD LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input

QUAD LED PATH

IP66 c UL us


- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation :
  Residential: 8 to 10ft
  Commercial: 5 to 7ft
- Transformer Required (order separately)

Input	9-15VAC
Power	3W / 4.5VA
Brightness	Up to 100 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours


6091-27 **6091-30**	2700K 3000K	**BZ**	*Bronze on Aluminum*

Example: 6091-30BZ

14" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

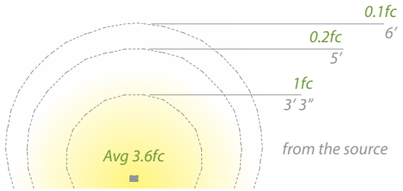





Accessories

9" Mounting Stake		**9000-ST9-BZ**	*Bronze*	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*

ECLIPSE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Solid diecast corrosion resistant aluminum alloy
- Constant output for 9V-15V input

ECLIPSE LED PATH

IP66 c UL us


- Sturdy side mount design works well in applications where directional illumination is desired
- Recommended spacing for installation :
  Residential: 8 to 10ft
  Commercial: 5 to 7ft
- Transformer Required (order separately)


Input	9-15VAC
Power	2.9W / 4.7VA
Brightness	Up to 125 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6031-27	2700K	**BK**	*Black on Aluminum*
6031-30	3000K	**BZ**	*Bronze on Aluminum*

Example: 6031-30BZ

14" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

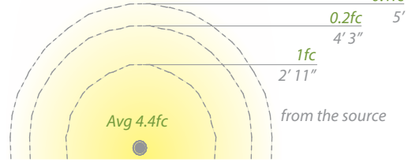

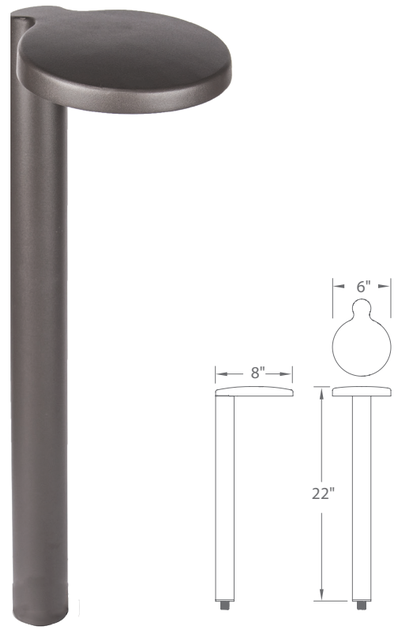

Accessories

9" Mounting Stake		**9000-ST9-BZ**	*Bronze*	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*

AREA LED AREA LIGHT

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Solid brass or corrosion resistant aluminum alloy
- Constant output for 9V-15V input



AREA LED AREA LIGHT

IP66 c UL us


- Broad appeal makes this fixture suitable for varying landscape designs
- Recommended spacing for installation :
  Residential: 11 to 13ft
  Commercial: 7 to 9ft
- Transformer Required (order separately)


Input	9-15VAC
Power	5.8W / 9.4VA
Brightness	Up to 150 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6011-27	2700K	**BK**	*Black on Aluminum*
6011-30	3000K	**BZ**	*Bronze on Aluminum*
		BBR	*Bronze on Brass*

Example: 6011-30BZ

Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

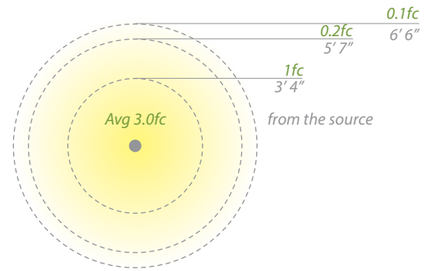

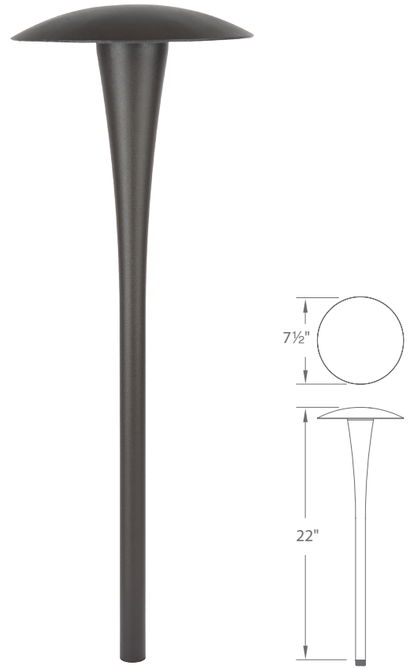

Accessories

9" Mounting Stake		**9000-ST9-BZ**	*Bronze*	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Bronze*	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BK** **5000-SCP-BZ**	*Black on Aluminum* *Bronze on Aluminum*	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Stainless Steel*	*Heavy duty stainless steel spike to position fixture*

GATE LED BOLLARD/PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input
- Mounting accessories included

GATE LED BOLLARD/PATH

IP66 c UL us


- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input
- Mounting accessories included
- Detachable back plate for lighting control included
- Transformer Required (order separately)

Input	9-15VAC
Power	7.2W, 7.6VA
Brightness	Up to 115 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6651-27	2700K	**BK**	*Black on Aluminum*
6651-30	3000K	**BZ**	*Bronze on Aluminum*

Example: 6651-30BK

Power stake, 6 foot lead wire, and direct burial gel filled wire nuts included

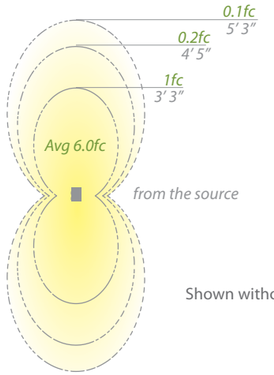

Mounting accessory included
12V




M6000-STAKE



Shown without plate

Shown with plate

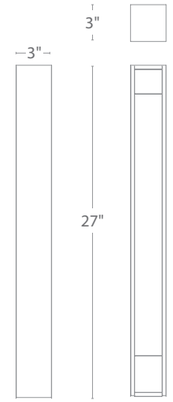

- Sleek linear design blends seamlessly into pathways while providing soft, even illumination



Single direction ilumination with back plate

SCOOP 12V/120V/277V LED BOLLARD

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input
- Mounting accessories included

SCOOP 12V/120V/277V LED BOLLARD

IP66 c UL us

12V

Input	9-15VAC
Power	7.8W/8.5VA
Brightness	Up to 180 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6611-27 2700K
6611-30 3000K

BK *Black on Aluminum*
BZ *Bronze on Aluminum*

120V

Input	120V
Power	12.5W
Brightness	Up to 350 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6612-27 2700K
6612-30 3000K

BK *Black on Aluminum*
BZ *Bronze on Aluminum*

277V

Input	277V
Power	13.2W
Brightness	Up to 370 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6613-27 2700K
6613-30 3000K

BK *Black on Aluminum*
BZ *Bronze on Aluminum*


Transformer Required (order separately)

MLV dimming only

Example: 6611-30BK


Recommended spacing for installation :
(**12V**) 6611

- Residential: 5 to 6ft
- Commercial: 3 to 4ft

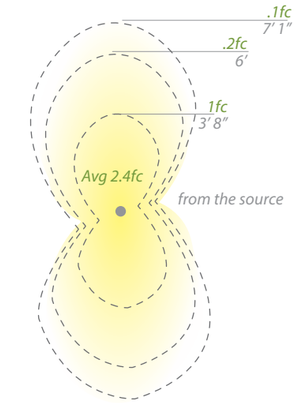

Recommended spacing for installation:
(**120V, 277V**) 6612, 6613

- Residential: 6.5 to 7.5ft
- Commercial: 4.5 to 5.5ft

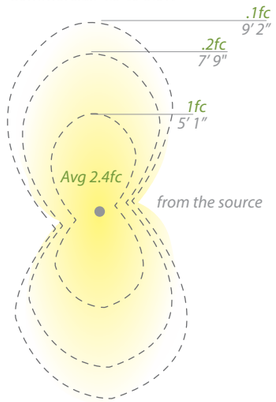

TRIAC or ELV dimming



Mounting accessory included

12V



M6000-STAKE


120V/277V



M6610-CON-KIT

ELV dimming only

- Sleek linear design blends seamlessly into pathways while providing soft, even illumination

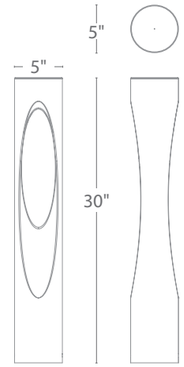



Even illumination front and back

CHAMBER 12V/120V/277V LED BOLLARD

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input
- Mounting accessories included

CHAMBER 12V/120V/277V LED BOLLARD

IP66 c UL us

12V		120V		277V	
Input	9-15VAC	Input	120V	Input	277V
Power	5.8W, 6.2VA	Power	12.5W	Power	13.2W
Brightness	Up to 150 lm	Brightness	Up to 400 lm	Brightness	Up to 450 lm
Color Temp	2700K Warm white, 3000K Pure white	Color Temp	2700K Warm white, 3000K Pure white	Color Temp	2700K Warm white, 3000K Pure white
CRI	90	CRI	90	CRI	90
Rated Life	60,000 hours	Rated Life	60,000 hours	Rated Life	60,000 hours


6631-27	2700K	**BK**	*Black on Aluminum*	**6632-27**	2700K	**BK**	*Black on Aluminum*	**6633-27**	2700K	**BK**	*Black on Aluminum*
6631-30	3000K	**BZ**	*Bronze on Aluminum*	**6632-30**	3000K	**BZ**	*Bronze on Aluminum*	**6633-30**	3000K	**BZ**	*Bronze on Aluminum*

Transformer Required (order separately)


MLV dimming only | *TRIAC or ELV dimming* | *ELV dimming only*

Example: 6633-30BK

Recommended spacing for installation :
(**12V**) 6631
- Residential: 19.5 to 23ft
- Commercial: 13 to 15.5ft

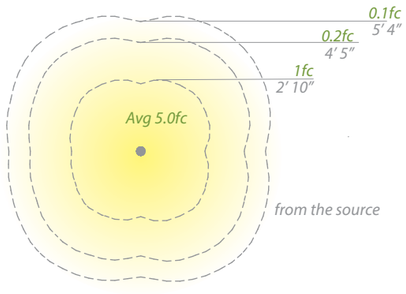


Recommended spacing for installation :
(**120V, 277V**) 6632, 6633
- Residential: 12.5 to 15ft
- Commercial: 8 to 10ft

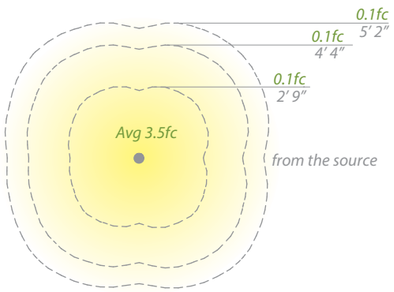



- Sleek linear design blends seamlessly into pathways while providing soft, even illumination

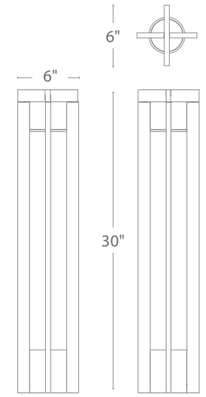

Mounting accessory included

12V



M6000-STAKE

120V/277V



M6630-CON-KIT

CHAMBER 120V/227V

12", 16", 20", & 25" LED OUTDOOR WALL SCONCE


IP65 · TITLE 24 CALIFORNIA · WET · DARK SKY

Color Temp: 3000K
CRI: 90
Dimming: 100%–10% ELV
Rated Life: 50,000 hours*
Input: 120V (277V special order)


- Solid aluminum construction with weather-resistant finish
- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- No transformer or driver required




Bold Mid-Century Modern look with intersecting aluminum frames and cutting-edge LED light.




WS-W48612



WS-W48616



WS-W48620



WS-W48625

		Size	Watt	LED Lumens	Delivered Lumens	Finish
	**WS-W48612**	*12"*	*9.5W*	*800*	*213*	
	**WS-W48616**	*16"*	*12W*	*1000*	*255*	**BK** *Black* **BZ** *Bronze*
	**WS-W48620**	*20"*	*18W*	*1600*	*519*	


Example: **WS-W48616-BK**

For 277V, add an "F" before the finish: **WS-W48616F-BK**

CHAMBER 120V/277V

16" LED OUTDOOR PENDANT



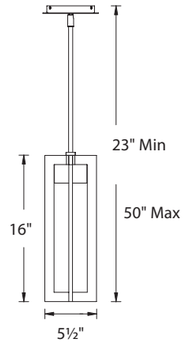


	Size	Watt	LED Lumens	Delivered Lumens	Finish
PD-W48616	*16"*	*12W*	*1000*	*372*	**BK** *Black* **BZ** *Bronze*


Example: **PD-W48616-BK**

CHAMBER 120V/277V

20" LED OUTDOOR POST MOUNT

IP65 · TITLE 24 CALIFORNIA · WET · DARK SKY



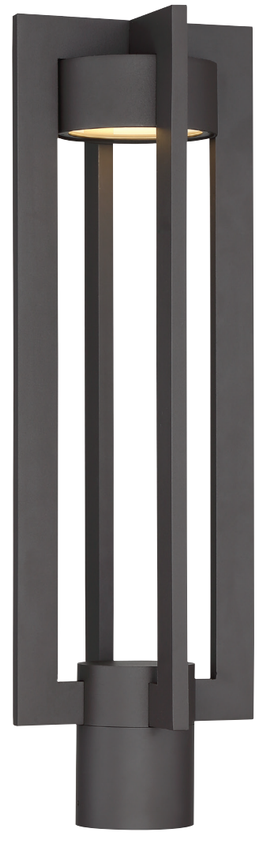

	Size	Watt	LED Lumens	Delivered Lumens	Finish
PM-W48620	*20"*	*17.5W*	*1600*	*634*	**BK** *Black* **BZ** *Bronze*

Example: **PM-W48620-BZ**

TOWER 12V/120V/277V LED BOLLARD

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input
- Mounting accessories included

TOWER 12V/120V/277V LED BOLLARD

IP66 c UL us

12V	
Input	9-15VAC
Power	5.8W, 6.2VA
Brightness	Up to 170 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

120V	
Input	120V
Power	12.5W
Brightness	Up to 430 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

277V	
Input	277V
Power	13.2W
Brightness	Up to 470 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6621-27	2700K	**BK**	*Black on Aluminum*
6621-30	3000K	**BZ**	*Bronze on Aluminum*

6622-27	2700K	**BK**	*Black on Aluminum*
6622-30	2700K	**BZ**	*Bronze on Aluminum*

6623-27	2700K	**BK**	*Black on Aluminum*
6623-30	3000K	**BZ**	*Bronze on Aluminum*


Transformer Required (order separately)

MLV dimming only | *TRIAC or ELV dimming* | *ELV dimming only*

Example: 6622-30BK


Recommended spacing for installation :
(**12V**) 6621

- Residential: 12 to 14.5ft
- Commercial: 4 to 6.5ft

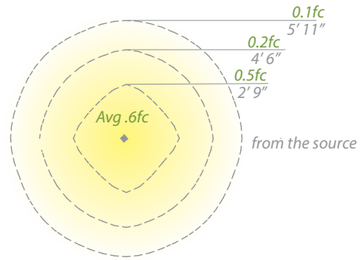


Recommended spacing for installation :
(**120V, 277V**) 6622, 6623

- Residential: 16 to 22ft
- Commercial: 8 to 11ft

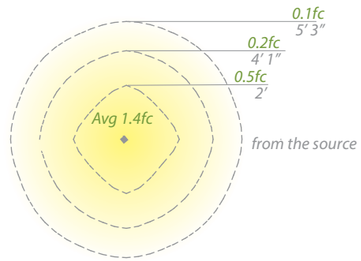



- Sleek linear design blends seamlessly into pathways while providing soft, even illumination

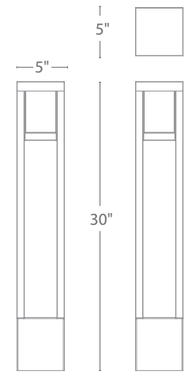

Mounting accessory included

12V



M6000-STAKE

120V/277V



M6620-CON-KIT

ARCHETYPE 12V/120V/277V LED BOLLARD

- IP66 Rated, protected against high-pressure water jets
- Factory sealed water tight fixtures
- Constant output for 9V-15V input
- Mounting accessories included

ARCHETYPE 12V/120V/277V LED BOLLARD

IP66 c UL us

12V

Input	9-15VAC
Power	5.8W, 6.2VA
Brightness	Up to 195 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6641-27 2700K
6641-30 3000K

BK *Black on Aluminum*
BZ *Bronze on Aluminum*

120V

Input	120V
Power	12.5W
Brightness	Up to 470 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6642-27 2700K
6642-30 3000K

BK *Black on Aluminum*
BZ *Bronze on Aluminum*

277V

Input	277V
Power	13.2W
Brightness	Up to 550 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6643-27 2700K
6643-30 3000K

BK *Black on Aluminum*
BZ *Bronze on Aluminum*


Transformer Required (order separately)

MLV dimming only | *TRIAC or ELV dimming* | *ELV dimming only*

Example: 6641-30BK




- Sleek linear design blends seamlessly into pathways while providing soft, even illumination




Recommended spacing for installation :
(**12V**) 6641

- Residential: 11.5 to 14ft
- Commercial: 7 to 9ft

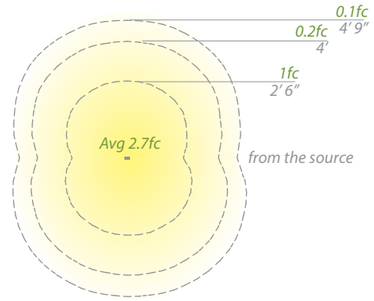

Recommended spacing for installation :
(**120V, 277V**) 6642, 6643

- Residential: 12.5 to 14.5ft
- Commercial: 8 to 9.5ft

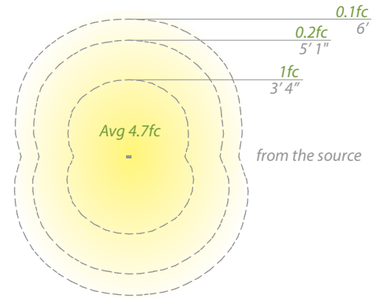

Mounting accessory included

12V




M6000-STAKE

120V/277V



M6640-CON-KIT

ARCHETYPE 120V/277V
18" LED OUTDOOR SCONCE

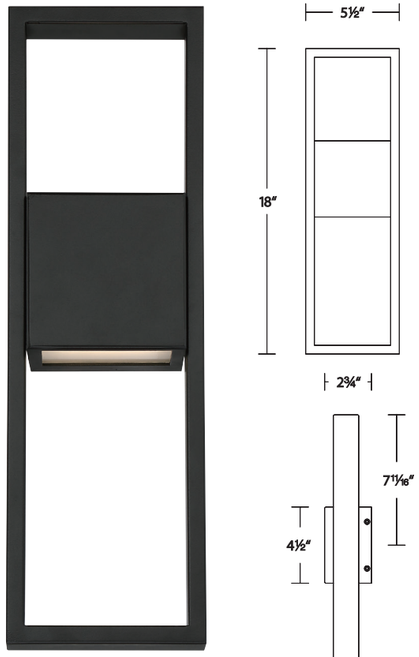

WS-W13918

Color Temp: *3000K*
CRI: *90*
Dimming: *100% - 10% ELV*
Rated Life: *54,000 hours*
Input: *120V*

- Aluminum hardware with etched glass diffuser
- No transformer or driver required

A low-profile, artful design adds a distinctive, sophisticated look in any outdoor application.

	Size	Watt	LED Lumens	Delivered Lumens	Finish	
WS-W13918	*18"*	*16W*	*1200*	*427*	**BK**	*Black*

Example: **WS-W13918-BK**


	Size	Watt	LED Lumens	Delivered Lumens	Finish	
WS-W15912	*12"*	*10W*	*800*	*331*		
WS-W15918	*18"*	*13W*	*1000*	*435*	**BK**	*Black*
WS-W15924	*24"*	*16W*	*1200*	*571*		

Example: **WS-W15912-BK**

ARCHETYPE 120V/277V
12", 18" & 24" LED OUTDOOR SCONCE

WET IP65 TITLE 24 CALIFORNIA




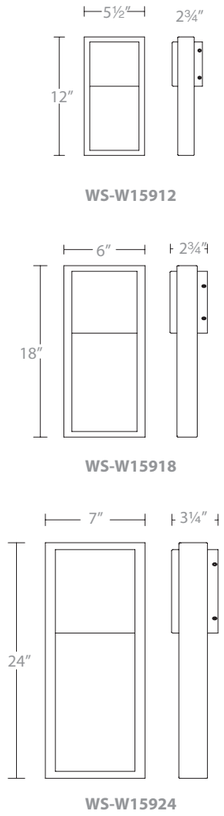

Color Temp: *3000K*
CRI: *90*
Dimming: *100% - 10% ELV*
Rated Life: *54,000 hours*
Input: *120V*

- Aluminum hardware with etched glass diffuser
- No transformer or driver required

ARCHETYPE
18" LED OUTDOOR PENDANT

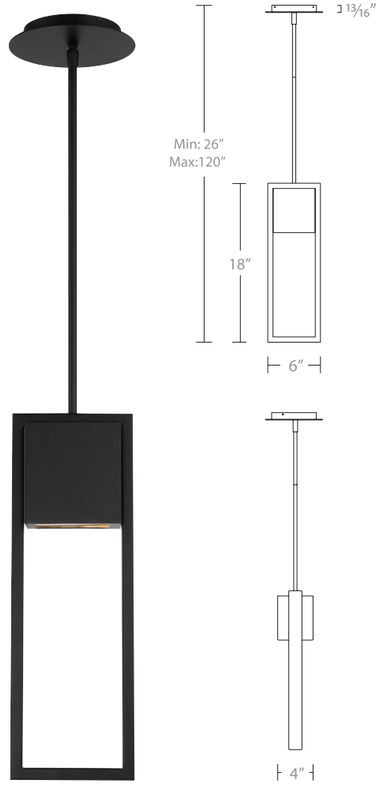

- Aluminum hardware with etched glass diffuser
- No transformer or driver needed
- Three 12" and one 6" downrod included (additional rods available)

Color Temp: *3000K*
CRI: *90*
Dimming: *100% - 10% ELV*
Rated Life: *54,000 hours*
Input: *120V*

A low-profile, artful design adds a distinctive, sophisticated look in any outdoor application.

	Size	Watt	LED Lumens	Delivered Lumens	Finish	
PD-W15918	*18"*	*10W*	*800*	*379*	**BK**	*Black*

Example: **PD-W15918-BK**


	Size	Watt	LED Lumens	Delivered Lumens	Finish	
PM-W15928	*28"*	*16W*	*1200*	*382*	**BK**	*Black*

Example: **PM-W15928-BK**

ARCHETYPE
28" LED OUTDOOR PENDANT

WET TITLE 24 CALIFORNIA DARK SKY



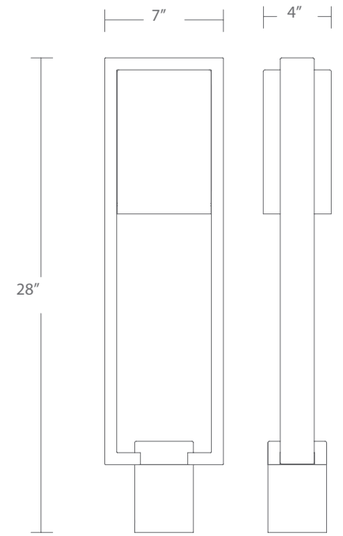

- Aluminum hardware with etched glass diffuser
- No transformer or driver needed
- Mount on 3" maximum post (not included)

Color Temp: *3000K*
CRI: *90*
Dimming: *100% - 10% ELV*
Rated Life: *54,000 hours*
Input: *120V*



12V OUTDOOR SUBMERSIBLE LANDSCAPE TAPE LIGHTING

- Submersible up to 5 feet
- May be tied into any 12V landscape lighting system
- Maximum of 40 ft per run to stay within 5 amps
- Flexible linear lights maybe cut to desired length at the end of the run
- Various lengths may be joined together with IP68 Rated connectors
- UV-stabilized silicone seals and protects the tape sections

12V OUTDOOR SUBMERSIBLE LANDSCAPE TAPE LIGHTING

WET IP68 c UL us *1838 listed*

- Integrates with other landscape lighting products using the same transformer



Transformer Required (order separately)


Input	12VAC
Power	2W/ 2.1VA *per foot*
Brightness	Up to 115 lm *per foot*
CRI	85
Rated Life	60,000 hours

Model		*Color Temp*		*Brightness*
8011	*1 foot*	**27BK**	*2700K Warm White*	*110 lm per foot*
8051	*5 feet*	**30BK**	*3000K Pure White*	*115 lm per foot*
8101	*10 feet*			

Example: **8051-30BK**



Distinct mechanical and electrical connections minimize spacing between LEDs when joining sections, and allow for seemingly endless tape runs that can be powered separately

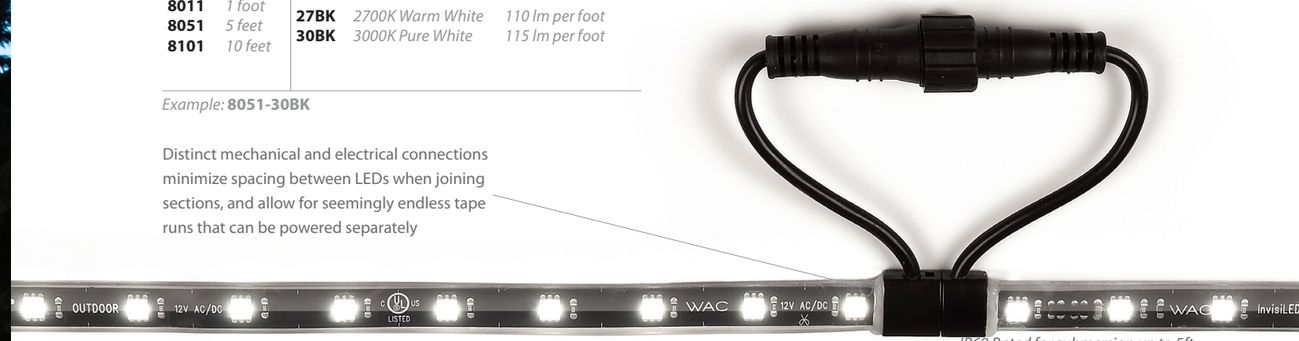

IP68 Rated for submersion up to 5ft


Accessories

	*Clear Channel*	**LED-TO24-CH5**	*5 feet Includes mounting hardware*		*Lead Wire with 5A fuse*	**8000-06BK** *6 feet* **8000-10BK** *10 feet*	*40 ft max tape run; protects tape sections from over current*
	*Surface Mounting Clip*	**LED-TO24-C1**	*Secures on both edges (10 Qty)*		*Joiner Cable - Short*	**8001-6BK** *6 inch* **8001-12BK** *1 foot*	
	*Edge Mounting Clip*	**LED-TO24-C2**	*Secures on one edge (10 Qty)*		*Joiner Cable - Long*	**8001-72BK** *6 feet* **8001-120BK** *10 feet*	
	*Invisible Clip*	**LED-TO24-C3**	*Spring clip secures beneath tape (10 Qty)*		*4 Way "X" Connector*	**8003-BK**	
	*End Cap*	**LED-TO24-EC**			*3 Way "Y" Connector*	**8002-BK**	

Model	
9075-TRN-SS	*75W Max Dimensions: 13.97"L x 5.35"W x 5.63"H*
9150-TRN-SS	*150W Max Dimensions: 18.90"L x 6.69"W x 6.30"H*
9300-TRN-SS	*300W Max Dimensions: 18.90"L x 6.69"W x 6.30"H*
9600-TRN-SS	*600W Max (2 x 300W outputs) Dimensions: 14.49"L x 10.08"W x 5.94"H*




- IP65 Rated
- 12V to 15V taps
- Knock outs for power and photosensor connections
- 3-prong outlet for timer
- Outdoor Rated stainless steel transformer contains an outdoor Rated 3-prong plug for power

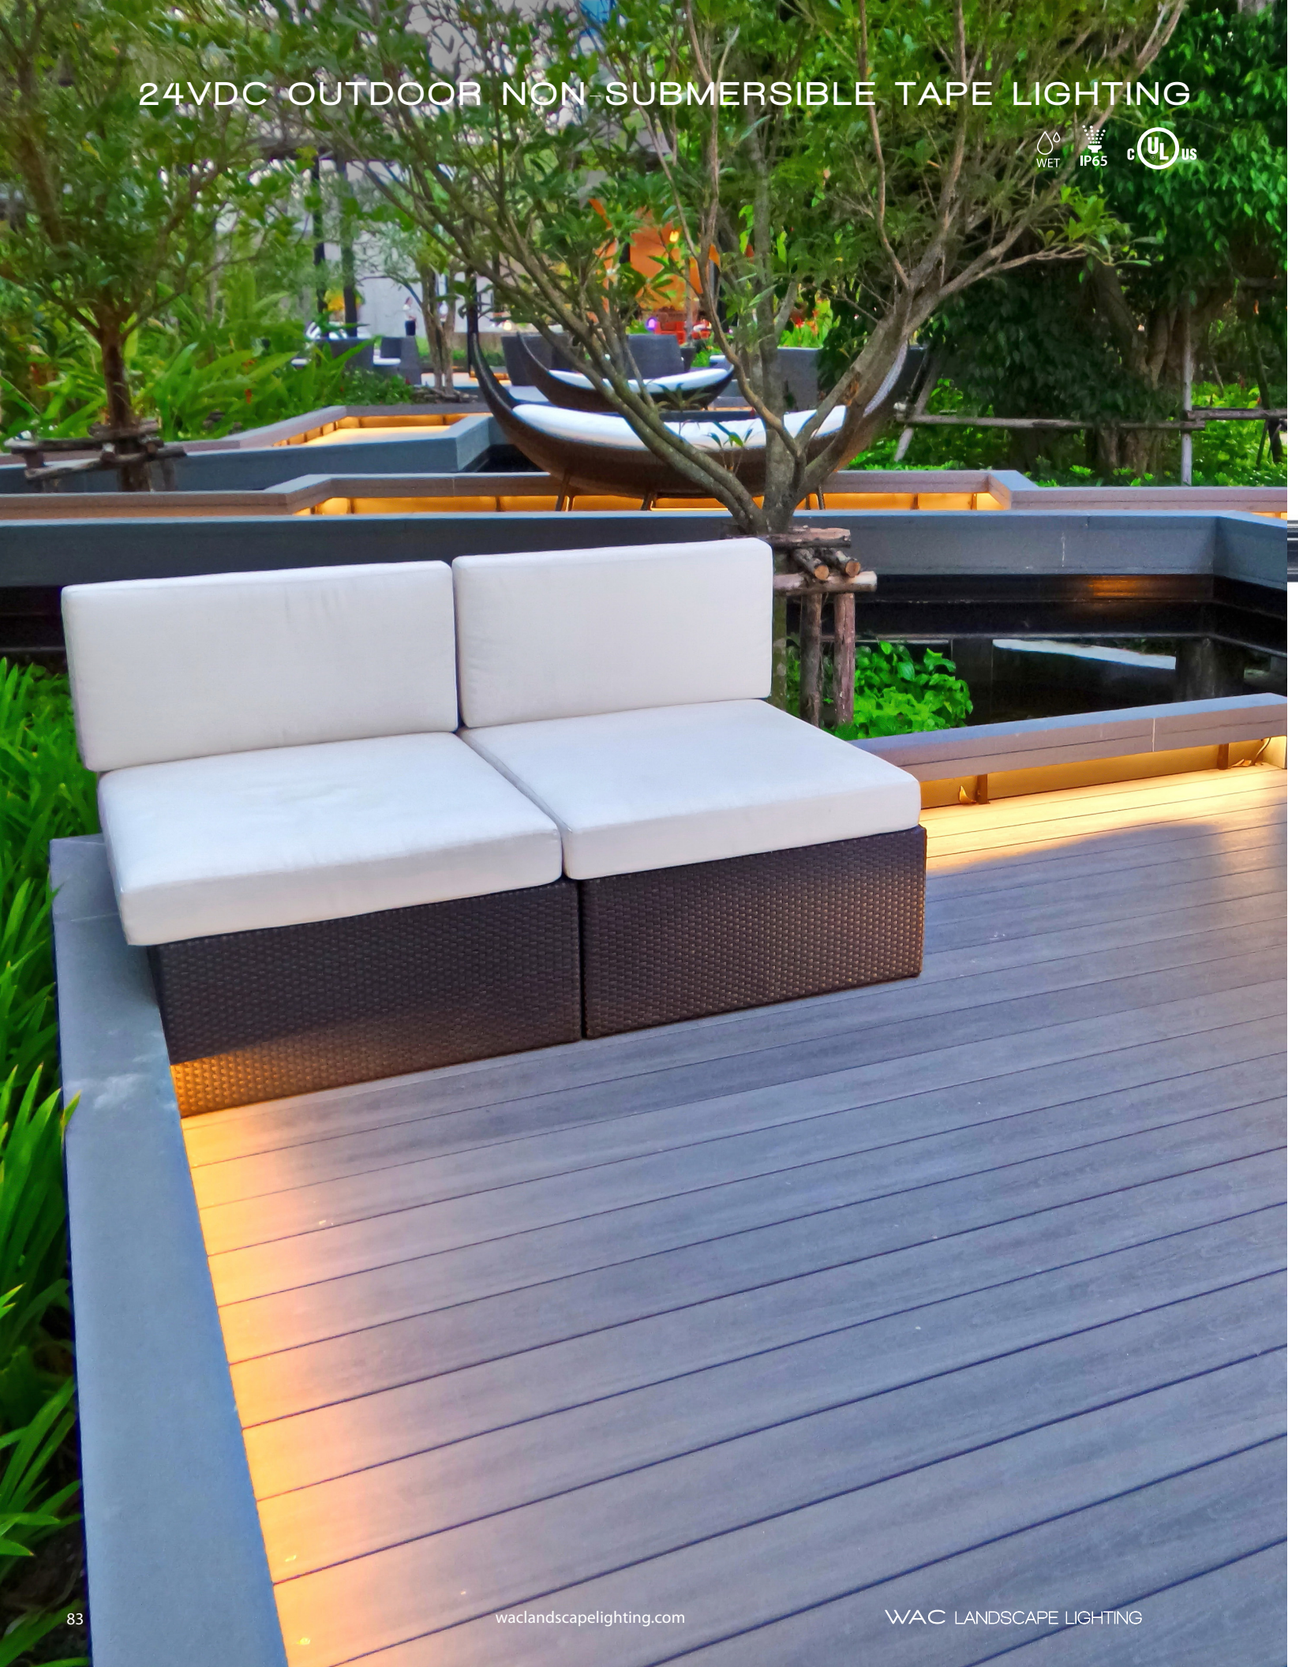

24VDC OUTDOOR NON-SUBMERSIBLE TAPE LIGHTING

Input	24VDC
Power	1.2W/ 2.4W *per foot*
Brightness	Up to 200 lm *per foot*
CRI	90
Rated Life	50,000 hours



TAPE SELECTIONS

System	Lumens	Power	Max Run	Length		Color Temp	Color	
				01	*1 foot*			
				05	*5 feet*			
T24-OD1	*100 lm/ft*	*1.2W/ft*	*80ft*	**10**	*10 feet*	**27** *2700K*		
T24-OD2	*200 lm/ft*	*2.4W/ft*	*40ft*	**20**	*20 feet*	**30** *3000K*	**BK**	*Black*
				40	*40 feet*	**40** *4000K*		
				80*	*80 feet**			

**T24-OD2 not avaiable in 80 feet*

EXAMPLE: T24-OD2-01-27

- May be cut every 4 inches
- Beam Spread: 115°
- Multiple roll lengths offered
- Equal brightness from end to end
- Protection against water spray, dust with silicone jacket (IP65)
- 100 ft max distance between the power supply and begining of InvisiLED®




Accessories

	***Invisiled Outdoor Joiner Cable.*** *Extends power supply lead wire*	**T24-WE-IC-002-BK** *2 in* **T24-WE-IC-006-BK** *6 in* **T24-WE-IC-012-BK** *1 ft* **T24-WE-IC-036-BK** *3 ft* **T24-WE-IC-072-BK** *6 ft* **T24-WE-IC-144-BK** *12 ft* **T24-WE-IC-240-BK** *20ft*	*Black*	
	***Invisiled Outdoor Lead Wire.*** *Connects to Indoor Power Supply*	**T24-WE-BO12-BK** *1 ft* **T24-WE-BO72-BK** *6 ft*	*Black*	
	***Invisiled Outdoor Power Connector Kit with Wire Jacket and Silicone Sealant.*** *Allows power to Wet Rated tape*	**T24-WE-EX2-006-BK** *6 in*	*Black*	
	***Invisiled Outdoor Tape to Tape Y Connector.*** *Splits power to the two tape sections*	**T24-WE-Y-BK**	*Black*	
	Wet Rated Tape End Cap with Silicone Sealant. *24VDC Wet Rated (10 pieces)*	**T24-WE-EC**	*Clear*	*(10 pieces)*
	***Invisiled Outdoor Surface Mounting Clip.*** *24VDC Wet Rated Mounting Screws*	**LED-TO24-C1**	*Black*	*(10 pieces)*
	***Invisiled Outdoor Edge Mounting Clip.*** *24VDC Wet Rated Tape Mounting Screws*	**LED-TO24-C2**	*Black*	*(10 pieces)*
	***Invisiled Outdoor Underside Mounting Clip.*** *24VDC Wet Rated Tape Mounting Screws*	**T24-WE-C3**	*Black*	*(10 pieces)*
	***Invisiled Outdoor Surface Mount Clear Channel***	**T24-WE-CH5** *5 ft*	*Clear*	
	***Silicone Sealant.*** *Wet Location Tape Sealant (45 grams)*	**T24-WE-SI-45**	*White*	

Type		Model	Input	Output	Dimmable	
Remote Wet Location		**PS-24DC-U96R-WE**	*120V-277VAC*	*24V DC 96W*	*ELV / TRIAC*	*Includes a 6 foot lead wire*
Portable Wet Location		**PS-24DC-A96P-WE**	*120V*	*24V DC 96W*	*N/A*	*Includes a 6 foot lead wire 120V input power cord ready*

24V SUBMERSIBLE OUTDOOR TAPE LIGHTING

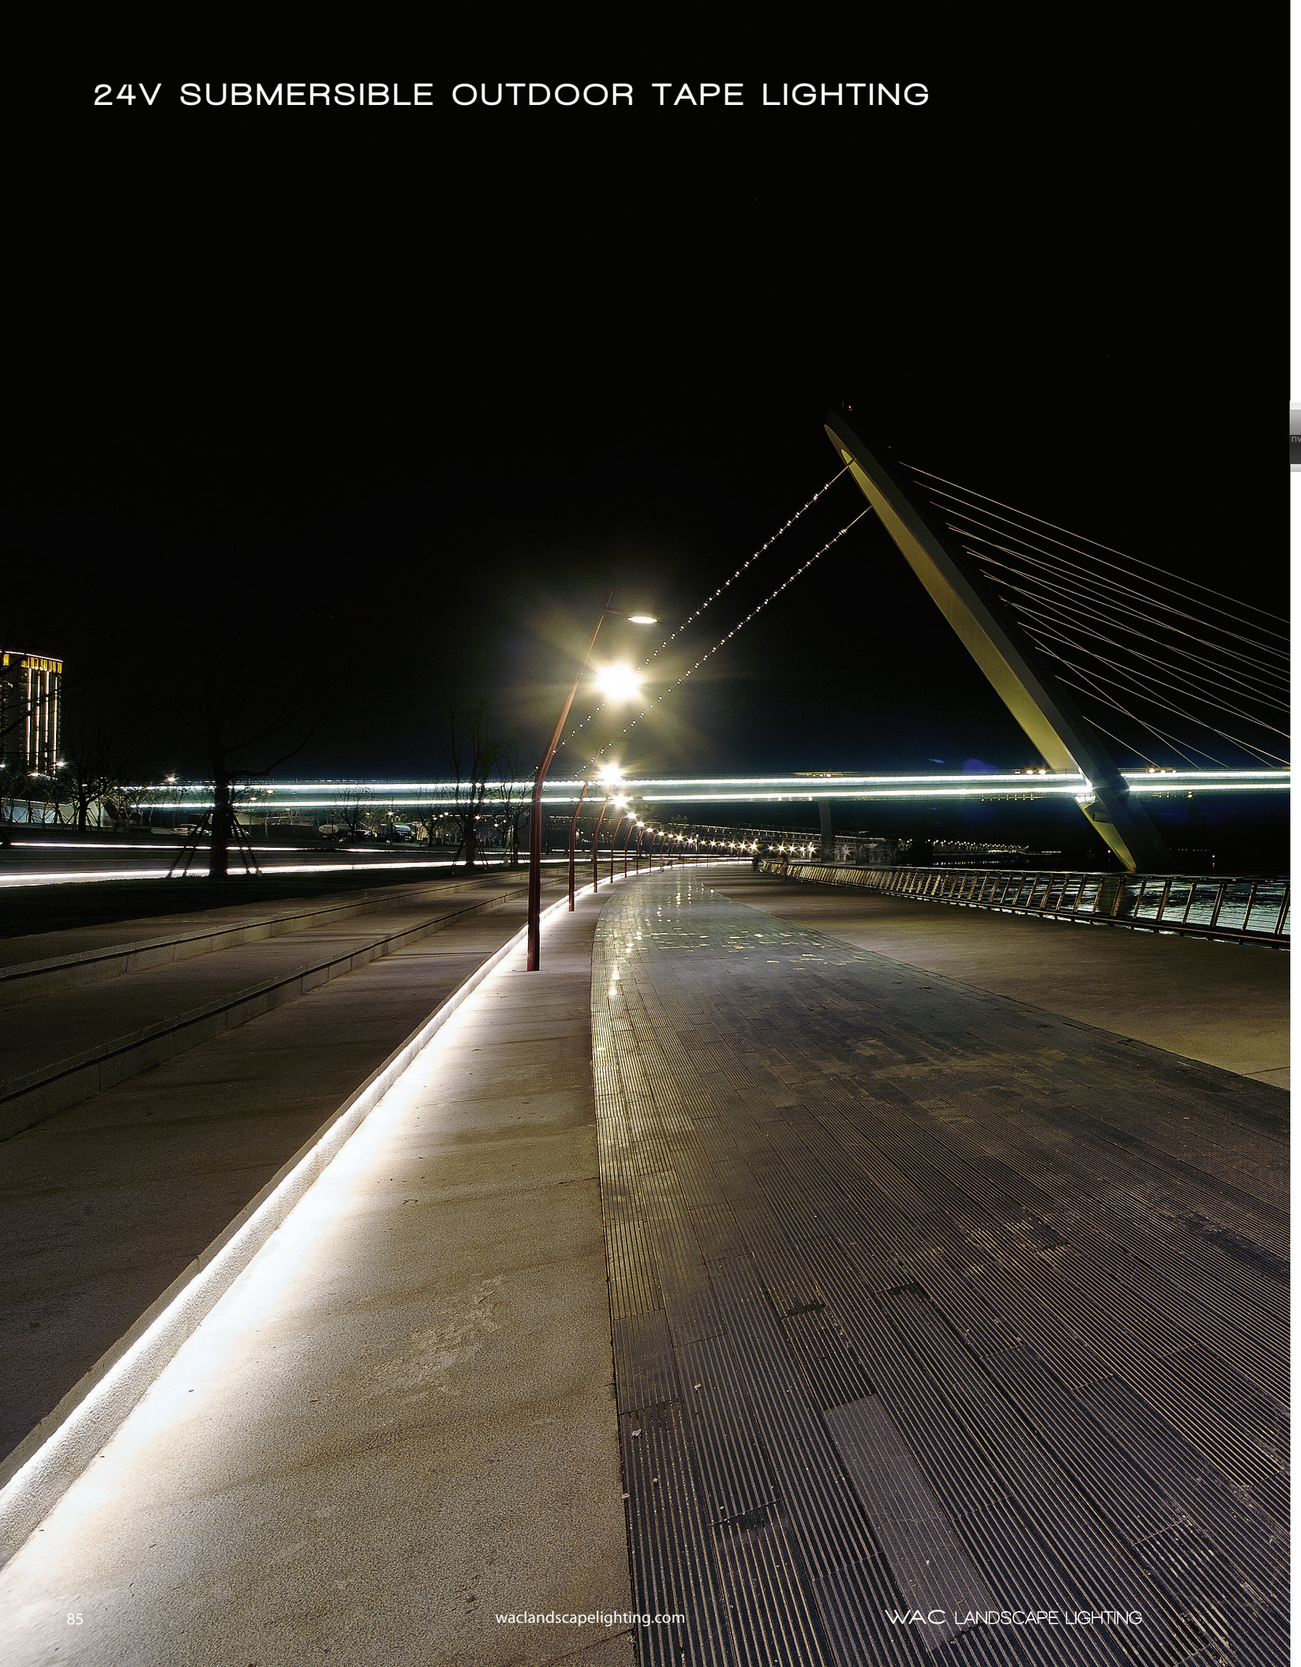


24V SUBMERSIBLE OUTDOOR TAPE LIGHTING


WET IP68 c UL us


- IP-68 Rated, UL/cUL listed for wet location
- May be field cut every 6 inches at the end of a run
- Maximum run length of 28ft per electrical feed

Power	3.5W /ft
Brightness	Up to 220 lm /ft
CRI	90
Rated Life	80,000 hours

Double insulated PVC encasement and distinct electrical and mechanical junctions allow for seemingly endless runs that can be powered separately





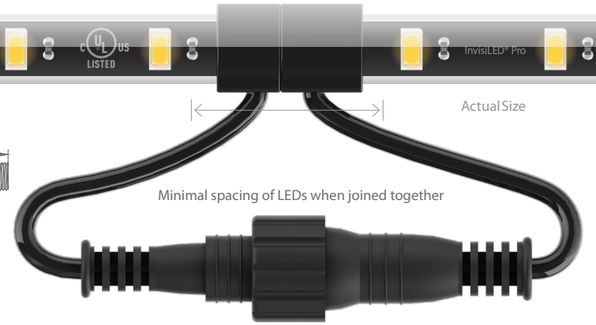

TAPE SELECTIONS

System	*Color Temp*	*Length*		*Color*	
LED-TO2427	*2700K*	**1**	*1 foot*		
LED-TO2430	*3000K*	**5**	*5 feet*	**WT**	*White*
LED-TO2435	*3500K*	**10**	*10 feet*		

EXAMPLE: LED-TO2435-10-WT

CLASS 2 POWER SUPPLY FOR PRO OUTDOOR (REQUIRED)

Type		*Model*	*Power*	*Input*	*Output*	*Dimmable*	
Remote Damp Location		**EN-OD24100-RB2-T**	96W	*120V AC*	*24V AC*	*ELV*	*Includes a 6 foot lead wire*
Remote Wet Location		**EN-O24100-RB2-T**	96W	*120V - 277V AC*	*24V DC*	*0-10V*	*Includes a 6 foot lead wire*



Clear Channel **LED-TO24-CH5** 5 feet

Includes a diffuser, two end caps, and five screws
Snap in to hold Pro Outdoor, Palette Outdoor or Landscape.

	Surface mounting clip Secures on both edges	**LED-TO24-C1** 10 pcs 20 Screws
	Edge mounting clip Secures on one edge	**LED-TO24-C2** 10 pcs 10 Screws
	Invisible clip Holds from the underside	**LED-TO24-C3** 10 pcs 10 Screws

Clips to hold indoor InvisiLED tapesFor Pro Outdoor, Palette Outdoor, or Landscape Tape Light

	3-Way "Y" Connector *Connects tape sections*	**LED-TO24-Y**	
	4-Way "X" Connector *Connects tape sections*	**LED-TO24-X**	
	Joiner Cable *Extends distance between transformers and controllers*	**LED-TO24-IC6** *6 in* **LED-TO24-IC12** *12 in* **LED-TO24-IC72** *72 in* **LED-TO24-IC120** *120 in*	
	End cap *1 cut and 1 male end cap*	**LED-TO24-EC**	Black

Compatible with Pro Outdoor, Landscape Tape Light

24VDC SUBMERSIBLE OUTDOOR RGB TAPE LIGHTING




Featured Product: **LED-TCO-5-RGB** with **LED-TO24-CH5**

**Not rated for use inside a swimming pool*

24VDC SUBMERSIBLE OUTDOOR RGB TAPE LIGHTING

WET IP68 cULus *1838 listed*




- IP-68 Rated, UL/cUL listed for wet location
- Variable colors with 3500K White
- DMX and wireless controller options for Palette outdoor system
- Maximum run length of 40 feet
- May be field cut every 2 inches at the end of a run
- Dim with wired controller and wireless controller accessory





Power	1.5W / ft
Brightness	40 lm / ft on 3500K Setting
Rated Life	80,000 hours

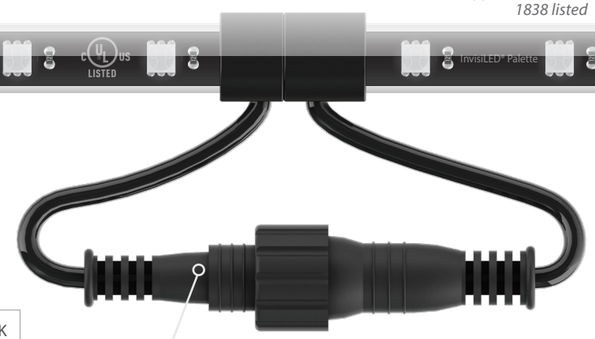

Double insulated PVC encasement and distinct electrical and mechanical junctions allow for seemingly endless runs that can be powered separately

TAPE SELECTION

System	*Length*		*Type*	
LED-TCO	**1**	*1' Foot*	**RGB**	*Color Changing*
	5	*5' Feet*		
	10	*10' Feet*		

Example: **LED-TCO-5-RGB**

CONTROLLER FOR PALETTE OUTDOOR (REQUIRED)

Master Controller (required)		**LED-TO24-CM**	*4 function wired controller*
Wireless Controller (required)		**LED-TO24-WS**	*4 function wireless controller*
Slave Controller (optional)		**LED-TO24-CS**	*Connects to Master Controller, adding 40 ft run* Compatible with Palette Outdoor

CLASS 2 POWER SUPPLY FOR PALETTE OUTDOOR (REQUIRED)

Type		*Model*	*Power*	*Input*	*Output*	
Remote Wet Location		**EN-O24100-RB2-T**	96W	*120V - 277V AC*	*24V DC*	*Includes a 6 foot lead wire*

ACCESSORIES FOR PALETTE OUTDOOR

Signal Wire *Master to Slave controller or Slave to Slave*		**LED-TO24-SW60** **LED-TO24-SW120**	*60 in* *120 in*
DMX Signal Wire *DMX to Master controller*		**LED-TO24-MW60** **LED-TO24-MW120**	*60 in* *120 in*
RGB Joiner Cable *Extends distance between tape and to controllers*		**LED-TO24-IC6-RGB** **LED-TO24-IC12-RGB** **LED-TO24-IC72-RGB** **LED-TO24-IC120-RGB**	*6 in* *12 in* *72 in* *120 in*
3-Way "Y" Connector *Connects tape sections*		**LED-TO24-Y-RGB**	
4 Way "X" Connector *Connects tape sections*		**LED-TO24-X-RGB**	

Compatible with Palette Outdoor

Surface Mounting Clip Secures on both edges		**LED-TO24-C1**	10 pcs 20 Screws
Edge Mounting Clip Secures on one edge		**LED-TO24-C2**	10 pcs 10 Screws
Invisible Clip Holds from the underside		**LED-TO24-C3**	10 pcs 10 Screws

Clips to hold indoor InvisiLED tapes, Pro Outdoor, Palette Outdoor, Landscape Tape Light

Clear Channel		**LED-TO24-CH5**	5 feet

Includes a diffuser, two end caps, and five screws. (Pro Outdoor, Palette Outdoor, Landscape Tape Light snap in to hold outdoor InvisiLED tapes).

End Cap *1 cut and 1 male end cap*		**LED-TO24-EC**	Black

DECK & PATIO LED LANDSCAPE

- IP66 Rated, protected against powerful water jets
- Translucent lens provides for uniform diffused light output
- 100%-10% dimming - see specification for list of tested dimmers
- Solid diecast brass or corrosion resistant aluminum alloy
- ADA Compliant

IP66 ADA c UL us

1838 listed




3011

Input	9-15VAC
Power	2.8W / 4.6VA
Brightness	60 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90+
Rated Life	50,000 hours

3011-27	2700K	**BK**	Black on Aluminum
3011-30	3000K	**BBR**	Bronze on Brass
		BZ	Bronze on Aluminum
		WT	White on Aluminum

Transformer Required (order separately)

Example: 3011-27BZ






3021

Input	9-15VAC
Power	2.8W / 4.6VA
Brightness	60 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90+
Rated Life	50,000 hours

3021-27	2700K	**BK**	Black on Aluminum
3021-30	3000K	**BBR**	Bronze on Brass
		BZ	Bronze on Aluminum
		WT	White on Aluminum


Transformer Required (order separately)

Example: 3021-30BZ





3031



Input	9-15VAC
Power	2.8W / 4.6VA
Brightness	75 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90+
Rated Life	50,000 hours

3031-27	2700K	**BK**	Black on Aluminum
3031-30	3000K	**BBR**	Bronze on Brass
		BZ	Bronze on Aluminum
		WT	White on Aluminum

Transformer Required (order separately)

Example: 3031-27BZ

See photometric data for 3011, 3021, 3031 on page 123

6' lead wire and direct burial gel filled wire nuts included

STEP LIGHTS LED LANDSCAPE

- Invisible hardware
- IP66 Rated, protected against high-pressure water jets
- Constant output for 9V-15V input
- 100%-10% dimming



STEP LIGHTS LED LANDSCAPE

IP68


1838 listed (12V)
1598 listed (120V)

CIRCLE AND SQUARE STEP LIGHTS

- Transformer Required (order separately)
- Solid stainless steel construction
- Includes a spring clip for wall or step applications
- 6' lead wire


12V

Input	9-15VAC
Power	4.1W / 6.6VA
Brightness	55 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	85
Rated Life	70,000 hours

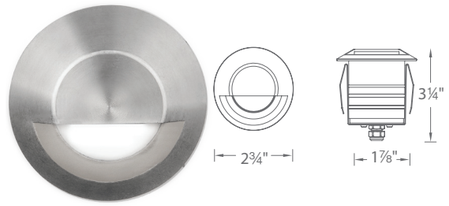

CIRCLE 2041

2041-27	2700K	**BS**	*Bronzed Stainless Steel*
2041-30	3000K	**SS**	*Stainless Steel*

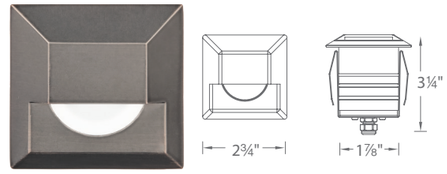

SQUARE 2061

2061-27	2700K	**BS**	*Bronzed Stainless Steel*
2061-30	3000K	**SS**	*Stainless Steel*


Example: 2061-30BS

RECTANGLE STEP LIGHTS

- Corrosion resistant aluminum alloy, or cast stainless steel construction

	12V	**120V**
Input	9-15VAC	110-120VAC
Power	2W / 3.1VA	3.5W
Brightness	Up to 38 lm	Up to 65 lm
Color Temp	2700K Warm white, 3000K Pure white & Amber	3000K Pure white
CRI	90+	90+
Rated Life	60,000 hours	54,000 hours


Transformer Required (order separately)

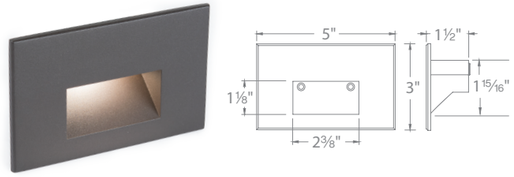

12V

4011-27	2700K	**BBR***	Bronze on Brass
4011-30	3000K	**BZ**	Bronze on Aluminum
4011-AM	Amber	**BK**	Black on Aluminum
		WT	White on Aluminum
120V		**SS***	Cast Stainless Steel
WL-LED100-C	3000K		
WL-LED100-AM	Amber		

Transformer Required (order separately)

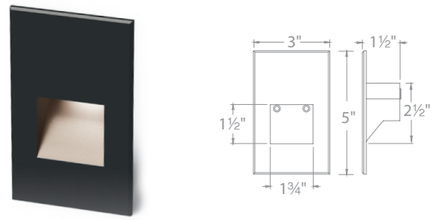


12V

4021-27	2700K	**BZ**	Bronze on Aluminum
4021-30	3000K	**BK**	Black on Aluminum
4021-AM	Amber	**WT**	White on Aluminum
		SS*	Cast Stainless Steel
120V			
WL-LED200-C	3000K		
WL-LED200-AM	Amber		

Transformer Required (order separately)

Example: WL-LED200-C-BK

**Cast Stainless Steel finish is only available in 3000K and Amber colors.*
***Available in 277V; Example:* **WL-LED100F-C-WT; BBR** *finish is not available in 277V option*

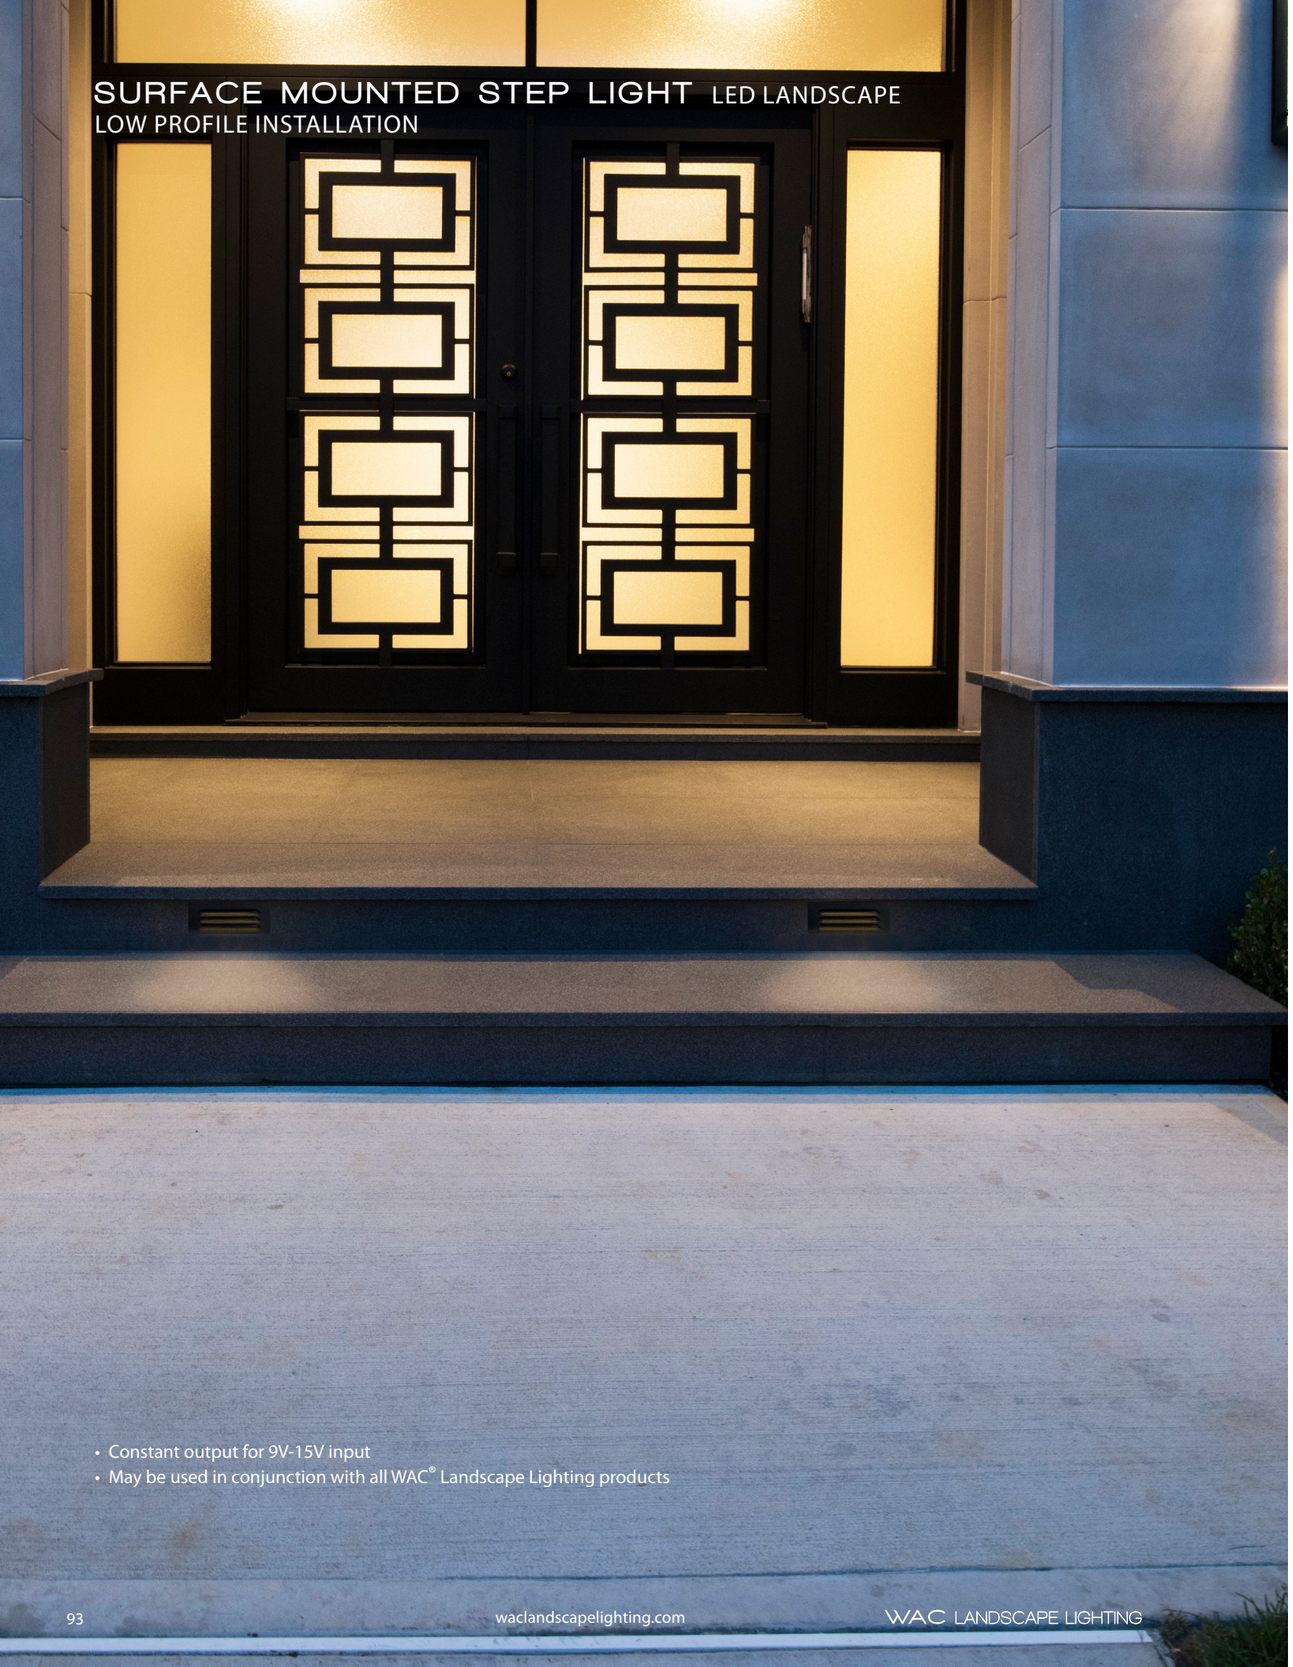

- Constant output for 9V-15V input
- May be used in conjunction with all WAC® Landscape Lighting products

SURFACE MOUNTED STEP LIGHT LED LANDSCAPE


LOW PROFILE INSTALLATION

IP66

c UL us *1838 listed*

- Slim, low profile design-surface mount installation
- Junction box not required
- Die-cast aluminum or die-cast brass
- Invisible hardware
- 6' lead wire included
- Compatible with WAC® 12V Landscape Transformers *(sold separately)*






4501-27

4501

Input: *9-15V*
Power: *4W/6.5VA*
Brightness: *55 lm*
Color Temp: *2700K Warm white, 3000K Pure white*
CRI: *90*
Rated Life: *70,000 hours*

Model	Color	Finish	
4501-27	*2700K*	**BK**	*Black on Aluminum*
		BZ	*Bronze on Aluminum*
		WT	*White on Aluminum*
		BBR	*Bronze on Brass*
4501-30	*3000K*	**BK**	*Black on Aluminum*
		BZ	*Bronze on Aluminum*
		WT	*White on Aluminum*
		BBR	*Bronze on Brass*






4901-27

4901

Input: *9-15V*
Power: *8W/12VA*
Brightness: *100 lm*
Color Temp: *2700K Warm white, 3000K Pure white*
CRI: *90*
Rated Life: *70,000 hours*

Model	Color	Finish	
4901-27	*2700K*	**BK**	*Black on Aluminum*
		BZ	*Bronze on Aluminum*
		WT	*White on Aluminum*
		BBR	*Bronze on Brass*
4901-30	*3000K*	**BK**	*Black on Aluminum*
		BZ	*Bronze on Aluminum*
		WT	*White on Aluminum*
		BBR	*Bronze on Brass*

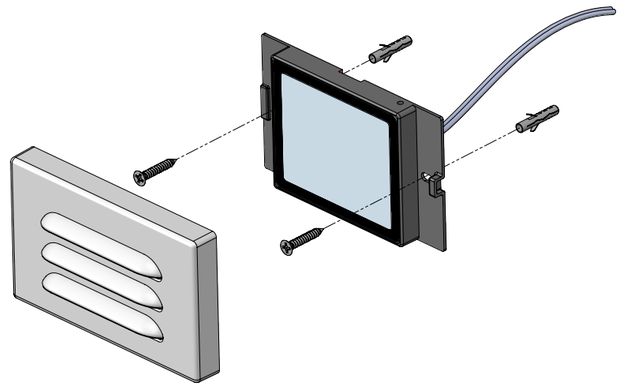

Fixture can be mounted directly to the wall without a junction box

12V & 120V RECTANGULAR STEP & WALL LIGHTS

TITLE 24 CALIFORNIA · IP66

LED LANDSCAPE


Input:	*12V*	*120V*
Brightness:	*Up to 4 lm*	*Up to 4 lm*
CRI:	*90*	*90*
Dimming:	*100% - 10% MLV*	*100% - 10% ELV*
Rated Life:	*60,000 hours*	*50,000 hours*

- Fluid decorative profile with full cut-off illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish
- Title 24 Compliant (120V only)

Transformer Required (order separately)







Voltage	*Power*	*Model*	*Color Temp*	*Finishes*	
12V	2W / 3.1VA	**4031-27** **4031-30** **4031-AM**	*2700K* *3000K* *Amber*	**BK** **BZ** **WT**	*Black on AL* *Bronze on AL* *White on AL*
120V	3.5W	**WL-LED110-C** **WL-LED110-AM**	*3000K* *Amber*	**BK** **BZ** **WT**	*Black on AL* *Bronze on AL* *White on AL*

Example: **4031-30WT**
Example: **WL-LED110-C-WT**


Voltage	*Power*	*Model*	*Color Temp*	*Finishes*	
12V	2W / 3.1VA	**4041-27** **4041-30** **4041-AM**	*2700K* *3000K* *Amber*	**BK** **BZ** **WT**	*Black on AL* *Bronze on AL* *White on AL*
120V	3.5W	**WL-LED210-C** **WL-LED210-AM**	*3000K* *Amber*	**BK** **BZ** **WT**	*Black on AL* *Bronze on AL* *White on AL*


Example: **4041-30BK**
Example: **WL-LED210-C-BK**

Input:	*12V*	*120V*
Brightness:	*Up to 2 lm*	*Up to 3 lm*
CRI:	*90*	*90*
Dimming:	*100% - 10% MLV*	*100% - 10% ELV*
Rated Life:	*60,000 hours*	*50,000 hours*

- Geometric design with downward illumination
- Die-cast aluminum construction with abrasion-resistant powder- coated finish
- Title 24 Compliant (120V only)

Transformer Required (order separately)





Voltage	*Power*	*Model*	*Color Temp*	*Finishes*	
12V	2W / 3.1VA	**4091-27** **4091-30** **4091-AM**	*2700K* *3000K* *Amber*	**BK** **BZ** **WT**	*Black on AL* *Bronze on AL* *White on AL*
120V	3.5W	**WL-LED140-C** **WL-LED140-AM**	*3000K* *Amber*	**BK** **BZ** **WT**	*Black on AL* *Bronze on AL* *White on AL*

Example: **4091-30BK**
Example: **WL-LED140-C-BK**



IP66 Rated self contained fixture with various face plates.
Fits into a switch box or a 2″ x 4″ junction box with minimum inside dimensions of 3″L x 2″W x 2.5″D.

AL - Aluminum

12V & 120V RECTANGULAR STEP & WALL LIGHTS

TITLE 24 CALIFORNIA · IP66


LED LANDSCAPE

Input:	*12V*	*120V*
Brightness:	*Up to 28 lm*	*Up to 40 lm*
CRI:	*90*	*90*
Dimming:	*100% - 10% MLV*	*100% - 10% ELV*
Rated Life:	*60,000 hours*	*50,000 hours*


- Tempered glass diffuses light for even illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish, or **marine-grade stainless steel** option available
- Title 24 Compliant (120V only)

Transformer Required (order separately)









Mounts Vertically or Horizontally

Voltage	*Power*	*Model*	*Color Temp*	*Finishes*	
12V	2W / 3.1VA	**4071-27** **4071-30** **4071-AM**	*2700K* *3000K* *Amber*	**BK** **BZ** **SS** **WT**	*Black on AL* *Bronze on AL* ***Stainless Steel*** *White on AL*
120V	3.5W	**WL-LED130-C** **WL-LED130-AM**	*3000K* *Amber*	**BK** **BZ** **SS** **WT**	*Black on AL* *Bronze on AL* ***Stainless Steel*** *White on AL*


Example: **4071-27SS**
Example: **WL-LED130-C-SS**

Input:	*12V*	*120V*
Brightness:	*Up to 17 lm*	*Up to 36 lm*
CRI:	*90*	*90*
Dimming:	*100% - 10% MLV*	*100% - 10% ELV*
Rated Life:	*60,000 hours*	*50,000 hours*


- Louvered design shields glare for visual comfort
- Die-cast aluminum construction with abrasion-resistant powder-coated finish
- Title 24 Compliant (120V only)

Transformer Required (order separately)









Voltage	*Power*	*Model*	*Color Temp*	*Finishes*	
12V	2W / 3.1VA	**4051-27** **4051-30** **4051-AM**	*2700K* *3000K* *Amber*	**BK** **BZ** **WT**	*Black on AL* *Bronze on AL* *White on AL*
120V	3.5W	**WL-LED120-C** **WL-LED120-AM**	*3000K* *Amber*	**BK** **BZ** **WT**	*Black on AL* *Bronze on AL* *White on AL*

Example: **4051-30BZ**
Example: **WL-LED120-C-BZ**

Voltage	*Power*	*Model*	*Color Temp*	*Finishes*	
12V	2W / 3.1VA	**4061-27** **4061-30** **4061-AM**	*2700K* *3000K* *Amber*	**BK** **BZ** **WT**	*Black on AL* *Bronze on AL* *White on AL*
120V	3.5W	**WL-LED220-C** **WL-LED220-AM**	*3000K* *Amber*	**BK** **BZ** **WT**	*Black on AL* *Bronze on AL* *White on AL*

Example: **4061-30BZ**
Example: **WL-LED220-C-BZ**

AL - Aluminum

TRANSFORMERS LED LANDSCAPE

From our fully adjustable integRated LED accent light to our submersible in-grounds, every product is engineered to work well together as a fully integRated solution. We have everything you need whether you're lighting a small jewel of a garden or a sublime outdoor oasis, all connected to the same transformer.

IP65

c UL us
1838 listed

Model	
9075-TRN-SS	*75W Max* *Dimensions: 13.97" L x 5.35"W x 5.63"H*
9150-TRN-SS	*150W Max* *Dimensions: 18.90" L x 6.69"W x 6.30"H*
9300-TRN-SS	*300W Max* *Dimensions: 18.90" L x 6.69"W x 6.30"H*
9600-TRN-SS	*600W Max (2 x 300W outputs)* *Dimensions: 14.49" L x 10.08"W x 5.94"H*



- IP65 Rated
- 12V to 15V taps
- Knock outs for power and photosensor connections
- 3-prong outlet for timer
- Outdoor Rated stainless steel transformer contains an outdoor Rated 3-prong plug for power

Accessories LED LANDSCAPE

Mechanical Timer		**9000-MTI-WT**	*White*	*Connect within the transformer*
Photosensor		**9000-PCH-GY**	*1000VA Max*	*Attached directly to the transformer*
Photosensor - Remote		**9000-PCR-GY**	*1000VA Max*	*If transformer is located in a shady spot, this photosensor has a 10 foot cord and a stainless steel bracket to secure in a sunny area*
Direct Burial Water proof Wire Nuts		**9020-WNT-BK**		*Silicone filled wire nut with gasket (Pack of 20pcs)*
12V Direct Burial Outdoor Cable		**9100-12G-BK** **9250-12G-BK** **9500-12G-BK**	*100 feet 12 gauge* *250 feet 12 gauge* *500 feet 12 gauge*	

ACCESSORIES LED LANDSCAPE

Mounting & Glare Control Accessories LED LANDSCAPE

5" Long Shroud For 5211 Grand Accent		**5211-LSHR-BK** **5211-LSHR-BZ** **5211-LSHR-BBR**	*Reduce glare; ideal for downlighting application*
6" Long Shroud For 5011/5012 Accent		**5010-LSHR-BZ** **5010-LSHR-BBR** **5010-LSHR-BK**	*Reduce glare; ideal for downlighting application*
5" Long Shroud For 5111 Mini Accent		**5111-LSHR-BZ** **5111-LSHR-BBR** **5111-LSHR-BK**	*Reduce glare; ideal for downlighting application*
Grand Accent Snoot		**5211-SNOOT-BK** **5211-SNOOT-BZ** **5211-SNOOT-BBR**	*Reduce glare; ideal for downlighting application*
Accent Snoot		**5010-SNOOT-BK** **5010-SNOOT-BZ** **5010-SNOOT-BBR**	*Reduce glare; ideal for downlighting application*
Mini Accent Snoot		**5111-SNOOT-BK** **5111-SNOOT-BZ** **5111-SNOOT-BBR**	*Reduce glare; ideal for downlighting application*
9" Mounting Stake		**9000-ST9-BZ**	*Durable PC stake*
14" Mounting Stake		**9000-ST14-BZ**	*Durable PC stake*
Surface Mount Flange/Stake		**5000-SCP-BZ** **5000-SCP-BBR** **5000-SCP-BK**	*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*
Guardian Mount		**9000-SP9-BZ**	*Heavy duty stainless steel spike to position fixture*
Gutter Mount Bracket		**5000-GM-BK** **5000-GM-BZ**	*Stainless steel universal mounting bracket for gutter mounting fixture*
Tree Mount Junction Box		**5000-TCP-BK** **5000-TCP-BZ**	*Aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V listed*
		**5000-TCL-BK** **5000-TCL-BZ**	*Large aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V listed*
Large Tree Mount Canopy Strap		**5000-TST-BK**	*Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)*
		5000-STB-BK	*Tree mount bracket only*

Optic Accessories LED LANDSCAPE

Grand Accent Optics		**LENS-25-AMB** **LENS-25-GRN** **LENS-25-RED**	*Amber* *Green* *Red*	**LENS-25-BLU** **LENS-25-FR** **LENS-25-SPR**	*Blue* *Frosted* *Spread*	**5211-HCL** **LENS-25-BEL**	*Honeycomb Louver* *Beam Elongating*
Accent Optics		**LENS-20-AMB** **LENS-20-GRN** **LENS-20-RED**	*Amber* *Green* *Red*	**LENS-20-BLU** **LENS-20-FR** **LENS-20-SPR**	*Blue* *Frosted* *Spread*	**5011-HCL** **LENS-20-BEL**	*Honeycomb Louver* *Beam Elongating*
Mini Accent Optics		**LENS-16-AMB** **LENS-16-GRN** **LENS-16-RED**	*Amber* *Green* *Red*	**LENS-16-BLU** **LENS-16-FR** **LENS-16-SPR**	*Blue* *Frosted* *Spread*	**5111-HCL** **LENS-16-BEL**	*Honeycomb Louver* *Beam Elongating*
Mini Wall Wash Optics		**LENS-2X3-AMB** **LENS-2X3-GRN** **LENS-2X3-RED**	*Amber* *Green* *Red*	**LENS-2X3-BLU** **LENS-2X3-FR** **LENS-2X3-SPR**	*Blue* *Frosted* *Spread*	**LENS-2X3-BEL**	*Beam Elongating*
Wall Wash Optics		**LENS-2X4-AMB** **LENS-2X4-GRN** **LENS-2X4-RED**	*Amber* *Green* *Red*	**LENS-2X4-BLU** **LENS-2X4-FR** **LENS-2X4-SPR**	*Blue* *Frosted* *Spread*		
NEMA wall wash-optics		**LENS-3X5-AMB** **LENS-3X5-GRN** **LENS-3X5-RED**	*Amber* *Green* *Red*	**LENS-3X5-BLU** **LENS-3X5-FR** **LENS-3X5-SPR**	*Blue* *Frosted* *Spread*	**LENS-3X5-BEL**	*Beam Elongating*

LINE VOLTAGE LED LANDSCAPE OFFERING

1598 listed

ACCENT 120V **PATENTED**

Integral brightness control, adjustable beam angle




Power	3.5W to 14.5W
Brightness	100lm to 900lm
Beam Angle	15° to 60°
CRI	85
Color Temp	3000K Pure White
Rated Life	45,000 hours
Listing	IP-66

Detachable shroud

6' lead wire and wire nuts included

See photometric data on pages 118



Model	Finishes
5012-30BK	*Black on Aluminum*
5012-30BZ	*Bronze on Aluminum*
5012-30BBR	*Bronze on Brass*

WALL WASH 120V **PATENTED**


Integral brightness control



Power	3.5W to 14.5W
Brightness	95lm to 855lm
Beam Angle	15° upward (50° by 80°)
CRI	85
Color Temp	3000K Pure White
Rated Life	45,000 hours
Listing	IP-66

6' lead wire and wire nuts included

See photometric data on pages 124



Model	Finishes
5022-30BK	*Black on Aluminum*
5022-30BZ	*Bronze on Aluminum*
5022-30BBR	*Bronze on Brass*

3" INGROUND 120V **PATENTED**


Integral brightness control, adjustable beam angle



Power	3W to 11.5W
Brightness	65lm to 515lm
Beam Angle	15° to 60°
CRI	85
Color Temp	3000K Pure White
Rated Life	45,000 hours
Listing	IP-67

6' lead wire and wire nuts include

See photometric data on pages 122



Model	Finishes
5032-30BZ	*Bronze on Aluminum*
5032-30BBR	*Bronze on Brass*

BOLLARDS 120V-277V



Scoop
See pages 69-70



Chamber
See pages 71-74



Tower
See pages 75-76



Archetype
See pages 77-78

SHINING FROM THE BACKGROUND

Like professional stagehands, these high-performers easily disappear into the backdrop with their diminutive sizes while adaptably making the whole show possible

Featuring product: **5012-30BZ** Accent




Endurance® LED BRICK LIGHTS

ADA IP66

- Option to easily retrofit Hadco or Kichler incandescent brick lights using the existing housings
- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire - no driver needed

Open Illumination Brick Light






WL-5105
Opal

Input	120V
Power	5.5W
Brightness	Up to 110 lm
Color tem	3000K Pure White
CRI	90
Dimming:	100% - 10% ELV
Rated Life	80,000 hours

WL-5105-30

aBK	*Architectural Black*
aBZ	*Architectural Bronze*
aGH	*Architectural Graphite*
aWT	*Architectural White*

Low Glare Brick Light





WL-5205
Louver

Input	120V
Power	5.5W
Brightness	Up to 45 lm
Color Temp	3000K Pure White
CRI	90
Dimming:	100% - 10% ELV
Rated Life	80,000 hours

WL-5205-30

aBK	*Architectural Black*
aBZ	*Architectural Bronze*
aGH	*Architectural Graphite*
aWT	*Architectural White*

Endurance® LED FLOOD LIGHTS

IP66

TWO LEVELS OF BRIGHTNESS, SAME COMPACT SIZE





Ceiling Mounted
360° Horizontal rotation
90° Vertical aiming




Shown with Round Canopy
Box includes two canopies for use with surface mount or recessed junction boxes



Shown in Architectural White
Two different power options in one compact size

Input	120V
CRI	90
Dimming:	100% - 10% ELV
Rated Life	54,000 hours

- Breathable waterproof technology and factory-sealed LED light engine ensures fixture can maintain stable atmospheric pressure and prevent condensation
- Die-cast aluminum construction
- Specify 2 lumen packages using the same sized fixture for building facade design integrity
- 120V direct wire—no driver needed
- 1/2" threaded heavy-duty mounting arm
- Photo or motion sensor sold separately



		Power	Comparable	Color Temp		Delivered Lumens	Finish	
Flood	**WP-LED335**	*35.5W*	*100W HID*	**30**	*3000K*	*2450*	**aBK**	*Architectural Black*
				50	*5000K*	*2730*	**aBZ**	*Architectural Bronze*
							aGH	*Architectural Graphite*
Flood Pro	**WP-LED354**	*53W*	*150W HID*	**35**	*3500K*	*3445*	**aWT**	*Architectural White*

Example: **WP-LED354-35-aWT**

MOTION SENSOR (120V)
Available in 4 complementary colors



MS-120-BK	*Black*
MS-120-BZ	*Bronze*
MS-120-GY	*Gray*
MS-120-WT	*White*

PHOTOSENSOR (120V)
Available in 4 complementary colors



PC-120-BK	*Black*
PC-120-BZ	*Bronze*
PC-120-GY	*Gray*
PC-120-WT	*White*


Endurance® LED FLOOD LIGHTS

SINGLE SPOT



Input: *120V*
CRI: *85*
Dimming: *100% - 10% ELV*
Rated Life: *39,000 hours*

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire - no driver needed
- Photo/motion sensor sold seperately

		Power	*Comparable*	*Color Temp*		*Delivered Lumens*	*Finish*	
	**WP-LED415**	*15W*	*75W Halogen*	**30**	*3000K*	*965*	**aBK**	*Architectural Black*
				50	*5000K*	*1030*	**aBZ**	*Architectural Bronze*
							aGH	*Architectural Graphite*
							aWT	*Architectural White*

Max 6¾″

Example: WP-LED415-30-AWT

PHOTOSENSOR (120V)
Available in 4 complementary colors



PC-120-BK	*Black*
PC-120-BZ	*Bronze*
PC-120-GY	*Gray*
PC-120-WT	*White*

MOTION SENSOR (120V)
Available in 4 complementary colors



MS-120-BK	*Black*
MS-120-BZ	*Bronze*
MS-120-GY	*Gray*
MS-120-WT	*White*


Endurance® LED FLOOD LIGHTS

DOUBLE SPOT



Input: *120V*
CRI: *85*
Dimming: *100% - 10% ELV*
Rated Life: *39,000 hours*

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire - no driver needed
- Photo/motion sensor sold seperately

		Power	*Comparable*	*Color Temp*		*Delivered Lumens*	*Finish*	
	**WP-LED430**	*30W*	*2 x 75W Halogen*	**30**	*3000K*	*965 x2*	**aBK**	*Architectural Black*
				50	*5000K*	*1030 x2*	**aBZ**	*Architectural Bronze*
							aGH	*Architectural Graphite*
							aWT	*Architectural White*

Max 12½″ Max 6½″

Example: WP-LED430-30-ABZ

PHOTOSENSOR (120V)
Available in 4 complementary colors



PC-120-BK	*Black*
PC-120-BZ	*Bronze*
PC-120-GY	*Gray*
PC-120-WT	*White*

MOTION SENSOR (120V)
Available in 4 complementary colors




MS-120-BK	*Black*
MS-120-BZ	*Bronze*
MS-120-GY	*Gray*
MS-120-WT	*White*

Endurance® WALL-MOUNTED LED SPOTLIGHT


DESIGNED FOR SIGN LIGHTING OR WALL-MOUNTED LIGHTING IN ANY DIRECTION

IP66

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire - no driver needed

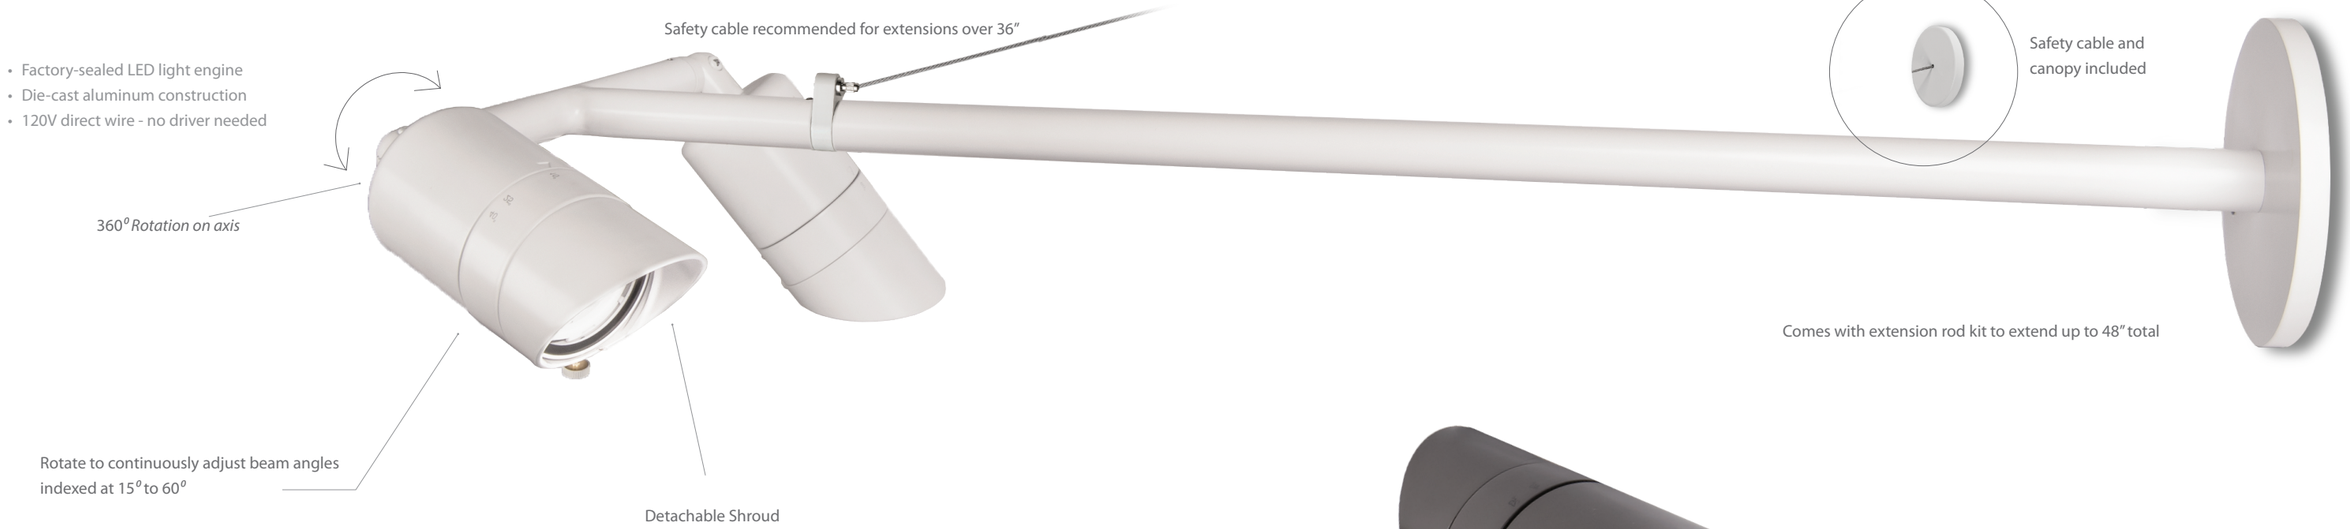

DOUBLE
WP-LED529




Input	120V
Power	30W
Brightness	Up to 1140 lm x2
Comparable	150W x2 PAR 38
Color Temp	3000K & 4000K
CRI	85
Dimming:	100% - 10% ELV
Rated Life	50,000 hours

3000K & 4000K	*Pure White*
	aBK *Architectural Black*
WP-LED529-30	**aBZ** *Architectural Bronze*
WP-LED529-40	**aGH** *Architectural Graphite*
	aWT *Architectural White*



SINGLE
WP-LED514



Input	120V
Power	15W
Brightness	Up to 1140 lm
Comparable	150W PAR 38
Color Temp	3000K & 4000K
CRI	85
Dimming:	100% - 10% ELV
Rated Life	50,000 hours


3000K & 4000K	*Pure White*
	aBK *Architectural Black*
WP-LED514-30	**aBZ** *Architectural Bronze*
WP-LED514-40	**aGH** *Architectural Graphite*
	aWT *Architectural White*

Endurance® LED WALL PACKS


IP66 DARK SKY ADA

FIN

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 20° forward throw illumination
- Built-in level for easy adjustment
- Photo/Motion sensor sold separately

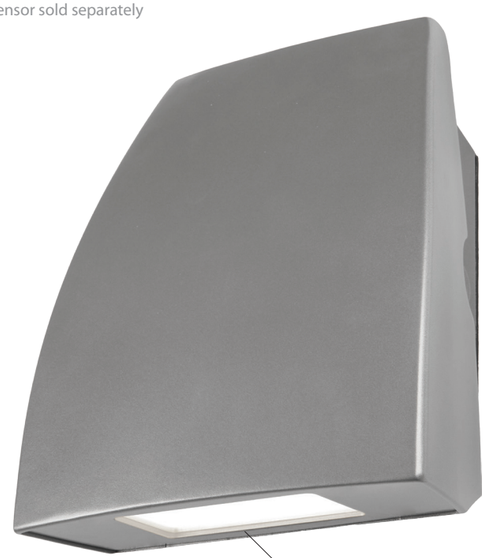

Tempered Prismatic Glass
Reduces glare while optimizing light distribution



Input	120V-277V
Power	19W/27W/35W
Brightness	Delivered 1390/2075/2750 lm
Comparable	39W/70W/100W HID
Color Temp	3000K
CRI	85
Dimming:	100% - 10% ELV or 0-10V
Rated Life	100,000 hours

3000K	*Pure White*
WP-LED119-30	**aBZ** *Architectural Bronze*
WP-LED127-30	**aGH** *Architectural Graphite*
WP-LED135-30	**aWT** *Architectural White*

MOTION SENSOR (120V)
Available in 3 complementary colors



MS-120-BZ	*Bronze*
MS-120-GY	*Gray*
MS-120-WT	*White*

PHOTOSENSOR (120V)
Available in 3 complementary colors




PC-120-BZ	*Bronze*
PC-120-GY	*Gray*
PC-120-WT	*White*

Endurance® LED WALL PACKS

IP66

HAWK

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 20° forward throw illumination
- Built-in level for easy adjustment
- Photo/Motion sensor sold separately






Input	120V-277V
Power	19W/27W
Brightness	Delivered 1435 lm/2095 lm
Comparable	39W HID/70W HID
Color Temp	3000K
CRI	85
Dimming:	100% - 10% ELV or 0-10V
Rated Life	100,000 hours

3000K	*Pure White*
WP-LED219-30	**aBZ** *Architectural Bronze*
WP-LED227-30	**aGH** *Architectural Graphite*
	aWT *Architectural White*



Mounts in any orientation
for direct and indirect illumination



Includes box sleeve. For use with
surface mount junction boxes

MOTION SENSOR (120V)
Available in 3 complementary colors



MS-120-BZ	*Bronze*
MS-120-GY	*Gray*
MS-120-WT	*White*

PHOTOSENSOR (120V)
Available in 3 complementary colors



PC-120-BZ	*Bronze*
PC-120-GY	*Gray*
PC-120-WT	*White*

RUBIX LED DECORATIVE CEILING MOUNTS

Input: 120-277V
Dimming: 100% - 10% ELV or 0-10V
Color Temp: 3000K Pure White
CRI: 90
Rated Life: 70,000 hours

IP65 · TITLE 24 CALIFORNIA · ETL



- Ceiling mount
- Die-cast aluminum construction



Beam	86˚
Power	16W
Brightness	750 lm

FM-W2505

AL	*Brushed Aluminum*
BK	*Black*
BZ	*Bronze*
GH	*Graphite*
WT	*White*

Example: FM-W2505-BK



ADA · IP65 · TITLE 24 CALIFORNIA · ETL



- Ceiling mount
- Die-cast aluminum construction

Beam	95˚
Power	30W
Brightness	1875 lm

FM-W2510

AL	*Brushed Aluminum*
BK	*Black*
BZ	*Bronze*
GH	*Graphite*
WT	*White*

Example: FM-W2510-BK

RUBIX & SCOOP LED DECORATIVE WALL MOUNTS

- Mounts up or down
- Die-cast aluminum construction

Input: 120-277V
Dimming: 100% - 10% ELV or 0-10V
Color Temp: 3000K Pure White
CRI: 90
Rated Life: 70,000 hours






WALL MOUNT

IP65 · TITLE 24 CALIFORNIA · ETL

Single light
WS-W2504



Beam	86˚
Power	16W
Brightness	750 lm

Up & Down light
WS-W2505

Beam	86˚
Power	30W
Brightness	1400 lm

WS-W2504
WS-W2505


AL	*Brushed Aluminum*
BK	*Black*
BZ	*Bronze*
GH	*Graphite*
WT	*White*

Example: WS-W2504-BZ



SCOOP WALL MOUNT

IP65 · TITLE 24 CALIFORNIA · ADA · ETL



Beam	86˚
Power	16W
Brightness	805 lm

WS-W20506

AL	*Brushed Aluminum*
BK	*Black*
BZ	*Bronze*
GH	*Graphite*
WT	*White*


Example: WS-W20506-BK



WALL MOUNT

ENERGY STAR · DARK SKY · ADA

Single light
WS-W2509



- Mounts up or down
- Die-cast aluminum construction

Beam	86˚
Power	16W
Brightness	805 lm

WS-W2509

AL	*Brushed Aluminum*
BK	*Black*
BZ	*Bronze*
GH	*Graphite*
WT	*White*

Example: WS-W2509-WT



WALL MOUNT

ENERGY STAR · ADA

Up & Down light
WS-W2510



Beam	86˚
Power	30W
Brightness	1385 lm


WS-W2510

AL	*Brushed Aluminum*
BK	*Black*
BZ	*Bronze*
GH	*Graphite*
WT	*White*

Example: WS-W2510-WT


TUBE LED DECORATIVE CEILING MOUNT

Input: 120-277V
Dimming: 100% - 10% ELV 0-10V
Color Temp: 3000K Pure White
CRI: 90
Rated Life: 70,000 hours

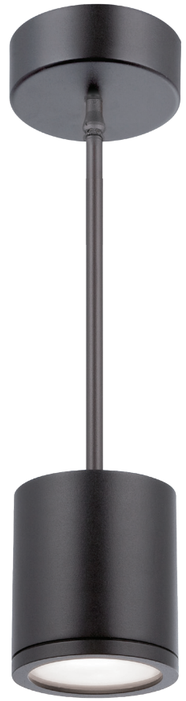

PENDANT

DARK SKY · IP65 · TITLE 24 CALIFORNIA · ETL



- Die-cast aluminum construction
- Hang straight swivel
- Three 12″ and one 6″ down rods included

Beam	33˚	PD-W2605	**WT** *White*
Power	16W		**BK** *Black*
Brightness	800 lm		**BZ** *Bronze*
			GH *Graphite*
			AL *Brushed Aluminum*

Example: PD-W2605-BK

TUBE LED DECORATIVE CEILING MOUNT



IP65 · TITLE 24 CALIFORNIA · ETL




- Ceiling mount
- Die-cast aluminum construction

Beam	35˚	FM-W2605	**WT** *White*
Power	16W		**BK** *Black*
Brightness	800 lm		**BZ** *Bronze*
			GH *Graphite*
			AL *Brushed Aluminum*

Example: FM-W2605-WT



IP65 · TITLE 24 CALIFORNIA · ADA · ETL



- Ceiling mount
- Die-cast aluminum construction

Beam	91˚	FM-W2612	**WT** *White*
Power	30W		**BK** *Black*
Brightness	1740 lm		**BZ** *Bronze*
			GH *Graphite*
			AL *Brushed Aluminum*

Example: FM-W2612-GH


TUBE LED DECORATIVE WALL MOUNTS

Input: 120-277V
Dimming: 100% - 10% ELV or 0-10V
Color Temp: 3000K Pure White
CRI: 90
Rated Life: 70,000 hours



4″ SINGLE LIGHT WALL MOUNT

DARK SKY · IP65 · TITLE 24 CALIFORNIA · ETL



- Mounts up or down
- Die-cast aluminum construction


Beam	33˚	WS-W2605	**WT** *White*
Power	16W		**BK** *Black*
Brightness	800 lm		**BZ** *Bronze*
			GH *Graphite*
			AL *Brushed Aluminum*

Example: WS-W2605-AL



4″ DOUBLE LIGHT WALL MOUNT

IP65 · TITLE 24 CALIFORNIA · ETL



- Die-cast aluminum construction


Beam	33˚	WS-W2604	**WT** *White*
Power	30W		**BK** *Black*
Brightness	1750 lm		**BZ** *Bronze*
			GH *Graphite*
			AL *Brushed Aluminum*

Example: WS-W2604-AL



SINGLE LIGHT WALL MOUNT

DARK SKY · IP65 · TITLE 24 CALIFORNIA · ADA · ETL



- Mounts up or down
- Die-cast aluminum construction

Beam	70˚	WS-W2609	**WT** *White*
Power	16W		**BK** *Black*
Brightness	825 lm		**BZ** *Bronze*
			GH *Graphite*
			AL *Brushed Aluminum*

Example: WS-W2609-BK



DOUBLE LIGHT WALL MOUNT

IP65 · TITLE 24 CALIFORNIA · ADA · ETL



- Die-cast aluminum construction


Beam	70˚	WS-W2610	**WT** *White*
Power	30W		**BK** *Black*
Brightness	1525 lm		**BZ** *Bronze*
			GH *Graphite*
			AL *Brushed Aluminum*

Example: WS-W2610-BK

LANDSCAPE

GRAND ACCENT 12V PHOTOMETRICS

At 15° Setting



DISTANCE	15W FOOT CANDLES	15W BEAM WIDTH	22W FOOT CANDLES	22W BEAM WIDTH	26W FOOT CANDLES	26W BEAM WIDTH	30W FOOT CANDLES	30W BEAM WIDTH	33W FOOT CANDLES	33W BEAM WIDTH
4ft	260.4fc	1.1ft	418.4fc	1.1ft	465.4fc	1.1ft	521.4fc	1.1ft	549.3fc	1.1ft
8ft	65.1fc	2.1ft	104.6fc	2.1ft	116.4fc	2.1ft	130.4fc	2.1ft	137.3fc	2.1ft
12ft	28.9fc	3.2ft	46.5fc	3.2ft	51.7fc	3.2ft	57.9fc	3.2ft	61.0fc	3.2ft
16ft	16.3fc	4.2ft	26.2fc	4.2ft	29.1fc	4.2ft	32.6fc	4.2ft	34.3fc	4.2ft
24ft	7.2fc	6.3ft	11.6fc	6.3ft	12.9fc	6.3ft	14.5fc	6.3ft	15.3fc	6.3ft
32ft	4.1fc	8.4ft	6.5fc	8.4ft	7.3fc	8.4ft	8.1fc	8.4ft	8.6fc	8.4ft
40ft	2.6fc	10.5ft	4.2fc	10.5ft	4.7fc	10.5ft	5.2fc	10.5ft	5.5fc	10.5ft
48ft	1.8fc	12.6ft	2.9fc	12.6ft	3.2fc	12.6ft	3.6fc	12.6ft	3.8fc	12.6ft
60ft	1.2fc	15.8ft	1.9fc	15.8ft	2.1fc	15.8ft	2.3fc	15.8ft	2.4fc	15.8ft

At 25° Setting




DISTANCE	15W FOOT CANDLES	15W BEAM WIDTH	22W FOOT CANDLES	22W BEAM WIDTH	26W FOOT CANDLES	26W BEAM WIDTH	30W FOOT CANDLES	30W BEAM WIDTH	33W FOOT CANDLES	33W BEAM WIDTH
4ft	198.0fc	1.8ft	323.3fc	1.8ft	362.6fc	1.8ft	399.3fc	1.8ft	418.4fc	1.8ft
8ft	49.5fc	3.5ft	80.8fc	3.5ft	90.7fc	3.5ft	99.8fc	3.5ft	104.6fc	3.5ft
12ft	22.0fc	5.3ft	35.9fc	5.3ft	40.3fc	5.3ft	44.4fc	5.3ft	46.5fc	5.3ft
16ft	12.4fc	7.1ft	20.2fc	7.1ft	22.7fc	7.1ft	25.0fc	7.1ft	26.2fc	7.1ft
24ft	5.5fc	10.6ft	9.0fc	10.6ft	10.1fc	10.6ft	11.1fc	10.6ft	11.6fc	10.6ft
32ft	3.1fc	14.2ft	5.1fc	14.2ft	5.7fc	14.2ft	6.2fc	14.2ft	6.5fc	14.2ft
40ft	2.0fc	17.7ft	3.2fc	17.7ft	3.6fc	17.7ft	4.0fc	17.7ft	4.2fc	17.7ft
48ft	1.4fc	21.3ft	2.2fc	21.3ft	2.5fc	21.3ft	2.8fc	21.3ft	2.9fc	21.3ft
60ft	0.9fc	26.6ft	1.4fc	26.6ft	1.6fc	26.6ft	1.8fc	26.6ft	1.9fc	26.6ft

At 40° Setting



DISTANCE	15W FOOT CANDLES	15W BEAM WIDTH	22W FOOT CANDLES	22W BEAM WIDTH	26W FOOT CANDLES	26W BEAM WIDTH	30W FOOT CANDLES	30W BEAM WIDTH	33W FOOT CANDLES	33W BEAM WIDTH
4ft	107.4fc	2.9ft	167.4fc	2.9ft	191.5fc	2.9ft	210.8fc	2.9ft	223.2fc	2.9ft
8ft	26.8fc	5.8ft	41.9fc	5.8ft	47.9fc	5.8ft	52.7fc	5.8ft	55.8fc	5.8ft
12ft	11.9fc	8.7ft	18.6fc	8.7ft	21.3fc	8.7ft	23.4fc	8.7ft	24.8fc	8.7ft
16ft	6.7fc	11.6ft	10.5fc	11.6ft	12.0fc	11.6ft	13.2fc	11.6ft	13.9fc	11.6ft
24ft	3.0fc	17.5ft	4.7fc	17.5ft	5.3fc	17.5ft	5.9fc	17.5ft	6.2fc	17.5ft
32ft	1.7fc	23.3ft	2.6fc	23.3ft	3.0fc	23.3ft	3.3fc	23.3ft	3.5fc	23.3ft
40ft	1.1fc	29.1ft	1.7fc	29.1ft	1.9fc	29.1ft	2.1fc	29.1ft	2.2fc	29.1ft
48ft	0.7fc	34.9ft	1.2fc	34.9ft	1.3fc	34.9ft	1.5fc	34.9ft	1.5fc	34.9ft
60ft	0.5fc	43.7ft	0.7fc	43.7ft	0.9fc	43.7ft	0.9fc	43.7ft	1.0fc	43.7ft

At 60° Setting



DISTANCE	15W FOOT CANDLES	15W BEAM WIDTH	22W FOOT CANDLES	22W BEAM WIDTH	26W FOOT CANDLES	26W BEAM WIDTH	30W FOOT CANDLES	30W BEAM WIDTH	33W FOOT CANDLES	33W BEAM WIDTH
4ft	50.1fc	4.6ft	79.4fc	4.6ft	91.6fc	4.6ft	100.1fc	4.6ft	105.4fc	4.6ft
8ft	12.5fc	9.2ft	19.8fc	9.2ft	22.9fc	9.2ft	25.0fc	9.2ft	26.3fc	9.2ft
12ft	5.6fc	13.9ft	8.8fc	13.9ft	10.2fc	13.9ft	11.1fc	13.9ft	11.7fc	13.9ft
16ft	3.1fc	18.5ft	5.0fc	18.5ft	5.7fc	18.5ft	6.3fc	18.5ft	6.6fc	18.5ft
24ft	1.4fc	27.7ft	2.2fc	27.7ft	2.5fc	27.7ft	2.8fc	27.7ft	2.9fc	27.7ft
32ft	0.8fc	37.0ft	1.2fc	37.0ft	1.4fc	37.0ft	1.6fc	37.0ft	1.6fc	37.0ft
40ft	0.5fc	46.2ft	0.8fc	46.2ft	0.9fc	46.2ft	1.0fc	46.2ft	1.1fc	46.2ft
48ft	0.3fc	55.4ft	0.6fc	55.4ft	0.6fc	55.4ft	0.7fc	55.4ft	0.7fc	55.4ft
60ft	0.2fc	69.3ft	0.4fc	69.3ft	0.4fc	69.3ft	0.4fc	69.3ft	0.5fc	69.3ft

LANDSCAPE

GRAND ACCENT 120V PHOTOMETRICS

At 15° Setting



DISTANCE	13W FOOT CANDLES	13W BEAM WIDTH	16W FOOT CANDLES	16W BEAM WIDTH	21W FOOT CANDLES	21W BEAM WIDTH	26W FOOT CANDLES	26W BEAM WIDTH	31W FOOT CANDLES	31W BEAM WIDTH
4ft	298.8fc	1.1ft	356.4fc	1.1ft	457.7fc	1.1ft	541.1fc	1.1ft	613.5fc	1.1ft
8ft	74.7fc	2.1ft	89.1fc	2.1ft	114.4fc	2.1ft	135.3fc	2.1ft	153.4fc	2.1ft
12ft	33.2fc	3.2ft	39.6fc	3.2ft	50.9fc	3.2ft	60.1fc	3.2ft	68.2fc	3.2ft
16ft	18.7fc	4.2ft	22.3fc	4.2ft	28.6fc	4.2ft	33.8fc	4.2ft	38.3fc	4.2ft
24ft	8.3fc	6.3ft	9.9fc	6.3ft	12.7fc	6.3ft	15.0fc	6.3ft	17.0fc	6.3ft
32ft	4.7fc	8.4ft	5.6fc	8.4ft	7.2fc	8.4ft	8.5fc	8.4ft	9.6fc	8.4ft
40ft	3.0fc	10.5ft	3.6fc	10.5ft	4.6fc	10.5ft	5.4fc	10.5ft	6.1fc	10.5ft
48ft	2.1fc	12.6ft	2.5fc	12.6ft	3.2fc	12.6ft	3.8fc	12.6ft	4.3fc	12.6ft
60ft	1.3fc	15.8ft	1.6fc	15.8ft	2.0fc	15.8ft	2.4fc	15.8ft	2.7fc	15.8ft

At 25° Setting




DISTANCE	13W FOOT CANDLES	13W BEAM WIDTH	16W FOOT CANDLES	16W BEAM WIDTH	21W FOOT CANDLES	21W BEAM WIDTH	26W FOOT CANDLES	26W BEAM WIDTH	31W FOOT CANDLES	31W BEAM WIDTH
4ft	238.8fc	1.8ft	281.6fc	1.8ft	356.1fc	1.8ft	424.5fc	1.8ft	474.8fc	1.8ft
8ft	59.7fc	3.5ft	70.4fc	3.5ft	89.0fc	3.5ft	106.1fc	3.5ft	118.7fc	3.5ft
12ft	26.5fc	5.3ft	31.3fc	5.3ft	39.6fc	5.3ft	47.2fc	5.3ft	52.8fc	5.3ft
16ft	14.9fc	7.1ft	17.6fc	7.1ft	22.3fc	7.1ft	26.5fc	7.1ft	29.7fc	7.1ft
24ft	6.6fc	10.6ft	7.8fc	10.6ft	9.9fc	10.6ft	11.8fc	10.6ft	13.2fc	10.6ft
32ft	3.7fc	14.2ft	4.4fc	14.2ft	5.6fc	14.2ft	6.6fc	14.2ft	7.4fc	14.2ft
40ft	2.4fc	17.7ft	2.8fc	17.7ft	3.6fc	17.7ft	4.2fc	17.7ft	4.7fc	17.7ft
48ft	1.7fc	21.3ft	2.0fc	21.3ft	2.5fc	21.3ft	2.9fc	21.3ft	3.3fc	21.3ft
60ft	1.1fc	26.6ft	1.3fc	26.6ft	1.6fc	26.6ft	1.9fc	26.6ft	2.1fc	26.6ft

At 40° Setting



DISTANCE	13W FOOT CANDLES	13W BEAM WIDTH	16W FOOT CANDLES	16W BEAM WIDTH	21W FOOT CANDLES	21W BEAM WIDTH	26W FOOT CANDLES	26W BEAM WIDTH	31W FOOT CANDLES	31W BEAM WIDTH
4ft	113.6fc	2.9ft	136.1fc	2.9ft	175.2fc	2.9ft	204.2fc	2.9ft	234.2fc	2.9ft
8ft	28.4fc	5.8ft	34.0fc	5.8ft	43.8fc	5.8ft	51.0fc	5.8ft	58.5fc	5.8ft
12ft	12.6fc	8.7ft	15.1fc	8.7ft	19.5fc	8.7ft	22.7fc	8.7ft	26.0fc	8.7ft
16ft	7.1fc	11.6ft	8.5fc	11.6ft	10.9fc	11.6ft	12.8fc	11.6ft	14.6fc	11.6ft
24ft	3.2fc	17.5ft	3.8fc	17.5ft	4.9fc	17.5ft	5.7fc	17.5ft	6.5fc	17.5ft
32ft	1.8fc	23.3ft	2.1fc	23.3ft	2.7fc	23.3ft	3.2fc	23.3ft	3.7fc	23.3ft
40ft	1.1fc	29.1ft	1.4fc	29.1ft	1.8fc	29.1ft	2.0fc	29.1ft	2.3fc	29.1ft
48ft	0.8fc	34.9ft	0.9fc	34.9ft	1.2fc	34.9ft	1.4fc	34.9ft	1.6fc	34.9ft
60ft	0.5fc	43.7ft	0.6fc	43.7ft	0.8fc	43.7ft	0.9fc	43.7ft	1.0fc	43.7ft

At 60° Setting



DISTANCE	13W FOOT CANDLES	13W BEAM WIDTH	16W FOOT CANDLES	16W BEAM WIDTH	21W FOOT CANDLES	21W BEAM WIDTH	26W FOOT CANDLES	26W BEAM WIDTH	31W FOOT CANDLES	31W BEAM WIDTH
4ft	53.5fc	4.6ft	64.2fc	4.6ft	81.9fc	4.6ft	97.1fc	4.6ft	110.1fc	4.6ft
8ft	13.4fc	9.2ft	16.0fc	9.2ft	20.5fc	9.2ft	24.3fc	9.2ft	27.5fc	9.2ft
12ft	5.9fc	13.9ft	7.1fc	13.9ft	9.1fc	13.9ft	10.8fc	13.9ft	12.2fc	13.9ft
16ft	3.3fc	18.5ft	4.0fc	18.5ft	5.1fc	18.5ft	6.1fc	18.5ft	6.9fc	18.5ft
24ft	1.5fc	27.7ft	1.8fc	27.7ft	2.3fc	27.7ft	2.7fc	27.7ft	3.1fc	27.7ft
32ft	0.8fc	37.0ft	1.0fc	37.0ft	1.3fc	37.0ft	1.5fc	37.0ft	1.7fc	37.0ft
40ft	0.5fc	46.2ft	0.6fc	46.2ft	0.8fc	46.2ft	1.0fc	46.2ft	1.1fc	46.2ft
48ft	0.4fc	55.4ft	0.4fc	55.4ft	0.6fc	55.4ft	0.7fc	55.4ft	0.8fc	55.4ft
60ft	0.2fc	69.3ft	0.3fc	69.3ft	0.4fc	69.3ft	0.4fc	69.3ft	0.5fc	69.3ft

LANDSCAPE

ACCENT 12V PHOTOMETRICS

At 10° Setting



POWER	1W		2W		8W		15W		18W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	55.9fc	0.8ft	129.0fc	0.8ft	233.8fc	0.8ft	341.4fc	0.8ft	435.3fc	0.8ft
8ft	14.0fc	1.7ft	32.3fc	1.7ft	58.5fc	1.7ft	85.4fc	1.7ft	108.8fc	1.7ft
12ft	6.2fc	2.5ft	14.3fc	2.5ft	26.0fc	2.5ft	37.9fc	2.5ft	48.4fc	2.5ft
16ft	3.5fc	3.4ft	8.1fc	3.4ft	14.6fc	3.4ft	21.3fc	3.4ft	27.2fc	3.4ft
24ft	1.6fc	5.0ft	3.6fc	5.0ft	6.5fc	5.0ft	9.5fc	5.0ft	12.1fc	5.0ft
32ft	0.9fc	6.7ft	2.0fc	6.7ft	3.7fc	6.7ft	5.3fc	6.7ft	6.8fc	6.7ft
40ft	0.6fc	8.4ft	1.3fc	8.4ft	2.3fc	8.4ft	3.4fc	8.4ft	4.4fc	8.4ft
48ft	0.4fc	10.1ft	0.9fc	10.1ft	1.6fc	10.1ft	2.4fc	10.1ft	3.0fc	10.1ft
60ft	0.2fc	12.6ft	0.6fc	12.6ft	1.0fc	12.6ft	1.5fc	12.6ft	1.9fc	12.6ft

At 25° Setting



POWER	1W		2W		8W		15W		18W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	25.2fc	1.8ft	54.8fc	1.8ft	105.8fc	1.8ft	153.0fc	1.8ft	194.6fc	1.8ft
8ft	6.3fc	3.5ft	13.7fc	3.5ft	26.5fc	3.5ft	38.3fc	3.5ft	48.7fc	3.5ft
12ft	2.8fc	5.3ft	6.1fc	5.3ft	11.8fc	5.3ft	17.0fc	5.3ft	21.6fc	5.3ft
16ft	1.6fc	7.1ft	3.4fc	7.1ft	6.6fc	7.1ft	9.6fc	7.1ft	12.2fc	7.1ft
24ft	0.7fc	10.6ft	1.5fc	10.6ft	2.9fc	10.6ft	4.3fc	10.6ft	5.4fc	10.6ft
32ft	0.4fc	14.2ft	0.9fc	14.2ft	1.7fc	14.2ft	2.4fc	14.2ft	3.0fc	14.2ft
40ft	0.3fc	17.7ft	0.5fc	17.7ft	1.1fc	17.7ft	1.5fc	17.7ft	1.9fc	17.7ft
48ft	0.2fc	21.3ft	0.4fc	21.3ft	0.7fc	21.3ft	1.1fc	21.3ft	1.4fc	21.3ft
60ft	0.1fc	26.6ft	0.2fc	26.6ft	0.5fc	26.6ft	0.7fc	26.6ft	0.9fc	26.6ft

At 40° Setting



POWER	1W		2W		8W		15W		18W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	14.5fc	3.0ft	33.2fc	3.0ft	60.2fc	3.0ft	88.6fc	3.0ft	113.9fc	3.0ft
8ft	3.6fc	6.1ft	8.3fc	6.1ft	15.0fc	6.1ft	22.1fc	6.1ft	28.5fc	6.1ft
12ft	1.6fc	9.1ft	3.7fc	9.1ft	6.7fc	9.1ft	9.8fc	9.1ft	12.7fc	9.1ft
16ft	0.9fc	12.2ft	2.1fc	12.2ft	3.8fc	12.2ft	5.5fc	12.2ft	7.1fc	12.2ft
24ft	0.4fc	18.2ft	0.9fc	18.2ft	1.7fc	18.2ft	2.5fc	18.2ft	3.2fc	18.2ft
32ft	0.2fc	24.3ft	0.5fc	24.3ft	0.9fc	24.3ft	1.4fc	24.3ft	1.8fc	24.3ft
40ft	0.1fc	30.4ft	0.3fc	30.4ft	0.6fc	30.4ft	0.9fc	30.4ft	1.1fc	30.4ft
48ft	0.1fc	36.5ft	0.2fc	36.5ft	0.4fc	36.5ft	0.6fc	36.5ft	0.8fc	36.5ft
60ft	0.1fc	45.6ft	0.1fc	45.6ft	0.3fc	45.6ft	0.4fc	45.6ft	0.5fc	45.6ft

At 60° Setting



POWER	1W		2W		8W		15W		18W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	9.0fc	4.5ft	16.6fc	4.5ft	41.2fc	4.5ft	54.0fc	4.5ft	70.1fc	4.5ft
8ft	2.3fc	8.9ft	4.1fc	8.9ft	10.3fc	8.9ft	13.5fc	8.9ft	17.5fc	8.9ft
12ft	1.0fc	13.4ft	1.8fc	13.4ft	4.6fc	13.4ft	6.0fc	13.4ft	7.8fc	13.4ft
16ft	0.6fc	17.9ft	1.0fc	17.9ft	2.6fc	17.9ft	3.4fc	17.9ft	4.4fc	17.9ft
24ft	0.3fc	26.8ft	0.5fc	26.8ft	1.1fc	26.8ft	1.5fc	26.8ft	1.9fc	26.8ft
32ft	0.1fc	35.8ft	0.3fc	35.8ft	0.6fc	35.8ft	0.8fc	35.8ft	1.1fc	35.8ft
40ft	0.1fc	44.7ft	0.2fc	44.7ft	0.4fc	44.7ft	0.5fc	44.7ft	0.7fc	44.7ft
48ft	0.1fc	53.7ft	0.1fc	53.7ft	0.3fc	53.7ft	0.4fc	53.7ft	0.5fc	53.7ft
60ft	0.0fc	67.1ft	0.1fc	67.1ft	0.2fc	67.1ft	0.2fc	67.1ft	0.3fc	67.1ft

LANDSCAPE

ACCENT 120V PHOTOMETRICS

At 15° Setting



POWER	3.5W		6.5W		10.5W		13.5W		14.5W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	50.4fc	1.1ft	102.4fc	1.1ft	151.8fc	1.1ft	192.9fc	1.1ft	200.3fc	1.1ft
8ft	12.6fc	2.1ft	25.6fc	2.1ft	37.9fc	2.1ft	48.2fc	2.1ft	50.1fc	2.1ft
12ft	5.6fc	3.2ft	11.4fc	3.2ft	16.9fc	3.2ft	21.4fc	3.2ft	22.3fc	3.2ft
16ft	3.1fc	4.2ft	6.4fc	4.2ft	9.5fc	4.2ft	12.1fc	4.2ft	12.5fc	4.2ft
24ft	1.4fc	6.3ft	2.8fc	6.3ft	4.2fc	6.3ft	5.4fc	6.3ft	5.6fc	6.3ft
32ft	0.8fc	8.4ft	1.6fc	8.4ft	2.4fc	8.4ft	3.0fc	8.4ft	3.1fc	8.4ft
40ft	0.5fc	10.5ft	1.0fc	10.5ft	1.5fc	10.5ft	1.9fc	10.5ft	2.0fc	10.5ft
48ft	0.3fc	12.6ft	0.7fc	12.6ft	1.1fc	12.6ft	1.3fc	12.6ft	1.4fc	12.6ft
60ft	0.2fc	15.8ft	0.5fc	15.8ft	0.7fc	15.8ft	0.9fc	15.8ft	0.9fc	15.8ft

At 25° Setting




POWER	3.5W		6.5W		10.5W		13.5W		14.5W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	37.2fc	1.8ft	73.1fc	1.8ft	113.1fc	1.8ft	139.2fc	1.8ft	149.1fc	1.8ft
8ft	9.3fc	3.5ft	18.3fc	3.5ft	28.3fc	3.5ft	34.8fc	3.5ft	37.3fc	3.5ft
12ft	4.1fc	5.3ft	8.1fc	5.3ft	12.6fc	5.3ft	15.5fc	5.3ft	16.6fc	5.3ft
16ft	2.3fc	7.1ft	4.6fc	7.1ft	7.1fc	7.1ft	8.7fc	7.1ft	9.3fc	7.1ft
24ft	1.0fc	10.6ft	2.0fc	10.6ft	3.1fc	10.6ft	3.9fc	10.6ft	4.1fc	10.6ft
32ft	0.6fc	14.2ft	1.1fc	14.2ft	1.8fc	14.2ft	2.2fc	14.2ft	2.3fc	14.2ft
40ft	0.4fc	17.7ft	0.7fc	17.7ft	1.1fc	17.7ft	1.4fc	17.7ft	1.5fc	17.7ft
48ft	0.3fc	21.3ft	0.5fc	21.3ft	0.8fc	21.3ft	1.0fc	21.3ft	1.0fc	21.3ft
60ft	0.2fc	26.6ft	0.3fc	26.6ft	0.5fc	26.6ft	0.6fc	26.6ft	0.7fc	26.6ft

At 40° Setting



POWER	3.5W		6.5W		10.5W		13.5W		14.5W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	20.7fc	3.0ft	36.7fc	3.0ft	63.4fc	3.0ft	81.9fc	3.0ft	85.9fc	3.0ft
8ft	5.2fc	6.1ft	9.2fc	6.1ft	15.8fc	6.1ft	20.5fc	6.1ft	21.5fc	6.1ft
12ft	2.3fc	9.1ft	4.1fc	9.1ft	7.0fc	9.1ft	9.1fc	9.1ft	9.5fc	9.1ft
16ft	1.3fc	12.2ft	2.3fc	12.2ft	4.0fc	12.2ft	5.1fc	12.2ft	5.4fc	12.2ft
24ft	0.6fc	18.2ft	1.0fc	18.2ft	1.8fc	18.2ft	2.3fc	18.2ft	2.4fc	18.2ft
32ft	0.3fc	24.3ft	0.6fc	24.3ft	1.0fc	24.3ft	1.3fc	24.3ft	1.3fc	24.3ft
40ft	0.2fc	30.4ft	0.4fc	30.4ft	0.6fc	30.4ft	0.8fc	30.4ft	0.9fc	30.4ft
48ft	0.1fc	36.5ft	0.3fc	36.5ft	0.4fc	36.5ft	0.6fc	36.5ft	0.6fc	36.5ft
60ft	0.1fc	45.6ft	0.2fc	45.6ft	0.3fc	45.6ft	0.4fc	45.6ft	0.4fc	45.6ft

At 60° Setting



POWER	3.5W		6.5W		10.5W		13.5W		14.5W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	13.2fc	4.5ft	24.5fc	4.5ft	33.1fc	4.5ft	46.6fc	4.5ft	53.6fc	4.5ft
8ft	3.3fc	8.9ft	6.1fc	8.9ft	8.3fc	8.9ft	11.7fc	8.9ft	13.4fc	8.9ft
12ft	1.5fc	13.4ft	2.7fc	13.4ft	3.7fc	13.4ft	5.2fc	13.4ft	6.0fc	13.4ft
16ft	0.8fc	17.9ft	1.5fc	17.9ft	2.1fc	17.9ft	2.9fc	17.9ft	3.4fc	17.9ft
24ft	0.4fc	26.8ft	0.7fc	26.8ft	0.9fc	26.8ft	1.3fc	26.8ft	1.5fc	26.8ft
32ft	0.2fc	35.8ft	0.4fc	35.8ft	0.5fc	35.8ft	0.7fc	35.8ft	0.8fc	35.8ft
40ft	0.1fc	44.7ft	0.2fc	44.7ft	0.3fc	44.7ft	0.5fc	44.7ft	0.5fc	44.7ft
48ft	0.1fc	53.7ft	0.2fc	53.7ft	0.2fc	53.7ft	0.3fc	53.7ft	0.4fc	53.7ft
60ft	0.1fc	67.1ft	0.1fc	67.1ft	0.1fc	67.1ft	0.2fc	67.1ft	0.2fc	67.1ft

LANDSCAPE

MINI ACCENT 12V PHOTOMETRICS

At 10° Setting



POWER	1W		2W		4W		6W		7W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	83.1fc	0.6ft	122.8fc	0.6ft	181.0fc	0.6ft	244.1fc	0.6ft	274.9fc	0.6ft
8ft	20.8fc	1.2ft	30.7fc	1.2ft	45.3fc	1.2ft	61.0fc	1.2ft	68.7fc	1.2ft
12ft	9.2fc	1.8ft	13.6fc	1.8ft	20.1fc	1.8ft	27.1fc	1.8ft	30.5fc	1.8ft
16ft	5.2fc	2.3ft	7.7fc	2.3ft	11.3fc	2.3ft	15.3fc	2.3ft	17.2fc	2.3ft
24ft	2.3fc	3.5ft	3.4fc	3.5ft	5.0fc	3.5ft	6.8fc	3.5ft	7.6fc	3.5ft
32ft	1.3fc	4.7ft	1.9fc	4.7ft	2.8fc	4.7ft	3.8fc	4.7ft	4.3fc	4.7ft
40ft	0.8fc	5.9ft	1.2fc	5.9ft	1.8fc	5.9ft	2.4fc	5.9ft	2.7fc	5.9ft
48ft	0.6fc	7.0ft	0.9fc	7.0ft	1.3fc	7.0ft	1.7fc	7.0ft	1.9fc	7.0ft
60ft	0.4fc	8.8ft	0.5fc	8.8ft	0.8fc	8.8ft	1.1fc	8.8ft	1.2fc	8.8ft

At 25° Setting



POWER	1W		2W		4W		6W		7W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	22.8fc	1.9ft	36.0fc	1.9ft	52.7fc	1.9ft	71.1fc	1.9ft	76.8fc	1.9ft
8ft	5.7fc	3.7ft	9.0fc	3.7ft	13.2fc	3.7ft	17.8fc	3.7ft	19.2fc	3.7ft
12ft	2.5fc	5.6ft	4.0fc	5.6ft	5.9fc	5.6ft	7.9fc	5.6ft	8.5fc	5.6ft
16ft	1.4fc	7.4ft	2.2fc	7.4ft	3.3fc	7.4ft	4.4fc	7.4ft	4.8fc	7.4ft
24ft	0.6fc	11.1ft	1.0fc	11.1ft	1.5fc	11.1ft	2.0fc	11.1ft	2.1fc	11.1ft
32ft	0.4fc	14.8ft	0.6fc	14.8ft	0.8fc	14.8ft	1.1fc	14.8ft	1.2fc	14.8ft
40ft	0.2fc	18.5ft	0.4fc	18.5ft	0.5fc	18.5ft	0.7fc	18.5ft	0.8fc	18.5ft
48ft	0.2fc	22.3ft	0.2fc	22.3ft	0.4fc	22.3ft	0.5fc	22.3ft	0.5fc	22.3ft
60ft	0.1fc	27.8ft	0.2fc	27.8ft	0.2fc	27.8ft	0.3fc	27.8ft	0.3fc	27.8ft

At 40° Setting



POWER	1W		2W		4W		6W		7W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	13.0fc	3.1ft	20.7fc	3.1ft	27.7fc	3.1ft	39.6fc	3.1ft	42.0fc	3.1ft
8ft	3.3fc	6.1ft	5.2fc	6.1ft	6.9fc	6.1ft	9.9fc	6.1ft	10.5fc	6.1ft
12ft	1.4fc	9.2ft	2.3fc	9.2ft	3.1fc	9.2ft	4.4fc	9.2ft	4.7fc	9.2ft
16ft	0.8fc	12.3ft	1.3fc	12.3ft	1.7fc	12.3ft	2.5fc	12.3ft	2.6fc	12.3ft
24ft	0.4fc	18.4ft	0.6fc	18.4ft	0.8fc	18.4ft	1.1fc	18.4ft	1.2fc	18.4ft
32ft	0.2fc	24.5ft	0.3fc	24.5ft	0.4fc	24.5ft	0.6fc	24.5ft	0.7fc	24.5ft
40ft	0.1fc	30.6ft	0.2fc	30.6ft	0.3fc	30.6ft	0.4fc	30.6ft	0.4fc	30.6ft
48ft	0.1fc	36.8ft	0.1fc	36.8ft	0.2fc	36.8ft	0.3fc	36.8ft	0.3fc	36.8ft
60ft	0.1fc	45.9ft	0.1fc	45.9ft	0.1fc	45.9ft	0.2fc	45.9ft	0.2fc	45.9ft

At 50° Setting



POWER	1W		2W		4W		6W		7W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	9.0fc	3.9ft	12.3fc	3.9ft	16.9fc	3.9ft	25.0fc	3.9ft	29.8fc	3.9ft
8ft	2.3fc	7.7ft	3.1fc	7.7ft	4.2fc	7.7ft	6.2fc	7.7ft	7.4fc	7.7ft
12ft	1.0fc	11.6ft	1.4fc	11.6ft	1.9fc	11.6ft	2.8fc	11.6ft	3.3fc	11.6ft
16ft	0.6fc	15.5ft	0.8fc	15.5ft	1.1fc	15.5ft	1.6fc	15.5ft	1.9fc	15.5ft
24ft	0.3fc	23.2ft	0.3fc	23.2ft	0.5fc	23.2ft	0.7fc	23.2ft	0.8fc	23.2ft
32ft	0.1fc	30.9ft	0.2fc	30.9ft	0.3fc	30.9ft	0.4fc	30.9ft	0.5fc	30.9ft
40ft	0.1fc	38.7ft	0.1fc	38.7ft	0.2fc	38.7ft	0.2fc	38.7ft	0.3fc	38.7ft
48ft	0.1fc	46.4ft	0.1fc	46.4ft	0.1fc	46.4ft	0.2fc	46.4ft	0.2fc	46.4ft
60ft	0.0fc	58.0ft	0.1fc	58.0ft	0.1fc	58.0ft	0.1fc	58.0ft	0.1fc	58.0ft

LANDSCAPE

INTERBEAM 12V PHOTOMETRICS

At 20° Setting




POWER	6W	
DISTANCE	FOOT CANDLES	BEAM WIDTH
4ft	107.3fc	1.5ft
8ft	26.8fc	3.0ft
12ft	11.9fc	4.0ft
16ft	6.7fc	5.5ft
24ft	3.0fc	8.5ft
32ft	1.7fc	11.5ft
40ft	1.1fc	14.0ft
48ft	0.7fc	17.0ft
60ft	0.5fc	20.0ft

At 35° Setting



POWER	6W	
DISTANCE	FOOT CANDLES	BEAM WIDTH
4ft	61.9fc	2.5ft
8ft	15.5fc	5.0ft
12ft	2.7fc	6.4ft
16ft	6.9fc	7.5ft
24ft	3.9fc	10.0ft
32ft	1.7fc	15.0ft
40ft	1.0fc	20.0ft
48ft	0.4fc	30.5ft
60ft	0.3fc	38.0ft

At 60° Setting



POWER	6W	
DISTANCE	FOOT CANDLES	BEAM WIDTH
4ft	34.4fc	4.5ft
8ft	8.6fc	9.0ft
12ft	3.8fc	14.0ft
16ft	2.2fc	18.5ft
24ft	1.0fc	27.5ft
32ft	0.5fc	37.0ft
40ft	0.3fc	46.0ft
48ft	0.2fc	55.5ft
60ft	0.2fc	69.5ft

LANDSCAPE

3" INGROUND 12V PHOTOMETRICS

At 15° Setting	POWER	1W		2W		7W		13W		14W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	47.2fc	1.1ft	75.8fc	1.1ft	165.3fc	1.1ft	236.2fc	1.1ft	283.4fc	1.1ft
	8ft	11.8fc	2.1ft	18.9fc	2.1ft	41.3fc	2.1ft	59.0fc	2.1ft	70.9fc	2.1ft
	12ft	5.2fc	3.2ft	8.4fc	3.2ft	18.4fc	3.2ft	26.2fc	3.2ft	31.5fc	3.2ft
	16ft	3.0fc	4.2ft	4.7fc	4.2ft	10.3fc	4.2ft	14.8fc	4.2ft	17.7fc	4.2ft
	24ft	1.3fc	6.3ft	2.1fc	6.3ft	4.6fc	6.3ft	6.6fc	6.3ft	7.9fc	6.3ft
	32ft	0.7fc	8.4ft	1.2fc	8.4ft	2.6fc	8.4ft	3.7fc	8.4ft	4.4fc	8.4ft
	40ft	0.5fc	10.5ft	0.8fc	10.5ft	1.7fc	10.5ft	2.4fc	10.5ft	2.8fc	10.5ft
	48ft	0.3fc	12.6ft	0.5fc	12.6ft	1.1fc	12.6ft	1.6fc	12.6ft	2.0fc	12.6ft
	60ft	0.2fc	15.8ft	0.3fc	15.8ft	0.7fc	15.8ft	1.0fc	15.8ft	1.3fc	15.8ft

At 30° Setting	POWER	1W		2W		7W		13W		14W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	19.4fc	2.1ft	38.8fc	2.1ft	68.0fc	2.1ft	97.1fc	2.1ft	116.6fc	2.1ft
	8ft	4.9fc	4.3ft	9.7fc	4.3ft	17.0fc	4.3ft	24.3fc	4.3ft	29.1fc	4.3ft
	12ft	2.2fc	6.4ft	4.3fc	6.4ft	7.6fc	6.4ft	10.8fc	6.4ft	13.0fc	6.4ft
	16ft	1.2fc	8.6ft	2.4fc	8.6ft	4.3fc	8.6ft	6.1fc	8.6ft	7.3fc	8.6ft
	24ft	0.5fc	12.9ft	1.1fc	12.9ft	1.9fc	12.9ft	2.7fc	12.9ft	3.2fc	12.9ft
	32ft	0.3fc	17.1ft	0.6fc	17.1ft	1.1fc	17.1ft	1.5fc	17.1ft	1.8fc	17.1ft
	40ft	0.2fc	21.4ft	0.4fc	21.4ft	0.7fc	21.4ft	1.0fc	21.4ft	1.2fc	21.4ft
	48ft	0.1fc	25.7ft	0.3fc	25.7ft	0.5fc	25.7ft	0.7fc	25.7ft	0.8fc	25.7ft
	60ft	0.1fc	32.2ft	0.2fc	32.2ft	0.3fc	32.2ft	0.4fc	32.2ft	0.5fc	32.2ft

At 45° Setting	POWER	1W		2W		7W		13W		14W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	10.9fc	3.3ft	21.8fc	3.3ft	38.1fc	3.3ft	54.4fc	3.3ft	65.3fc	3.3ft
	8ft	2.7fc	6.6ft	5.4fc	6.6ft	9.5fc	6.6ft	13.6fc	6.6ft	16.3fc	6.6ft
	12ft	1.2fc	9.9ft	2.4fc	9.9ft	4.2fc	9.9ft	6.0fc	9.9ft	7.3fc	9.9ft
	16ft	0.7fc	13.3ft	1.4fc	13.3ft	2.4fc	13.3ft	3.4fc	13.3ft	4.1fc	13.3ft
	24ft	0.3fc	19.9ft	0.6fc	19.9ft	1.1fc	19.9ft	1.5fc	19.9ft	1.8fc	19.9ft
	32ft	0.2fc	26.5ft	0.3fc	26.5ft	0.6fc	26.5ft	0.9fc	26.5ft	1.0fc	26.5ft
	40ft	0.1fc	33.1ft	0.2fc	33.1ft	0.4fc	33.1ft	0.5fc	33.1ft	0.7fc	33.1ft
	48ft	0.1fc	39.8ft	0.2fc	39.8ft	0.3fc	39.8ft	0.4fc	39.8ft	0.5fc	39.8ft
	60ft	0.0fc	49.7ft	0.1fc	49.7ft	0.2fc	49.7ft	0.2fc	49.7ft	0.3fc	49.7ft

At 60° Setting	POWER	1W		2W		7W		13W		14W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	7.3fc	4.6ft	14.5fc	4.6ft	25.4fc	4.6ft	36.3fc	4.6ft	43.6fc	4.6ft
	8ft	1.8fc	9.2ft	3.6fc	9.2ft	6.4fc	9.2ft	9.1fc	9.2ft	10.9fc	9.2ft
	12ft	0.8fc	13.9ft	1.6fc	13.9ft	2.8fc	13.9ft	4.0fc	13.9ft	4.8fc	13.9ft
	16ft	0.5fc	18.5ft	0.9fc	18.5ft	1.6fc	18.5ft	2.3fc	18.5ft	2.7fc	18.5ft
	24ft	0.2fc	27.7ft	0.4fc	27.7ft	0.7fc	27.7ft	1.0fc	27.7ft	1.2fc	27.7ft
	32ft	0.1fc	37.0ft	0.2fc	37.0ft	0.4fc	37.0ft	0.6fc	37.0ft	0.7fc	37.0ft
	40ft	0.1fc	46.2ft	0.1fc	46.2ft	0.3fc	46.2ft	0.4fc	46.2ft	0.4fc	46.2ft
	48ft	0.1fc	55.4ft	0.1fc	55.4ft	0.2fc	55.4ft	0.3fc	55.4ft	0.3fc	55.4ft
	60ft	0.0fc	69.3ft	0.1fc	69.3ft	0.1fc	69.3ft	0.2fc	69.3ft	0.2fc	69.3ft

LANDSCAPE

3" INGROUND 120V PHOTOMETRICS

At 15° Setting	POWER	3W		5.5W		8.5W		10.5W		11.5W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	44.4fc	1.1ft	81.1fc	1.1ft	125.4fc	1.1ft	154.9fc	1.1ft	169.6fc	1.1ft
	8ft	11.1fc	2.1ft	20.3fc	2.1ft	31.3fc	2.1ft	38.7fc	2.1ft	42.4fc	2.1ft
	12ft	4.9fc	3.2ft	9.0fc	3.2ft	13.9fc	3.2ft	17.2fc	3.2ft	18.8fc	3.2ft
	16ft	2.8fc	4.2ft	5.1fc	4.2ft	7.8fc	4.2ft	9.7fc	4.2ft	10.6fc	4.2ft
	24ft	1.2fc	6.3ft	2.3fc	6.3ft	3.5fc	6.3ft	4.3fc	6.3ft	4.7fc	6.3ft
	32ft	0.7fc	8.4ft	1.3fc	8.4ft	2.0fc	8.4ft	2.4fc	8.4ft	2.7fc	8.4ft
	40ft	0.4fc	10.5ft	0.8fc	10.5ft	1.3fc	10.5ft	1.5fc	10.5ft	1.7fc	10.5ft
	48ft	0.3fc	12.6ft	0.6fc	12.6ft	0.9fc	12.6ft	1.1fc	12.6ft	1.2fc	12.6ft
	60ft	0.2fc	15.8ft	0.4fc	15.8ft	0.6fc	15.8ft	0.7fc	15.8ft	0.8fc	15.8ft

At 30° Setting	POWER	15W		22W		26W		30W		33W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	24.5fc	2.1ft	45.1fc	2.1ft	69.6fc	2.1ft	86.0fc	2.1ft	94.2fc	2.1ft
	8ft	6.1fc	4.3ft	11.3fc	4.3ft	17.4fc	4.3ft	21.5fc	4.3ft	23.5fc	4.3ft
	12ft	2.7fc	6.4ft	5.0fc	6.4ft	7.7fc	6.4ft	9.6fc	6.4ft	10.5fc	6.4ft
	16ft	1.5fc	8.6ft	2.8fc	8.6ft	4.4fc	8.6ft	5.4fc	8.6ft	5.9fc	8.6ft
	24ft	0.7fc	12.9ft	1.3fc	12.9ft	1.9fc	12.9ft	2.4fc	12.9ft	2.6fc	12.9ft
	32ft	0.4fc	17.1ft	0.7fc	17.1ft	1.1fc	17.1ft	1.3fc	17.1ft	1.5fc	17.1ft
	40ft	0.2fc	21.4ft	0.5fc	21.4ft	0.7fc	21.4ft	0.9fc	21.4ft	0.9fc	21.4ft
	48ft	0.2fc	25.7ft	0.3fc	25.7ft	0.5fc	25.7ft	0.6fc	25.7ft	0.7fc	25.7ft
	60ft	0.1fc	32.2ft	0.2fc	32.2ft	0.3fc	32.2ft	0.4fc	32.2ft	0.4fc	32.2ft

At 45° Setting	POWER	15W		22W		26W		30W		33W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	16.2fc	3.3ft	29.9fc	3.3ft	46.2fc	3.3ft	57.0fc	3.3ft	62.5fc	3.3ft
	8ft	4.1fc	6.6ft	7.5fc	6.6ft	11.5fc	6.6ft	14.3fc	6.6ft	15.6fc	6.6ft
	12ft	1.8fc	9.9ft	3.3fc	9.9ft	5.1fc	9.9ft	6.3fc	9.9ft	6.9fc	9.9ft
	16ft	1.0fc	13.3ft	1.9fc	13.3ft	2.9fc	13.3ft	3.6fc	13.3ft	3.9fc	13.3ft
	24ft	0.5fc	19.9ft	0.8fc	19.9ft	1.3fc	19.9ft	1.6fc	19.9ft	1.7fc	19.9ft
	32ft	0.3fc	26.5ft	0.5fc	26.5ft	0.7fc	26.5ft	0.9fc	26.5ft	1.0fc	26.5ft
	40ft	0.2fc	33.1ft	0.3fc	33.1ft	0.5fc	33.1ft	0.6fc	33.1ft	0.6fc	33.1ft
	48ft	0.1fc	39.8ft	0.2fc	39.8ft	0.3fc	39.8ft	0.4fc	39.8ft	0.4fc	39.8ft
	60ft	0.1fc	49.7ft	0.1fc	49.7ft	0.2fc	49.7ft	0.3fc	49.7ft	0.3fc	49.7ft

At 60° Setting	POWER	15W		22W		26W		30W		33W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	10.6fc	4.6ft	19.5fc	4.6ft	30.1fc	4.6ft	37.1fc	4.6ft	40.7fc	4.6ft
	8ft	2.6fc	9.2ft	4.9fc	9.2ft	7.5fc	9.2ft	9.3fc	9.2ft	10.2fc	9.2ft
	12ft	1.2fc	13.9ft	2.2fc	13.9ft	3.3fc	13.9ft	4.1fc	13.9ft	4.5fc	13.9ft
	16ft	0.7fc	18.5ft	1.2fc	18.5ft	1.9fc	18.5ft	2.3fc	18.5ft	2.5fc	18.5ft
	24ft	0.3fc	27.7ft	0.5fc	27.7ft	0.8fc	27.7ft	1.0fc	27.7ft	1.1fc	27.7ft
	32ft	0.2fc	37.0ft	0.3fc	37.0ft	0.5fc	37.0ft	0.6fc	37.0ft	0.6fc	37.0ft
	40ft	0.1fc	46.2ft	0.2fc	46.2ft	0.3fc	46.2ft	0.4fc	46.2ft	0.4fc	46.2ft
	48ft	0.1fc	55.4ft	0.1fc	55.4ft	0.2fc	55.4ft	0.3fc	55.4ft	0.3fc	55.4ft
	60ft	0.0fc	69.3ft	0.1fc	69.3ft	0.1fc	69.3ft	0.2fc	69.3ft	0.2fc	69.3ft

HARDSCAPE PHOTOMETRICS

7032

	Distance from Fixture				
Mounting Height	0	1'	2'	3'	4'
12"	12.73fc	2.88fc	0.42fc	0.09fc	0.03fc
24"	3.16fc	1.95fc	0.73fc	0.26fc	0.10fc
36"	1.39fc	1.11fc	0.65fc	0.33fc	0.16fc

7062

	Distance from Fixture				
Mounting Height	0	1'	2'	3'	4'
12"	36.23fc	8.55fc	1.21fc	0.28fc	0.09fc
24"	9.29fc	5.76fc	2.14fc	0.75fc	0.30fc
36"	4.18fc	3.34fc	1.86fc	0.93fc	0.47fc

7122

	Distance from Fixture				
Mounting Height	0	1'	2'	3'	4'
12"	64.85fc	15.61fc	2.42fc	0.57fc	0.19fc
24"	16.35fc	10.31fc	3.90fc	1.49fc	0.61fc
36"	7.25fc	5.85fc	3.44fc	1.77fc	0.91fc

7182

	Distance from Fixture				
Mounting Height	0	1'	2'	3'	4'
12"	90.67fc	22.67fc	3.34fc	0.76fc	0.24fc
24"	23.13fc	14.68fc	5.57fc	2.04fc	0.82fc
36"	10.31fc	8.36fc	4.83fc	2.42fc	1.21fc

DECK & PATIO PHOTOMETRICS

3011

	Distance from Fixture						
Mounting Height	0	0.5'	1'	2'	3'	4'	5'
6"	6.79fc	82fc	2.65fc	0.15fc	0.03fc	0.01fc	0.01fc
12"	15fc	39fc	9.9fc	0.42fc	0.09fc	0.03fc	0.02fc
30"	5.79fc	7.21fc	6.35fc	2.17fc	0.43fc	0.14fc	0.06fc

3021

	Distance from Fixture						
Mounting Height	0	0.5'	1'	2'	3'	4'	5'
6"	16fc	74fc	0.92fc	0.04fc	0.01fc	-	-
12"	21fc	38fc	7.29fc	0.18fc	0.03fc	0.01fc	-
30"	5.86fc	7.2fc	5.97fc	1.85fc	0.24fc	0.07fc	0.03fc


3031

	Distance from Fixture						
Mounting Height	0	0.5'	1'	2'	3'	4'	5'
6"	15fc	117fc	1.6fc	0.11fc	0.03fc	0.01fc	0.01fc
12"	15fc	43fc	19fc	0.26fc	0.07fc	0.03fc	0.01fc
30"	5.1fc	7.22fc	7fc	3.95fc	0.49fc	0.09fc	0.04fc

WALL WASH PHOTOMETRICS


FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5021-30	3ft	27.5fc	16.3fc	10.9fc	4.7fc	0.72fc	0.33fc
	4ft	15.6fc	9.6fc	5.9fc	2.7fc	0.40fc	0.18fc
	5ft	10fc	5.9fc	4.0fc	1.3fc	0.26fc	0.12fc
	6ft	6.8fc	4.1fc	2.7fc	1.2fc	0.18fc	0.08fc
	7ft	5fc	3.1fc	2.0fc	0.88fc	0.13fc	0.06fc
	8ft	3.9fc	2.4fc	1.6fc	0.67fc	0.10fc	0.05fc
	9ft	3.1fc	1.8fc	1.2fc	0.54fc	0.08fc	0.04fc
	10ft	2.5fc	1.5fc	0.99fc	0.44fc	0.06fc	0.03fc

5021

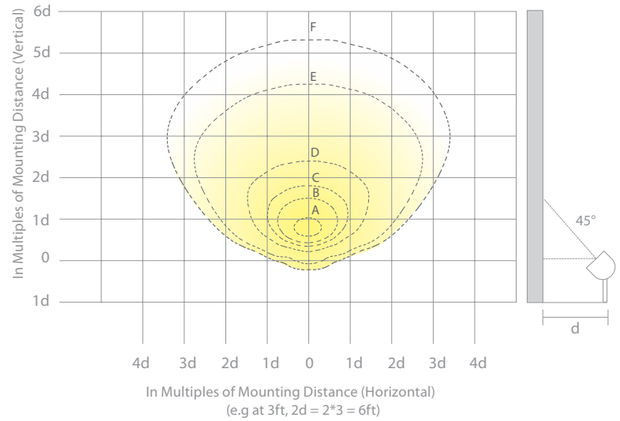


FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5022-30	3ft	27.5fc	16.3fc	10.9fc	4.7fc	0.72fc	0.33fc
	4ft	15.6fc	9.6fc	5.9fc	2.7fc	0.40fc	0.18fc
	5ft	10fc	5.9fc	4.0fc	1.3fc	0.26fc	0.12fc
	6ft	6.8fc	4.1fc	2.7fc	1.2fc	0.18fc	0.08fc
	7ft	5fc	3.1fc	2.0fc	0.88fc	0.13fc	0.06fc
	8ft	3.9fc	2.4fc	1.6fc	0.67fc	0.10fc	0.05fc
	9ft	3.1fc	1.8fc	1.2fc	0.54fc	0.08fc	0.04fc
	10ft	2.5fc	1.5fc	0.99fc	0.44fc	0.06fc	0.03fc

5022

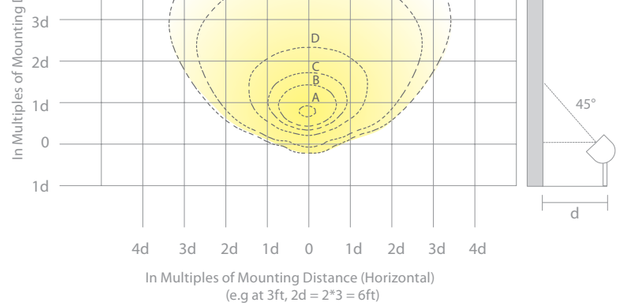

FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5121-30	3ft	27.5fc	16.3fc	10.9fc	4.7fc	0.72fc	0.33fc
	4ft	15.6fc	9.6fc	5.9fc	2.7fc	0.40fc	0.18fc
	5ft	10fc	5.9fc	4.0fc	1.3fc	0.26fc	0.12fc
	6ft	6.8fc	4.1fc	2.7fc	1.2fc	0.18fc	0.08fc
	7ft	5fc	3.1fc	2.0fc	0.88fc	0.13fc	0.06fc
	8ft	3.9fc	2.4fc	1.6fc	0.67fc	0.10fc	0.05fc
	9ft	3.1fc	1.8fc	1.2fc	0.54fc	0.08fc	0.04fc
	10ft	2.5fc	1.5fc	0.99fc	0.44fc	0.06fc	0.03fc

5121

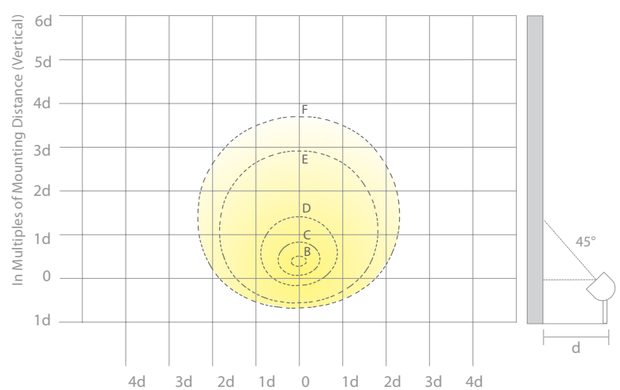


LANDSCAPE

ADJUSTABLE BEAM WALL WASH PHOTOMETRICS


FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5221/5222 (4X3)	3ft	27.9fc	11.3fc	5.6fc	1.5fc	0.05fc	0.02fc
	4ft	15.7fc	6.3fc	3.2fc	0.85fc	0.03fc	0.01fc
	5ft	10.1fc	4.1fc	2fc	0.53fc	0.02fc	0.01fc
	6ft	7fc	2.8fc	1.4fc	0.37fc	0.01fc	-
	7ft	5.1fc	2.1fc	1fc	0.28fc	0.01fc	-
	8ft	4fc	1.6fc	0.79fc	0.21fc	0.01fc	-
	9ft	3.1fc	1.3fc	0.62fc	0.17fc	0.01fc	-
	10ft	2.5fc	1.0fc	0.51fc	0.14fc	-	-

5221/5222
NEMA 4X3

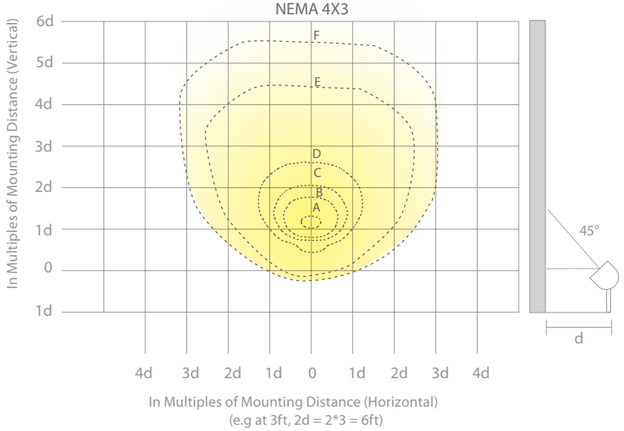


FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5221/5222 (5X4)	3ft	28.9fc	13.4fc	7.9fc	3fc	0.36fc	0.14fc
	4ft	16.3fc	7.5fc	4.4fc	1.7fc	0.20fc	0.08fc
	5ft	10.4fc	4.8fc	2.8fc	1.1fc	0.13fc	0.05fc
	6ft	7.3fc	3.4fc	2.0fc	0.75fc	0.09fc	0.04fc
	7ft	5.3fc	2.5fc	1.5fc	0.55fc	0.07fc	0.03fc
	8ft	4.1fc	1.9fc	1.1fc	0.42fc	0.05fc	0.02fc
	9ft	3.2fc	1.5fc	0.87fc	0.33fc	0.04fc	0.02fc
	10ft	2.6fc	1.2fc	0.71fc	0.27fc	0.03fc	0.01fc

5221/5222
NEMA 5X4

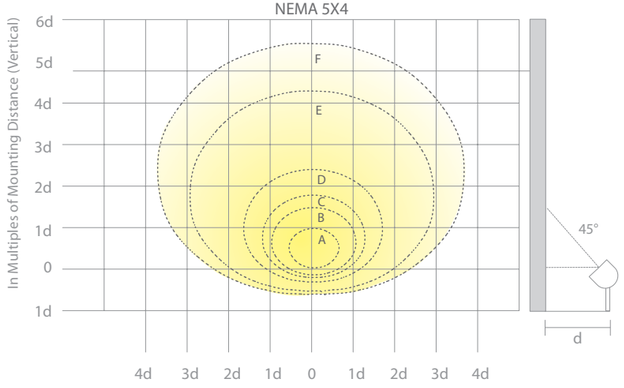

FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5221/5222 (6X5)	3ft	28.9fc	13.6fc	8.8fc	4.1fc	0.70fc	0.32fc
	4ft	16.3fc	7.7fc	5.0fc	2.3fc	0.39fc	0.18fc
	5ft	10.4fc	4.9fc	3.2fc	1.5fc	0.25fc	0.12fc
	6ft	7.2fc	3.4fc	2.2fc	1.0fc	0.18fc	0.08fc
	7ft	5.3fc	2.5fc	1.6fc	0.75fc	0.13fc	0.06fc
	8ft	4.1fc	1.9fc	1.2fc	0.58fc	0.10fc	0.05fc
	9ft	3.2fc	1.5fc	0.98fc	0.45fc	0.08fc	0.04fc
	10ft	2.6fc	1.2fc	0.79fc	0.37fc	0.06fc	0.03fc

5221/5222
NEMA 6X5

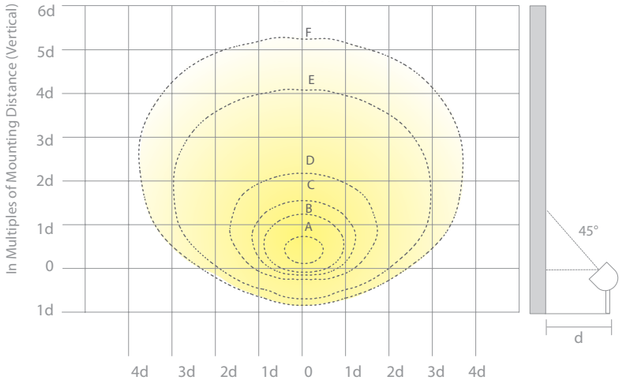

Alphanumeric index

1000-CON-PVC 32
1011 32
1021 32
1031 32
1041 32
1051 32
1061 32
2000-CON-PVC 34
2011 32
2021 32
2031 30
2041 94
2051 34
2061 92
2071 34
2081 33
2091 34
2101 34
2111 34
2121 34
2131 34
2501 40
2511 40
2541 40
2571 40
2591 40
3011 90
3021 90
3031 90
3611 38
3811 36
3821 36
3831 36
4011 92
4021 92
4031 95
4051 96
4071 96
4091 95
4501 94
4901 94
5000-GM 6, 8, 10,14,16,18, 20, 90,98
5000-LCO 18
5000-SCP 6, 8, 12,14, 16, 18
20, 42, 44, 46, 48, 50, 52, 54
56 ,58, 60, 61, 64, 66, 98
5000-TCL 6, 8, 10, 14,16, 20, 98
5000-TCP 6, 8, 10, 14,16, 18, 20, 98
5000-TST-BK 8, 10,14,16, 20, 98
5000-X 14, 20
5010-LSHR 8, 98
5010-SNOOT 8, 98
5011 8
5011-CC 25
5012 ..... 8, 99
5021 18
5021-CC 25
5022 ..... 18, 98
5030-GRD 24
5030-PIP-PVC 24
5031 24
5031-CC 25
5032 ..... 24, 99
5111 10
5111-LSHR 10, 12, 14, 90
5111-SNOOT 10, 14, 90
5121 20
5211 6
5211-LSHR 6, 90
5211-SNOOT 6, 90
5212 6
5311 14
5511 28
6011 66
6021 56
6031 64
6041 48
6042 48
6051 50
6053 50
6061 58
6071 60
6081 52
6091 62
6111 12
6211 12

Alphanumeric index

6311 54
6321 54
6401 46
6611, 6612, 6613 70
6631, 6633, 6632 72
6621, 6622, 6623 76
6641, 6642, 6643 78
7032 44
7062 44
7122 44
7182 44
8000 82
8001 82
8002 82
8003 82
8011 82
8051 82
8101 82
9000-MTI-WT 97
9000-PCH-GY 97
9000-PCR-GY 97
9000-SP9 ..... 6, 8, 10, 14, 18, 20, 42, 44, 46
48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 98
9000-ST9 .. 6, 8, 10, 14, 18, 20, 42, 44, 46, 48, 50
52, 54, 56, 58, 60, 62, 64, 66, 98
9000-ST14 ..... 6, 8, 10, 14, 18, 20, 42, 44, 46
48,50, 52, 54, 56, 58, 60, 62, 64, 66, 90
9020-WNT 28, 97
9075-TRN-SS 97
9100 97
9150-TRN-SS 97
9250 97
9300-TRN-SS 97
9500 97
9600-TRN-SS 97

A

ARCHETYPE 77, 78, 79, 80

C

CHAMBER 71, 72, 73, 74

E

EN-O24100-RB2-T 86, 88
EN-OD24100-RB2-T 86

F

FM-W2505 111
FM-W2510 111
FM-W2605 113
FM-W2612 113

L

LED-TCO 88
LED-TO24 ..... 86, 88
LED-TO24-C1 ..... 86, 88
LED-TO24-C2 ..... 86, 88
LED-TO24-C3 ..... 86, 88
LED-TO24-CH5 ..... 86, 88
LED-TO24-CM 86, 88
LED-TO24-CS 86, 88
LED-TO24-EC 86, 88
LED-TO24-IC 86, 88
LED-TO24-IC6 ..... 86, 88
LED-TO24-IC6-RGB 86, 88
LED-TO24-IC12 ..... 86, 88
LED-TO24-IC12-RGB 86, 88
LED-TO24-IC72 ..... 86, 88
LED-TO24-IC72-RGB 86, 88
LED-TO24-IC120 ..... 86, 88
LED-TO24-IC120-RGB 86, 88
LED-TO24-MW 88
LED-TO24-MW60 88
LED-TO24-MW120 88
LED-TO24-SW 88
LED-TO24-SW60 88
LED-TO24-SW120 88
LED-TO24-WS 88
LED-TO24-X 88
LED-TO24-X-RGB 88
LED-TO24-Y 88
LED-TO24-Y-RGB 88
LENS-2X3 ..... 20, 90
LENS-2X4 ..... 18, 98
LENS-16 ..... 10, 98
LENS-20 ..... 8, 98
LENS-25 ..... 6, 24, 98

Alphanumeric index

M

M6000-STAKE 6, 8, 10, 14, 18, 70, 72, 76, 78
M6610-CON-KIT 70
M6620-CON-KIT 72
M6630-CON-KIT 76
M6640-CON-KIT 78
MS-120 ..... 104, 105, 109, 110

P

PC-120 ..... 104, 105, 109, 110
PD-W2605 113
PD-W15918 80
PD-W15928 80
PD-W48616 74
PM-W48620 74
PS-24DC-U96R-WE 84
PS-24DC-U96P-WE 84

T

T24-OD1 84
T24-OD2 84
T24-WE-BO12-BK 84
T24-WE-BO72-BK 84
T24-WE-C3 84
T24-WE-CH5 84
T24-WE-EX2-006-BK 84
T24-WE-EC 84
T24-WE-IC-002-BK 84
T24-WE-IC-006-BK 84
T24-WE-IC-012-BK 84
T24-WE-IC-036-BK 84
T24-WE-IC-072-BK 84
T24-WE-IC-144-BK 84
T24-WE-IC-240-BK 84
T24-WE-SI-45 84
T24-WE-Y-BK 84

W

WL-5105 102
WL-5205 102
WL-LED100 92
WL-LED120 96
WL-LED130 96
WL-LED140 95
WL-LED200 92
WL-LED210 95
WL-LED220 96
WP-LED119 109
WP-LED127 109
WP-LED135 109
WP-LED219 110
WP-LED227 110
WP-LED235 104
WP-LED254 104
WP-LED415 105
WP-LED430 106
WP-LED514 108
WP-LED529 107
WS-W2504 112
WS-W2505 112
WS-W2509 112
WS-W2510 112
WS-W2604 114
WS-W2605 114
WS-W2609 114
WS-W2610 114
WS-W13918 79
WS-W15912 79
WS-W15918 79
WS-W15924 79
WS-W20506 112
WS-W48612 73
WS-W48616 73
WS-W48620 73
WS-W48625 73



Headquarters
Tel: 800.526.2588
Fax: 800.526.2585

East Factory
44 Harbor Park Drive
Port Washington, NY 11050

Central Factory
1600 Distribution Ct,
Lithia Springs, GA 30122

West Factory
1750 Archibald Ave
Ontario, CA 91761

Custom Orders
customs@waclighting.com
Consult with us to take advantage of our custom capabilities.



WAC

LANDSCAPE LIGHTING

Many LED luminaires within are patented. WAC Landscape Lighting technology is protected by several patents and pending patent applications, including U.S. Patent Nos. 9,784,440, 10,190,757, 10,208,935, 10,323,832, 10,330,294, 10,465,888, 10,571,101, 10,598,358, 10,920,971, 10,928,045, 10,941,924, 10,962,209, 10,969,088, 10,989,401
WAC Lighting will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe its patents are being infringed. WAC Lighting retains the right to modify the design of its products at any time as part of the company's continuous improvement program. Please refer to our website for the latest product specifications. Copyright 2021©

800.526.2588 | waclandscapelighting.com