

2024



WAC LIMITED®





WAC LIMITED

Maximize desirability and minimize expenses with WAC LIMITED products designed to accommodate single-family or multi-family residential, apartment living, and large-scale hospitality projects.

A well-lit space elevates the perceived value of all finishes used and increases functionality of spaces while also minimizing maintenance and energy expenses. Dollar for dollar, quality lighting improves occupant experiences more than any other construction material. Our wide array of products covers kitchens, baths, bedrooms, closets, hallways, living rooms, laundry rooms and garages—all designed for safety and proven to last.

We also understand that installation costs are a major part of the value equation. As such, WAC LIMITED luminaires are engineered to reduce these costs. Premium lighting products and designs for residential and hospitality applications can be found in the WAC Lighting and dweLED product lines.





WAC LIMITED

Maximize desirability and minimize expenses with WAC LIMITED products designed to accommodate single-family or multi-family residential, apartment living, and large-scale hospitality projects.

A well-lit space elevates the perceived value of all finishes used and increases functionality of spaces while also minimizing maintenance and energy expenses. Dollar for dollar, quality lighting improves occupant experiences more than any other construction material. Our wide array of products covers kitchens, baths, bedrooms, closets, hallways, living rooms, laundry rooms and garages—all designed for safety and proven to last.

We also understand that installation costs are a major part of the value equation. As such, WAC LIMITED luminaires are engineered to reduce these costs. Premium lighting products and designs for residential and hospitality applications can be found in the WAC Lighting and dweLED product lines.

WAC LIMITED®

DISC II LED FAN



F-033L-BN




An energy efficient ceiling fan with a quiet DC motor and LED luminaire make Disc II 70% more efficient than conventional fans.

DISC II LED FAN



CALIFORNIA
JA8
TITLE 24

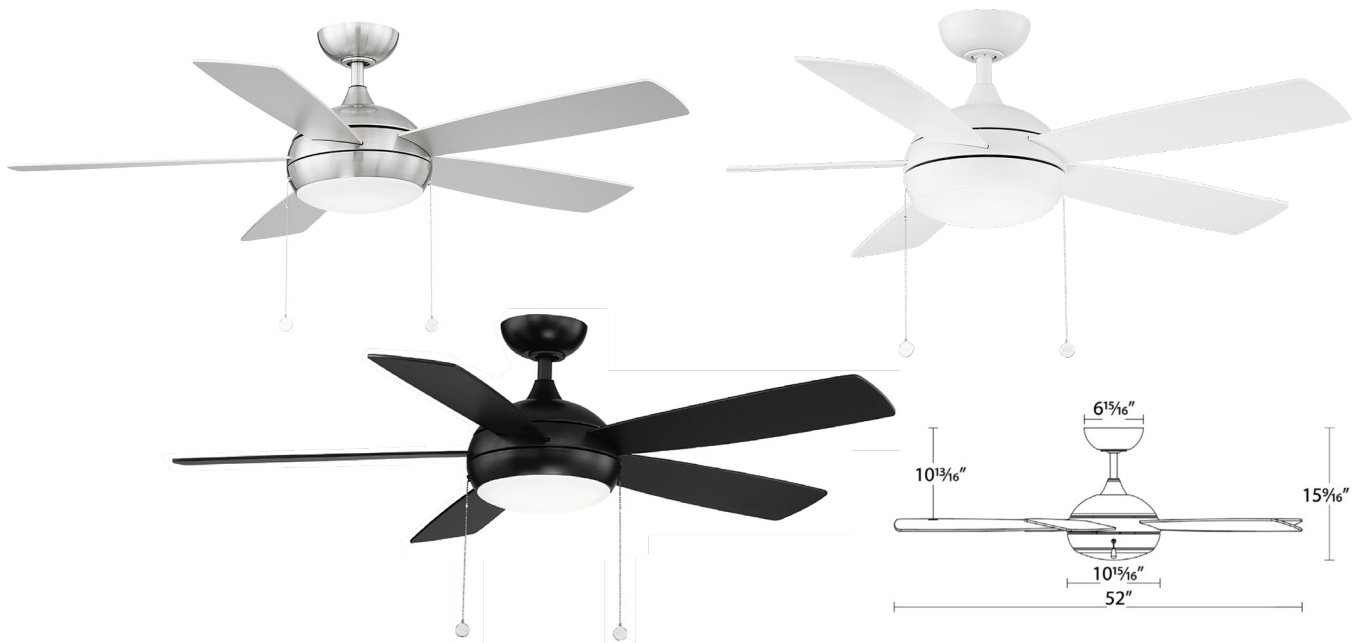

A streamlined look suited for bedrooms and living rooms. The sweep of the 52" blades efficiently creates a cooling effect and complements the silent DC motor.

Blade:	12° pitch, 52" sweep, plywood
Downrod:	¾" W x 4 ½" H included
Mounting Slope:	Up to 30° standard, 45° with optional Slope Ceiling Kit
Lead Wire:	80"
Hanging Weight:	18 lbs
Lumens/Delivered Lumens:	2100/1410
Total Power:	51W
LED Power:	25W
CRI:	90
Color Temperature:	3000K
LED Rated Life:	50,000 hrs
LED Dimming:	100%-10% ELV/TRIAC (Refer to online product page for dimming compatibility)

- 3-speed 120 x 15 DC motor for quiet and powerful operation
- Precision balanced blades for wobble-free operation
- Pull-chain operated and reversible from housing
- Fan and LED module are Energy Star® certified
- Memory module—fan will recall last speed setting if switched off

Model		Housing	Blade
F-033L	BN	Brushed Nickel	Brushed Nickel
	MB	Matte Black	Matte Black
	MW	Matte White	Matte White

Example: **F-033L-BN**


ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	25W	17W
Airflow	5,032 CFM	3,964 CFM
Energy Costs*	-	\$5/yr
Efficiency	237 CFM/W	237 CFM/W

*Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day

ACCESSORIES *sold separately*

DC-1 Coupler		BN	Brushed Nickel
		MB	Matte Black
		MW	Matte White
SC- Slope Ceiling Kit		BN	Brushed Nickel
		MB	Matte Black
		MW	Matte White
DR- Downrods	12"	BN	Brushed Nickel
	18"		
	24"		
	36"		
	48"		
	60"		
	72"		
		MB	Matte Black
		MW	Matte White

ATLANTIS LED FAN

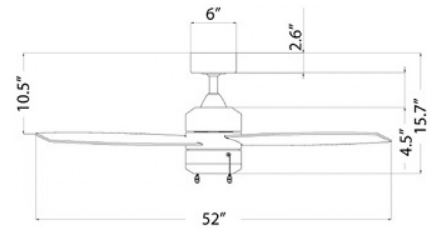

ATLANTIS offers a Damp rated, high-value fan with three speed options and can be reversed from the housing. Enhance your interiors with the gently-curved shape of this elegant fan.

Blade:	13° pitch, 52" sweep, plywood
Downrod:	¾" W x 6" H included
Mounting Slope:	Up to 30° standard, 45° with optional Slope Ceiling Kit
Lead Wire:	80"
Hanging Weight:	18 lbs
Lumens/Delivered Lumens:	1600/708
Total Power:	83W
LED Power:	19.5W
CRI:	90
Color Temperature:	3000K
LED Rated Life:	50,000 hrs
LED Dimming:	100%-10% ELV/TRIAC (Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 16 AC motor
- Pull chain operation
- Fan is reversible from housing

Model		Housing	Blade
F-072L	MB MW	Matte Black Matte White	Matte Black Matte White

Example: **F-072L-MB**

ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	63W	40W
Airflow	5,001 CFM	3,717 CFM
Energy Costs*	-	\$11/yr
Efficiency	92 CFM/W	92 CFM/W

*Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day

ACCESSORIES *sold separately*

DC-1 Coupler	MB	Matte Black
	MW	Matte White
SC- Slope Ceiling Kit	MB	Matte Black
	MW	Matte White
DR- Downrods	12"	MB MW Matte Black Matte White
	18"	
	24"	
	36"	
	48"	
	60"	
	72"	

ATLANTIS FLUSH FLUSH MOUNT LED FAN



CALIFORNIA
JA8
TITLE 24



ATLANTIS FLUSH offers a Damp rated, high-value fan with three speed options and can be reversed from the housing. Enhance your interiors with the gently-curved shape of this elegant fan.

Blade:	13° pitch, 52" sweep, plywood
Lead Wire	8"
Hanging Weight:	18 lbs
Lumens/Delivered Lumens:	1600/708
Total Power:	83W
LED Power:	19.5W
CRI:	90
Color Temperature:	3000K
LED Rated Life:	50,000 hrs
LED Dimming:	100%-10% ELV/ TRIAC (Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 16 AC motor
- Pull chain operation
- Fan is reversible from housing

Model		Housing	Blade
F-073L	MB	Matte Black	Matte Black
	MW	Matte White	Matte White

Example: **F-073L-MB**

ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	63W	40W
Airflow	4,116 CFM	3,046 CFM
Energy Costs*	-	\$11/yr
Efficiency	75 CFM/W	75 CFM/W

*Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day




Cut and securely reconnect with ease



Input: 24VDC
Lumens: Up to 300 lm/ft
Rated Life: 50,000 hours


- Cut and re-connectable with secure screw terminal accessories
- May be cut every 2 inches
- Uniform illumination
- Seamless line of light



System	Lumens	Max Run	Wattage	Length	Length Description	Color Temp	CRI	Finish
T24-GE1	100+ lm/ft	40ft (60W), 40 ft (96W)	1.2W/ft	15	15 ft spool (incl. 2 pcs Tape to Tape Connector)	27 2700K	90	WT White
T24-GE2	200+ lm/ft	24ft (60W), 30ft (96W)	2.2W/ft	24	24 ft spool (incl. 4 pcs Tape to Tape Connector)	30 3000K		
T24-GE3	300+ lm/ft	15ft (60W), 24ft (96W)	3.9W/ft	100	100 ft spool (incl. 10 pcs Tape to Tape Connector)	35 3500K		
						40 4000K		

Example: **T24-GE3-15-27WT**

EXAMPLE INSTALLATION FOR WIRELESS AND DMX CONTROL

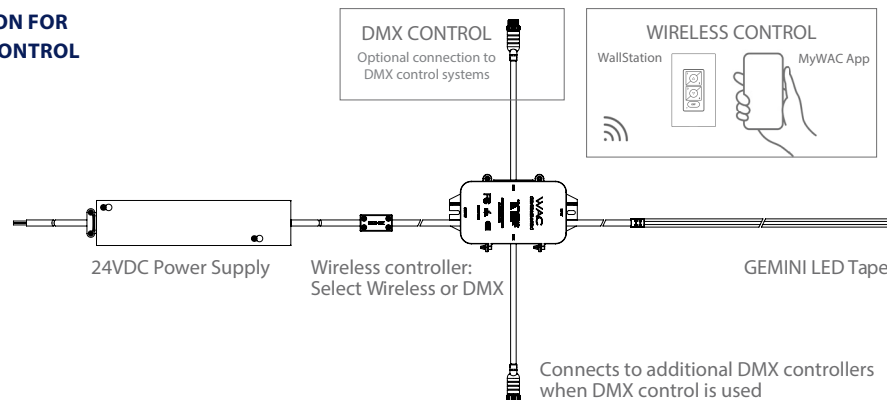

POWER SUPPLY AND CONTROLLER



- ELV Dimming 100%-10%
- 6ft Output lead wires



- TRIAC, ELV Dimming 100%-1%
- Universal Input, ≤ 0.9 pf
- Overload and short circuit protection



- Allows Gemini Tape to be wirelessly controlled through MyWAC app, WallStation, or DMX. Wi-Fi network is required to operate the system.



Model	Dimension	Input	Output	Dimming
EN-BT60-24*	6 1/2" x 2 1/16" x 1 1/4"	120V	24VDC 60W	ELV
EN-BT96-24*	6 1/2" x 2 1/16" x 1 1/4"	120V	24VDC 96W	ELV
PS-24DC-U60R-BT	8 13/16" x 2 1/16" x 1 1/4"	120V-277V	24VDC 60W	ELV/TRIAC
PS-24DC-U96R-BT	8 13/16" x 2 1/16" x 1 1/4"	120V-277V	24VDC 96W	ELV/TRIAC
CTR-WDMX-24VDC	5" x 3 1/2" x 1 1/2"	24VDC	24VDC 90W	MyWAC/ WallStation/ DMX

*Not compatible with wireless controller (CTR-WDMX-24VDC)


ACCESSORIES FOR GEMINI TAPE

Type	Model	Finish
 Tape to Tape Connector Connects tape sections (10 pieces per pack)	T24-BS-MM	CL Clear
 Power to Tape Connector Connects tape sections (10 pieces per pack)	T24-BS-PM	
 L Connector Connects tape sections (2 pieces per pack)	T24-BS-L	
 Flex Y Connector Connects tape sections and power feed Includes LED-T-B (1 pc)	T24-BS-Y	BK Black WT White
 Flex X Connector Connects tape sections and power feed Includes LED-T-B (1 pc)	T24-BS-X	
 Low Voltage Wiring Box Neatly house connections for up to 2 wires	LED-T-B	WT White

Example: **T24-BS-MM-CL**

Type	Model	Finish
 Joiner Cable Extend distance between tape sections	T24-BS-IC-002 T24-BS-IC-006 T24-BS-IC-012 T24-BS-IC-036 T24-BS-IC-072	BK Black WT White
 Extension Cable Extends distance between tape sections and power supply (Includes LED-T-B (1 pc) & screw driver)	T24-BS-EX2-072 T24-BS-EX2-144 T24-BS-EX2-240 T24-BS-EX2-480	

Example: **T24-BS-EX2-240-WT**

Model	Finish	Input/Output	L	W	H	Description
 IR-96-24VACDC-BK IR-96-24VACDC-WT	Black White	24V AC/DC 96W	1 3/8"	3/4"	3/8"	IR (Infrared) sensor switch works by turning the lights on when it becomes unobstructed. Can be surface mounted with bracket provided or double sided adhesive.



INDOOR ALUMINUM CHANNELS



Shallow Aluminum Channel **LED-T-CH4** **5 feet**
Additional End Caps **LED-T-CH4-EC** **2 pcs**

Includes a diffuser, two end caps, four mounting clips and four screws.



Aluminum Channel **LED-T-CH** **5 feet**
Additional End Caps **LED-T-CH-EC** **2 pcs**

Diffuses light from WAC tape
Includes a diffuser, two end caps, and five screws



Deep Aluminum Channel **LED-T-CH1** **5 feet**
Additional End Caps **LED-T-CH1-EC** **2 pcs**

Eliminates visible hot spots
Includes a diffuser, 2 end caps, and 5 screws



45° Angled Aluminum Channel **LED-T-CH2** **5 feet**
Additional End Caps **LED-T-CH2-EC** **2 pcs**

Includes a diffuser, 2 end caps, and 5 screws



LED-T-CL3-PT

Includes 2 pieces, four screws. Use to mount Aluminum Channel



Spot Optic - Deep Channel* **LED-T-CH3-SP** **5 feet**
Additional End Caps **LED-T-CH1-EC** **2 pcs**

Eliminates visible hot spots
Includes a diffuser, 2 end caps, and 5 screws

*Spot 9° Beam Angle



Flood Optic - Deep Channel* **LED-T-CH3-FL** **5 feet**
Additional End Caps **LED-T-CH1-EC** **2 pcs**

Eliminates visible hot spots
Includes a diffuser, 2 end caps, and 5 screws

*Flood 54° Beam Angle



Wide Flood Optic - Deep Channel* **LED-T-CH3-WF** **5 feet**
Additional End Caps **LED-T-CH1-EC** **2 pcs**

Eliminates visible hot spots
Includes a diffuser, 2 end caps, and 5 screws

*Wide Flood 84° Beam Angle



Adjustable Channel Clip **LED-T-CL2-PT**


Includes 2 pieces, 4 screws. Used to mount Aluminum Channel.
Adjust 50° from center either way

INDOOR MOUNTING ACCESSORIES



Aluminum Retrofit Channel **LED-T-RC** **3 feet**

Can be bent to create fixed curves or used as a glare shield

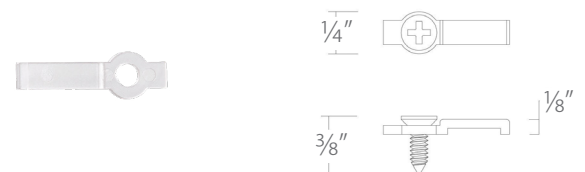

Plastic Mounting Clip **T24-BS-CL1** **Clear**

For installation on non-flat surfaces
Includes: 10 pcs plastic clips and 10 pcs screws


BARLIGHT UNDER CABINET LIGHTING



50% OFF 100%



ROCKER SWITCH
ADJUSTS BETWEEN
50%, OFF, OR 100%




ALL-IN-ONE CCT SELECTABLE,
ADJUSTS BETWEEN
2700K, 3000K
OR 3500K

BARLIGHT UNDER CABINET LIGHTING



ALL-IN-ONE CCT SELECTABLE

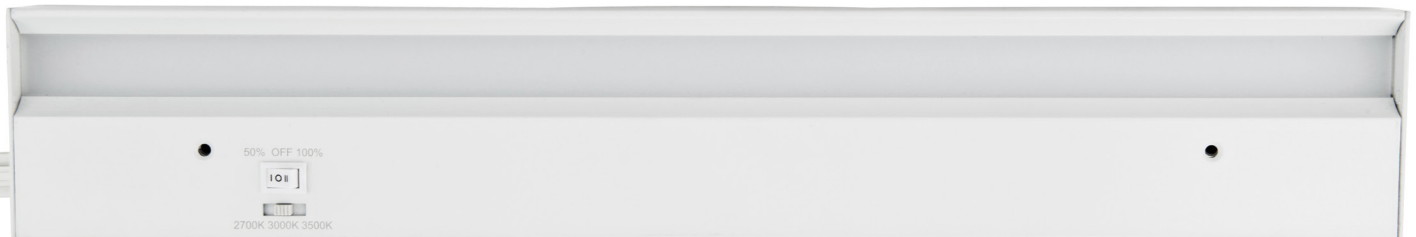

Perfect for lighting kitchen counters, our 120V under cabinet Barlight with selectable 3 CCT technology and a High-Low switch to provide quality illumination for all tasks.

- Input:** 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours
- Rocker switch to adjust between 0%, 50%, or 100%
 - Construction: aluminum with white PC diffuser

		Model	Length	Wattage	Max Lumens at 3000K	Color Temp	CRI	Finish
	BA-AC	08	8"	6.5W	355	CS 2700K 3000K 3500K	90	WT White
		18	18"	10.5W	600			
		24	24"	15W	910			
		30	30"	17.5W	1075			

Example: **BA-AC18-CS-WT**


	Model	Description	Length	Finish
	BA-I	"I" Connector BA-I		WT White
	BA-IC12 BA-IC24 BA-IC36	Interconnect Cable BA-IC	12" 24" 36"	
	BA-PC6	Power Cord	72"	



MINI PUCK LIGHT UNDER CABINET LIGHTING

An innovative under cabinet lighting solution that can be surface mounted or recessed mounted into cabinetry for a cleaner appearance, Mini Puck Lights deliver optimal ambient illumination in kitchens and other spaces.

- Input:** 24VAC or 24VDC
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours
- Install as surface or recessed
 - Compatible with portable wall plug or hardwired 24V driver/transformer
 - Construction: die-cast Aluminum and PC diffuser
 - Each fixture equipped with 6ft lead wires

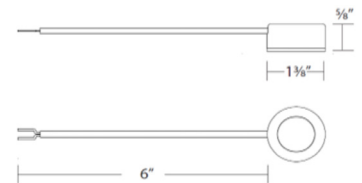

	Model	Wattage	Lumens	Color Temp	CRI	Finish
	HR-LED10 1 single light					
	HR-LED10/6 Pack of 6 lights	2W per light	95lm per light	30 3000K	90	BK Black WT White
	HR-LED10/10 Pack of 10 lights					
	HR-LED10/6K Puck Light Kit: 6 wired lights, 1 multiple terminal block, and 24V Portable Power Supply					

Example: **HR-LED10-30-BK**

COMPATIBLE 24VDC CLASS 2 POWER SUPPLY

	Model	Dimensions	Input	Output	Dimming	Finish
Portable Power Supply 	EN-2420D-P-BK EN-2420D-P-WT	2 3/4" x 1 5/8" x 1 1/8"	100V-240V	24VDC 24W	Non-Dimmable	Black White
Remote Power Supply 	EN-24DC060-UNV-RB2 EN-24DC096-UNV-RB2	8 13/16" x 2 1/16" x 2 1/4" 8 13/16" x 2 1/16" x 2 1/4"	100V-277V 100V-277V	24VDC 60W 24VDC 96W	TRIAC, ELV TRIAC, ELV	Black Black

COMPATIBLE 24VAC CLASS 2 POWER SUPPLY

	Model	Dimensions	Input	Output	Dimming	Finish
Portable Power Supply 	EN-2460-P-AR	2 3/4" x 1 5/8" x 1 3/4"	120V	24VAC 60W	Non-Dimmable	Black
Remote Power Supply 	EN-2460-RB2 EN-24100-RB2	6 1/2" x 1 5/8" x 1 1/4" 6 1/2" x 1 5/8" x 1 1/4"	120V 120V	24VAC 60W 24VAC 100W	ELV	Black Black

MULTIPLE TERMINAL BLOCK

	Model	Description	Finish
	MTB-01 MTB-01-WT	Multiple Terminal Block (Enclosure for up to 6 output connections)	Black White

PUCK LIGHT UNDER CABINET LIGHTING



Surface or Recessed Mounted

120V Direct Input
No Driver Required

BUILD A SYSTEM

Available with 3 CCT selectable color temperatures, finishes, and recessed or surface mounted options. Order single pucks or kits of multiple pucks to link together.

BEAUTIFULLY FINISHED CAST ALUMINUM



Black



Brushed Nickel



White

ALL-IN-ONE CCT SELECTABLE






PUCK LIGHT UNDER CABINET LIGHTING



A solid lighting solution for kitchen counters, our 120V under cabinet Puck Light with 3 CCT selectable technology provides quality illumination for all tasks.




Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Install as surface or recessed mount
- No driver required
- Construction: die-cast aluminum and PC diffuser



	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	HR-AC70 1 single wired light	4W	290	CS 2700K 3000K 3500K	90	BK BN WT Black Brushed Nickel White
	HR-AC71 1 single wired light and cord					
	HR-AC72 1 double wired light					
	HR-AC73 Puck light kit: 2 double wired lights, 1 single wired light, and cord	4W x 3	290 x 3			

Example: **HR-AC72-CS-BN**

	Model		Description		CRI	Finish
	HR-PC6		Power Cord		90	BK WT Black White
	HR-HWB		Hardware Box			
	HR-IC	12 24 36	12" 24" 36"	Linking Cable		

Example: **HR-HWB-BK**



LOTOS 2" ADJUSTABLE LED RECESSED



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 2¼", driver: 1¼"
- 360° retractable pivot: downlight and adjustable
- Heavy gauge retention clips secure fixture to ceiling
- Installs into ceilings between ½" and 1½" thick
- Minimum plenum space required: 4"
- Construction: steel with frosted TIR lens

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R2ERAR 2" Round Adjustable IC Rated, Airtight, Wet Location Listed	W 45°	6W	500	1203	930 3000K	90	WT White
	R2ESAR 2" Square Adjustable IC Rated, Airtight, Wet Location Listed							
	R2ESAR-2 2 Light Adjustable IC Rated, Airtight, Wet Location Listed		12W	500x2	1203x2			
	R2ESAR-3 3 Light Adjustable IC Rated, Airtight, Wet Location Listed		18W	500x3	1203x3			

Example: **R2ERAR-W930-WT**

LOTOS 4" & 6" ADJUSTABLE LED RECESSED

ALL-IN-ONE CCT SELECTABLE



R4ERAR/R6ERAR



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

- | | | | |
|--------------------|--------------------|--|---|
| Input: | 120-277V | • Fixture height: 1½", driver 1¼" | • Installs into ceilings between ½" and 1½" thick |
| Dimming: | 100%-5% ELV, TRIAC | • 360° retractable pivot: downlight and adjustable | • Minimum plenum space required: 4" |
| Rated Life: | 50,000 hours | • Heavy gauge retention clips secures fixture to ceiling | • Construction: steel with frosted TIR lens |

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R4ESAR 4" Square Adjustable IC Rated, Airtight, Wet Location Listed	W 45°	9W	750	1050	2700K 3000K 9CS 3500K 4000K 5000K	90	WT White
	R4ERAR 4" Round Adjustable IC Rated, Airtight, Wet Location Listed	W 45°	9W	800	1020	2700K 3000K 9CS 3500K 4000K 5000K	90	BK Black WT White
	R6ERAR 6" Round Adjustable IC Rated, Airtight, Wet Location Listed	W 45°	15W	1340	1896	2700K 3000K 9CS 3500K 4000K 5000K	90	BK Black WT White

Example: **R4ERAR-W9CS-WT**

- Installs into ceilings between ½" and 1¾" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Fire Rated	Finish
	R4ERAR 4" Round Adjustable IC Rated, Airtight, Wet Location Listed Fire Rated	W 45°	9W	800	1020	2700K 3000K 9CS 3500K 4000K 5000K	90	F	WT White
	R6ERAR 6" Round Adjustable IC Rated, Airtight, Wet Location Listed Fire Rated	W 45°	9W	1320	1896	2700K 3000K 9CS 3500K 4000K 5000K	90	F	WT White

Example: **R6ERAR-W9CS-FWT**

Frame-In Kit (Optional Accessory)

Model

Notes

New Construction Frame



RER-FRAME

Suitable for joists ranging from 12" to 24" apart

LOTOS R 4" REGRESSED ADJUSTABLE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

- | | | | |
|--------------------|--------------------|---|---|
| Input: | 120-277V | • Fixture height: 1½", driver 1¼" | • Installs into ceilings between ½" and 1½" thick |
| Dimming: | 100%-5% ELV, TRIAC | • 360° retractable pivot: downlight and adjustable | • Minimum plenum space required: 4" |
| Rated Life: | 50,000 hours | • Beam cutoff angle: 15° | • Construction: steel with frosted TIR lens |
| | | • Heavy gauge retention clips secure fixture to ceiling | |

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R4ERA2R 4" Round Regressed Adjustable IC Rated, Airtight, Wet Location Listed	W 50°	9W	775	750	2700K 3000K 3500K 4000K 5000K	90	BK Black WT White

Example: **R4ERA2R-W9CS-WT**

- Installs into ceilings between ½" and 1¾" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours

FIRE RATED	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Fire Rated	Finish
	R4ERA2R 4" Round Regressed Adjustable IC Rated, Airtight, Wet Location Listed Fire Rated	W 50°	9W	775	750	2700K 3000K 3500K 4000K 5000K	90	F	WT White

Example: **R4ERA2R-W9CS-FWT**

Frame-In Kit (Optional Accessory)	Model	Notes
New Construction Frame	RER-FRAME	Suitable for joists ranging from 12" to 24" apart

LOTOS 4" & 6" ROUND LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 1", driver 1"
- Heavy gauge retention clips secures fixture to ceiling
- Installs into ceilings between 1/2" and 1 1/2" thick
- Minimum plenum space required: 4"
- Construction: steel with translucent diffuser

	Model	Beam	Wattage	Max Lumens	Color Temp	CRI	Finish
	R4ERDR 4" Round Downlight IC Rated, Airtight, Wet Location Listed	W	8W	725	9CS 2700K 3000K 3500K 4000K 5000K	90	WT White
	R6ERDR 6" Round Downlight IC Rated, Airtight, Wet Location Listed	W	14W	1200			

Example: **R4ERDR-W9CS-WT**

- Installs into ceilings between 1/2" and 1 3/4" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours

	Model	Beam	Wattage	Max Lumens	Color Temp	CRI	Fire Rated	Finish
	R4ERDR 4" Round Downlight IC Rated, Airtight, Wet Location Listed Fire Rated	W	8W	725	9CS 2700K 3000K 3500K 4000K 5000K	90	F	WT White
	R6ERDR 6" Round Downlight IC Rated, Airtight, Wet Location Listed Fire Rated	W	12W	1200				

Example: **R4ERDR-W9CS-FWT**

Frame-In Kit (Optional Accessory)	Model	Notes
New Construction Frame	RER-FRAME	Suitable for joists ranging from 12" to 24" apart



LOTOS 4" & 6" SQUARE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input:	120-277V	• Fixture height: 1", driver 1"
Dimming:	100%-5% ELV, TRIAC	• Heavy gauge retention clips secures fixture to ceiling
Rated Life:	50,000 hours	• Installs into ceilings between 1/2" and 1 1/2" thick
		• Minimum plenum space required: 4"
		• Construction: steel with translucent diffuser

	Model	Beam	Wattage	Max Lumens	Color Temp	CRI	Finish
	R4ESDR 4" Square Downlight IC Rated, Airtight, Wet Location Listed	W	8W	600	9CS 2700K 3000K 3500K 4000K 5000K	90	WT White
	R6ESDR 6" Square Downlight IC Rated, Airtight, Wet Location Listed	W	14W	950			

Example: **R4ESDR-W9CS-WT**

Frame-In Kit (Optional Accessory)	Model	Notes
New Construction Frame	 RER-FRAME	Suitable for joists ranging from 12" to 24" apart

ION 2" LED RECESSED



Minimum profile ION 2" Round and Square downlight with removable driver and electrical box for easy remodel or new construction installation.

Power: 9W
Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Construction: die-cast aluminum with frosted TIR lens



	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R2DRDR Round Remodel IC Rated, Airtight, Wet Location Listed	F 45°	680	1390	930 3000K	90	WT White
	R2DRDN Round New Construction IC Rated, Airtight, Wet Location Listed						
	R2DSDR Square Remodel IC Rated, Airtight, Wet Location Listed	F 45°	735	1390	930 3000K	90	WT White
	R2SDSN Square New Construction IC Rated, Airtight, Wet Location Listed						

Example: **R2DRDR-F930-WT**

Frame-In Kit (Optional Accessory)

Model

Notes

New Construction Frame



R2DRDN-FRAME

Ceiling thickness: 1/2" - 1 1/2"

PATRIOT 3" LED RECESSED



ALL-IN-ONE CCT SELECTABLE



5-CCT meets adjustability. 3" PATRIOT Recessed Downlight and Adjustable provides up to 1000 lumens, perfect for residential applications. An optional frame-in kit is available for all new construction installations.

Power: 12W
Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Two beam angle options included: 45° beam film pre-installed, remove film for 25° narrow beam
- Construction: die-cast aluminum with reflector

	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R3HRDR Round Remodel IC Rated, Airtight, Wet Location Listed	F 25° 45°	1035	3045	9CS 2700K 3000K 3500K 4000K 5000K	90	WT White
	R3HRAR Round Adjustable Remodel IC Rated, Airtight, Wet Location Listed		1000	3095			
	R3HSDR Square Remodel IC Rated, Airtight, Wet Location Listed		1035	3045			
	R3HSAR Square Adjustable Remodel IC Rated, Airtight, Wet Location Listed		1000	3095			

Example: **R3HRDR-F9CS-WT**

Frame-In Kit (Optional Accessory)

Model

Notes

New Construction Frame



R3H-FRAME

Ceiling thickness: 1/2" - 1 1/2"

POP-IN 4" LED RECESSED



Power: 12W
Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

ALL-IN-ONE CCT SELECTABLE



Minimum profile downlight with driver and electrical connection box attached to fixture for easy remodel or new construction installation.

- Electrical wiring box directly on the back of the fixture
- Available as a remodel or new construction
- Installs into ceilings between ½ and 1½" thick
- Construction: die-cast aluminum with frosted TIR lens

	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R4DRDR Round Remodel IC Rated, Airtight, Wet location Listed						
	R4DRDN Round New construction IC Rated, Airtight, Wet location Listed		1080	1309			
	R4SDR Square Remodel IC Rated, Airtight, Wet location Listed	F 45°			9CS 2700K 3000K 3500K 4000K 5000K	90	BK Black WT White
	R4SDN Square New construction IC Rated, Airtight, Wet location Listed		1000	1256			

Example: **R4DRDR-F9CS-WT**

Frame-In Kit (Optional Accessory)

Model

Notes

New Construction Frame



R4DRDN-FRAME

Ceiling thickness: ½"-1½"

BLAZE 6" LED RECESSED




ALL-IN-ONE CCT SELECTABLE



BLAZE 6" Round and Square.
5-CCT selectable downlight.

Power: 25W
Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Construction: die-cast aluminum with frosted TIR lens

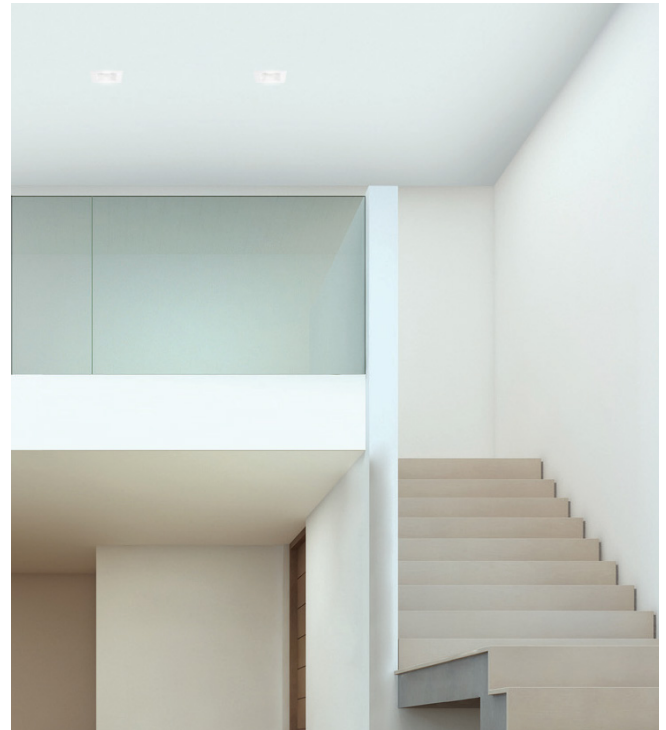

	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish			
	R6DRDR Round Remodel IC Rated, Airtight, Wet Location Listed	F 55°	2485	2130	9CS 2700K 3000K 3500K 4000K 5000K	90	WT White			
	R6DRDN Round New construction IC Rated, Airtight, Wet location Listed									
	R6DSDR Square Remodel IC Rated, Airtight, Wet location Listed		2360	2060						
	R6DSDN Square New Construction IC Rated, Airtight, Wet location Listed									


Example: **R6DSDR-F9CS-WT**

Frame-In Kit (Optional Accessory)

Model

Notes

New Construction Frame



R6DRDN-FRAME

Ceiling thickness: 1/2"-1 1/2"

TWIST-N-LITE LUMINAIRE SYSTEM



Quick and convenient. Easy to use and easy to install, our new Twist-N-Lite system offers a variety of surface mounts and pendant luminaires in five color temperatures and three finishes. A single flexible mounting base accommodates our complete suite of Twist-N-Lite products. The flexible design enables you to interchange the fixtures in the field to meet your various lighting applications. This energy-efficient engineering wonder offers dimmable options for high performance and a classic, minimalistic aesthetic. Select your color temperature, Twist it in and Turn it on. Elevating multifunctional illumination to a higher standard.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Installs over 3", 4" or combination 3/0, 4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser
- Shared canopy allows for easily swapping between fixtures without adjusting the mounting hardware
- All wiring and connections are made in the junction box prior to installing the mounting base and canopy

Quick Install: Mount and power any fixture in the Twist-N-Lite family by twisting it onto the canopy




TWIST-N-LITE LUMINAIRE SYSTEM



ALL-IN-ONE CCT SELECTABLE



- 45° flood beam angle




Model	Wattage	Max Lumens	Color Temp	CRI	Finish
FM-240103	12W	900	2700K	CS	90
			3000K		
			3500K		
			4000K		
			5000K		
					BK Black BN Brushed Nickel WT White

Example: **FM-240103-CS-WT**



- Dual-layer acrylic for frosted and even glow




Model	Wattage	Max Lumens	Color Temp	CRI	Finish
FM-240203	9W	550	2700K	CS	90
			3000K		
			3500K		
			4000K		
			5000K		
					BK Black BN Brushed Nickel WT White

Example: **FM-240203-CS-BK**



- Dual-layer acrylic for frosted and even look




Model	Wattage	Max Lumens	Color Temp	CRI	Finish
FM-240209	22W	1500	2700K	CS	90
			3000K		
			3500K		
			4000K		
			5000K		
					BK Black BN Brushed Nickel WT White

Example: **FM-240209-CS-BN**



- Dual-layer acrylic for frosted and even look
- Retract or extend the cable by pressing on the cable gripper



Model	Wattage	Max Lumens	Color Temp	CRI	Finish
PD-240212	13W	900	2700K	CS	90
			3000K		
			3500K		
			4000K		
			5000K		
					BK Black BN Brushed Nickel WT White

Example: **PD-240212-CS-BK**



EDGELESS LED CEILING OR WALL LUMINAIRE



ALL-IN-ONE CCT SELECTABLE



5"



8"



12"

Edgeless LED luminaires are designed with a low profile and slim trim. They are engineered for smooth, glare-free, consistent illumination. A welcome addition to ceilings and walls for various applications.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Size: 5", 8", 12"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser



	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	FM-240505	15W	1330	9CS 2700K 3000K 3500K 4000K 5000K	90	BK Black WT White
	FM-240508	20W	1985			
	FM-240512	30W	2750			

Example: **FM-240508-9CS-WT**

I CAN'T BELIEVE IT'S NOT RECESSED
LED CEILING LIGHT



Multiple mid-powered LEDs illuminate the acrylic diffuser uniformly without socket shadows, which are common in conventional flush mounts.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Imitates a traditional 6" line voltage recessed downlight with an R30 light bulb
- Install into 4" junction box or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser
- Finished screw caps included to eliminate shadows

	Model	Max Lumens	Power	Color Temp	CRI	Finish
	FM-616G2-930	1050	16W	3000K	90	WT White

Example: **FM-616G2-930-WT**

DISC LED CEILING LIGHT & RECESSED RETROFIT



FM-306-930JB-WT



FM-306MS-930JB-WT

Multiple mid-powered LEDs uniformly illuminate the acrylic diffuser.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- FM-306MS: motion sensor keeps the light illuminated for 3 minutes before shutting off if no movement is detected
- Construction: aluminum with translucent diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish	
	FM-304	725	12W	930 3000K	90	WT White	Fits over a 4" recessed can or direct wire in a 3" or 4" junction box or pancake box
	FM-306	950	15W	930 3000K 940 4000K	90	WT White	Fits over a 5" to 6" recessed can or direct wire in a 3" or 4" junction box or pancake box
	FM-306	950	15W	930JB 3000K	90	WT White	
	FM-306MS Infrared Motion Sensor	1100	14W	930JB 3000K	90	WT White	Direct mount on a 3" or 4" junction box or pancake box
	FM-309	1725	23W	9CSJB 2700K 3000K 3500K 4000K 5000K	90	WT White	

Example: **FM-306-930JB-WT**



Model	Lumens	Power	Color Temp		CRI	Finish	
FM-304	725	12W	930	3000K	90	BN Brushed nickel BZ Bronze WT White	Fits over a 4" recessed can or direct wire in a 3" or 4" junction box or pancake box
FM-306	950	15W	930 940	3000K 4000K	90 90	BN Brushed nickel BZ Bronze WT White	Fits over a 5" to 6" recessed can or direct wire in a 3" or 4" junction box or pancake box
FM-306	950	15W	930JB	3000K	90	WT White	Direct mount in a 3" or 4" junction box or pancake box
FM-306MS Infrared Motion Sensor	1100	14W	930JB	3000K	90	WT White	Direct mount in a 3" or 4" junction box or pancake box

BLO • FLO • GLO

LED CEILING & WALL MOUNTS



ALL-IN-ONE CCT SELECTABLE




BLO



Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Install over 3", 4" or a combination 3/0, 4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser



Model	Max Lumens	Wattage	Color Temp	CRI	Finish
FM-113	1600	22W	CS 2700K 3000K 3500K 4000K 5000K	90	WT White
FM-115	2230	26W			

FLO



Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 24", 36", 48"
- Installation: wall and ceiling
- Construction: aluminum with translucent acrylic diffuser





Model	Max Lumens	Wattage	Color Temp	CRI	Finish
WS-224	1400	17W	CS 2700K 3000K 3500K 4000K 5000K	90	WT White
WS-236	2250	28W			
WS-248	2630	32W			

GLO



Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Install over 3", 4" or a combination 3/0, 4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser



Model	Max Lumens	Wattage	Color Temp	CRI	Finish
FM-211	1160	15W	CS 2700K 3000K 3500K 4000K 5000K	90	WT White
FM-214	1660	22W			
FM-216	2300	26W			

ROUND & SQUARE
5" LED CEILING OR WALL LUMINAIRE



At just ½" thick, these edge-lit flush mounts are frequently replacing the usage of recessed lighting and larger flush mounts to preserve ceiling height. Mounting over standard size junction boxes, the broad illumination is perfect for lighting hallways and other narrow spaces. Available in a range of sizes, smaller sizes are also wet location rated for use outdoors.

- Input:** 120V-277V

Dimming: 100%-10% ELV, 100%-5% TRIAC

Rated Life: 50,000 hours
- Size: 5"
 - Install into 3", 4" or a combination 3/0-4/0 electrical box
 - Construction: injection molded UV rated PC with translucent diffuser
 - Suitable for outdoor and coastal regions

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	FM-05RN Round	12W	1050			BK Black BZ Bronze NI Nickel WT White
				930 3000K 935 3500K	90 90	
	FM-05SQ Square	12W	1030			BZ Bronze WT White











Example: **FM-05RN-930-WT**

ROUND & SQUARE LED CEILING OR WALL LUMINAIRE



Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 7", 11", 15" (Round only)
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser

		Model	Max Lumens	Wattage	Color Temp	CRI	Finish
		FM-07RN Round	1100	15W	930 3000K 935 3500K	90 90	BK Black BN Brushed Nickel BZ Bronze WT White
		FM-11RN Round	1525	20W			
		FM-15RN Round	2550	28W			
		FM-07SQ Square	1100	15W			BN Brushed Nickel BZ Bronze WT White
		FM-11SQ Square	1650	20W			

Example: **FM-15RN-930-WT**



LITHIUM EM BATTERY BACKUP



ALL-IN-ONE CCT SELECTABLE



Convenient emergency battery backup button is discreet to maintain product appearance

The standard ceiling light and emergency battery backup ceiling light are nearly identical in 2 convenient sizes.

High light output, hidden hardware, and broad even illumination are the primary features of this sleek flush mount. Often used in hallways, dorm rooms, and bathrooms. Installation is a snap.

Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- During emergency mode, fixture will stay illuminated for 90 minutes at reduced power
- Install over 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	FM-200111	15W	1080	CS 2700K 3000K 3500K 4000K 5000K	90	BN Brushed Nickel
	FM-200115	25W	1815			
	FM-200115EM Emergency Back Up					
	FM-200118	31W	2410			
	FM-200118EM Emergency Back Up					

Example: **FM-200115-CS-BN**

METRO LED FLUSH MOUNT



Multiple mid-powered LEDs deliver soft illumination through translucent acrylic. Metro is available as a wall sconce or as a flush mount to meet a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

- Input:

Dimming:

Rated Life:
- 120-277V

100%-10% ELV, 100%-5% TRIAC

50,000 hours
- Sizes: 12", 18"

• Fixture height: 1¾"

• Install into 3", 4" or a combination 3/0-4/0 electrical box

• Construction: aluminum with dual layer acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	FM-180112	1800	24W	303000K	90	BN Brushed Nickel CH Chrome
	FM-180118	2375	32W			

Example: FM-180118-30-BN

METRO LED VANITY LIGHTS & WALL SCONCE



Multiple mid-powered LEDs deliver soft illumination through translucent acrylic. Metro is available as a wall sconce or as a flush mount to meet a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 20", 27", 37"
- Construction: aluminum with dual layer acrylic diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-180120	1150	16W	30 3000K	90	BN Brushed Nickel CH Chrome
	WS-180127	1450	20W			
	WS-180137	2130	28W			


Example: **WS-180127-30-BN**



REMI LED VANITY LIGHTS & WALL SCONCE



ALL-IN-ONE CCT SELECTABLE

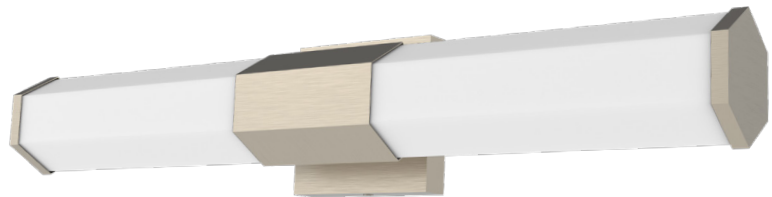

Finely crafted of white acrylic and aluminum, Remi delivers robust, flattering illumination as a vanity luminaire in a elegant bath or wall sconce that blends with any interior decor.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 16", 24"
- Construction: aluminum with acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-230116	900	18W	CS 2700K 3000K 3500K	90	BN Brushed Nickel BK Black
	WS-230124	1500	30W			

Example: **WS-230116-CS-BN**

STUDIO LED VANITY LIGHTS & WALL SCONCE



ALL-IN-ONE CCT SELECTABLE



Sleek and contemporary. The Studio bath vanity offers a three-in-one LED CCT Selectable feature to create beautiful, flattering illumination for an updated aesthetic. Stylish and modern, the solid linear aluminum profile is durable and works well in various residential and hospitality settings.

- Input:** 120V

Dimming: 100%-10% ELV, 100%-5% TRIAC

Rated Life: 50,000 hours
- Sizes: 26"
 - Construction: aluminum with acrylic diffuser
 - Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-240926	1950	31W	CS 2700K 3000K 3500K	90	BN Brushed Nickel BK Black

Example: WS-240926-CS-BK

RAZOR LED VANITY LIGHTS & WALL SCONCE



ALL-IN-ONE CCT SELECTABLE



A modern minimalist design evokes a unique mood and feel for any fine bath. The Razor bath vanity is a wall fixture with a contemporary design and a unique aluminum frame offered in black and brushed nickel. The frosted diffuser deploys soft, flattering illumination for your own personal environment, creating a warm and relaxing setting. The three-in-one CCT selectable allows individual color temperature adjustment to suit one's personal preferences.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 28"
- Construction: aluminum with glass diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-241128	835	20W	CS 2700K 3000K 3500K	90	BN Brushed Nickel BK Black

Example: **WS-241128-CS-BN**

DEMI LED VANITY LIGHTS & WALL SCONCE



ALL-IN-ONE CCT SELECTABLE



A compact but appealing design that blends well into contemporary bathrooms and powder rooms. This piece features a frosted glass diffuser for robust, flattering illumination in your sanctuary, where you perform most of your primping and prepping for the day ahead. The dimmable, three-in-one CCT selectable feature provides an option to adjust the color temperature of your choice.

- Input:** 120V

Dimming: 100%-10% ELV, 100%-5% TRIAC

Rated Life: 50,000 hours
- Sizes: 27"
 - Construction: aluminum with glass diffuser
 - Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-241227	1010	23W	CS 2700K 3000K 3500K	90	BN Brushed Nickel BK Black

Example: WS-241227-CS-BK

SLIM LED VANITY LIGHTS & WALL SCONCE



ALL-IN-ONE CCT SELECTABLE



Sleek and versatile with a modern architectural style. Slim is the perfect LED vanity light or wall sconce to provide a flattering glow for grooming in your fine bath.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 18", 24", 36"
- Construction: aluminum with acrylic diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-240818	1300	20W	CS 2700K 3000K 3500K 4000K 5000K	90	BN Brushed Nickel BK Black
	WS-240824	1700	24W			
	WS-240836	2200	30W			

Example: **WS-240824-CS-BK**



TURBO LED VANITY LIGHTS & WALL SCONCE



A contemporary design provides soft diffused illumination through translucent acrylic. Turbo can be mounted vertically or horizontally to accommodate a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

Input:	120-277V	• Sizes: 14", 24"
Dimming:	100%-10% ELV, 100%-5% TRIAC	• Construction: aluminum with dual layer acrylic diffuser
Rated Life:	50,000 hours	

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-180414	1000	12W	30 3000K 35 3500K	90 90	BN Brushed Nickel CH Chrome
	WS-180424	1570	18W			




Example: **WS-180414-35-BN**



Sleek style with plated brushed nickel finished end caps and high-powered LEDs that provide broad ample illumination. Fuse can be mounted on walls or on the ceiling to suit a variety of applications and styles in current architectural design.

- Input:**
Dimming:
Rated Life:

120V-277V
100%-10% ELV, 100%-5% TRIAC
50,000 hours
- Sizes: 16", 27", 37"
 - Construction: aluminum with acrylic diffuser
 - Installation: wall or ceiling, horizontally or vertically

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-180216	1025	16W	30 3000K	90	BN Brushed Nickel
	WS-180227	1450	20W			
	WS-180237	2025	28W			

Example: **WS-180216-30-BN**

LINK LED VANITY LIGHTS & WALL SCNCE



This low-profile transitional wall sconce provides bountiful light and style. Link adds a clean, modern look to bath vanities and other decor. May be installed horizontally over a vanity or vertically as a sconce.

Input: 120V-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 27", 37"
- Construction: aluminum with white acrylic diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-180327	1380	20W	30 3000K	90	BN Brushed Nickel
	WS-180337	1950	28W			

Example: **WS-180337-30-BN**







CUBIX & CYLINDER OUTDOOR SCNCE



Available in single and double directions, Cubix and Cylinder are ideal for illuminating outdoor entrances and walkways.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Sizes: 6 $\frac{3}{4}$ " single light, 9 $\frac{7}{16}$ " double lights
- Construction: die-cast aluminum
- Finish: powder coated aluminum

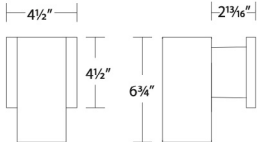	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	WS-W220208 Cubix Single Light	6W	285	30	3000K	80
	WS-W220212 Cubix Double Light	18W	765			
	WS-W190208 Cylinder Single Light	6W	285			
	WS-W190212 Cylinder Double Light	18W	765			
BK Black BZ Bronze WT White						

Example: **WS-W220208-30-BK**



Offered in a curvaceous single and double head configuration, the adjustable Cylinder Indoor/Outdoor Sconces provide strong energy efficient LED spot lighting precisely where you need it. Cleanly finished with no visible hardware, these stylish aluminum cylinders are available in three architectural powder coat finishes.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Construction: aluminum with TIR lens
- Finish: powder coated aluminum


	Model	Max Lumens	Wattage	Color Temp		CRI	Finish
	WS-W230301	1085	17W	30	3000K	90	BK Black BZ Bronze WT White
	WS-W230302	1085 x 2	33W				

Example: WS-W230301-30-BK

VUE OUTDOOR SCNCE



ALL-IN-ONE CCT SELECTABLE

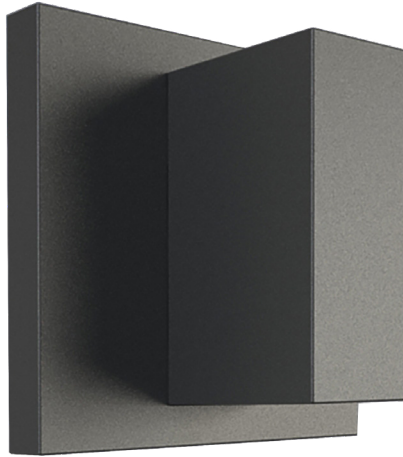

A geometric design that defines a modern aesthetic in your indoor or outdoor space. Vue is a die-cast aluminum sconce that provides up and down lighting for beautiful ambient illumination.

Input:	120V	• Size: 5"
Dimming:	100%-10% ELV	• Construction: die-cast aluminum
Rated Life:	50,000 hours	• Finish: powder coated aluminum

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-W230205	250 Up 250 Down	9W	CS 3000K 3500K 4000K	90	BK Black WT White

Example: **WS-W230205-CS-BK**

MIDTOWN OUTDOOR SCNCE

ALL-IN-ONE CCT SELECTABLE




A handsome tower-styled fixture provides a soft glow and refined aesthetic that is pleasing to the eyes. Perfect for illuminating modern exterior and interior spaces, the LED luminaire offers versatility in a clean, contemporary look. This versatile sconce is constructed with die-cast aluminum for durability and quality while providing ambient and down lighting through its smooth, curvaceous acrylic diffuser. Customize the color temperature of your light from 2700K warm white to 5000K cool white.

- Input:** 120V

Dimming: 100%-10% ELV

Rated Life: 50,000 hours
- Sizes: 10"
 - Construction: die-cast aluminum with acrylic diffuser
 - Finish: powder coated aluminum

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-W241310	375	12W	CS 2700K 3000K 3500K 4000K 5000K	90	BK Black

Example: WS-W241310-CS-BK

VEGA OUTDOOR SCNCE



Add a modern vibe and powerful illumination to your porch, deck, or garage with the sleek Vega, an ADA-compliant indoor/outdoor sconce.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Sizes: 9", 14"
- Construction: die-cast aluminum with acrylic diffuser
- Finish: powder coated aluminum

	Model	Max Lumens	Wattage	Color Temp		CRI	Finish	
	WS-W190109	545	8W	30	3000K	90	BK	Black
	WS-W190114	1050	16W					


Example: **WS-W190114-30-BK**

120/277V RECTANGULAR STEP & WALL LIGHTS



Input: 120V, 277V
Brightness: Up to 4 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours


- Fluid decorative profile with full cut-off illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish or plated brushed nickel finish
- Title 24 compliant (120V only)

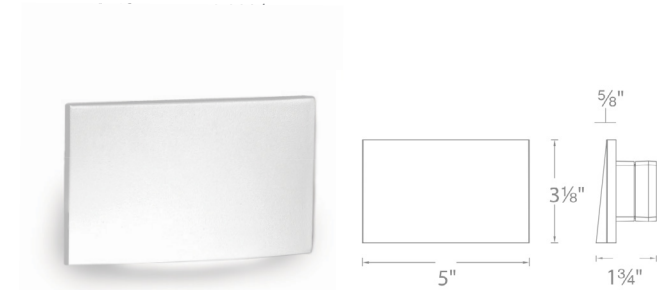

Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED110-C WL-LED110-AM	120V	3.5W	3000K Amber	90	BK Black on AL BN* Brushed Nickel
WL-LED110F-C WL-LED110F-AM	277V	3W	3000K Amber		BZ Bronze on AL WT White on AL

Example: **WL-LED110-C-WT**

* BN finish is damp location listed and is not warranted for contact with harsh chemicals or exterior installations.

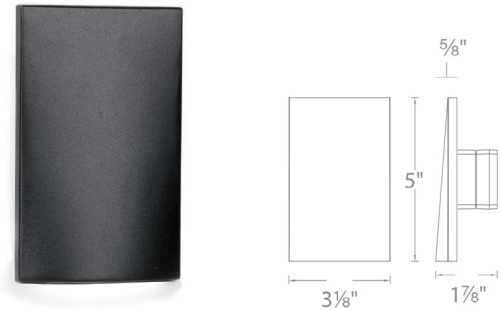


Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED210-C WL-LED210-AM	120V	3.5W	3000K Amber	90	BK Black on AL BN* Brushed Nickel
WL-LED210F-C WL-LED210F-AM	277V	3W	3000K Amber		BZ Bronze on AL WT White on AL

Example: **WL-LED210-C-BK**

Input: 120V, 277V
Brightness: Up to 36 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Louvered design shields glare for visual comfort
- Die-cast aluminum construction with abrasion-resistant powder-coated finish

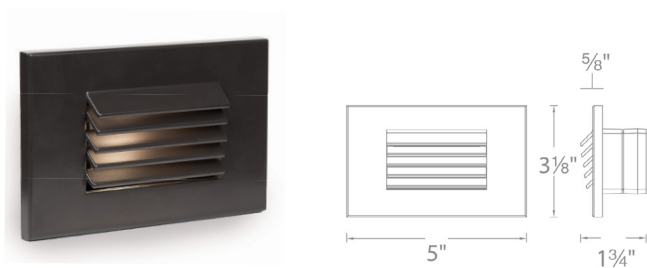

Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED120-C WL-LED120-AM	120V	3.5W	3000K Amber	90	BK Black on AL BZ Bronze on AL
WL-LED120F-C WL-LED120F-AM	277V	3W	3000K Amber		WT White on AL

Example: **WL-LED120-C-BZ**



Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED220-C WL-LED220-AM	120V	3.5W	3000K Amber	90	BK Black on AL BZ Bronze on AL
WL-LED220F-C WL-LED220F-AM	277V	3W	3000K Amber		WT White on AL

Example: **WL-LED220-C-BZ**

120V/277V RECTANGULAR STEP & WALL LIGHTS

CALIFORNIA
JA8
TITLE 24

IP66



ETL
LISTED US

WET

ADA

Input: 120V, 277V
Brightness: Up to 40 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Tempered glass diffuses light for even illumination
- Die-cast aluminum construction
- Abrasion-resistant powder-coated finish or marine grade stainless steel option available
- Title 24 compliant (120V only)

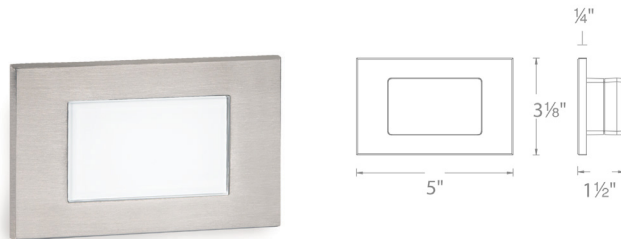


Mounts Vertically or Horizontally

Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED130-C WL-LED130-AM	120V	3.5W	3000K Amber	90	BK Black on AL BZ Bronze on AL SS Stainless Steel WT White on AL
WL-LED130F-C WL-LED130F-AM	277V	3W	3000K Amber		

Example: **WL-LED130-C-SS**

Input: 120V, 277V
Brightness: Up to 3 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Geometric design with downward illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish
- Title 24 compliant (120V only)




Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED140-C WL-LED140-AM	120V	3.5W	3000K Amber	90	BK Black on AL BZ Bronze on AL WT White on AL
WL-LED140F-C WL-LED140F-AM	277V	3W	3000K Amber		

Example: **WL-LED140-C-BK**



IP66 rated self contained fixture with various face plates. Fits into a Switch Box or a 2" x 4" Junction Box with minimum inside dimensions of 3"L x 2"W x 2.5"D.

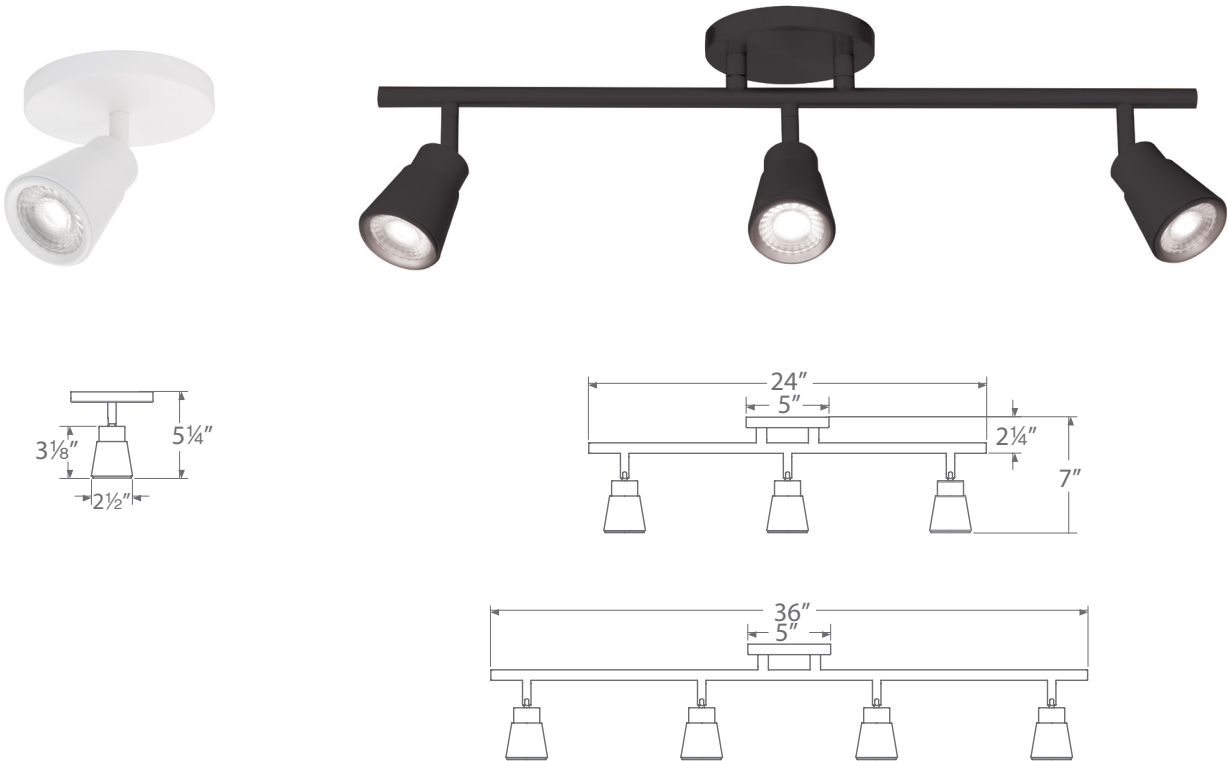

Monopoint, 3-head, or 4-head fixed track with individually adjustable LED track fixtures can be wall mounted or ceiling mounted for a wide multitude of applications. It is specifically designed for residential and low-ceiling commercial applications.

- Comparable To:** 65W MR16

Input: 120V

Dimming: 100%-10% ELV, 100%-5% TRIAC

Rated Life: 50,000 hours
- Monopoint, 3-head, or 4-head fixed rails
 - Sizes: 5" (Monopoint), 24", 36"
 - Construction: die-cast aluminum with frosted TIR lens
 - Installation: wall and ceiling
 - 350° horizontal and 90° vertical aiming per head

System	Model	Lights	Beam	Max Lumens	CBCP	Wattage	Color Temp	CRI	Finish	
TK	1805	01	45°	800	1095	10W	30 3000K	90	BK	Black
		03		2400 (800 x3)	3285 (1095 x3)	30W			BN	Brushed Nickel
		04		3200 (800 x4)	4380 (1095 x4)	40W			WT	White

Example: TK-180503-30-BK


LOW VOLTAGE LED/MR16 FLEXIBLE SPOT LIGHTS

Power:	7W	Color Temp:	3000K
Lumens:	450	Dimming:	ELV
CBCP:	929	LED Lamp	
Comparable:	35W MR16	Rated Life:	25,000 hours

- Integral electronic transformer
- Accepts 12V LED MR16 or halogen MR16 lamps up to 50W max
- LED MR16 included when ordered as LED
- 1 watt minimum load
- Can be wall or ceiling mounted
- Available extensions from 6 to 48 inches
- Clear lens included (see below for alternate lens options)

007

Model	Lamp	Extension (optional)	CRI	Finish
ME-007LED ME-007	MR16 LED 12V 7W included MR16 sold separately	X6 6" X12 12" X18 18" X24 24" X36 36" X48 48"	90	BK Black WT White



Example: **ME-007LED-BK** or **ME-007LED-X6-BK** (with 6" extension)

FRAMING PROJECTOR ACCESSORY


008FP	BK Black WT White
--------------	------------------------------------

Example: **008FP-BK**



808

Model	Lamp	Extension (optional)	CRI	Finish
ME-808LED ME-808	MR16 LED 12V 7W included MR16 sold separately	X6 6" X12 12" X18 18" X24 24" X36 36" X48 48"	90	BK Black WT White



Example: **ME-808LED-WT** or **ME-808LED-X12-WT** (with 12" extension)

LAMPS

Finish	Wattage	Color Temp	Input	Beam	CRI	Lumens	CBCP	Average Life
Black White	7W	3000K	12V	35°	90	450	929	25,000 Hours



MR16

MR16LED-BAB-BK
MR16LED-BAB-WT


LENS ACCESSORIES

Amber LENS-16-AMB	Blue Green LENS-16-BLU LENS-16-GRN	Red Frosted LENS-16-RED LENS-16-FR	UV Filter Spread LENS-16-UVF LENS-16-SPR	Beam Elongating Honeycomb Louver LENS-16-BEL LENS-16-HCL
--------------------------	--	--	--	--



Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Suitable for H, J or L track
- 350° horizontal and 90° vertical aiming
- Driver concealed within fixture
- Construction: die-cast aluminum with frosted TIR lens

System		Model	Beam	Max Lumens	CBCP	Wattage	Color Temp	CRI	Finish
	H H Track	7010	45°	850	1078	10W	30 3000K	90	BK Black BN Brushed Nickel WT White
	L L Track J J/J2 Track	7010			1078				BK Black WT White

Example: **H-7010-30-BN**

CHARGE 8010 & 8020 LED TRACK



Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Suitable for H, J or L track
- 350° horizontal and 90° vertical aiming
- Driver concealed within fixture
- Construction: die-cast aluminum with frosted TIR lens

	System	Model	Beam	Max Lumens	CBCP	Wattage	Color Temp	CRI	Finish
	H H Track	8020	45°	1280	1402	16W	30 3000K	90	BK Black BN Brushed Nickel WT White
	L L Track			850	1196	11W			BK Black BN Brushed Nickel DB Dark Bronze WT White
	J J/J2 Track				1196	11W			BK Black WT White
	H H Track	8010		850x3	1196x3	11Wx3			BK Black BN Brushed Nickel DB Dark Bronze WT White
	L L Track J J/J2 Track	8010							
<p>Track Pack includes</p> <ul style="list-style-type: none"> • 4ft H Track • Floating Canopy • Three 8010 Charge Track Heads 	H H Track	8010/3							

Example: **H-8010-30-DB**

H TRACK SYSTEM

Description: Single circuit H-Track
Power per Circuit: 120V, 1920W max
Operating Current: Rated 20A max




TRACK SECTIONS

Model	Length	Finish	Description
HT H Track	2 2'	BK Black	120V 3-wire track
	4 4'	BN Brushed Nickel	
	6 6'	WT White	
	8 8'	DB Dark Bronze	

Example: **HT6-BK**

Each section includes two matching end caps



















TRACK SUSPENSION

System		Model	Finish	
All Track Suspension Kit		SK	18 18" 24 24"	36 36" 48 48"
Suspension Kit Extender		R	18 18" 24 24" 36 36"	48 48" 72 72"
Sloped Ceiling Adapter		SK14	BK Black BN Brushed Nickel WT White DB Dark Bronze	Extends track from ceiling. Includes track bracket, rod and ceiling canopy. Use two per 4' length, three per 8' length.
Rod Coupler		RI		Use with Rod Coupler (RI) to further extend track from ceiling.
Suspension Adjustment Collar Kit		SK05		Use with suspension kits to accommodate sloped ceilings. Max capacity: 7A, 800W, 120V.
Cable Suspension		SKC96		Join two rods for suspensions longer than 48".
Cable Suspension Canopy with Feed		SKCF96	NI Nickel	Used when suspension rod is field cut to custom lengths. One kit of two required for each rod.
Low Voltage Track Head Extension		X	6 6" 12 12" 18 18"	24 24" 36 36" 48 48"
Line Voltage Track Head Extension (H track only)		H	18 18" 24 24"	36 36" 48 48"
Wall Mount Suspension Bracket		TBKT		24"

Example: **SK24-BK**

ACCESSORIES

		Model	Finish	Dimensions	Description
Live End Connector		HLE	BK Black BN Brushed Nickel WT White DB Dark Bronze	4 1/4" x 1 3/8" x 3/4"	Use for direct wiring through ceiling. A canopy plate is required when using with a standard junction box.
Live End BX Connector		HBXLE		6" x 1 3/8" x 1 1/4"	Use with surface mounted BX or non-metallic sheathed cable. Also provides through the ceiling connection.
"I" Power Connector		HI-PWR		6 3/4" x 1 3/8" x 3/4"	Power entry point at the connection of 2 tracks.
"L" Connector Left		HL-LEFT		2 3/4" x 2 3/4" x 3/4"	Use to join 2 track sections to make power feedable 90° left polarity turns.
"L" Connector Right		HL-RIGHT		2 3/4" x 2 3/4" x 3/4"	Use to join 2 track sections to make power feedable 90° right polarity turns.
"T" Connector		HT		4" x 2 3/4" x 3/4"	Use to join 3 tracks sections. "T" Connector with opposite polarity can be custom ordered.
"X" Connector		HX		4 1/8" x 4 1/8" x 3/4"	Use to join 4 track sections.
"I" Connector		HI		9 3/4" x 1 3/8" x 3/4"	Use to join two sections of track with electrical continuity.
"I" Dead End Connector		HI-DEC		3" x 1 3/8" x 3/4"	Joins two sections of track without electrical continuity.
Flexible Track Connector		HFLX		9 3/4" x 1 3/8" x 3/4"	Connects two track sections at variable angles. Use as a transition from wall-to-wall, wall-to-ceiling. Power feedable.
Suspension Loop		H-LOOP		1 3/8" x 1 3/8" x 3"	3" electrical loop accepts chain hung fixtures up to 35lbs. Contains compartment for electrical connections.
15' Cord, Male Plug		HCORD	BK Black WT White	15'	Maximim capacity: 7A, 800W, 120V.
T-Bar Drop Ceiling Attachment		T-BARCLIP	Chrome	1 1/2" x 1 1/4"	Attaches track to T-bar drop ceilings. Use two for 2' or 4' tracks, three for 6' or 8' tracks.
Monopoint Canopy Adapter		HMP	BK Black BN Brushed Nickel WT White DB Dark Bronze	5 3/8" x 5 3/8"	Mount a single track fixture to a junction box. When used with a low voltage track head the transformer box will protrude off of the face of the monopoint.
Canopy Plate		CP		4 1/2" x 4 1/2"	Covers a standard 4" junction box. Use with any powerable connectors.
Floating Canopy Connector		HFC		4 1/2" x 4 1/2" x 1 1/2"	Connects to octagon box. Allows track to be powered anywhere along the length of the track.

H TRACK CURRENT LIMITER

WAC TRACK CURRENT LIMITERS ARE DESIGNED TO ADDRESS ENERGY ALLOWANCES

WITHOUT A CURRENT LIMITER

WATTAGE TOWARDS ENERGY ALLOWANCE

ASHRAE 90.1 AND IECC

The greater of either:

- The sum of the maximum rated wattage of the luminaires OR
- 30 watts per linear ft of track circuit

CALIFORNIA'S TITLE 24

The greater of either:

- The sum of the maximum rated wattage of the luminaires OR
- 45 watts per linear ft of track circuit

WITH A CURRENT LIMITER

WATTAGE TOWARDS ENERGY ALLOWANCE


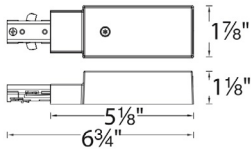


ASHRAE 90.1 AND IECC

Wattage rating of the current limiter

CALIFORNIA'S TITLE 24

The greater of either:

- Wattage rating of the current limiter OR
- 12.5 watts per linear foot of track circuit







	Model	Circuit Breaker	Max Wattage	Finish
 <p>Slime Single Live End</p> 	THL-HLES			
		1/2A	0.5A	60W
		1A	1.0A	120W
		2A	2.5A	300W
		5A	5.0A	600W
		7A	7.5A	900W
 <p>Single Live End</p> 	THL-HLE			

Example: **THL-HLES-1A-BK**







LOW VOLTAGE

MR16 MULTIPLE SPOTS (1 WATT MINIMUM LOAD TRANSFORMERS)




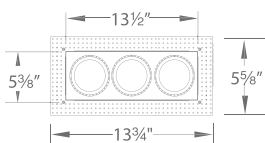


1 LIGHT

Trims (Order Housing Separately)		Model	Finish	Reflector/Trim	
		1 Light Trim MT-116 Halogen MR16 sold separately MT-116LED LED MR16 included	WT/WT	White/White	
		1 Light Invisible Trim™ MT-116TL Halogen MR16 sold separately MT-116LEDTL LED MR16 included	WT	White	
Low Voltage Multiple Spot Housings (Required)		Model	Type	Wattage	Rating
		MT-116HS	1 Light	12V 50W MAX	Non-IC

2 LIGHTS

Trims (Order Housing Separately)		Model	Finish	Reflector/Trim	
 	2 Light Trim MT-216 Halogen MR16 sold separately MT-216LED LED MR16 included		WT/WT	White/White	
 	2 Light Invisible Trim™ MT-216TL Halogen MR16 sold separately MT-216LEDTL LED MR16 included		WT	White	
Low Voltage Multiple Spot Housings (Required)		Model	Type	Wattage	Rating
 	MT-216HS	2 Lights	12V 50W MAX	Non-IC	

3 LIGHTS

Trims (Order Housing Separately)		Model	Finish	Reflector/Trim	
 		3 Light Trim MT-316 Halogen MR16 sold separately MT-316LED LED MR16 included	WT/WT	White/White	
 		3 Light Invisible Trim™ MT-316TL Halogen MR16 sold separately MT-316LEDTL LED MR16 included	WT	White	
Low Voltage Multiple Spot Housings (Required)		Model	Type	Wattage	Rating
 		MT-316HS	3 Lights	12V 50W MAX	Non-IC

Non-IC housings require 3" of clearance from insulation on all sides. Recommended ELV dimming. Accommodates ceiling thickness of up to 1" for remodel & 3/4" for new construction.

LENSES, LOUVERS & LAMPS

Colored Lenses

LENS-16 Colored Lens

Color

AMB Amber
BLU Blue
GRN Green
RED Red

Lenses & Louvers

LENS-16-UVF UV Filter Lens
LENS-16-FR Frosted Lens
LENS-16-HCL Honeycomb Louver

LENS-16-SPR Spread Lens
LENS-16-BEL Beam Elongating Lens

LED MR16 Lamp

MR16LED-BAB





Finish



BK Black
WT White

2.5" LOW VOLTAGE MR16



- 1 watt minimum load transformers
- Non-IC housings require 3" of clearance from insulation on all sides
- Accommodates ceiling thickness of up to ¾" for both remodel or new construction

2.5" trims (Order Housing Separately)	Model	Finish	Baffle/Trim
 	HR-836 HR-836LED Metal Trim	BN WT	Brushed Nickel White/White
 	HR-837 HR-837LED Gimbal Ring, 25° Adjustment from Vertical	BK BN WT	Black Brushed Nickel White

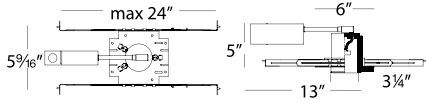




2.5" Housings (Required)	Model	Input	Transformer	Output	Type
	HR-801	120V	Electronic	12V, 50W max 1W min	Remodel Non-IC
	HR-802	120V	Electronic	12V, 50W max 1W min	New Construction Non-IC



Non-IC housings require 3" of clearance from insulation on all sides.

4" LOW VOLTAGE MR16

Accommodates Most LED MR16 Lamps

- Die-cast aluminum construction
- Steel spring clips secure trim to housing
- Abrasion resistant powder coat paint or plated metal finish

4" Downlight Trims (Order Housing Separately)		Model	Input	Finish	Description
		Square open reflector HR-D412-S MR16 sold separately HR-D412LED-S LED MR16 included	MR16, 50W max	SC/BN SC/WT	Specular/Brushed Nickel Specular/White
		Round open reflector HR-D412 MR16 sold separately HR-D412LED LED MR16 included	35° adjustment from vertical, MR16, 50W max		
		Step baffle HR-D411 MR16 sold separately HR-D411LED LED MR16 included		WT/WT	White Baffle/White
		Gimbal ring HR-D417 MR16 sold separately HR-D417LED LED MR16 included	25° adjustment from vertical, MR16, 50W max	BN WT	Brushed Nickel White
		Directional spot HR-D425 MR16 sold separately HR-D425LED LED MR16 included	80° adjustment from vertical, MR16, 50W max	WT	White

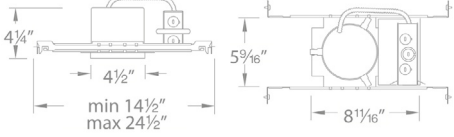
4" Low Voltage Housings (Required)	Model	Input	Transformer	Output	Type
	HR-8402E	120V	Electronic	12V, 50W max 1W min	New Construction Non-IC
	HR-8401E	120V	Electronic	12V, 50W max 1W min	Remodel Non-IC

Non-IC housings require 3" of clearance from insulation on all sides.
Accommodates ceiling thickness of up to 3/4" for remodel and new construction.

MR16 TRACK LUMINAIRES




809



System	Model	Lamp (Voltage/Wattage)	Finish
HHT	H	809LED MR16 LED 12V 7W Included	BK Black
LHT	L	809 MR16 sold separately	WT White
JHT	J/J2		

Example: **LHT-809-BK**


180



System	Model	Lamp (Voltage/Wattage)	Finish
HHT	H	180LED MR16 LED 12V 7W Included	BK Black
LHT	L	180 MR16 sold separately	WT White
JHT	J/J2		

Example: **LHT-180-BK**

LED LAMPS


		Model	Finish	Wattage	Color Temp	Input	Beam	CRI	Lumens	CBCP	Average Life
	MR16	MR16LED-BAB-BK MR16LED-BAB-WT	Black White	7W	3000K	12V	35°	90	450	850	25,000 Hours

LENS ACCESSORIES

Amber LENS-16-AMB	Blue Green LENS-16-BLU LENS-16-GRN	Red Frosted LENS-16-RED LENS-16-FR	UV Filter Spread LENS-16-UVF LENS-16-SPR	Beam Elongating Honeycomb Louver LENS-16-BEL LENS-16-HCL
--------------------------	--	--	--	--

MR16 TRACK LUMINAIRES

007



System	Model	Lamp (Voltage/Wattage)	Finish
HHT	H	007LED MR16 LED 12V 7W included	BK Black
LHT	L	007 MR16 sold separately	WT White
JHT	J/J2		

Example: **JHT-007-BK**


Clear lens included

Framing Projector Accessory


008FP-BK
008FP-WT

 Black
 White
Available in Monopoint

808




System	Model	Lamp (Voltage/Wattage)	Finish
HHT	H	808LED MR16 LED 12V 7W included	BK Black
LHT	L	808 MR16 sold separately	WT White
JHT	J/J2		

Example: **JHT-808LED-BK**

Clear lens included

Available in Monopoint


LED LAMPS

		Model	Finish	Wattage	Color Temp	Input	Beam	CRI	Lumens	CBCP	Average Life
	MR16	MR16LED-BAB-BK	Black	7W	3000K	12V	35°	90	450	850	25,000 Hours
		MR16LED-BAB-WT	White								

LENS ACCESSORIES

Amber LENS-16-AMB	Blue Green LENS-16-BLU LENS-16-GRN	Red Frosted LENS-16-RED LENS-16-FR	UV Filter Spread LENS-16-UVF LENS-16-SPR	Beam Elongating Honeycomb Louver LENS-16-BEL LENS-16-HCL
--------------------------	--	--	--	--


GU10 TRACK LUMINAIRES



System		Model	Lamp (Voltage/Wattage)	Finish	
HTK	H	103LED	GU10LED 7W included	BK	Black
LTK	L			DB*	Dark Bronze
JTK	J/J2			WT	White

Example: LTK-103LED-BK

*DB Finish only available in HTK



System		Model	Lamp (Voltage/Wattage)	Finish	
HTK	H	104LED	GU10LED 7W included	BK	Black
LTK	L			WT	White
JTK	J/J2				


Example: LTK-104LED-WT

LED LAMPS

		Model	Finish	Power	Color Temp	Voltage	Beam	CRI	Lumens	CBCP	Average Life
	GU10	GU10LED-BAB-BK	Black	7W	3000K	12V	35°	90	470	850	25,000 Hours
		GU10LED-BAB-WT	White								

PAR & BR TRACK LUMINAIRES


720, 730

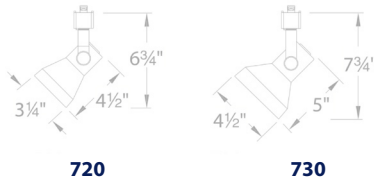**720****730**

System	Model	Lamp (Voltage/Wattage)	Finish
HTK	H	PAR20 50W max PAR30 75W max	BK Black WT White
LTK	L		
JTK	J/J2		
	720		
	730		

Example: **HTK-730-WT***Order lamp separately*

763, 764, 765

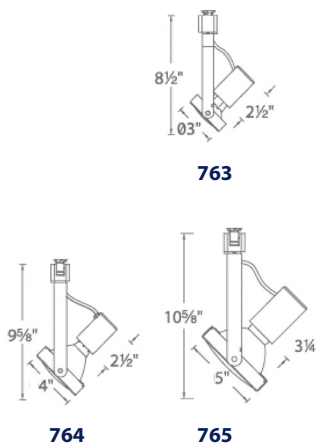
**763****764****765**

System	Model	Lamp (Voltage/Wattage)	Finish
HTK	H	BR20, PAR20 50W max BR30, PAR30 75W max BR40, PAR38 100W max	BK Black WT White
LTK	L		
JTK	J/J2		
	763		
	764		
	765		

Example: **HTK-763-WT***Order lamp separately*



704




System		Model	Lamp (Voltage/Wattage)	Finish
HTK	H	704	120V BR30 and PAR30 75W Max	BK Black
LTK	L			WT White
JTK	J/J2			

Example: **LTK-704-WT** *Order lamp separately*



703




System		Model	Lamp (Voltage/Wattage)	Finish
HTK	H	703	BR30 and PAR30 75W Max	BK Black
LTK	L			WT White
JTK	J/J2			

Example: **HTK-703-BK** *Order lamp separately*



PAR & BR TRACK LUMINAIRES

178 UNIVERSAL MEDIUM BASE



System	Model	Lamp (Voltage/Wattage)	Finish
HTK H	178	BR20/30/40. PAR20/30/38 120V 100W Max	BK Black
LTK L			WT White
JTK J/J2			

Example: **LTK-178-BN**


Order lamp separately

BARN DOOR (ORDER SEPARATELY)

PAR20BD	BK Black
PAR30BD	WT White
PAR38BD	



725



System	Model	Lamp (Voltage/Wattage)	Finish
HTK H	725	PAR20 / BR20 50W max	BK Black
LTK L			WT White
JTK J/J2			

Example: **HTK-725-WT**

Order lamp separately

INDEX

DISC II	4-5
ATLANTIS	6
ATLANTIS FLUSH	7
GEMINI	8-9
INDOOR ALUMINUM CHANNELS	11
BARLIGHT	12-13
MINI PUCK LIGHT	15
PUCK LIGHT	16-17
LOTOS 2" ADJUSTABLE	19
LOTOS 4" & 6" ADJUSTABLE	20
LOTOS R 4" REGRESSED ADJUSTABLE	21
LOTOS 4" & 6"	22-23
ION 2"	24
PATRIOT 3"	25
POP-IN 4"	26
BLAZE 6"	27
TWIST-N-LITE LUMINAIRE SYSTEM	28-29
EDGELESS	31
I CAN'T BELIEVE IT'S NOT RECESSED	32
DISC	33
BLO • FLO • GLO	35
ROUND & SQUARE 5"	36
ROUND & SQUARE	37
LITHIUM EM BATTERY BACKUP	39
METRO LED FLUSH MOUNT	40
METRO	41
REMI	43
STUDIO	44
RAZOR	45
DEMI	46
SLIM	47
TURBO	49
FUSE	50
LINK	51
CUBIX & CYLINDER	53
CYLINDER OUTDOOR SCONCE	54
VUE	55
MIDTOWN	56
VEGA	57
120/277V RECTANGULAR STEP & WALL LIGHTS	58-59
SOLO LED FIXED RAIL	60
LOW VOLTAGE LED/MR16 FLEXIBLE SPOT LIGHT	61
BULLET 7010	62
CHARGE 8010 & 8020	63
H TRACK SYSTEM	64-65
HTRACK CURRENT LIMITER	66
LOW VOLTAGE MR16 MULTIPLE SPOTS (1 WATT MINIMUM LOAD TRANSFORMERS)	67
2.5" LOW VOLTAGE MR16	68
4" LOW VOLTAGE MR16	69
MR16 TRACK LUMINAIRES	70-71
GU10 TRACK LUMINAIRES	72
PAR & BR TRACK LUMINAIRES	73-75

Headquarters

Tel: 800.526.2588
Fax: 800.526.2585

44 Harbor Park Dr
Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway
Suite 100
Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave
Ontario, CA 91761

Consult our manufacturing facility to take advantage of our custom capabilities
in large quantities. For up to date product specifications and assistance please
visit **waclighting.com**
or call

1-800-526-2588

WAC LIMITED®

WAC LIMITED technology and designs are protected by several patents and patent applications. WAC LIMITED will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe its patents are being infringed.

Copyright © 2024 WAC LIMITED. All rights reserved. This catalog is copyrighted and WAC LIMITED will use all measures available to it under the law against anyone who copies or derives from its copyrighted work.

WAC LIMITED retains the right to modify the design of its products at any time as part of the company's continuous improvement program. Please refer to our website for the latest product specifications.

wacighting.com

