



WAC LIMITED®

2025





WAC LIMITED

Maximize desirability and minimize expenses with WAC LIMITED products designed to accommodate single-family or multi-family residential, apartment living, and large-scale hospitality projects.

A well-lit space elevates the perceived value of all finishes used and increases functionality of spaces while also minimizing maintenance and energy expenses. Dollar for dollar, quality lighting improves occupant experiences more than any other construction material. Our wide array of products covers kitchens, baths, bedrooms, closets, hallways, living rooms, laundry rooms and garages—all designed for safety and proven to last.

We also understand that installation costs are a major part of the value equation. As such, WAC LIMITED luminaires are engineered to reduce these costs.

DISC II




F-033L-BN



An energy efficient ceiling fan with a quiet DC motor and LED luminaire make Disc II 70% more efficient than conventional fans.

DISC II

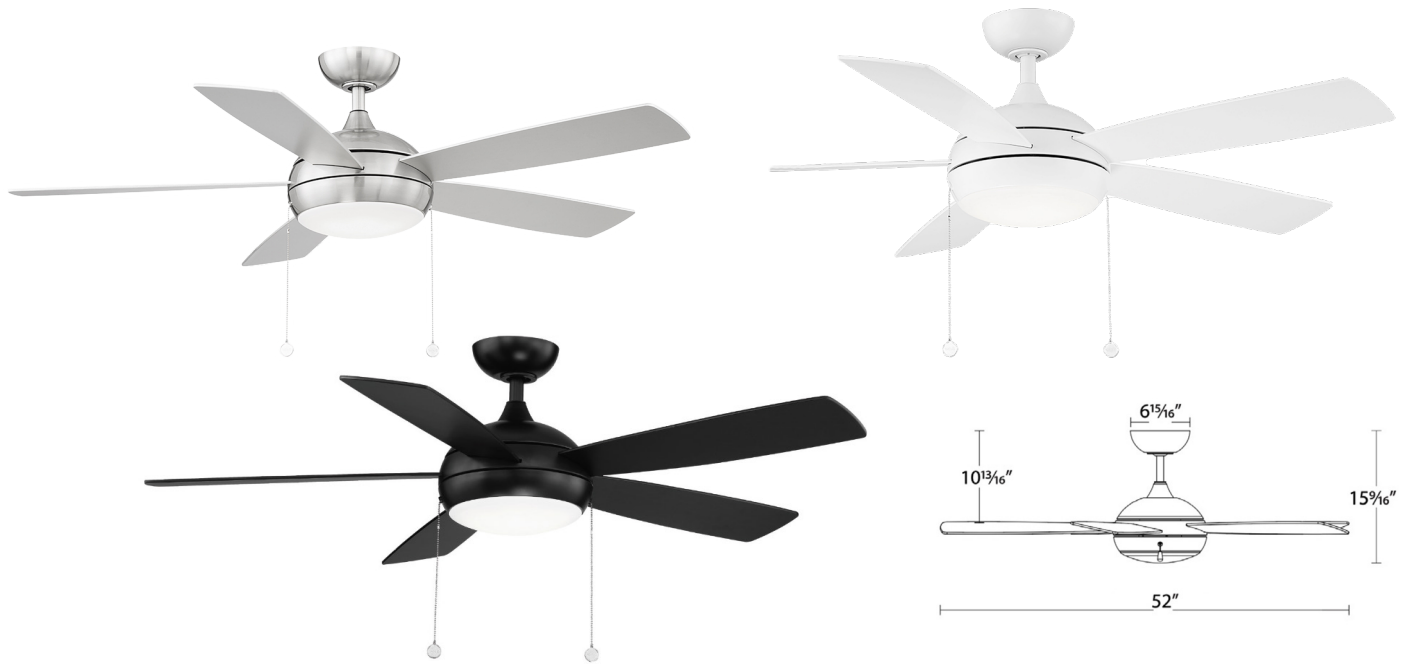

A streamlined look suited for bedrooms and living rooms. The sweep of the 52" blades efficiently creates a cooling effect and complements the silent DC motor.

| | |
|---------------------------------|--|
| Blade: | 12° pitch, 52" sweep, plywood |
| Downrod: | ¾" W x 4 ½" H included |
| Mounting Slope: | Up to 30° standard, 45° with optional Slope Ceiling Kit |
| Lead Wire: | 80" |
| Hanging Weight: | 18 lbs |
| Lumens/Delivered Lumens: | 2520-2620/1692-1746 |
| Total Power: | 52W |
| LED Power: | 26W |
| CRI: | 90 |
| Color Temperature: | 2700K, 3000K, 4000K, 5000K |
| LED Rated Life: | 50,000 hrs |
| LED Dimming: | 100%-10% ELV/ TRIAC (Refer to online product page for dimming compatibility) |

- 3-speed 120 x 15 DC motor for quiet and powerful operation
- Precision balanced blades for wobble-free operation
- Pull-chain operated and reversible from housing
- Fan is Energy Star rated
- Memory module—fan will recall last speed setting if switched off

| Model | Housing | | Blade |
|---------------|-----------|----------------|----------------|
| F-033L | BN | Brushed Nickel | Brushed Nickel |
| | MB | Matte Black | Matte Black |
| | MW | Matte White | Matte White |

Example: **F-033L-BN**


| ENERGY GUIDE | | |
|---------------|------------|------------------|
| Standard | High Speed | Weighted Average |
| Electricity | 25W | 17W |
| Airflow | 5,032 CFM | 3,964 CFM |
| Energy Costs* | - | \$5/yr |
| Efficiency | 237 CFM/W | 237 CFM/W |

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day

ACCESSORIES *sold separately*

| | | |
|---------------------------------|------------|--|
| DC- Coupler | BN | Brushed Nickel |
| | MB | Matte Black |
| | MW | Matte White |
| SC- Slope Ceiling Kit | BN | Brushed Nickel |
| | MB | Matte Black |
| | MW | Matte White |
| DR- Downrods | 12" | BN Brushed Nickel MB Matte Black MW Matte White |
| | 18" | |
| | 24" | |
| | 36" | |
| | 48" | |
| | 60" | |
| 72" | | |

ATLANTIS

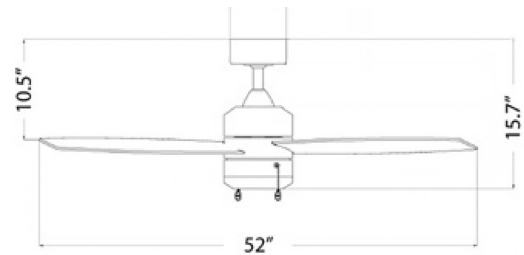

ATLANTIS offers a damp rated, high-value fan with three speed options and can be reversed from the housing. Enhance your interiors with the gently-curved shape of this elegant fan.

- Blade:** 13° pitch, 52" sweep, plywood
- Downrod:** 3/4" W x 6" H included
- Mounting Slope:** Up to 30° standard, 45° with optional Slope Ceiling Kit
- Lead Wire:** 80"
- Hanging Weight:** 18 lbs
- Lumens/Delivered Lumens:** 1600/708
- Total Power:** 83W
- LED Power:** 19.5W
- CRI:** 90
- Color Temperature:** 3000K
- LED Rated Life:** 50,000 hrs
- LED Dimming:** 100%-10% ELV/ TRIAC (Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 16 AC motor
- Pull chain operation
- Fan is reversible from housing

| Model | Housing | Blade | |
|---------------|-----------|-------------|-------------|
| F-072L | MB | Matte Black | Matte Black |
| | MW | Matte White | Matte White |

Example: **F-072L-MB**


| ENERGY GUIDE | | |
|---------------|------------|------------------|
| Standard | High Speed | Weighted Average |
| Electricity | 63W | 40W |
| Airflow | 5,001 CFM | 3,717 CFM |
| Energy Costs* | - | \$11/yr |
| Efficiency | 92 CFM/W | 92 CFM/W |

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day

ACCESSORIES sold separately

| | | |
|---------------------------------|------------------------|---|
| DC- Coupler | MB MW | Matte Black Matte White |
| SC- Slope Ceiling Kit | MB MW | Matte Black Matte White |
| DR- Downrods | MB MW | Matte Black Matte White |
| | | 12" 18" 24" 36" 48" 60" 72" |

ATLANTIS FLUSH

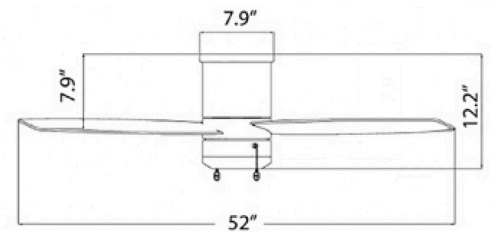

ATLANTIS FLUSH offers a damp rated, high-value fan with three speed options and can be reversed from the housing. Enhance your interiors with the gently-curved shape of this elegant fan.

- Blade:** 13° pitch, 52" sweep, plywood
- Lead Wire** 8"
- Hanging Weight:** 18 lbs
- Lumens/Delivered Lumens:** 1600/708
- Total Power:** 83W
- LED Power:** 19.5W
- CRI:** 90
- Color Temperature:** 3000K
- LED Rated Life:** 50,000 hrs
- LED Dimming:** 100%-10% ELV/TRIAC
(Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 16 AC motor
- Pull chain operation
- Fan is reversible from housing

| Model | Housing | Blade | |
|---------------|-----------|-------------|-------------|
| F-073L | MB | Matte Black | Matte Black |
| | MW | Matte White | Matte White |


Example: **F-073L-MB**

| ENERGY GUIDE | | |
|---------------|------------|------------------|
| Standard | High Speed | Weighted Average |
| Electricity | 63W | 40W |
| Airflow | 4,116 CFM | 3,046 CFM |
| Energy Costs* | - | \$11/yr |
| Efficiency | 75 CFM/W | 75 CFM/W |

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day



QUADE

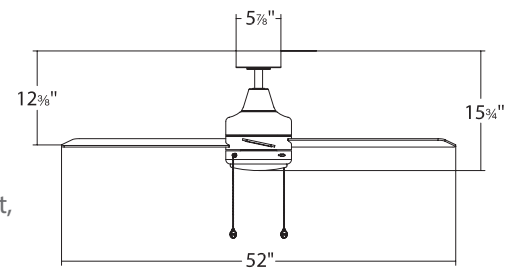

This four-blade, double pull chain ceiling fan offers a clean aesthetic. Its minimalist, industrial design is ideal for today's lofts, home offices, and bedrooms. The LED luminaire is offered in four CCTs with impressive light output. Three attractive housing and blade finish combinations are available. The 13-degree pitch on every blade moves the perfect amount of air when activated. A wide range of downrod lengths are available for different standard and slope ceiling heights.

- Blade:** 13 degrees 52
- Downrod:** 0.75 ID x 6"H
- Mounting Slope:** Up to 30
- Lead Wire:** 80"
- Hanging Weight:** 15 lbs
- Lumens/Delivered Lumens:** 1991 - 2159 (Based on CCT) / 980
- Total Power:** 67W
- LED Power:** 21W
- CRI:** 90
- Color Temperature:** 2700K, 3000K, 4000K, 5000K (selectable)
- LED Rated Life:** 50,000 hrs
- LED Dimming:** 100%-10% ELV/TRIAC (Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 20 AC motor
- Pull chain operation
- Fan is reversible from housing

| Model | Housing | | Blade |
|---------------|-----------|----------------|----------------|
| F-106L | BN | Brushed Nickel | Brushed Nickel |
| | MB | Matte Black | Matte Black |
| | MW | Matte White | Matte White |

Example: **F-106L-MB**

| ENERGY GUIDE | | |
|---------------|------------|------------------|
| Standard | High Speed | Weighted Average |
| Electricity | 46W | 31W |
| Airflow | 4564 CFM | 3431 CFM |
| Energy Costs* | - | \$9/yr |
| Efficiency | 107 CFM/W | 107 CFM/W |

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day


ACCESSORIES *sold separately*

| | | |
|---------------------------------|------------|--|
| DC- Coupler | BN | Brushed Nickel |
| | MB | Matte Black |
| | MW | Matte White |
| SC- Slope Ceiling Kit | MB | Brushed Nickel |
| | MW | Matte Black |
| | MW | Matte White |
| DR- Downrods | 12" | BN Brushed Nickel MB Matte Black MW Matte White |
| | 18" | |
| | 24" | |
| | 36" | |
| | 48" | |
| | 60" | |
| | 72" | |

HUG PULL CHAIN 44



JA8
TITLE 2

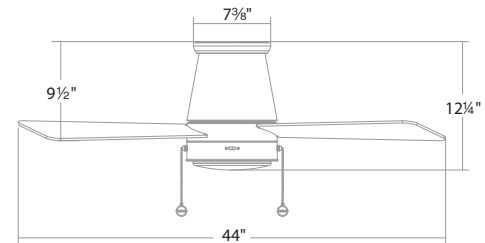

The Hug Pull Chain's handsome style enhances various designs, making it perfect for mid-size spaces, including bedrooms, mudrooms, and other areas throughout the home.

This three-blade, double-pull chain ceiling fan features a 13.5-degree pitch on every blade, which moves the perfect amount of air for any application. The round shade on the underside of the fan features an LED luminaire that offers a complete layer of light in four CCTs.

| | |
|---------------------------------|--|
| Blade: | 13.5 degrees 44 |
| Lead Wire | 8" |
| Hanging Weight: | 15.1lbs |
| Lumens/Delivered Lumens: | 1991 - 2159 (Based on CCT) / 999 |
| Total Power: | 70W |
| LED Power: | 21W |
| CRI: | 90 |
| Color Temperature: | 2700K, 3000K, 4000K, 5000K (selectable) |
| LED Rated Life: | 50,000 hrs |
| LED Dimming: | 100%-10% ELV/ TRIAC (Refer to online product page for dimming compatibility) |

- 3 fan speeds
- Silent 153 x 18 AC motor
- Pull chain operation
- Fan is reversible from housing


| Model | Housing | | Blade |
|---------------|-----------|----------------|----------------|
| F-107L | BN | Brushed Nickel | Brushed Nickel |
| | MB | Matte Black | Matte Black |
| | MW | Matte White | Matte White |

Example: **F107L-MB**

| ENERGY GUIDE | | |
|---------------|------------|------------------|
| Standard | High Speed | Weighted Average |
| Electricity | 49W | 28W |
| Airflow | 4845 CFM | 3048 CFM |
| Energy Costs* | - | \$8/yr |
| Efficiency | 93 CFM/W | 93 CFM/W |

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day

HUG PULL CHAIN 52

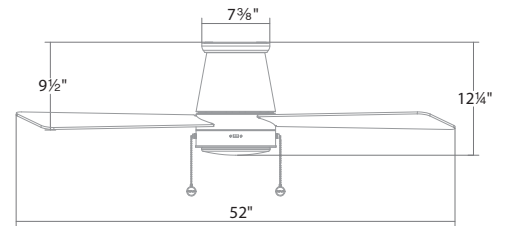

The Hug Pull Chain’s handsome style enhances various designs, making it perfect for mid-size spaces, including bedrooms, mudrooms, and other areas throughout the home. This three-blade, double-pull chain ceiling fan features a 13.5-degree pitch on every blade, which moves the perfect amount of air for any application. The round shade on the underside of the fan features an LED luminaire that offers a complete layer of light in four CCTs.

| | |
|---------------------------------|---|
| Blade: | 13.5 degrees 52" |
| Lead Wire | 8" |
| Hanging Weight: | 15.7lbs |
| Lumens/Delivered Lumens: | 1991 - 2159 (Based on CCT) / 999 |
| Total Power: | 73W |
| LED Power: | 21W |
| CRI: | 90 |
| Color Temperature: | 2700K, 3000K, 4000K, 5000K (selectable) |
| LED Rated Life: | 50,000 hrs |
| LED Dimming: | 100%-10% ELV/TRIAC (Refer to online product page for dimming compatibility) |

- 3 fan speeds
- Silent 153 x 18 AC motor
- Pull chain operation
- Fan is reversible from housing

| Model | Housing | | Blade |
|---------------|-----------|----------------|----------------|
| F-108L | BN | Brushed Nickel | Brushed Nickel |
| | MB | Matte Black | Matte Black |
| | MW | Matte White | Matte White |

Example: **F108L-MB**

| ENERGY GUIDE | | |
|---------------|------------|------------------|
| Standard | High Speed | Weighted Average |
| Electricity | 52W | 33W |
| Airflow | 4921 CFM | 3087 CFM |
| Energy Costs* | - | \$9/yr |
| Efficiency | 93 CFM/W | 93 CFM/W |

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day



CUT AND SECURELY RECONNECT WITH EASE



Input: 24VDC
Lumens: Up to 300 lm/ft
Rated Life: 50,000 hours



- Cut and re-connectable with secure screw terminal accessories
- May be cut every 2 inches
- Uniform illumination
- Seamless line of light

| System | Lumens | Max Run | Wattage | Length | Length Description | Color Temp | CRI | Finish |
|----------------|------------|-------------------------|---------|------------|--|-----------------|-----|-----------------|
| T24-GE1 | 100+ lm/ft | 40ft (60W), 40 ft (96W) | 1.2W/ft | 15 | 15 ft spool (incl. 2 pcs Tape to Tape Connector) | 27 2700K | 90 | WT White |
| T24-GE2 | 200+ lm/ft | 24ft (60W), 30ft (96W) | 2.2W/ft | 24 | 24 ft spool (incl. 4 pcs Tape to Tape Connector) | 30 3000K | | |
| T24-GE3 | 300+ lm/ft | 15ft (60W), 24ft (96W) | 3.9W/ft | 100 | 100 ft spool (incl. 10 pcs Tape to Tape Connector) | 35 3500K | | |
| | | | | | | 40 4000K | | |

Example: **T24-GE3-15-27WT**



GEMINI KIT

This kit provides all the necessary components for seamless single-CCT linear lighting installations. Tailored for a quick and easy installation, these kits ensure optimal compatibility and an easy setup. Enhance your efficiency and eliminate guesswork with our curated installation kits, designed to deliver superior performance and reliability for any lighting project.





INCLUDES:

- Gemini Tape 300 24VDC 15ft
- Remote Power Supply 96W 24VDC
- In Wall Rated Extension Cable 12ft White
- Power to Tape connector 10 pcs
- Tape to Tape connector 3 pcs

| System | Lumens | Max Run | Wattage | Length | Color Temp | CRI | Finish |
|-------------------------|------------|------------------------|---------|-------------|------------|-----|--------|
| T24-GE3-15-27KIT | 300+ lm/ft | 15ft (60W), 24ft (96W) | 3.9W/ft | 15 ft spool | 2700K | 90 | White |
| T24-GE3-15-30KIT | | | | | 3000K | | |
| T24-GE3-15-35KIT | | | | | 3500K | | |

Example: **T24-GE3-15-30KIT**







POWER SUPPLY

| Type | Model | Dimension | Input | Output | Dimming |
|--|--------------------------|---|-----------|---------------|-----------------|
|  <p>Portable power supply</p> <ul style="list-style-type: none"> • Include 6' lead wire • Integral on-off switch | PS-24DC-60P-GE | 4" x 2 ³ / ₁₆ " x 1 ¹ / ₂ " | 120V | 24VDC 60W | Non Dimmable |
|  <p>Remote power supply</p> <ul style="list-style-type: none"> • ELV Dimming 100%-10% • Include 6' lead wire | EN-BT60-24* | 6 ¹ / ₂ " x 2 ¹ / ₁₆ " x 1 ¹ / ₄ " | 120V | 24VDC 60W | ELV |
| | EN-BT96-24* | 6 ¹ / ₂ " x 2 ¹ / ₁₆ " x 1 ¹ / ₄ " | 120V | 24VDC 96W | ELV |
|  <p>Remote power supply</p> <ul style="list-style-type: none"> • TRIAC, ELV Dimming 100%-1% • Universal Input, ≤ 0.9 pf | PS-24DC-U60R-BT | 8 ¹ / ₁₆ " x 2 ¹ / ₁₆ " x 1 ¹ / ₄ " | 120V-277V | 24VDC 60W | ELV/TRIAC |
| | PS-24DC-U96R-BT | 8 ¹ / ₁₆ " x 2 ¹ / ₁₆ " x 1 ¹ / ₄ " | 120V-277V | 24VDC 96W | ELV/TRIAC |
|  <p>Remote power supply</p> <ul style="list-style-type: none"> • 3 x 96W outputs (288W total) • Include 3 x 6' lead wires | PS-24DC-U3X96R-BT | 12" x 4 ⁵ / ₁₆ " x 2" | 120V-277V | 24VDC 3 x 96W | ELV/TRIAC/0-10V |



*Not compatible with Touch Panel and Motion Sensor (CT-6A-R2)

*Not compatible with iR sensor (IR-96-24VACDC)


ACCESSORIES FOR GEMINI TAPE

| Type | Model | Finish |
|---|------------------|------------------------------------|
|  <p>Tape to Tape Connector Connects tape sections (10 pieces per pack)</p> | T24-BS-MM | |
|  <p>Power to Tape Connector Connects power cable to tape (10 pieces per pack)</p> | T24-BS-PM | CL Clear |
|  <p>L Connector Connects tape sections (2 pieces per pack)</p> | T24-BS-L | |
|  <p>Flex Y Connector Connects tape sections and power feed Includes LED-T-B (1pc)</p> | T24-BS-Y | BK Black WT White |
|  <p>Flex X Connector Connects tape sections and power feed Includes LED-T-B (1pc)</p> | T24-BS-X | |
|  <p>Low Voltage Wiring Box Neatly house connections for up to 2 wires</p> | LED-T-B | WT White |


Example: **T24-BS-MM-CL**

| Type | Model | Finish |
|--|-----------------------|--------|
|  <p>Joiner Cable Extend distance between tape sections</p> | T24-BS-IC-002 | 2 in |
| | T24-BS-IC-006 | 6 in |
| | T24-BS-IC-012 | 1 ft |
| | T24-BS-IC-036 | 3 ft |
| | T24-BS-IC-072 | 6 ft |
|  <p>Extension Cable Extends distance between tape sections and power supply (Includes LED-T-B (1 pc) & screw driver)</p> | T24-BS-EX2-072 | 6 ft |
| | T24-BS-EX2-144 | 12 ft |
| | T24-BS-EX2-240 | 20 ft |
| | T24-BS-EX2-480 | 40 ft |

Example: **T24-BS-EX2-240-WT**

| Model | Finish | Input/Output | L | W | H | Description |
|--|----------------|---------------|---------------------------------|------|------|---|
|  <p>IR-96-24VACDC-BK IR-96-24VACDC-WT</p> | Black White | 24V AC/DC 96W | 1 ³ / ₈ " | 3/4" | 3/8" | IR (Infrared) sensor switch works by turning the lights on when it becomes unobstructed. Can be surface mounted with bracket provided or double sided adhesive. |


INDOOR ALUMINUM CHANNELS

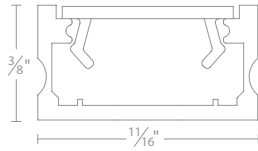

SHALLOW ALUMINUM CHANNEL LED-T-CH5-BK
LED-T-CH5-WT 5'
LED-T-CH5-AL


ADDITIONAL END CAPS LED-T-CH5-EC-BK
LED-T-CH5-EC-WT 2 pcs
LED-T-CH5-EC-AL

Includes a diffuser, 2 end caps, and 5 screws.




**ALUMINUM CHANNEL
ADDITIONAL END CAPS** LED-T-CH 5'
LED-T-CH-EC 2 pcs

Diffuses light from InvisiLED tape.
Includes a diffuser, 2 end caps, and 5 screws.



**45° ANGLED ALUMINUM CHANNEL
ADDITIONAL END CAPS** LED-T-CH2 5'
LED-T-CH2-EC 2 pcs


Includes a diffuser, 2 end caps, and 5 screws.



**DEEP ALUMINUM CHANNEL
ADDITIONAL END CAPS** LED-T-CH1 5'
LED-T-CH1-EC 2 pcs


Eliminates visible hot spots.
Includes a diffuser, 2 end caps, and 5 screws.

INDOOR MOUNTING ACCESSORIES




ALUMINUM RETROFIT CHANNEL LED-T-RC 3 feet

Can be bent to create fixed curves or used as a glare shield.



CLEAR CHANNEL LED-TO24-CH5 5 feet

Compatible with InvisiLED Lite+, Pro+, Pro2+ and Pro3 only.



FIXED ANGLE CHANNEL CLIP LED-T-CL3-PT

Includes 2 pieces, 4 screws. Use to mount Aluminum Channel.



CLIP LED-T-CL

For surfaces that are difficult to adhere.
Includes: 10 pcs plastic clips and 10 pcs screws. Compatible with InvisiLED Lite+, Pro+, Pro2+ and Pro3 only.




CURVE CLIP LED-T-CL1

Clips to hold indoor InvisiLED tapes sections. Includes: 10 pcs plastic clips and 10 pcs screws. Compatible with InvisiLED Lite+, Pro+, Pro2+ and Pro3 only.



ADJUSTABLE CHANNEL CLIP LED-T-CL2-PT

Includes 2 pieces, 4 screws. Used to mount Aluminum Channel.
Adjust 50° from center either way.





OPTICAL CHANNELS AND LENS ACCESSORIES



FROSTED DIFFUSER

Standard diffuser included with channel.



LED-T-CH5-COV-FR 5'
LED-T-CH8-COV-FR 8'



**SPOT OPTIC DEEP CHANNEL
ADDITIONAL END CAPS**

Eliminates visible hot spots.
Includes a diffuser, 2 end caps, and 5 screws.



LED-T-CH3-SP 5'
LED-T-CH1-EC 2 pcs

Spot 9° Beam Angle




SEMI-CLEAR DIFFUSER

Optional diffuser available, order separately.



LED-T-CH5-COV-SF 5'
LED-T-CH8-COV-SF 8'



**FLOOD OPTIC DEEP CHANNEL
ADDITIONAL END CAPS**

Eliminates visible hot spots.
Includes a diffuser, 2 end caps, and 5 screws.



LED-T-CH3-FL 5'
LED-T-CH1-EC 2 pcs

Flood 54° Beam Angle




BLACK DIFFUSER

Optional diffuser available, order separately.



LED-T-CH5-COV-BK 5'
LED-T-CH8-COV-BK 8'



**WIDE FLOOD OPTIC DEEP CHANNEL
ADDITIONAL END CAPS**


Eliminates visible hot spots.
Includes a diffuser, 2 end caps, and 5 screws.



LED-T-CH3-WF 5'
LED-T-CH1-EC 2 pcs

Wide Flood 84° Beam Angle

UNDER CABINET STRIP PLUG & PLAY

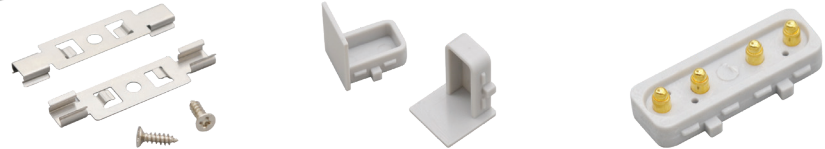

Accessories Included

Ideal for under cabinet lighting applications, our Strip Plug & Play fixture is easy to order and install. This low-profile luminaire is just 1/2" inch tall and 1/2" wide while delivering over 200 lumens per foot. For a clean architectural look, join the strips end-to-end seamlessly.



Input: 24VDC
Dimming: 100-10% ELV, 100-10% TRIAC
Rated Life: 50,000 hours

- Connect multiple pieces together for a seamless run
- Mount easily using clips, endcaps and joiner accessories
- Only need to purchase one length and one power supply for working system
- Construction: Aluminum with PC diffuser

| | Model | Length | Wattage | Lumens | Color Temp | CRI | Finish |
|--|-----------|---------------|---------|--------|------------------------------------|-----|---------------------------------------|
| | LU | 08 8" | 3W | 140 | 27 2700K 30 3000K | 90 | AL Aluminum BK Black |
| | | 20 20" | 6W | 360 | | | |
| | | 40 40" | 12W | 700 | | | |

Example: **LU-20-30-BK**

POWER SUPPLY

| Type | Model | Dimension | Input | Output |
|--|---------------------------|-----------------------------|-----------|-----------|
|  <p>Portable power supply</p> <ul style="list-style-type: none"> • Include 6' lead wire • Integral on-off switch | LU-2460D-P-BK | 4" x 2 3/16" x 1 1/2" | 120V | 24VDC 60W |
|  <p>Portable power supply</p> <ul style="list-style-type: none"> • Include 6' lead wire | LU-2420D-P-BK | 2 3/4" x 1 5/8" x 1 1/8" | 100V-240V | 24VDC 24W |
| | LU-2420D-P-WT | | | |
|  <p>Remote power supply</p> <ul style="list-style-type: none"> • Include 6' lead wire • TRIAC, ELV Dimming • Universal Input | LU-24DC060-UNV-RB2 | 8 13/16" x 2 1/16" x 2 1/4" | 100V-277V | 24VDC 60W |
| | LU-24DC096-UNV-RB2 | 8 13/16" x 2 1/16" x 2 1/4" | 100V-277V | 24VDC 96W |

ACCESSORIES

| Type | Model | Length | Finish |
|---|--|-----------------------------|----------------|
|  <p>Joiner Cable Extend Distance between sections</p> | LU-IC02 LU-IC06 LU-IC12 LU-IC36 LU-IC72 | 2" 6" 12" 3' 6' | Gray |
|  <p>I-Connector Connect two strip lights side-by-side</p> | LU-I | | |
|  <p>Live End Connect strip light to low voltage power supply</p> | LU-LE06 LU-LE72 | 6" 72" | |
|  <p>Multiple Terminal Block Enclosure to allow up to 6 output connections</p> | MTB-01 MTB-01-WT | | Black White |
|  <p>End Caps Cover the end of each run</p> | LU-EC | | Gray |
|  <p>Fixed Base Mount strip light flush to surface</p> | LU-FB | | |
|  <p>Angled Base Mount strip light at an angle</p> | LU-AB | | |

BARLIGHT



50% OFF 100%



ROCKER SWITCH
ADJUSTS BETWEEN
50%, OFF, OR 100%



ALL-IN-ONE CCT SELECTABLE,
ADJUSTS BETWEEN
2700K, 3000K
OR 3500K



BARLIGHT

ALL-IN-ONE CCT SELECTABLE




Perfect for lighting kitchen counters, our 120V undercabinet Barlight with selectable 3 CCT technology and a High-Low switch to provide quality illumination for all tasks.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Rocker switch to adjust between 0%, 50%, or 100%
- Construction: aluminum with white PC diffuser

| Model | Length | Wattage | Max Lumens at 3000K | Color Temp | CRI | Finish |
|--------------|---------------|---------|---------------------|-----------------------------------|-----|-----------------|
| BA-AC | 08 8" | 7W | 355 | CS 2700K 3000K 3500K | 90 | WT White |
| | 18 18" | 11W | 600 | | | |
| | 24 24" | 15W | 910 | | | |
| | 30 30" | 18W | 1075 | | | |

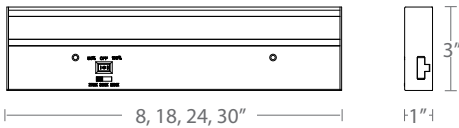

Example: **BA-AC18-CS-WT**


| Model | Description | Length | Finish |
|--|--------------------------|-------------------|-----------------|
| BA-I | 1" Connector BA-I | | WT White |
| BA-IC12 BA-IC24 BA-IC36 | Interconnect Cable BA-IC | 12" 24" 36" | |
| BA-PC6 | Power Cord | 72" | |





MINI PUCK LIGHT

An innovative undercabinet lighting solution that can be surface mounted or recessed mounted into cabinetry for a cleaner appearance, Mini Puck Lights deliver optimal ambient illumination in kitchens and other spaces.

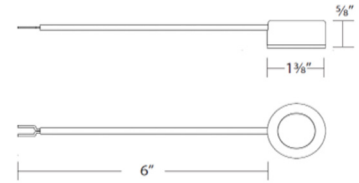

Input: 24VAC or 24VDC
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Install as surface mount or recessed mount
Compatible with portable wall plug or hardwired 24V driver/transformer
- Construction: die-cast Aluminum and PC diffuser
- Each fixture equipped with 6ft lead wires

| | Model | Wattage | Lumens | Color Temp | CRI | Finish |
|--|--|--------------|----------------|-----------------|-----|------------------------------------|
| | HR-LED10 1 single light | 2W per light | 95lm per light | 30 3000K | 90 | BK Black WT White |
| | HR-LED10/6 Pack of 6 lights | | | | | |
| | HR-LED10/10 Pack of 10 lights | | | | | |
| | HR-LED10/6K Puck Light Kit: 6 wired lights, 1 multiple terminal block, and 24V Portable Power Supply | | | | | |

Example: **HR-LED10-30-BK**

COMPATIBLE 24VDC CLASS 2 POWER SUPPLY

| | Model | Dimensions | Input | Output | Dimming | Finish |
|-----------------------|--|--|------------------------|------------------------|--------------------------|----------------|
| Portable Power Supply | EN-2420D-P-BK EN-2420D-P-WT | 2 3/4" x 1 5/8" x 1 1/8" | 100V-240V | 24VDC 24W | Non-Dimmable | Black White |
| Remote Power Supply | EN-24DC060-UNV-RB2 EN-24DC096-UNV-RB2 | 8 13/16" x 2 1/16" x 2 1/4" 8 13/16" x 2 1/16" x 2 1/4" | 100V-277V 100V-277V | 24VDC 60W 24VDC 96W | TRIAC, ELV TRIAC, ELV | Black Black |

COMPATIBLE 24VAC CLASS 2 POWER SUPPLY

| | Model | Dimensions | Input | Output | Dimming | Finish |
|-----------------------|---|--|--------------|-------------------------|--------------|----------------|
| Portable Power Supply | EN-2460-P-AR | 2 3/4" x 1 5/8" x 1 3/4" | 120V | 24VAC 60W | Non-Dimmable | Black |
| Remote Power Supply | EN-2460-RB2 EN-24100-RB2 | 6 1/2" x 1 5/8" x 1 1/4" 6 1/2" x 1 5/8" x 1 1/4" | 120V 120V | 24VAC 60W 24VAC 100W | ELV | Black Black |

MULTIPLE TERMINAL BLOCK

| | Model | Description | Finish |
|--|-----------------------------------|---|----------------|
| | MTB-01 MTB-01-WT | Multiple Terminal Block (Enclosure for up to 6 output connections) | Black White |

PUCK LIGHT



Surface or Recessed Mounted

120V Direct Input
No Driver Required

BUILD A SYSTEM

Available with 3 CCT selectable color temperatures, finishes, and recessed or surface mounted options. Order single pucks or kits of multiple pucks to link together.

BEAUTIFULLY FINISHED CAST ALUMINUM



Black



Brushed Nickel



White

ALL-IN-ONE CCT SELECTABLE







PUCK LIGHT

A solid lighting solution for kitchen counters, our 120V undercabinet Puck Light with 3 CCT selectable technology provides quality illumination for all tasks.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Install as surface mount or recessed mount
- No driver required
- Construction: die-cast aluminum and PC diffuser



| | Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|--|--|---------|------------|--------------------------------------|-----|--|
| | HR-AC70 1 single wired light | 4W | 290 | CS 2700K 3000K 3500K | 90 | BK Black BN Brushed Nickel WT White |
| | HR-AC71 1 single wired light and cord | | | | | |
| | HR-AC72 1 double wired light | | | | | |
| | HR-AC73 Puck light kit: 2 double wired lights, 1 single wired light, and cord | 4W x 3 | 290 x 3 | | | |

Example: **HR-AC72-CS-BN**

| | Model | Description | CRI | Finish |
|--|---------------|------------------------------------|-----|------------------------------------|
| | HR-PC6 | Power Cord | 90 | BK Black WT White |
| | HR-HWB | Hardware Box | | |
| | HR-IC | 12" 24" 36" Linking Cable | | |

Example: **HR-HWB-BK**



LOTOS 2" ADJUSTABLE LED RECESSED



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 2 1/4", driver: 1 1/4"
- 360° retractable pivot: downlight and adjustable
- Heavy gauge retention clips secure fixture to ceiling
- Installs into ceilings between 1/2" and 1 1/2" thick
- Minimum plenum space required: 4"
- Construction: steel with frosted TIR lens

| | Model | Beam | Wattage | Max Lumens | Max CBCP | Color Temp | CRI | Finish |
|--|---|--------------|---------|------------|----------|------------------|-----|-----------------|
| | R2ERAR 2" Round Adjustable IC Rated, Airtight, Wet Location Listed | | | | | | | |
| | R2ESAR 2" Square Adjustable IC Rated, Airtight, Wet Location Listed | | 6W | 500 | 1203 | | | |
| | R2ESAR-2 2 Light Adjustable IC Rated, Airtight, Wet Location Listed | W 45° | 12W | 500x2 | 1203x2 | 930 3000K | 90 | WT White |
| | R2ESAR-3 3 Light Adjustable IC Rated, Airtight, Wet Location Listed | | 18W | 500x3 | 1203x3 | | | |

Example: **R2ERAR-W930-WT**

LOTOS 4" & 6" ADJUSTABLE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



R4ERAR/R6ERAR



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 1 1/2", driver 1 1/4"
- 360° retractable pivot: downlight and adjustable
- Heavy gauge retention clips secures fixture to ceiling
- Installs into ceilings between 1/2" and 1 1/2" thick
- Minimum plenum space required: 4"
- Construction: steel with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

| | Model | Beam | Wattage | Max Lumens | Max CBCP | Color Temp | CRI | Finish |
|--|---------------------------------------|--------------|---------|------------|----------|---|-----|------------------------------------|
| | R4ESAR 4" Square Adjustable | W 45° | 9W | 750 | 1050 | 9CS 2700K 3000K 3500K 4000K 5000K | 90 | WT White |
| | R4ERAR 4" Round Adjustable | W 45° | 9W | 800 | 1020 | | | BK Black WT White |
| | R6ERAR 6" Round Adjustable | W 45° | 15W | 1340 | 1896 | | | |

Example: **R4ERAR-W9CS-WT**

- Installs into ceilings between 1/2" and 1 3/4" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours
- IC Rated, Airtight, Wet Location Listed

| FIRE RATED | Model | Beam | Wattage | Max Lumens | Max CBCP | Color Temp | CRI | Fire Rated | Finish |
|------------|--------------------------------------|--------------|---------|------------|----------|---|-----|------------|-----------------|
| | R4ERAR 4" Round Adjustable | W 45° | 9W | 800 | 1020 | 9CS 2700K 3000K 3500K 4000K 5000K | 90 | F | WT White |
| | R6ERAR 6" Round Adjustable | W 45° | 9W | 1320 | 1896 | | | | |

Example: **R6ERAR-W9CS-FWT**

| Frame-In Kit (Optional Accessory) | Model | Notes |
|-----------------------------------|------------------|---|
| New Construction Frame | RER-FRAME | Suitable for joists ranging from 12" to 24" apart |

LOTOS R 4" REGRESSED ADJUSTABLE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 1½", driver 1¼"
- 360° retractable pivot: downlight and adjustable
- Beam cutoff angle: 15°
- Heavy gauge retention clips secures fixture to ceiling
- Installs into ceilings between ½" and 1½" thick
- Minimum plenum space required: 4"
- Construction: steel with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

| | Model | Beam | Wattage | Max Lumens | Max CBCP | Color Temp | CRI | Finish |
|--|---|--------------|---------|------------|----------|------------------|-----|------------------------------------|
| | R4ERA2R 4" Round Regressed Adjustable | W 50° | 9W | 775 | 750 | 2700K | 90 | BK Black WT White |
| | | | | | | 3000K | | |
| | | | | | | 9CS 3500K | | |
| | | | | | | 4000K | | |
| | | | | | | 5000K | | |

Example: **R4ERA2R-W9CS-WT**

- Installs into ceilings between ½" and 1¾" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours
- IC Rated, Airtight, Wet Location Listed

| FIRE RATED | Model | Beam | Wattage | Max Lumens | Max CBCP | Color Temp | CRI | Fire Rated | Finish |
|------------|---|--------------|---------|------------|----------|------------------|-----|------------|-----------------|
| | R4ERA2R 4" Round Regressed Adjustable | W 50° | 9W | 775 | 750 | 2700K | 90 | F | WT White |
| | | | | | | 3000K | | | |
| | | | | | | 9CS 3500K | | | |
| | | | | | | 4000K | | | |
| | | | | | | 5000K | | | |

Example: **R4ERA2R-W9CS-FWT**


| Frame-In Kit (Optional Accessory) | Model | Notes |
|-----------------------------------|------------------|---|
| New Construction Frame | RER-FRAME | Suitable for joists ranging from 12" to 24" apart |



LOTOS R 6" REGRESSED ADJUSTABLE RETROFIT



ALL-IN-ONE CCT SELECTABLE

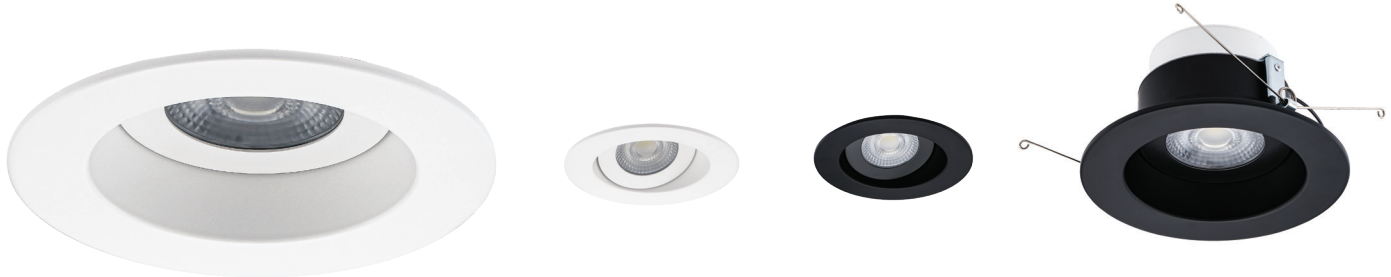

Versatile and multifunctional, the Lotus R Downlights retrofit into 6-inch housings and are field adjustable up to 50 degrees in the regressed trim for quality, glare-free illumination. Offered as an All-In-One Five CCT Selectable luminaire, Lotos is ideal for recessed applications in multifamily homes, hotels, senior living and apartment buildings.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Compatible with most standard 6" recessed cans
- 360° retractable pivot: downlight and adjustable
- Beam cutoff angle: 30°
- Edison Base (E26) adapter included
- Maximum Tilt Angle: 50°
- Construction: steel with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

| | Model | Beam | Wattage | Max Lumens | Color Temp | CRI | Finish |
|--|--|--------------|---------|------------|------------------|-----|------------------------------------|
| | R6DRAK 4" Round Regressed Adjustable | A 50° | 13W | 1270 | 2700K | 90 | BK Black WT White |
| | | | | | 3000K | | |
| | | | | | 9CS 3500K | | |
| | | | | | 4000K | | |
| | | | | | 5000K | | |

Example: **R6DRAK-A9CS-WT**

LOTOS 4" & 6" ROUND LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 1", driver 1"
- Heavy gauge retention clips secures fixture to ceiling
- Installs into ceilings between 1/2" and 1 1/2" thick
- Minimum plenum space required: 4"
- Construction: steel with translucent diffuser
- IC Rated, Airtight, Wet Location Listed

| | Model | Beam | Wattage | Max Lumens | Color Temp | CRI | Finish |
|--|-------------------------------------|----------|---------|------------|------------------------------------|-----|-----------------|
| | R4ERDR 4" Round Downlight | W | 8W | 725 | 2700K 3000K | 90 | WT White |
| | R6ERDR 6" Round Downlight | W | 14W | 1200 | 9CS 3500K 4000K 5000K | | |

Example: **R4ERDR-W9CS-WT**

- Installs into ceilings between 1/2" and 1 3/4" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours
- IC Rated, Airtight, Wet Location Listed

| FIRE RATED | Model | Beam | Wattage | Max Lumens | Color Temp | CRI | Fire Rated | Finish |
|------------|-------------------------------------|----------|---------|------------|------------------------------------|-----|------------|-----------------|
| | R4ERDR 4" Round Downlight | W | 8W | 725 | 2700K 3000K | 90 | F | WT White |
| | R6ERDR 6" Round Downlight | W | 12W | 1200 | 9CS 3500K 4000K 5000K | | | |

Example: **R4ERDR-W9CS-FWT**

| Frame-In Kit (Optional Accessory) | Model | Notes |
|-----------------------------------|------------------|---|
| New Construction Frame | RER-FRAME | Suitable for joists ranging from 12" to 24" apart |

Example: **R6ERAR-W9CS-FWT**

LOTOS 4" & 6" SQUARE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 1", driver 1"
- Heavy gauge retention clips secures fixture to ceiling
- Installs into ceilings between 1/2" and 1 1/2" thick
- Minimum plenum space required: 4"
- Construction: steel with translucent diffuser
- IC Rated, Airtight, Wet Location Listed

| | Model | Beam | Wattage | Max Lumens | Color Temp | CRI | Finish |
|--|--------------------------------------|----------|---------|------------|------------------|-----|-----------------|
| | R4ESDR 4" Square Downlight | W | 8W | 600 | 2700K | 90 | WT White |
| | | | | | 3000K | | |
| | R6ESDR 6" Square Downlight | W | 14W | 950 | 9CS 3500K | 90 | WT White |
| | | | | | 4000K | | |
| | | | | | 5000K | | |

Example: **R4ESDR-W9CS-WT**

| Frame-In Kit (Optional Accessory) | Model | Notes |
|-----------------------------------|------------------|---|
| New Construction Frame | RER-FRAME | Suitable for joists ranging from 12" to 24" apart |

Example: **R6ERAR-W9CS-FWT**

POP-IN

4" LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Minimum profile downlight with driver and electrical connection box attached to fixture.

Power: 12W
Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Electrical wiring box directly on the back of the fixture
- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Construction: die-cast aluminum with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

| | Model | Beam | Max Lumens | Max CBCP | Color Temp | CRI | Finish |
|--|--|--------------|------------|----------|---|-----|------------------------------------|
| | R4DRDR Round Remodel | | | | | | |
| | R4DRDN Round New construction | F 45° | 1080 | 1309 | 9CS 2700K 3000K 3500K 4000K 5000K | 90 | BK Black WT White |
| | R4SDR Square Remodel | | | | | | |
| | R4SDN Square New construction | | 1000 | 1256 | | | |

Example: **R4DRDR-F9CS-WT**

| Frame-In Kit (Optional Accessory) | Model | Color Temp |
|-----------------------------------|---------------------|----------------------------------|
| New Construction Frame | R4DRDN-FRAME | Ceiling thickness: 1/2" - 1 1/2" |



BLAZE 6" LED RECESSED


ALL-IN-ONE CCT SELECTABLE



BLAZE 6" Round and Square.
5-CCT selectable downlight.

Power: 25W
Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours


- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Construction: die-cast aluminum with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

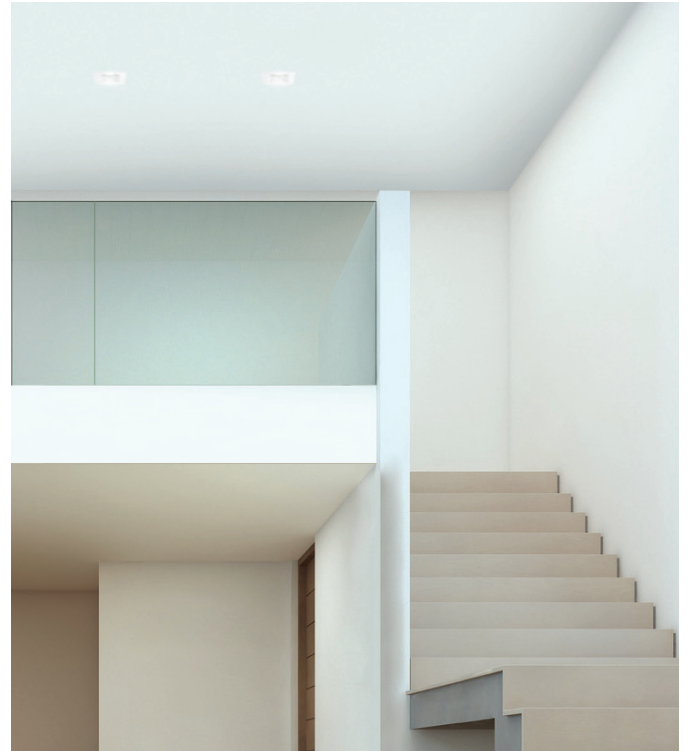

| | Model | Beam | Max Lumens | Max CBCP | Color Temp | CRI | Finish |
|--|---|--------------|------------|----------|---|-----|-----------------|
| | R6DRDR Round Remodel | F 55° | 2485 | 2130 | 9CS 2700K 3000K 3500K 4000K 5000K | 90 | WT White |
| | R6DRDN Round New construction | | | | | | |
| | R6SDDR Square Remodel | | 2360 | 2060 | | | |
| | R6SDSN Square New Construction | | | | | | |

Example: **R6SDDR-F9CS-WT**

| Frame-In Kit (Optional Accessory) | Model | Color Temp |
|-----------------------------------|---------------------|----------------------------------|
| New Construction Frame | R6DRDN-FRAME | Ceiling thickness: 1/2" - 1 1/2" |





KENRIC 3.5" LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Deep regress for glare free light. 1 fixture provides downlight and adjustable functions. Housing is compatible with either round or square configuration.

Power: 15W
Input: 120-277V
Dimming: 100%-5% ELV, TRIAC and 0-10V
Rated Life: 50,000 hours

- 360° horizontal rotation, 30° vertical tilt
- Support plate included for remodel installation
- Low-profile, regressed LED for glare control
- Die-cast aluminum, white powder coat
- Driver included
- IC-rated & airtight

| | Model | Beam | Max Lumens | Max CBCP | Color Temp | CRI | Finish |
|--|---|--------------|------------|----------|--|-----|-----------------|
| | R3JRAL Round Remodel Downlight/Adjustable Trimless | W 36° | 1450 | 3430 | CS 2700K 3000K 3500K 4000K 5000K | 90 | WT White |
| | R3JSAL Square Remodel Downlight/Adjustable Trimless | | 1420 | 3425 | | | |
| | R3JRAT Round Remodel Downlight/Adjustable Trim | | 1450 | 3430 | | | |
| | R3JSAT Square Remodel Downlight/Adjustable Trim | | 1420 | 3425 | | | |

Example: **R3JRAL-WCS-WT**

| Frame-In Kit (Optional Accessory) | Model | Notes |
|-----------------------------------|-----------------------|----------------------------------|
| New Construction Frame | R3JB-FRAME | Ceiling thickness: 1/2" - 1 1/2" |

ION 2" LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Minimum profile ION 2" Round and Square downlight with removable driver and electrical box.

Power: 9W
 Input: 120V-277V
 Dimming: 100%-10% ELV, 100%-5% TRIAC
 Rated Life: 50,000 hours

- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Construction: die-cast aluminum with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed



| | Model | Beam | Max Lumens | Max CBCP | Color Temp | CRI | Finish |
|--|---|--------------|------------|----------|---|-----|-----------------|
| | R2DRDR Round Remodel | F 30° | 695 | 2140 | 9CS 2700K 3000K 3500K 4000K 5000K | 90 | WT White |
| | R2DRDN Round New Construction | | | | | | |
| | R2DSDR Square Remodel | | | | | | |
| | R2DSDN Square New Construction | | | | | | |

Example: **R2DRDR-F9CS-WT**

| Frame-In Kit (Optional Accessory) | Model | Color Temp |
|-----------------------------------|---------------------|----------------------------------|
| New Construction Frame | R2DRDN-FRAME | Ceiling thickness: 1/2" - 1 1/2" |

PATRIOT 3" LED RECESSED



ALL-IN-ONE CCT SELECTABLE



5-CCT meets adjustability. 3" PATRIOT Recessed Downlight and Adjustable provide up to 1000 lumens, perfect for residential applications. An optional frame-in kit is available for all new construction installations.

Power: 12W
Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Two beam angle options included: 45° beam film pre-installed, remove film for 25° narrow beam
- Construction: die-cast aluminum with reflector
- IC Rated, Airtight, Wet Location Listed

| | Model | Beam | Max Lumens | Max CBCP | Color Temp | CRI | Finish |
|--|--|------------------------|------------|----------|---------------------------------------|-----|-----------------|
| | R3HRDR Round Remodel | F 25° 45° | 1035 | 3045 | 9CS 3500K 4000K 5000K | 90 | WT White |
| | R3HRAR Round Adjustable Remodel | | 1000 | 3095 | | | |
| | R3HSDR Square Remodel | | 1035 | 3045 | | | |
| | R3HSAR Square Adjustable Remodel | | 1000 | 3095 | | | |

Example: **R3HRDR-F9CS-WT**

| Frame-In Kit (Optional Accessory) | Model | Notes |
|-----------------------------------|------------------|----------------------------------|
| New Construction Frame | R3H-FRAME | Ceiling thickness: 1/2" - 1 1/2" |

TWIST-N-LITE LUMINAIRE SYSTEM



Quick and convenient. Easy to use and easy to install, our new Twist-N-Lite system offers a variety of surface mounts and pendant luminaires in five color temperatures and three finishes. The universal mounting base accommodates our complete suite of Twist-N-Lite products. The flexible design enables you to interchange the fixtures in the field to meet your various lighting applications. This energy-efficient engineering wonder offers dimmable options for high performance and a classic, minimalistic aesthetic. Select your color temperature, Twist it in and Turn it on. Elevating multifunctional illumination to a higher standard.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Installs over 3", 4" or combination 3/0, 4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser
- Shared canopy allows for easily swapping between fixtures without adjusting the mounting hardware
- All wiring and connections are made in the junction box prior to installing the mounting base and canopy

Quick Install: Mount and power any fixture in the Twist-N-Lite family by twisting it onto the canopy




TWIST-N-LITE

ALL-IN-ONE CCT SELECTABLE



- 45° flood beam angle




| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|------------------|---------|------------|------------|-----|--|
| FM-240103 | 12W | 900 | 2700K | 90 | BK Black BN Brushed Nickel WT White |
| | | | 3000K | | |
| | | | 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

Example: **FM-240103-CS-WT**



- Dual-layer acrylic for frosted and even glow




| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|------------------|---------|------------|------------|-----|--|
| FM-240203 | 9W | 550 | 2700K | 90 | BK Black BN Brushed Nickel WT White |
| | | | 3000K | | |
| | | | 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

Example: **FM-240203-CS-BK**



- Dual-layer acrylic for frosted and even look
- Retract or extend the cable by pressing on the cable gripper

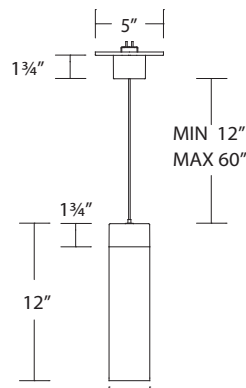

| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|------------------|---------|------------|------------|-----|--|
| PD-240212 | 13W | 900 | 2700K | 90 | BK Black BN Brushed Nickel WT White |
| | | | 3000K | | |
| | | | 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |


Example: **PD-240212-CS-BK**

TWIST-N-LITE

ALL-IN-ONE CCT SELECTABLE




Dual-layer acrylic for frosted and even look

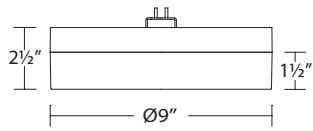


| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|------------------|---------|------------|-----------------|-----|--|
| FM-240209 | 22W | 1500 | 2700K | 90 | BK Black BN Brushed Nickel WT White |
| | | | 3000K | | |
| | | | CS 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

Example: **FM-240209-CS-BN**

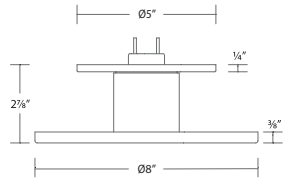


| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|------------------|---------|------------|-----------------|-----|--|
| FM-250708 | 10W | 720 | 2700K | 90 | BK Black BN Brushed Nickel WT White |
| | | | 3000K | | |
| | | | CS 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

Example: **FM-250708-CS-BK**

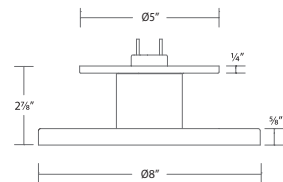

| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|------------------|---------|------------|-----------------|-----|--|
| FM-250808 | 14W | 800 | 2700K | 90 | BK Black BN Brushed Nickel WT White |
| | | | 3000K | | |
| | | | CS 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

Example: **FM-250808-CS-BK**

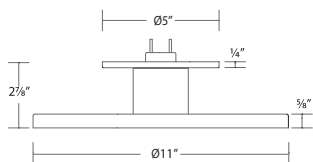

| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|------------------|---------|------------|-----------------|-----|--|
| FM-250811 | 19W | 1200 | 2700K | 90 | BK Black BN Brushed Nickel WT White |
| | | | 3000K | | |
| | | | CS 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

Example: **FM-250811-CS-BK**


TWIST-N-LITE



ALL-IN-ONE CCT SELECTABLE




| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|------------------|---------|------------|-----------------|-----|--|
| FM-250905 | 10W | 660 | 2700K | 90 | BK Black BN Brushed Nickel WT White |
| | | | 3000K | | |
| | | | CS 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

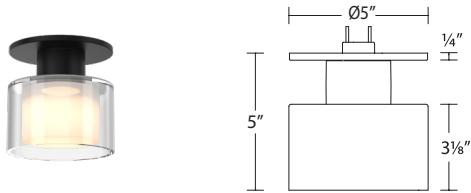


Example: **FM-250905-CS-BK**

| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|------------------|---------|------------|-----------------|-----|--|
| PD-250905 | 12W | 850 | 2700K | 90 | BK Black BN Brushed Nickel WT White |
| | | | 3000K | | |
| | | | CS 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

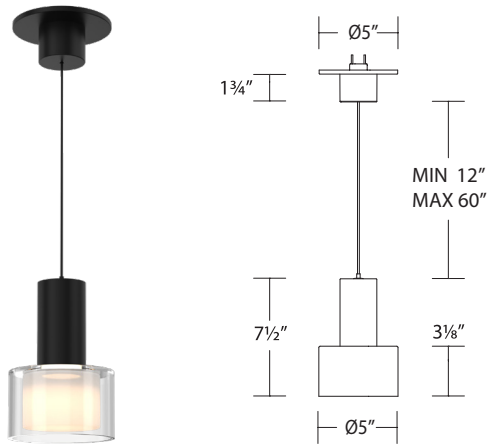

Example: **PD-250905-CS-BK**

| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|------------------|---------|------------|-----------------|-----|--|
| PD-251005 | 12W | 880 | 2700K | 90 | BK Black BN Brushed Nickel WT White |
| | | | 3000K | | |
| | | | CS 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

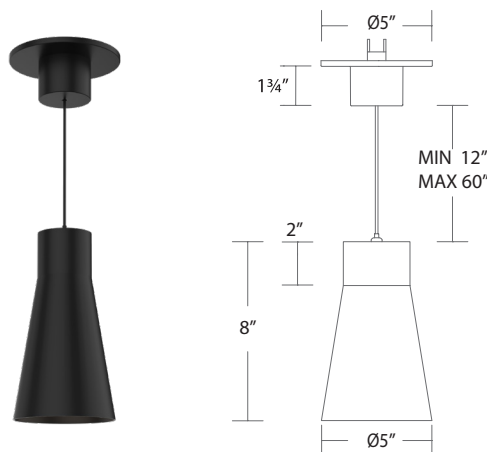

Example: **PD-251005-CS-BK**



EDGELESS FLUSH MOUNT



ALL-IN-ONE CCT SELECTABLE



5"



8"



12"

Edgeless LED luminaires are designed with a low profile and slim trim. They are engineered for smooth, glare-free, consistent illumination. A welcome addition to ceilings and walls for various applications.



Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Size: 5", 8", 12"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser

| | Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|--|------------------|---------|------------|--|-----|------------------------------------|
| | FM-240505 | 15W | 1330 | | | |
| | FM-240508 | 20W | 1985 | 2700K 3000K 9CS 3500K 4000K 5000K | 90 | BK Black WT White |
| | FM-240512 | 30W | 2750 | | | |

Example: **FM-240508-9CS-WT**



BLO • FLO • GLO

ALL-IN-ONE CCT SELECTABLE



BLO



Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Install over 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|---------------|------------|---------|---|-----|-----------------|
| | FM-113 | 1600 | 22W | CS 2700K 3000K 3500K 4000K 5000K | 90 | WT White |
| | FM-115 | 2230 | 26W | | | |

FLO



Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 24", 36", 48"
- Installation: wall and ceiling
- Construction: aluminum with translucent acrylic diffuser

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|---------------|------------|---------|---|-----|-----------------|
| | WS-224 | 1400 | 17W | CS 2700K 3000K 3500K 4000K 5000K | 90 | WT White |
| | WS-236 | 2250 | 28W | | | |
| | WS-248 | 2630 | 32W | | | |

GLO



Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Install over 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|---------------|------------|---------|---|-----|-----------------|
| | FM-211 | 1160 | 15W | CS 2700K 3000K 3500K 4000K 5000K | 90 | WT White |
| | FM-214 | 1660 | 22W | | | |
| | FM-216 | 2300 | 26W | | | |

ROUND & SQUARE

5" LED CEILING OR WALL LUMINAIRE



At just 1/2" thick, these edge-lit flush mounts are fantastic when ceiling cavities are shallow. Mounting over standard size junction boxes, the broad illumination is perfect for lighting hallways and other narrow spaces. Available in a range of sizes, smaller styles are also wet location rated for use outdoors.

Input: 120V-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Size: 5"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: injection molded UV rated PC with translucent diffuser
- Suitable for outdoor and coastal regions

| | Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|--|--------------------------|---------|------------|--------------------------------------|-----|--|
| | FM-05RN Round | 12W | 1050 | 930 3000K 935 3500K | 90 | BK Black BZ Bronze NI Nickel WT White |
| | FM-05SQ Square | 12W | 1030 | | | BZ Bronze WT White |

Example: **FM-05RN-930-WT**

ROUND & SQUARE



Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 7", 11", 15" (Round only)
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|--------------------------|------------|---------|--------------------------------------|-----|--|
| | FM-07RN Round | 1100 | 15W | | | |
| | FM-11RN Round | 1525 | 20W | | | BK Black BN Brushed Nickel BZ Bronze WT White |
| | FM-15RN Round | 2550 | 28W | 930 3000K 935 3500K | 90 | |
| | FM-07SQ Square | 1100 | 15W | | | BN Brushed Nickel BZ Bronze WT White |
| | FM-11SQ Square | 1650 | 20W | | | |

Example: **FM-15RN-930-WT**

ROUND



ALL-IN-ONE CCT SELECTABLE



This large ceiling luminaire offers an impressive size that will make a design statement while providing soft, diffused light and comforting illumination. Its robust 3,100 lumens are deployed for great rooms and larger spaces with high ceilings, or it can light up an entire walk-in closet with a single fixture. With a minimalistic design that complements a broad array of décor styles, this sleek, curvaceous luminaire integrates form and function to brighten the environment uniformly. Advanced 5-CCT All-in-One Technology provides five color temperatures from warm 2700K to cool 5000K white light.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 24"
- Fixture height: 1 3/4"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with acrylic diffuser

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|-----------------|-----|--|
| | FM-252124 | 3100 | 45W | 2700K | 90 | BK Black BZ Bronze WT White |
| | | | | 3000K | | |
| | | | | CS 3500K | | |
| | | | | 4000K | | |
| | | | | 5000K | | |

Example: **FM-252124-CS-BK**

DEW


ALL-IN-ONE CCT SELECTABLE



Elegant as a graceful dewdrop, this traditional domed flush mount features an appealing modern look with a soft, sweeping acrylic lens. The impressive 18" size and robust 3,000-plus lumen output are ideal for illuminating spaces with high ceilings. This ceiling fixture embraces a warm ambiance, soft illumination, and comfort like no other.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 18"
- Fixture height: 4¼"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with acrylic diffuser

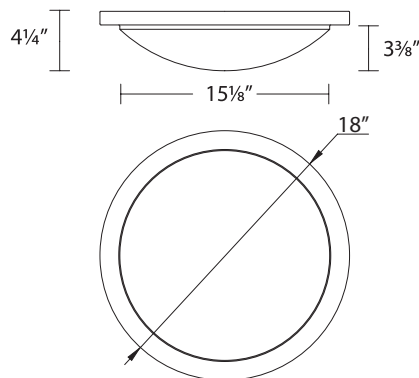

| Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|------------------|------------|---------|------------|-----|--|
| FM-252218 | 3050 | 45W | CS | 90 | 2700K |
| | | | | | 3000K |
| | | | | | 3500K |
| | | | | | 4000K |
| | | | | | 5000K |
| | | | | | BK Black BZ Bronze WT White |

Example: **FM-252218-CS-WT**

I CAN'T BELIEVE IT'S NOT RECESSED



ALL-IN-ONE CCT SELECTABLE



Multiple mid-powered LEDs illuminate the acrylic diffuser uniformly without socket shadows, which are common in conventional flush mounts.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Imitates a traditional 6" line voltage recessed downlight with an -- R30 light bulb
- Install into 4" junction box or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser
- Finished screw caps included to eliminate shadows

| | Model | Max Lumens | Power | Color Temp | CRI | Finish |
|--|-----------------|------------|-------|------------|-----|-----------------|
| | FM-616G2 | 1050 | 16W | 2700K | 90 | WT White |
| | | | | 3000K | | |
| | | | | 3500K | | |
| | | | | 4000K | | |
| | | | | 5000K | | |

Example: **FM-616G2-9CS-WT**

DISC LED CEILING LIGHT & RECESSED RETROFIT



FM-306-9CS-WT



FM-306MS-930JB-WT

Install over a 3" or 4" junction box or pancake box



Retrofit over a 4", 5" or 6" recessed can



Multiple mid-powered LEDs uniformly illuminate the acrylic diffuser.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- FM-306MS: motion sensor keeps the fixture illuminated for 3 minutes -- before shutting off if no movement is detected
- Construction: aluminum with translucent diffuser

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish | |
|--|---|------------|---------|--|-----|-----------------|--|
| | FM-304 | 650 | 12W | 930 3000K | 90 | WT White | Fits over a 4" recessed can or direct wire in a 3" or 4" junction box or pancake box |
| | FM-306 | 950 | 15W | 9CS 2700K 3000K 3500K 4000K 5000K | 90 | WT White | Fits over a 5" to 6" recessed can or direct wire in a 3" or 4" junction box or pancake box |
| | FM-306MS Infrared Motion Sensor | 1100 | 14W | 930JB 3000K | 90 | WT White | Direct mount on a 3" or 4" junction box or pancake box |
| | FM-309 | 1725 | 23W | 9CSJB 2700K 3000K 3500K 4000K 5000K | 90 | WT White | |

Example: **FM-306-9CS-WT**



LITHIUM EM BATTERY BACKUP



ALL-IN-ONE CCT SELECTABLE



Convenient emergency battery backup button is discreet to maintain product appearance

The standard ceiling light and emergency battery backup ceiling fixture are nearly identical in two convenient sizes.

High light output, hidden hardware, and broad even illumination are the primary features of this sleek flush mount. Often used in hallways, dorm rooms, and bathrooms. Installation is a snap.

- Input:** 120-277V
- Dimming:** 100%-10% ELV, 100%-5% TRIAC
- Rated Life:** 50,000 hours

- During emergency mode, fixture will stay illuminated for 90 minutes at reduced power
- Install over 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser

| | Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|--|---|---------|------------|------------|-----|--------------------------|
| | FM-200111 | 15W | 1080 | | | |
| | FM-200115 | 25W | 1815 | 2700K | 90 | BN Brushed Nickel |
| | FM-200115EM Emergency Back Up | | | CS | | |
| | FM-200118 | 31W | 2410 | 3500K | | |
| | FM-200118EM Emergency Back Up | | | | | |
| | | | | 5000K | | |

Example: **FM-200115-CS-BN**

METRO LED FLUSH MOUNT



Multiple mid-powered LEDs deliver soft illumination through translucent acrylic. Metro is available as a wall sconce or as a ceiling flush mount to meet a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 12", 18"
- Fixture height: 1 3/4"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with dual layer acrylic diffuser

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|------------|-------|--|
| | FM-180112 | 1800 | 24W | 30 | 3000K | 90 |
| | FM-180118 | 2375 | 32W | | | |
| | | | | | | BN Brushed Nickel CH Chrome |

Example: **FM-180118-30-BN**

METRO



Multiple mid-powered LEDs deliver soft illumination through translucent acrylic. Metro is available as a wall sconce or as a ceiling flush mount to meet a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 20", 27", 37"
- Construction: aluminum with dual layer acrylic diffuser
- Can be mounted vertically or horizontally

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|-----------------|-----|--|
| | WS-180120 | 1150 | 16W | | | |
| | WS-180127 | 1450 | 20W | 30 3000K | 90 | BN Brushed Nickel CH Chrome |
| | WS-180137 | 2130 | 28W | | | |


Example: **WS-180127-30-BN**





REMI

ALL-IN-ONE CCT SELECTABLE

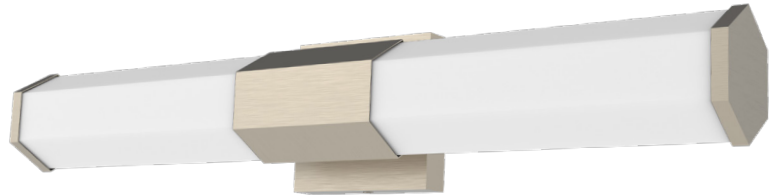

Finely crafted of white acrylic and aluminum, Remi delivers robust, flattering illumination as a vanity luminaire in an elegant bath or wall sconce that blends with any interior decor.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 16", 24"
- Construction: aluminum with acrylic diffuser

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|--------------------------------------|-----|---|
| | WS-230116 | 900 | 18W | CS 2700K 3000K 3500K | 90 | BN Brushed Nickel BK Black |
| | WS-230124 | 1500 | 30W | | | |

Example: **WS-230116-CS-BN**

STUDIO



ALL-IN-ONE CCT SELECTABLE



Sleek and contemporary. The Studio bath vanity offers a three-in-one LED CCT Selectable feature to create beautiful, flattering illumination for an updated aesthetic. Stylish and modern, the solid linear aluminum profile is durable and works well in various residential and hospitality settings.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 26"
- Construction: aluminum with acrylic diffuser
- Can be mounted vertically or horizontally

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|--------------------------------------|-----|--------------------------|
| | WS-240926 | 1950 | 31W | CS 2700K 3000K 3500K | 90 | BN Brushed Nickel |
| | | | | | | BK Black |
| | | | | | | |

Example: **WS-240926-CS-BK**

RAZOR



ALL-IN-ONE CCT SELECTABLE



A modern minimalist design evokes a unique mood and feel for any fine bath. The Razor bath vanity is a wall fixture with a contemporary design and a unique aluminum frame offered in Black and Brushed Nickel. The frosted diffuser deploys soft, flattering illumination for your own personal environment, creating a warm and relaxing setting. The three-in-one CCT selectable allows individual color temperature adjustment to suit one's personal preferences.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 28"
- Construction: aluminum with glass diffuser
- Can be mounted vertically or horizontally

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|--------------------------------------|-----|--------------------------|
| | WS-241128 | 835 | 20W | CS 2700K 3000K 3500K | 90 | BN Brushed Nickel |
| | | | | | | BK Black |
| | | | | | | |

Example: **WS-241128-CS-BN**

DEMI



ALL-IN-ONE CCT SELECTABLE



A compact but appealing design that blends well into contemporary bathrooms and powder rooms. This piece features a frosted glass diffuser for robust, flattering illumination in your sanctuary, where you perform most of your primping and prepping for the day ahead. The dimmable, three-in-one CCT selectable feature provides an option to adjust the color temperature of your choice.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 27"
- Construction: aluminum with glass diffuser
- Can be mounted vertically or horizontally

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|------------|-----|--------------------------|
| | WS-241227 | 1010 | 23W | CS | 90 | 2700K |
| | | | | | | 3000K |
| | | | | | | 3500K |
| | | | | | | BN Brushed Nickel |
| | | | | | | BK Black |

Example: **WS-241227-CS-BK**



SLIM

ALL-IN-ONE CCT SELECTABLE



Sleek and versatile with a modern architectural style. Slim is the perfect LED vanity light or wall sconce to provide a flattering glow for grooming in your fine bath.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours


- Sizes: 18", 24", 36"
- Construction: aluminum with acrylic diffuser
- Can be mounted vertically or horizontally

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|--|-----|---|
| | WS-240818 | 1300 | 20W | CS 2700K 3000K 3500K 4000K 5000K | 90 | BN Brushed Nickel BK Black |
| | WS-240824 | 1700 | 24W | | | |
| | WS-240836 | 2200 | 30W | | | |

Example: **WS-240824-CS-BK**



TURBO

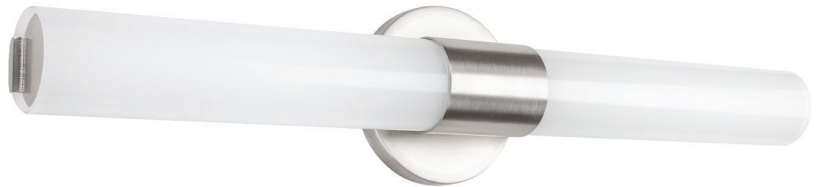

A contemporary design provides soft diffused illumination through translucent acrylic. Turbo can be mounted vertically or horizontally to accommodate a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 14", 24"
- Construction: aluminum with dual layer acrylic diffuser

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|------------------------------------|-----|--|
| | WS-180414 | 1000 | 12W | 30 3000K 35 3500K | 90 | BN Brushed Nickel CH Chrome |
| | WS-180424 | 1570 | 18W | | | |

Example: **WS-180414-35-BN**

FUSE



Sleek style with plated brushed nickel finished end caps and high-powered LEDs that provide broad ample illumination. Fuse can be mounted on walls or on the ceiling to suit a variety of applications and styles in current architectural design.

Input: 120V-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 16", 27", 37"
- Construction: aluminum with acrylic diffuser
- Installation: wall or ceiling, horizontally or vertically

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|-----------------|-----|--------------------------|
| | WS-180216 | 1025 | 16W | | | |
| | WS-180227 | 1450 | 20W | 30 3000K | 90 | BN Brushed Nickel |
| | WS-180237 | 2025 | 28W | | | |

Example: **WS-180216-30-BN**

LINK




This low-profile transitional wall sconce provides bountiful light and style. Link adds a clean, modern look to bath vanities and other decor. May be installed horizontally over a vanity or vertically as a sconce.

Input: 120V-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 27", 37"
- Construction: aluminum with white acrylic diffuser
- Can be mounted vertically or horizontally

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|------------------|------------|---------|------------|-------|-----------------------------|
| | WS-180327 | 1380 | 20W | | | |
| | WS-180337 | 1950 | 28W | 30 | 3000K | 90 BN Brushed Nickel |

Example: **WS-180337-30-BN**

An outdoor dining area at dusk, featuring several round wooden tables and modern upholstered chairs. Each table is set with a small, glowing mushroom-shaped table lamp. The background shows a building with large glass windows reflecting the interior lights, and lush greenery is visible through the glass. The overall atmosphere is warm and inviting.

Introducing our new indoor/outdoor table lamps to complement our expanding line of lighting fixtures. Perfect for design continuity both inside and out, enhance the atmosphere throughout your home with Rechargeable Battery-operated portables. Four stylish designs are available in a variety of colorful hues, including green, white, black, and bronze. Conical-shaped shades and sleek bases ensure a clean display with a tasteful layer of light on a patio table or around a hot tub. The stunning portables are ideal for optimal ambient illumination in outdoor homes and hospitality locations.

PORTABLE TABLE LAMPS - RECHARGEABLE



PLEAT



DARLA



CHANNING



CRYSTAL

Advanced CCT-select and rechargeable battery technologies allow you to choose color temperatures for any mood, from warm 2200K to 2700K to a cooler 3000 Kelvin, with an 85-plus color rendering index (CRI). Using easy onboard fingertip control, cycle through the temperatures with a quick tap, hold down to dim, or turn lamps off with firm suppression. Enjoy beautiful ambient illumination from these battery-operated lamps, which can be charged for up to 10-plus hours with the included power supply and USB-C cable. They are wet-listed for outdoor applications.

Input: USB-C
Dimming: Onboard
CRI: 85+

- Tap to switch between color temperatures (3CCT models) or hold to dim
- 7+ hours of illumination on a single charge
- Indoor/Outdoor use
- Power supply and USB-C cable included

| | Model | Wattage | Max Lumens | Color Temp | Battery Life | Finish | |
|--|-------|-------------------|------------|------------|-----------------------------------|-----------|---|
| | | TL-W251115 | 2W | 200 | 2200K CS 2700K 3000K | 10+ hours | BK Black BZ Bronze GR Green WT White |
| | | TL-W251209 | 2W | 160 | 2200K CS 2700K 3000K | 8+ hours | BK Black GR Green WT White |
| | | TL-W251511 | 2W | 200 | 2200K CS 2700K 3000K | 10+ hours | BK Black GR Green WT White |
| | | TL-W251315 | 2W | 220 | 27 2700K | 7+ hours | BK Black WT White |

Example: **TL-251511-CS-GR**

* Model TL-W251315 Crystal does not change CCT.





CUBIX & CYLINDER



WS-W220208-30-BK

WS-W220212-30-WT

WS-W190208-30-BZ

WS-W190212-30-WT

Available in single and double directions, Cubix and Cylinder are ideal for illuminating outdoor entrances and walkways.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Sizes: 6¾" single light, 9⅞" double lights
- Construction: die-cast aluminum
- Finish: powder coated aluminum

| | Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|--|---|---------|------------|-----------------|-----|--|
| | WS-W220208 Cubix Single Light | 6W | 285 | 30 3000K | 80 | BK Black BZ Bronze WT White |
| | WS-W220212 Cubix Double Light | 18W | 765 | | | |
| | WS-W190208 Cylinder Single Light | 6W | 285 | | | |
| | WS-W190212 Cylinder Double Light | 18W | 765 | | | |

Example: **WS-W220208-30-BK**

CYLINDER



Offered in a curvaceous single and double head configuration, the adjustable Cylinder Indoor/Outdoor Sconces provide strong energy efficient LED spot lighting precisely where you need it. Cleanly finished with no visible hardware, these stylish aluminum cylinders are available in three architectural powder coat finishes.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Construction: aluminum with TIR lens
- Finish: powder coated aluminum


| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|-------------------|------------|---------|-----------------|-----|--|
| | WS-W230301 | 1085 | 17W | 30 3000K | 90 | BK Black BZ Bronze WT White |
| | WS-W230302 | 1085 x 2 | 33W | | | |

Example: **WS-W230301-30-BK**



VUE

ALL-IN-ONE CCT SELECTABLE

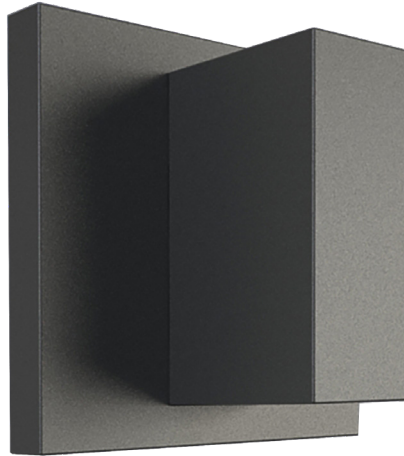

A geometric design that defines a modern aesthetic in your indoor or outdoor space. Vue is a die-cast aluminum sconce that provides up and down lighting for beautiful ambient illumination.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Size: 5"
- Construction: die-cast aluminum
- Finish: powder coated aluminum

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|-------------------|--------------------|---------|--------------------------------------|-----|------------------------------------|
| | WS-W230205 | 250 Up 250 Down | 9W | CS 3000K 3500K 4000K | 90 | BK Black WT White |

Example: **WS-W230205-CS-BK**

CAP



ALL-IN-ONE CCT SELECTABLE




This unique scrolled design features All-in-One CCT Selectable technology that ranges from warm 2700K to cool 5000K white light for various indoor and outdoor applications. Perfect for apartment doors and hotel rooms, this aluminum-constructed sconce with an acrylic diffuser can be customized with address numbers and styles to suit your project.



Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Construction: aluminum with acrylic diffuser
- Finish: powder coated aluminum

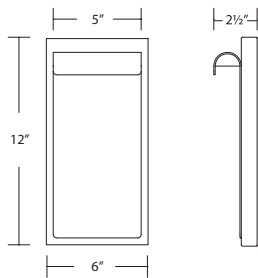

| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|-------------------|---------|------------|------------|-----|---|
| WS-W250212 | 13W | 215 | 2700K | 90 | BK Black GHBK Graphite on Black WTBK White on Black WT White |
| | | | 3000K | | |
| | | | 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

Example: **WS-W250212-CS-BK**


TABLET



ALL-IN-ONE CCT SELECTABLE




A minimalistic design with sleek, curvaceous appeal. Add clean lines and a beautiful ambiance to any space. Symmetrical openings allow softly diffused upward and downward illumination on surfaces below.

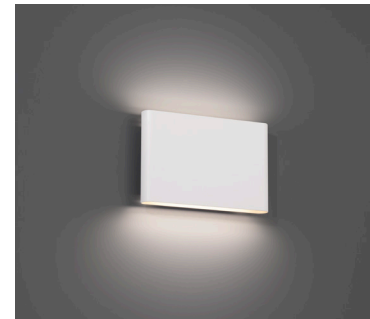

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Construction: aluminum with glass diffuser
- Finish: powder coated aluminum



| Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|-------------------|---------|------------|------------|-----|--|
| WS-W250305 | 17W | 790 | 2700K | 90 | BK Black BZ Bronze WT White |
| | | | 3000K | | |
| | | | 3500K | | |
| | | | 4000K | | |
| | | | 5000K | | |

Example: **WS-W250305-CS-BK**



LANTERN

ALL-IN-ONE CCT SELECTABLE



A classic wall fixture that incorporates vintage-style design elements and advanced LED technology. Lantern offers an elegant way to illuminate your walkway, driveway, yard, or patio. The WAC All-in-One CCT Selectable feature allows the user to shift from warm 2700K to 5000K cool white light.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Built-in photo sensor to control light on/off
- Construction: aluminum with TIR dual layer acrylic diffusers lens
- Finish: powder coated aluminum

| | Model | Wattage | Max Lumens | Color Temp | CRI | Finish |
|--|-------------------|---------|------------|---|-----|--|
| | WS-W250110 | 11W | 470 | 2700K 3000K 3500K 4000K 5000K | 90 | BK Black BZ Bronze WT White |
| | WS-W250114 | 15W | 660 | 2700K 3000K 3500K 4000K 5000K | 90 | BK Black BZ Bronze WT White |

Example: **WS-W250110-CS-BK**

MIDTOWN

ALL-IN-ONE CCT SELECTABLE



A handsome tower-styled fixture provides a soft glow and refined aesthetic that is pleasing to the eyes. Perfect for illuminating modern exterior and interior spaces, the LED luminaire offers versatility in a clean, contemporary look. This versatile sconce is constructed with die-cast aluminum for durability and quality while providing ambient and down lighting through its smooth, curvaceous acrylic diffuser. Customize the color temperature of your light from 2700K warm white to 5000K cool white.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Sizes: 10", 15"
- Construction: die-cast aluminum with acrylic diffuser
- Finish: powder coated aluminum

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|-------|-------------------|------------|---------|-----------------|-----|-----------------|
| | WS-W241310 | 375 | 12W | 2700K | 90 | BK Black |
| 3000K | | | | | | |
| | WS-W241315 | 625 | 15W | CS 3500K | 90 | BK Black |
| 4000K | | | | | | |
| 5000K | | | | | | |

Example: **WS-W241310-CS-BK**



VEGA

ALL-IN-ONE CCT SELECTABLE



Add a modern vibe and powerful illumination to your porch, deck, or garage with the sleek Vega, an ADA-compliant indoor/outdoor sconce.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Sizes: 9", 14"
- Construction: die-cast aluminum with acrylic diffuser
- Finish: powder coated aluminum

| | Model | Max Lumens | Wattage | Color Temp | CRI | Finish |
|--|-------------------|------------|---------|--|-----|-----------------|
| | WS-W190109 | 665 | 13W | CS 2700K 3000K 3500K 4000K 5000K | 90 | BK Black |
| | WS-W190114 | 1375 | 26W | | | |


Example: **WS-W190114-CS-BK**

120/277V STEP LIGHTS



Input: 120V, 277V
Brightness: Up to 4 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Fluid decorative profile with full cut-off illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish or plated Brushed Nickel finish
- Title 24 compliant (120V only)

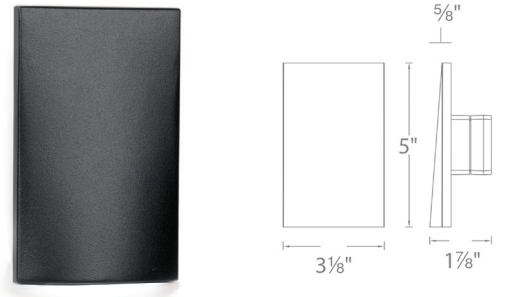

| Model | Voltage | Wattage | Color Temp | CRI | Finish |
|---|---------|---------|----------------|-----|--|
| WL-LED110-C WL-LED110-AM | 120V | 3.5W | 3000K Amber | 90 | BK Black on AL BN* Brushed Nickel |
| WL-LED110F-C WL-LED110F-AM | 277V | 3W | | | BZ Bronze on AL WT White on AL |

Example: **WL-LED110-C-WT**


| Model | Voltage | Wattage | Color Temp | CRI | Finish |
|---|---------|---------|----------------|-----|--|
| WL-LED210-C WL-LED210-AM | 120V | 3.5W | 3000K Amber | 90 | BK Black on AL BN* Brushed Nickel |
| WL-LED210F-C WL-LED210F-AM | 277V | 3W | | | BZ Bronze on AL WT White on AL |

Example: **WL-LED210-C-BK**

* BN finish is damp location listed and is not warranted for contact with harsh chemicals or exterior installations.

Input: 120V, 277V
Brightness: Up to 36 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Louvered design shields glare for visual comfort
- Die-cast aluminum construction with abrasion-resistant powder-coated finish

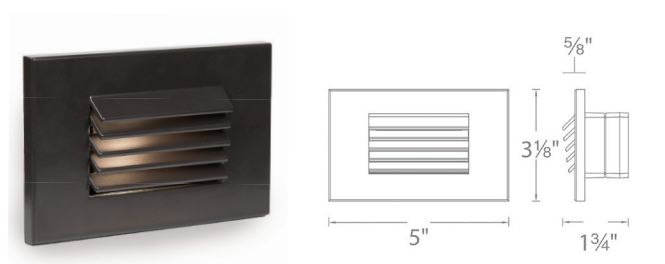

| Model | Voltage | Wattage | Color Temp | CRI | Finish |
|---|---------|---------|----------------|-----|---|
| WL-LED120-C WL-LED120-AM | 120V | 3.5W | 3000K Amber | 90 | BK Black on AL BZ Bronze on AL |
| WL-LED120F-C WL-LED120F-AM | 277V | 3W | | | WT White on AL |

Example: **WL-LED120-C-BK**



| Model | Voltage | Wattage | Color Temp | CRI | Finish |
|---|---------|---------|----------------|-----|---|
| WL-LED220-C WL-LED220-AM | 120V | 3.5W | 3000K Amber | 90 | BK Black on AL BZ Bronze on AL |
| WL-LED220F-C WL-LED220F-AM | 277V | 3W | | | WT White on AL |

Example: **WL-LED220-C-BZ**

120V/277V STEP LIGHTS

Input: 120V, 277V
Brightness: Up to 40 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Tempered glass diffuses light for even illumination
- Die-cast aluminum construction
- Abrasion-resistant powder-coated finish or marine grade stainless steel option available
- Title 24 compliant (120V only)

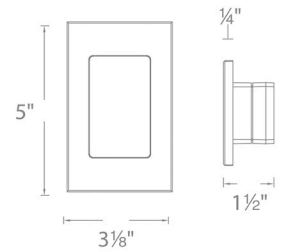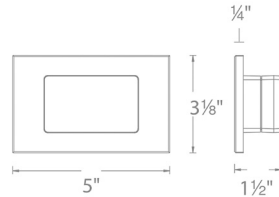


Mounts Vertically or Horizontally

| Model | Voltage | Wattage | Color Temp | CRI | Finish |
|---|---------|---------|----------------|-----|--|
| WL-LED130-C WL-LED130-AM | 120V | 3.5W | 3000K Amber | 90 | BK Black on AL BZ Bronze on AL |
| WL-LED130F-C WL-LED130F-AM | 277V | 3W | 3000K Amber | 90 | SS Stainless Steel WT White on AL |

Example: **WL-LED130-C-SS**

Input: 120V, 277V
Brightness: Up to 3 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Geometric design with downward illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish
- Title 24 compliant (120V only)

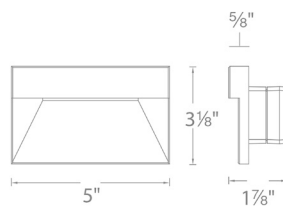




| Model | Voltage | Wattage | Color Temp | CRI | Finish |
|---|---------|---------|----------------|-----|---|
| WL-LED140-C WL-LED140-AM | 120V | 3.5W | 3000K Amber | 90 | BK Black on AL BZ Bronze on AL |
| WL-LED140F-C WL-LED140F-AM | 277V | 3W | 3000K Amber | 90 | WT White on AL |

Example: **WL-LED140-C-BK**



IP66 rated self contained fixture with various face plates. Fits into a Switch Box or a 2" x 4" Junction Box with minimum inside dimensions of 3"L x 2"W x 2.5"D.

SOLO

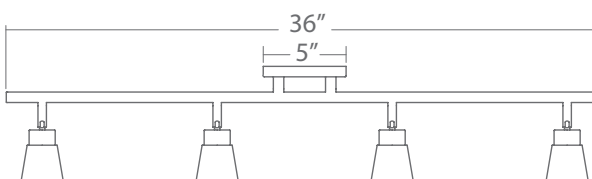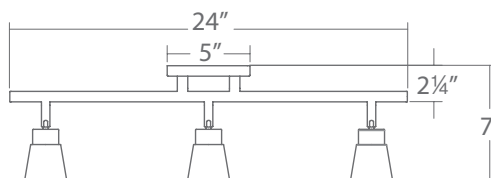

Monopoint, 3-head, or 4-head fixed track with individually adjustable LED track fixtures can be wall mounted or ceiling mounted for a wide multitude of applications. It is specifically designed for residential and low-ceiling commercial applications.

Comparable To: 65W MR16
Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Monopoint, 3-head, or 4-head fixed rails
- Sizes: 5" (Monopoint), 24", 36"
- Construction: die-cast aluminum with frosted TIR lens
- Installation: wall and ceiling
- 350° horizontal and 90° vertical aiming per head

| System | Model | Lights | Beam | Max Lumens | CBCP | Wattage | Color Temp | CRI | Finish |
|-----------|-------------|-----------|------|---------------|----------------|---------|-----------------|-----|--------------------------|
| TK | 1805 | 01 | | 800 | 1095 | 10W | 30 3000K | 90 | BK Black |
| | | 03 | 45° | 2400 (800 x3) | 3285 (1095 x3) | 30W | | | BN Brushed Nickel |
| | | 04 | | 3200 (800 x4) | 4380 (1095 x4) | 40W | | | WT White |

Example: **TK-180503-30-BK**




LOW VOLTAGE

| | | | |
|--------------------|----------|--------------------|--------------|
| Power: | 7W | Color Temp: | 3000K |
| Lumens: | 450 | Dimming: | ELV |
| CBCP: | 929 | LED Lamp | |
| Comparable: | 35W MR16 | Rated Life: | 25,000 hours |

- Integral electronic transformer
- Accepts 12V LED MR16 or halogen MR16 lamps up to 50W max
- LED MR16 included when ordered as LED
- 1 watt minimum load
- Can be wall or ceiling mounted
- Available extensions from 6 to 48 inches
- Clear lens included (see below for alternate lens options)

007

| Model | Lamp | Extension (optional) | CRI | Finish |
|-----------------------------------|--|----------------------|-----|------------------------------------|
| ME-007LED ME-007 | MR16 LED 12V 7W included MR16 sold separately | X6 | 90 | BK Black WT White |
| | | X12 | | |
| | | X18 | | |
| | | X24 | | |
| | | X36 | | |
| | | X48 | | |



Example: **ME-007LED-BK** or **ME-007LED-X6-BK** (with 6" extension)


FRAMING PROJECTOR ACCESSORY

| | | |
|--------------------------|------------------------|----------------|
| 008FP | BK WT | Black White |
| Example: 008FP-BK | | |



808

| Model | Lamp | Extension (optional) | CRI | Finish |
|----------------------------------|--|----------------------|-----|------------------------------------|
| ME-808LED ME808 | MR16 LED 12V 7W included MR16 sold separately | X6 | 90 | BK Black WT White |
| | | X12 | | |
| | | X18 | | |
| | | X24 | | |
| | | X36 | | |
| | | X48 | | |



Example: **ME-808LED-WT** or **ME-808LED-X12-WT** (with 12" extension)

| LAMPS | Finish | Wattage | Color Temp | Input | Beam | CRI | Lumens | CBCP | Average Life | |
|--------------------------|---|---|---------------------|--|-------------------------------------|--|--------|------|--------------|--------------|
| MR16 | MR16LED-BAB-BK MR16LED-BAB-WT | Black White | 7W | 3000K | 12V | 35° | 90 | 450 | 929 | 25,000 Hours |
| LENS ACCESSORIES | | | | | | | | | | |
| Amber LENS-16-AMB | Blue LENS-16-BLU Green LENS-16-GRN | Red LENS-16-RED Frosted LENS-16-FR | UV Filter Spread | LENS-16-UVF LENS-16-SPR | Beam Elongating Honeycomb Louver | LENS-16-BEL LENS-16-HCL | | | | |

CHARGE 8010 & 8020



ALL-IN-ONE CCT SELECTABLE



H-8010-CS-BN



H-8020-CS-WT

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Suitable for H, J or L track
- 350° horizontal and 90° vertical aiming
- Driver concealed within fixture
- Construction: die-cast aluminum with frosted TIR lens

| | System | Model | Beam | Max Lumens | Max CBCP | Wattage | Color Temp | CRI | Finish |
|--|--------------------------------------|---------------|------|------------|----------|---------|---|-----|---|
| | H HTrack | 8010 | 45° | 865 | 1006 | 9W | 2700K 3000K 3500K 4000K 5000K | 90 | BK Black |
| | L LTrack J J/J2 Track | | | | | | | | BN Brushed Nickel DB Dark Bronze WT White |
| <p>Track Pack includes</p> <ul style="list-style-type: none"> • 4ft H Track • Floating Canopy • Three 8010 Charge Track Heads | H HTrack | 8010/3 | | 865x3 | 1006x3 | 9Wx3 | | | BK Black BN Brushed Nickel DB Dark Bronze WT White |
| | H HTrack L LTrack J J/J2 Track | 8020 | 55° | 1330 | 1154 | 15W | | | BK Black WT White |

Example: **H-8010-CS-BN**

SOLO 5010, BULLET 7010, CYN 8110



ALL-IN-ONE CCT SELECTABLE



H-5010-CS-BK



H-7010-CS-WT



H-8110-CS-BK

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Suitable for H, J or L track
- 35° horizontal and 90° vertical aiming
- Driver concealed within fixture
- Construction: die-cast aluminum with frosted TIR lens

| | System | Model | Beam | Max Lumens | Max CBCP | Wattage | Color Temp | CRI | Finish |
|--|--|-------------|------|------------|----------|---------|---|-----|------------------------------------|
| | H H Track L L Track J J/J2 Track | 5010 | 45° | 870 | 1016 | 9W | CS 2700K 3000K 3500K 4000K 5000K | 90 | BK Black WT White |
| | H H Track L L Track J J/J2 Track | 7010 | | 890 | 1017 | 9W | | | BK Black WT White |
| | H H Track L L Track J J/J2 Track | 8110 | | 710 | 1567 | 10W | | | BK Black WT White |

Example: **H-5010-CS-BK**

H TRACK SYSTEM



Description: Single circuit H-Track
Power per Circuit: 120V, 1920W max
Operating Current: Rated 20A max




TRACK SECTIONS

| Model | Length | Finish | Description |
|-------------------|-------------|--------------------------|-------------------|
| HT H Track | 2 2' | BK Black | 120V 3-wire track |
| | 4 4' | BN Brushed Nickel | |
| | 6 6' | WT White | |
| | 8 8' | DB Dark Bronze | |

Example: **HT6-BK**

Each section includes two matching end caps



















TRACK SUSPENSION

| System | Model | Finish | Description | |
|--|--|---|---|--|
| All Track Suspension Kit | SK 18 18" 24 24" 36 36" 48 48" | BK Black BN Brushed Nickel WT White DB Dark Bronze | Extends track from ceiling. Includes track bracket, rod and ceiling canopy. Use two per 4' length, three per 8' length. | |
| Suspension Kit Extender | | | | R 18 18" 24 24" 36 36" 48 48" 72 72" |
| Sloped Ceiling Adapter | SK14 | BK Black BN Brushed Nickel WT White DB Dark Bronze | Use with suspension kits to accommodate sloped ceilings. Max capacity: 7A, 800W, 120V. | |
| Rod Coupler | RI | | Join two rods for suspensions longer than 48". | |
| Suspension Adjustment Collar Kit | SK05 | | Includes two collars | Used when suspension rod is field cut to custom lengths. One kit of two required for each rod. |
| Cable Suspension | SKC96 | | NI Nickel | Suspends track from ceiling. Includes 96" aircraft cable; may be field cut. |
| Cable Suspension Canopy with Feed | SKCF96 | BK Black WT White | Canopy covers a standard 4" junction box. Includes 96" of aircraft cable and feed wire; may be field cut. | |
| Low Voltage Track Head Extension | X 6 6" 12 12" 18 18" 24 24" 36 36" 48 48" | BK Black BN Brushed Nickel WT White DB Dark Bronze | Extends low voltage track heads from track. Specify extension, fixture and finish. Only available as complete unit. Custom order example: X18-HHT-809-WT. | |
| Line Voltage Track Head Extension (H track only) | H 18 18" 24 24" 36 36" 48 48" | | | Extends H System line voltage track heads. |
| Wall Mount Suspension Bracket | TBKT | | Extends track 24" from wall. Use two per 4' length, three per 8' length. | |

Example: **SK24-BK**



ACCESSORIES

| System | Model | Finish | Dimensions | Description | |
|-------------------------------|--|---|------------------------------------|---|--|
| Live End Connector |  HLE | BK Black BN Brushed Nickel WT White DB Dark Bronze | 4 1/4" x 1 3/8" x 3/4" | Use for direct wiring through ceiling. A canopy plate is required when using with a standard junction box. | |
| Live End BX Connector |  HBXLE | | 6" x 1 3/8" x 1 1/4" | Use with surface mounted BX or non-metallic sheathed cable. Also provides through the ceiling connection. | |
| "I" Power Connector |  HI-PWR | | 6 3/4" x 1 3/8" x 3/4" | Power entry point at the connection of 2 tracks. | |
| "L" Connector Left |  HL-LEFT | | 2 3/4" x 2 3/4" x 3/4" | Use to join 2 track sections to make power feedable 90° left polarity turns. | |
| "L" Connector Right |  HL-RIGHT | | 2 3/4" x 2 3/4" x 3/4" | Use to join 2 track sections to make power feedable 90° right polarity turns. | |
| "T" Connector |  HT | | 4" x 2 3/4" x 3/4" | Use to join 3 tracks sections. "T" Connector with opposite polarity can be custom ordered. | |
| "X" Connector |  HX | | 4 1/8" x 4 1/8" x 3/4" | Use to join 4 track sections. | |
| "I" Connector |  HI | | 9 3/4" x 1 3/8" x 3/4" | Use to join two sections of track with electrical continuity. | |
| "I" Dead End Connector |  HI-DEC | | 3" x 1 3/8" x 3/4" | Joins two sections of track without electrical continuity. | |
| Flexible Track Connector |  HFLX | | 9 3/4" x 1 3/8" x 3/4" | Connects two track sections at variable angles. Use as a transition from wall-to-wall, wall-to-ceiling. Power feedable. | |
| Suspension Loop |  H-LOOP | | 1 3/8" x 1 3/8" x 3" | 3" electrical loop accepts chain hung fixtures up to 35lbs. Contains compartment for electrical connections. | |
| 15' Cord, Male Plug |  HCORD | | BK Black WT White | 15' | Maximim capacity: 7A, 800W, 120V. |
| T-Bar Drop Ceiling Attachment |  T-BARCLIP | | Chrome | 1 1/2" x 1 1/4" | Attaches track to T-bar drop ceilings. Use two for 2' or 4' tracks, three for 6' or 8' tracks. |
| Monopoint Canopy Adapter |  HMP | BK Black BN Brushed Nickel WT White DB Dark Bronze | 5 3/8" x 5 3/8" | Mount a single track fixture to a junction box. When used with a low voltage track head the transformer box will protrude off of the face of the monopoint. | |
| Canopy Plate |  CP | | 4 1/2" x 4 1/2" | Covers a standard 4" junction box. Use with any powerable connectors. | |
| Floating Canopy Connector |  HFC | | 4 1/2" x 4 1/2" x 1 1/2" | Connects to octagon box. Allows track to be powered anywhere along the length of the track. | |

H TRACK CURRENT LIMITER

WAC TRACK CURRENT LIMITERS ARE DESIGNED TO ADDRESS ENERGY ALLOWANCES

WITHOUT A CURRENT LIMITER

WATTAGE TOWARDS ENERGY ALLOWANCE

ASHRAE 90.1 AND IECC

The greater of either:

- The sum of the maximum rated wattage of the luminaires OR
- 30 watts per linear ft of track circuit

CALIFORNIA'S TITLE 24

The greater of either:

- The sum of the maximum rated wattage of the luminaires OR
- 45 watts per linear ft of track circuit

WITH A CURRENT LIMITER

WATTAGE TOWARDS ENERGY ALLOWANCE

ASHRAE 90.1 AND IECC

Wattage rating of the current limiter

CALIFORNIA'S TITLE 24

The greater of either:

- Wattage rating of the current limiter OR
- 12.5 watts per linear foot of track circuit

| | Model | Circuit Breaker | Max Wattage | Finish | |
|-----------------------------|-----------------|------------------|-------------|---|--|
| <p>Slim Single Live End</p> | THL-HLES | 1/2A 0.5A | 60W | BK Black BN Brushed Nickel DB Dark Bronze WT White | |
| | | 1A 1.0A | 120W | | |
| <p>Single Live End</p> | THL-HLE | 2A 2.5A | 300W | | |
| | | 5A 5.0A | 600W | | |
| | | 7A 7.5A | 900W | | |

Example: **THL-HLES-1A-BK**



MR16 TRACK LUMINAIRES

809



| System | Model | Lamp (Voltage/Wattage) | Finish |
|---|-----------------------------|--|------------------------------------|
| HHT H LHT L JHT J/J2 | 809LED 809 | MR16 LED 12V 7W INCLUDED MR16 SOLD SEPARATELY | BK Black WT White |
| Example: LHT-809-BK | | | |

180



| System | Model | Lamp (Voltage/Wattage) | Finish |
|---|-----------------------------|--|------------------------------------|
| HHT H LHT L JHT J/J2 | 180LED 180 | MR16 LED 12V 7W Included MR16 sold separately | BK Black WT White |
| Example: LHT-180-BK | | | |

007



| System | Model | Lamp (Voltage/Wattage) | Finish |
|---|-----------------------------|--|------------------------------------|
| HHT H LHT L JHT J/J2 | 007LED 007 | MR16 LED 12V 7W included MR16 sold separately | BK Black WT White |
| Example: LHT-007-BK | | | Clear lens included |

Available in Monopoint

| | | | |
|-----------------------------|--|------------------------------------|----------------|
| Framing Projector Accessory | | 008FP-BK 008FP-WT | Black White |
|-----------------------------|--|------------------------------------|----------------|

808



| System | Model | Lamp (Voltage/Wattage) | Finish |
|---|-----------------------------|--|------------------------------------|
| HHT H LHT L JHT J/J2 | 808LED 808 | MR16 LED 12V 7W Included MR16 sold separately | BK Black WT White |
| Example: LHT-808LED-BK | | | Clear lens included |

Available in Monopoint

| LED LAMPS | | Finish | Wattage | Color Temp | Input | Beam | CRI | Lumens | CBCP | Average Life | |
|------------------|--------------------|---|---|---------------------|--|-------------------------------------|--|--------|------|--------------|--------------|
| | MR16 | MR16LED-BAB-BK MR16LED-BAB-WT | Black White | 7W | 3000K | 12V | 35° | 90 | 450 | 850 | 25,000 Hours |
| LENS ACCESSORIES | | | | | | | | | | | |
| Amber | LENS-16-AMB | Blue LENS-16-BLU Green LENS-16-GRN | Red LENS-16-RED Frosted LENS-16-FR | UV Filter Spread | LENS-16-UVF LENS-16-SPR | Beam Elongating Honeycomb Louver | LENS-16-BEL LENS-16-HCL | | | | |

GU10 TRACK LUMINAIRES



| | System | Model | Lamp (Voltage/Wattage) | Finish |
|--|-----------------|---------------|------------------------|------------------------|
| | HTK H | 103LED | GU10LED 7W INCLUDED | BK Black |
| | LTK L | | | DB* Dark Bronze |
| | JTK J/J2 | | | WT White |

Example: **LTK-103LED-BK**

*DB Finish only available in HTK



| | System | Model | Lamp (Voltage/Wattage) | Finish |
|--|-----------------|---------------|------------------------|-----------------|
| | HTK H | 104LED | GU10LED 7W included | BK Black |
| | LTK L | | | WT White |
| | JTK J/J2 | | | |

Example: **LTK-104LED-WT**




| LED LAMPS | | Finish | Wattage | Color Temp | Input | Beam | CRI | Lumens | CBCP | Average Life |
|-----------|------|--|----------------|------------|-------|------|-----------|--------|------|--------------|
| | GU10 | GU10LED-BAB-BK GU10LED-BAB-WT | Black White | 7W | 3000K | 12V | 35° 90 | 470 | 850 | 25,000 Hours |



PAR & BR TRACK LUMINAIRES

720, 730

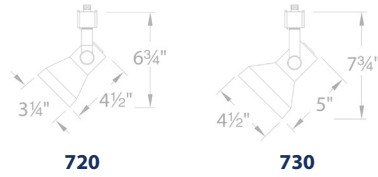


| System | Model | Lamp (Voltage/Wattage) | Finish |
|------------|-------|------------------------|------------------------------------|
| HTK | H | 720 | BK Black WT White |
| LTK | L | 730 | |
| JTK | J/J2 | | |

Example: **HTK-730-WT**

Order lamp separately

763, 764, 765

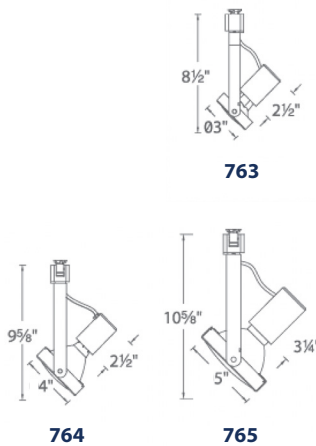


| System | Model | Lamp (Voltage/Wattage) | Finish |
|------------|-------|------------------------|------------------------------------|
| HTK | H | 763 | BK Black WT White |
| LTK | L | 764 | |
| JTK | J/J2 | 765 | |

Example: **HTK-763-WT**

Order lamp separately

PAR & BR TRACK LUMINAIRES

178 UNIVERSAL MEDIUM BASE



| System | Model | Lamp (Voltage/Wattage) | Finish |
|------------|-------|--|-----------------|
| HTK | H | 178 BR20/30/40. PAR20/30/38 120V 100W Max | BK Black |
| LTK | L | | WT White |
| JTK | J/J2 | | |

Example: **LTK-178-BN**

Order lamp separately


BARN DOOR (ORDER SEPARATELY)

PAR20BD
PAR30BD
PAR38BD

BK Black
WT White



725




| System | Model | Lamp (Voltage/Wattage) | Finish |
|------------|-------|------------------------------------|-----------------|
| HTK | H | 725 PAR20 / BR20 50W max | BK Black |
| LTK | L | | WT White |
| JTK | J/J2 | | |

Example: **HTK-725-WT**

Order lamp separately

703




| System | Model | Lamp (Voltage/Wattage) | Finish |
|------------|-------|--------------------------------------|-----------------|
| HTK | H | 703 BR30 and PAR30 75W Max | BK Black |
| LTK | L | | WT White |
| JTK | J/J2 | | |

Example: **LTK-703-BK**

Order lamp separately

704



| System | Model | Lamp (Voltage/Wattage) | Finish |
|------------|-------|---|-----------------|
| HTK | H | 704 120V BR30 and PAR30 75W Max | BK Black |
| LTK | L | | WT White |
| JTK | J/J2 | | |

Example: **LTK-704-WT**





Order lamp separately





LOW VOLTAGE





MR16 MULTIPLE SPOTS (1 WATT MINIMUM LOAD TRANSFORMERS)



1 LIGHT

| Trims (Order Housing Separately) | Model | Finish | Reflector/Trim |
|---|---|--------------|----------------|
|   | 1 Light Trim MT-116 Halogen MR16 sold separately MT-116LED LED MR16 included | WT/WT | White/White |
|   | 1 Light Invisible Trim™ MT-116TL Halogen MR16 sold separately MT-116LEDTL LED MR16 included | WT | White |





| Low Voltage Multiple Spot Housings (Required) | Model | Type | Wattage | Rating |
|---|-----------------|---------|-------------|--------|
|   | MT-116HS | 1 Light | 12V 50W MAX | Non-IC |



2 LIGHTS

| Trims (Order Housing Separately) | Model | Finish | Reflector/Trim |
|--|---|--------------|----------------|
|   | 2 Light Trim MT-216 Halogen MR16 sold separately MT-216LED LED MR16 included | WT/WT | White/White |
|   | 2 Light Invisible Trim™ MT-216TL Halogen MR16 sold separately MT-216LEDTL LED MR16 included | WT | White |

| Low Voltage Multiple Spot Housings (Required) | Model | Type | Wattage | Rating |
|---|-----------------|----------|-------------|--------|
|   | MT-216HS | 2 Lights | 12V 50W MAX | Non-IC |

3 LIGHTS

| Trims (Order Housing Separately) | Model | Finish | Reflector/Trim |
|---|---|--------------|----------------|
|   | 3 Light Trim MT-316 Halogen MR16 sold separately MT-316LED LED MR16 included | WT/WT | White/White |
|   | 3 Light Invisible Trim™ MT-316TL Halogen MR16 sold separately MT-316LEDTL LED MR16 included | WT | White |

| Low Voltage Multiple Spot Housings (Required) | Model | Type | Wattage | Rating |
|---|-----------------|----------|-------------|--------|
|   | MT-316HS | 3 Lights | 12V 50W MAX | Non-IC |

Non-IC housing require 3" of clearance from insulation on all sides. Recommended ELV dimming. Accommodates ceiling thickness of up to 1" for remodel & 3/4" for new construction.





LENSES, LOUVERS & LAMPS



| Colored Lenses | Color | Lenses | LED MR16 Lamp | Finish |
|-------------------------------|------------------|---|--------------------|------------------------------------|
| LENS - 16 Colored Lens | AMB Amber | LENS-16-UVF UV Filter Lens | MR16LED-BAB | BK Black WT White |
| | BLU Blue | LENS-16-FR Frosted Lens | | |
| | GRN Green | LENS-16-HCL Honeycomb Louver | | |
| | RED Red | | | |
| | | LENS-16-SPR Spread Lens | | |
| | | LENS-16-BEL Beam Elongating Lens | | |

2.5" LOW VOLTAGE MR16



- 1 watt minimum load transformers
- Non-IC housings require 3" of clearance from insulation on all sides
- Accommodates ceiling thickness of up to 3/4" for both remodel or new construction

| 2.5" trims (Order Housing Separately) | Model | Finish | Baffle//Trim |
|---|---|-------------------------------------|----------------------------------|
|   | HR-836 HR-836LED Metal Trim | BN WT | Brushed Nickel White/White |
|   | HR-837 HR-837LED Gimbal Ring, 25° Adjustment from Vertical | BK BN WT | Black Brushed Nickel White |

| 2.5" Housings (Required) | Model | Input | Transformer | Output | Type |
|---|---------------|-------|-------------|------------------------|----------------------------|
|  | HR-801 | 120V | Electronic | 12V, 50W max 1W min | Remodel Non-IC |
|  | HR-802 | 120V | Electronic | 12V, 50W max 1W min | New Construction Non-IC |











Non-IC housings require 3" of clearance from insulation on all sides.





4" LOW VOLTAGE MR16

Accommodates Most LED MR16 Lamps

- Die-cast aluminum construction
- Steel spring clips secure trim to housing
- Abrasion-resistant powder coat paint or plated metal finish

| 4" Downlight Trims (Order Housing Separately) | | Model | Input | Finish | Description |
|---|---|---|--|--|---|
|  |  | Square open reflector HR-D412-S MR16 sold separately HR-D412LED-S LED MR16 included | MR16, 50W max | SC/BN SC/WT | Specular/Brushed Nickel Specular/White |
|  |  | Round open reflector HR-D412 MR16 sold separately HR-D412LED LED MR16 included | 35° adjustment from vertical, MR16, 50W max | | |
|  |  | Step baffle HR-D411 MR16 sold separately HR-D411LED LED MR16 included | | 25° adjustment from vertical, MR16, 50W max | WT/WT |
|  |  | Gimbal ring HR-D417 MR16 sold separately HR-D417LED LED MR16 included | 80° adjustment from vertical, MR16, 50W max | | BN WT |
|  |  | Directional spot HR-D425 MR16 sold separately HR-D425LED LED MR16 included | | | WT |

| 4" Low Voltage Housings (Required) | Model | Input | Transformer | Output | Type |
|---|-----------------|-------|-------------|------------------------|----------------------------|
|  | HR-8402E | 120V | Electronic | 12V, 50W max 1W min | New Construction Non-IC |
|  | HR-8401E | 120V | Electronic | 12V, 50W max 1W min | Remodel Non-IC |

Non-IC housings require 3" of clearance from insulation on all sides. Accommodates ceiling thickness of up to 3/4" for remodel and new construction.

INDEX

| | | | |
|--|---------|---|---------|
| 120/277V STEP LIGHTS | 76 | LINK..... | 65 |
| 120V/277V STEP LIGHTS | 77 | LITHIUM..... | 53 |
| 2.5" LOW VOLTAGE | 90 | LOTOS | 25 - 26 |
| 4" LOW VOLTAGE | 91 | LOTOS | 30 - 31 |
| ACCESSORIES | 83 | LOTOS R | 27 - 29 |
| ATLANTIS | 6 | LOW VOLTAGE | 79 |
| ATLANTIS FLUSH..... | 7 | LOW VOLTAGE | 89 |
| BARLIGHT | 18 - 19 | METRO | 54 - 55 |
| BLAZE | 33 | MIDTOWN | 74 |
| BLO & FLO & GLO | 45 | MINI PUCK LIGHT..... | 21 |
| CAP | 72 | MR16 TRACK LUMINAIRES | 85 |
| CHARGE 8010 & 8020 | 80 | OPTICAL CHANNELS AND LENS ACCESSORIES | 15 |
| CUBIX & CYLINDER | 69 | PAR & BR TRACK LUMINAIRES | 87 - 88 |
| CYLINDER | 70 | PATRIOT | 37 |
| DEMI | 60 | POP-IN | 32 |
| DEW | 49 | PORTABLE TABLE LAMPS - RECHARGEABLE..... | 67 |
| DISC | 51 | PUCK LIGHT | 22 - 23 |
| DISC II | 4 - 5 | QUADE | 9 |
| EDGELESS | 43 | RAZOR | 59 |
| FUSE | 64 | REMI | 57 |
| GEMINI | 12 | ROUND & SQUARE | 46 - 47 |
| GU10 TRACK LUMINAIRES | 86 | ROUND | 48 |
| H TRACK CURRENT LIMITER | 84 | SLIM | 61 |
| H TRACK SYSTEM | 82 | SOLO 5010, BULLET 7010, CYN 8110 | 81 |
| HUG PULL CHAIN 44 | 10 | SOLO | 78 |
| HUG PULL CHAIN 52 | 11 | STUDIO | 58 |
| I CAN'T BELIEVE IT'S NOT RECESSED..... | 50 | TABLET..... | 72 |
| INDOOR ALUMINUM CHANNELS | 14 | TURBO..... | 63 |
| INDOOR MOUNTING ACCESSORIES | 14 | TWIST-N-LITE | 38 - 41 |
| ION | 36 | UNDER CABINET STRIP - PLUG & PLAY | 16 |
| KENRIC | 35 | VEGA | 75 |
| LANTERN | 73 | VUE | 71 |

Headquarters

Tel: 800.526.2588
Fax: 800.526.5285

44 Harbor Park Dr
Port Washington, NY 11050

Distribution and Assembly Facilities

South East

1600 Distribution Ct
Lithia Springs, GA 30122

Central

1700 South J Elmer Weaver Freeway
Suite 100
Cedar Hill, TX 75104

West

1750 S Archibald Ave
Ontario, CA 91761

Consult our manufacturing facility to take advantage of our custom capabilities in large quantities. For up to date product specifications and assistance please visit wacighting.com or call **1-800-526-2588**



WAC LIMITED®

WAC LIMITED technology and designs are protected by several patents and patent applications. WAC LIMITED will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe its patents are being infringed.

Copyright © 2025 WAC LIMITED. All rights reserved. This catalog is copyrighted and WAC LIMITED will use all measures available to it under the law against anyone who copies or derives from its copyrighted work.

WAC LIMITED retains the right to modify the design of its products at any time as part of the company's continuous improvement program. Please refer to our website for the latest product specifications.

wacighting.com