



dweLED™  
By WAC









# dweLED™

- Multi-Lights ..... 4
- Pendants + Chandeliers.....20
- Bath ..... 112
- Indoor Sconces.....148
- Task + Bedside ..... 176
- Ceiling Mounts .....194
- Outdoor..... 220



# dweLED™

## Luminaires For Every Space

Experience the pinnacle of lighting with luminaires by dweLED. Within these pages, you'll discover LED lighting solutions that exemplify our dedication to pushing the boundaries of design and technology. dweLED offers a diverse range of inspired styles, each meticulously crafted to illuminate your indoor and outdoor spaces with unparalleled beauty and elegance.

### FINISHES



Aged Brass  
AB



Aged Brass/Black  
AB/BK



Black  
BK



Black/Aged Brass  
BK/AB



Black/Brushed Nickel  
BK/BN



Black Chrome  
BC



Black/Gold  
BK/GO



Black/Gold/Aged Brass  
BK/GO/AB



Black/Gold Leaf  
BK/GL



Bronze  
BZ



Brushed Aluminum  
AL



Brushed Brass  
BR



Brushed Bronze  
BO



Brushed Nickel  
BN



Burnished Brass  
BB



Chrome  
CH



Graphite  
GH



Polished Nickel  
PN



Rubbed Bronze  
RB



Satin Nickel  
SN



Stainless Steel  
SS



Titanium  
TT



White  
WT




White/Aged Brass  
WT/AB



# dweLED Multi-Lights


dweLED presents our multi-light fixtures which incorporate multiple pendants that can be installed onto one square, round or linear canopy. These pendant styles can be arranged in various ways on a single canopy to create an artful statement as well as deliver ample lighting to various spaces throughout a home or business.

## SQUARE CANOPY 13, 25 & 41 LIGHTS

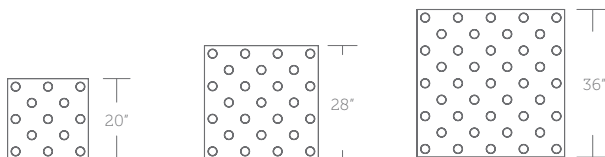


| Product          | Page # |
|------------------|--------|
| <b>BANDED</b>    | 6-7    |
| <b>CYLLINDRA</b> | 8-9    |
| <b>ICE CUBE</b>  | 10-11  |
| <b>INTERLACE</b> | 12-13  |
| <b>QUILL</b>     | 14-15  |
| <b>VIGGO</b>     | 16-17  |

## ROUND CANOPY 3, 5, 9, 15 & 21 LIGHTS

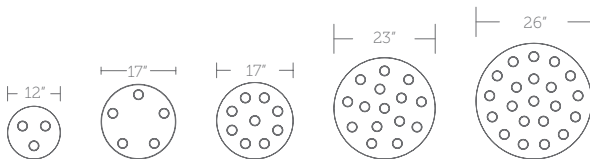

| Product          | Page # |
|------------------|--------|
| <b>BANDED</b>    | 6-7    |
| <b>CYLLINDRA</b> | 8-9    |
| <b>ICE CUBE</b>  | 10-11  |
| <b>INTERLACE</b> | 12-13  |
| <b>QUILL</b>     | 14-15  |
| <b>VIGGO</b>     | 16-17  |
| <b>VORNADO</b>   | 18     |
| <b>WHIRL</b>     | 19     |

## LINEAR CANOPY 3, 5, 14 & 23 LIGHTS

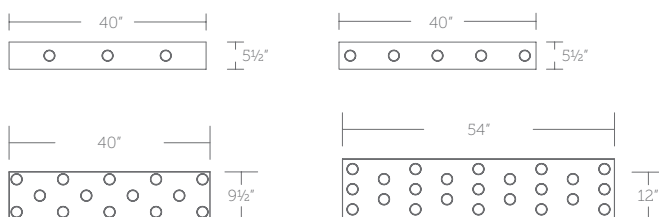

| Product          | Page # |
|------------------|--------|
| <b>BANDED</b>    | 6-7    |
| <b>CYLLINDRA</b> | 8-9    |
| <b>ICE CUBE</b>  | 10-11  |
| <b>INTERLACE</b> | 12-13  |
| <b>QUILL</b>     | 14-15  |
| <b>VIGGO</b>     | 16-17  |








# Multi-Lights

dweLED multi-light pendants transform spaces into stunning illuminated masterpieces. Ideal for homes or businesses, they offer versatile solutions for elevated interiors. Enjoy flexible control with dimming options and adjustable color temperatures (2700-4000K in select models). Color temperatures and dimming options vary by fixture.







# BANDED MULTI-LIGHT



## SQUARE CANOPY

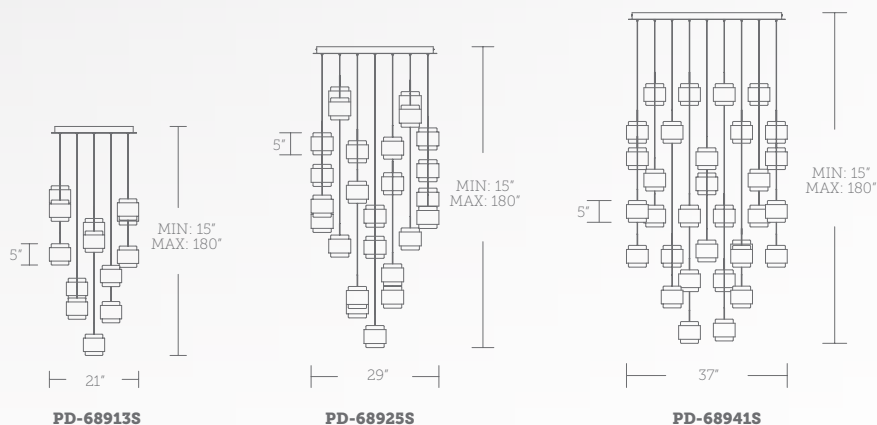

## LINEAR CANOPY

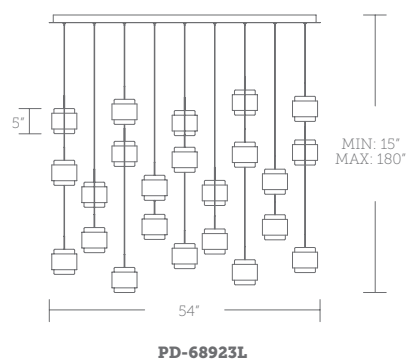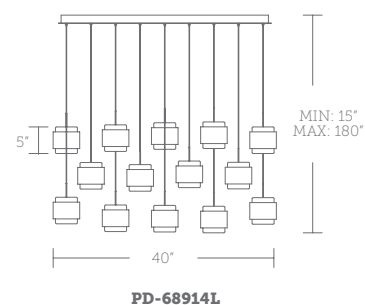

## ROUND CANOPY

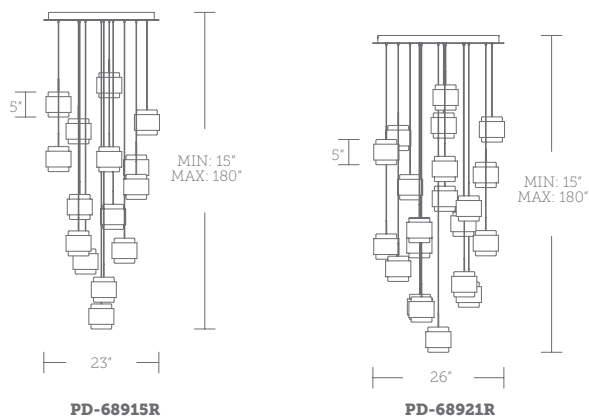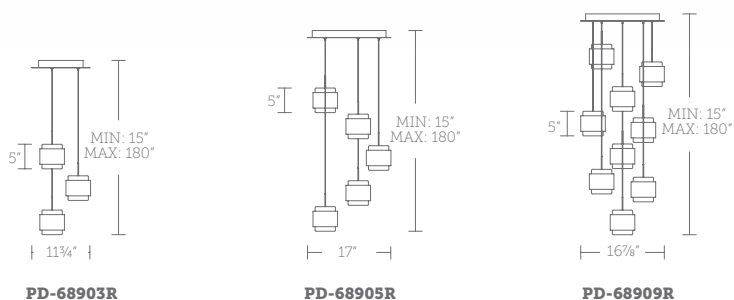





- Thin, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

| CCT                              | CRI | Voltage  | Dimming               | Rated Life      |
|----------------------------------|-----|----------|-----------------------|-----------------|
| 2700K<br>3000K<br>3500K<br>4000K | 90  | 120-277V | ELV<br>TRIAC<br>0-10V | 48,000<br>hours |


| Model No.        | # of Lights | Canopy | Wattage | LED Lumens | Delivered Lumens | Finish           | Min   | Max    |
|------------------|-------------|--------|---------|------------|------------------|------------------|-------|--------|
| <b>PD-68913S</b> | 13 lights   | Square | 126W    | 10387      | 5577             | <b>AB<br/>BK</b> | 15.0" | 180.0" |
| <b>PD-68925S</b> | 25 lights   |        | 232W    | 19975      | 10725            |                  |       |        |
| <b>PD-68941S</b> | 41 lights   |        | 372W    | 32759      | 17589            |                  |       |        |
| <b>PD-68903R</b> | 3 lights    | Round  | 26W     | 2397       | 1287             |                  |       |        |
| <b>PD-68905R</b> | 5 lights    |        | 50W     | 3995       | 2145             |                  |       |        |
| <b>PD-68909R</b> | 9 lights    |        | 79W     | 7191       | 3861             |                  |       |        |
| <b>PD-68915R</b> | 15 lights   |        | 132W    | 11985      | 6435             |                  |       |        |
| <b>PD-68921R</b> | 21 lights   | Linear | 184W    | 16779      | 9009             |                  |       |        |
| <b>PD-68903L</b> | 3 lights    |        | 26W     | 2397       | 1287             |                  |       |        |
| <b>PD-68905L</b> | 5 lights    |        | 50W     | 3995       | 2145             |                  |       |        |
| <b>PD-68914L</b> | 14 lights   |        | 129W    | 11186      | 6006             |                  |       |        |
| <b>PD-68923L</b> | 23 lights   |        | 208W    | 18377      | 9867             |                  |       |        |

Example: **PD-68913S-BK**


See complementary piece on page 75

# CYLLINDRA MULTI-LIGHT


## SQUARE CANOPY

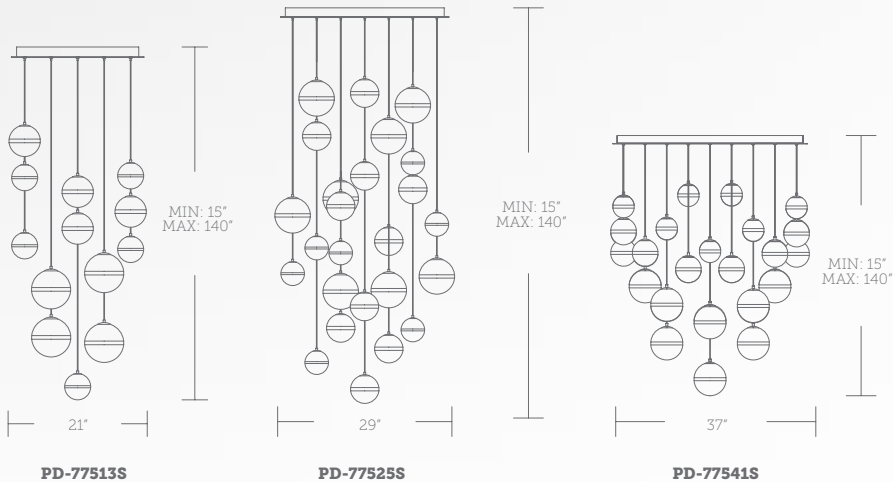

## ROUND CANOPY

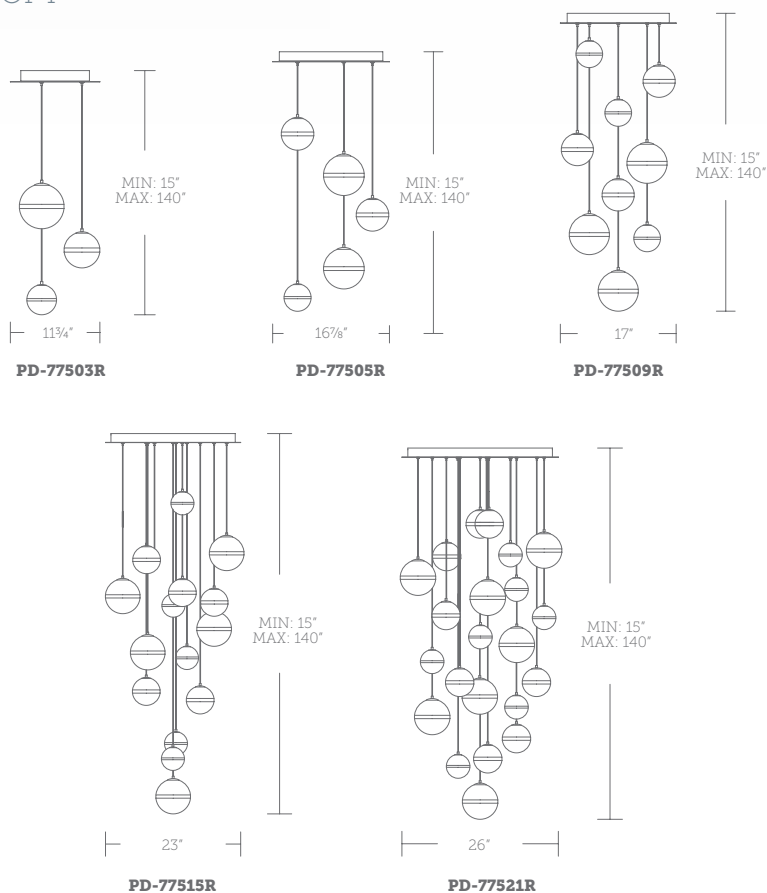

## LINEAR CANOPY

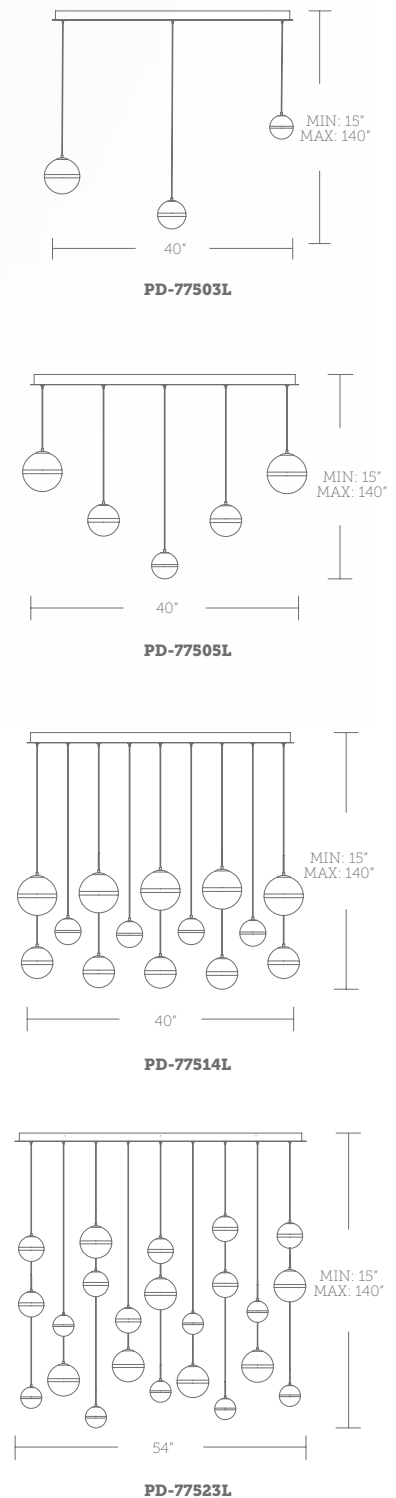



- Thin, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

| CCT                              | CRI | Voltage  | Dimming               | Rated Life      |
|----------------------------------|-----|----------|-----------------------|-----------------|
| 2700K<br>3000K<br>3500K<br>4000K | 90  | 120-277V | ELV<br>TRIAC<br>0-10V | 50,000<br>hours |

| Model No.        | # of Lights | Canopy | Wattage | LED Lumens | Delivered Lumens | Finish           | Min   | Max    |
|------------------|-------------|--------|---------|------------|------------------|------------------|-------|--------|
| <b>PD-77513S</b> | 13 lights   | Square | 128W    | 13367      | 9548             | <b>AB<br/>BC</b> | 15.0" | 140.0" |
| <b>PD-77525S</b> | 25 lights   |        | 236W    | 17440      | 12457            |                  |       |        |
| <b>PD-77541S</b> | 41 lights   |        | 385W    | 26800      | 19143            |                  |       |        |
| <b>PD-77503R</b> | 3 lights    |        | 28W     | 2299       | 1642             |                  |       |        |
| <b>PD-77505R</b> | 5 lights    | Round  | 48W     | 3941       | 2815             |                  |       |        |
| <b>PD-77509R</b> | 9 lights    |        | 84W     | 6896       | 4926             |                  |       |        |
| <b>PD-77515R</b> | 15 lights   |        | 140W    | 10920      | 7800             |                  |       |        |
| <b>PD-77521R</b> | 21 lights   |        | 196W    | 14483      | 10345            |                  |       |        |
| <b>PD-77503L</b> | 3 lights    | Linear | 28W     | 2299       | 1642             |                  |       |        |
| <b>PD-77505L</b> | 5 lights    |        | 48W     | 3941       | 2815             |                  |       |        |
| <b>PD-77514L</b> | 14 lights   |        | 132W    | 10296      | 7354             |                  |       |        |
| <b>PD-77523L</b> | 23 lights   |        | 236W    | 15961      | 11401            |                  |       |        |


Example: **PD-77513S-BC**

See complementary piece on page 36-37




# ICE CUBE MULTI-LIGHT


## SQUARE CANOPY



**PD-29313S**




**PD-29325S**




**PD-29341S**


## LINEAR CANOPY




**PD-29303L**



**PD-29305L**




**PD-29314L**

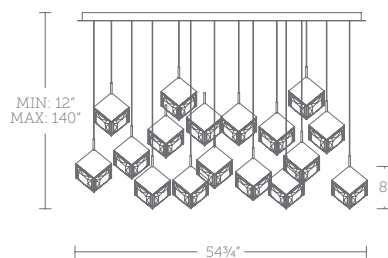


**PD-29323L**


## ROUND CANOPY




**PD-29303R**




**PD-29305R**




**PD-29309R**



**PD-29315R**



**PD-29321R**

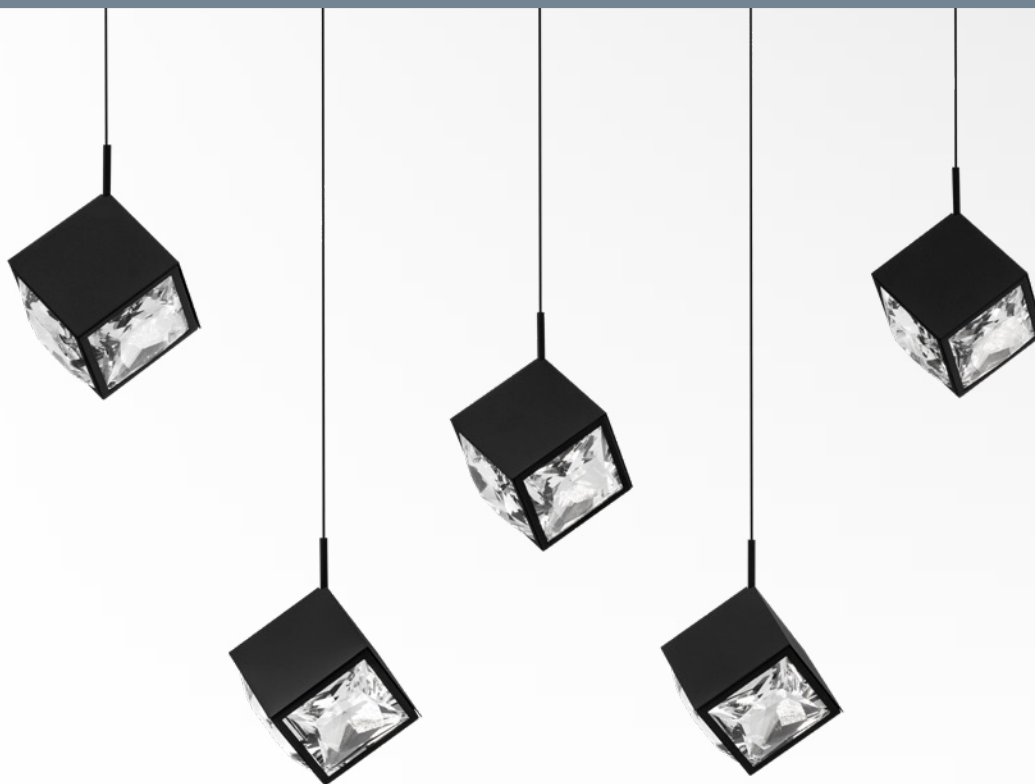

- Faceted K9 crystal is like a hand-cut jewel within a gleaming cube
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Canopy conceals a proprietary universal 120V-277V driver


| CCT                              | CRI | Voltage   | Dimming               | Rated Life      |
|----------------------------------|-----|-----------|-----------------------|-----------------|
| 2700K<br>3000K<br>3500K<br>4000K | 90  | 120V-277V | ELV<br>0-10V<br>TRIAC | 50,000<br>hours |

| Model No.        | # of Lights | Canopy | Wattage | LED Lumens | Delivered Lumens | Finish           | Min   | Max    |
|------------------|-------------|--------|---------|------------|------------------|------------------|-------|--------|
| <b>PD-29313S</b> | 13 Light    | Square | 93W     | 7900       | 4970             | <b>AB<br/>BK</b> | 12.0" | 140.0" |
| <b>PD-29325S</b> | 25 Light    |        | 180W    | 15300      | 9640             |                  |       |        |
| <b>PD-29341S</b> | 41 Light    |        | 294W    | 25200      | 15870            |                  |       |        |
| <b>PD-29303R</b> | 3 Light     |        | 21W     | 1800       | 1130             |                  |       |        |
| <b>PD-29305R</b> | 5 Light     | Round  | 36W     | 3060       | 1930             |                  |       |        |
| <b>PD-29309R</b> | 9 Light     |        | 65W     | 5580       | 3515             |                  |       |        |
| <b>PD-29315R</b> | 15 Light    |        | 108W    | 9180       | 5780             |                  |       |        |
| <b>PD-29321R</b> | 21 Light    |        | 150W    | 12800      | 8060             |                  |       |        |
| <b>PD-29303L</b> | 3 Light     | Linear | 21W     | 1800       | 1130             |                  |       |        |
| <b>PD-29305L</b> | 5 Light     |        | 36W     | 3060       | 1930             |                  |       |        |
| <b>PD-29314L</b> | 14 Light    |        | 102W    | 8600       | 5420             |                  |       |        |
| <b>PD-29323L</b> | 23 Light    |        | 165W    | 14000      | 8820             |                  |       |        |



Example: **PD-29305L-BK**  
See complementary piece on page 88

# INTERLACE MULTI-LIGHT




## SQUARE CANOPY

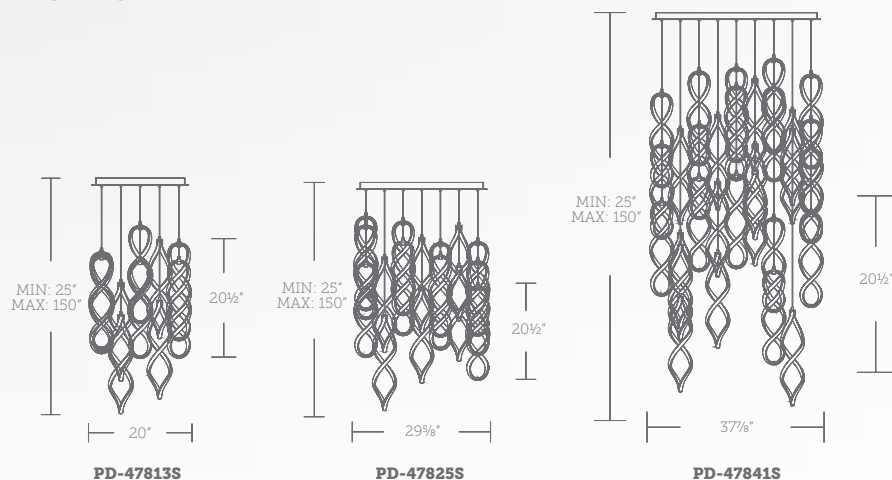

## LINEAR CANOPY



## ROUND CANOPY

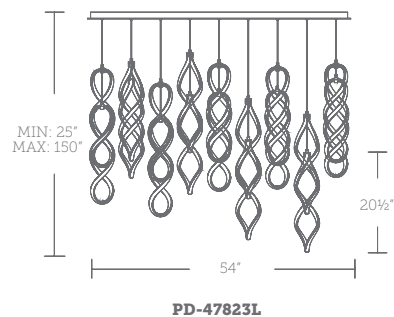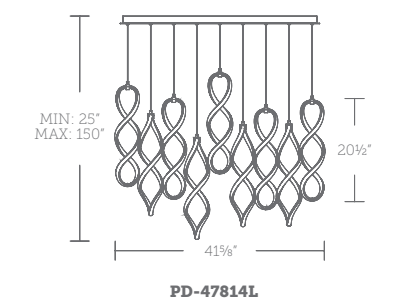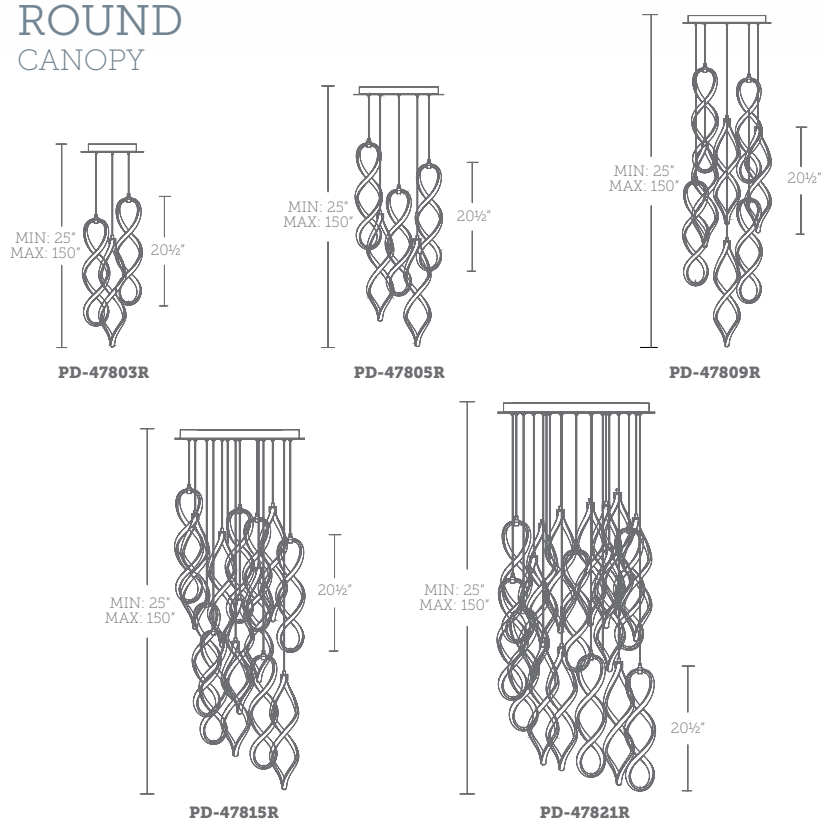






- Delicate bands of soft LED illumination weave playfully downward
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Omnidirectional diffused illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Canopy conceals a proprietary universal 120V-277V driver

| CCT   | CRI | Voltage   | Dimming | Rated Life   |
|-------|-----|-----------|---------|--------------|
| 2700K | 90  | 120V-277V | ELV     | 50,000 hours |
| 3000K |     |           | 0-10V   |              |
| 3500K |     |           | TRIAC   |              |
| 4000K |     |           |         |              |


| Model No.        | # of Lights | Canopy | Wattage | LED Lumens | Delivered Lumens | Finish           | Min   | Max    |
|------------------|-------------|--------|---------|------------|------------------|------------------|-------|--------|
| <b>PD-47813S</b> | 13 Light    | Square | 278W    | 13016      | 12577            | <b>BK<br/>CH</b> | 25.0" | 150.0" |
| <b>PD-47825S</b> | 25 Light    |        | 536W    | 25031      | 24186            |                  |       |        |
| <b>PD-47841S</b> | 41 Light    |        | 878W    | 41051      | 39665            |                  |       |        |
| <b>PD-47803R</b> | 3 Light     |        | 64W     | 3004       | 2902             |                  |       |        |
| <b>PD-47805R</b> | 5 Light     | Round  | 107W    | 5006       | 4837             |                  |       |        |
| <b>PD-47809R</b> | 9 Light     |        | 193W    | 9011       | 8707             |                  |       |        |
| <b>PD-47815R</b> | 15 Light    |        | 321W    | 15019      | 14511            |                  |       |        |
| <b>PD-47821R</b> | 21 Light    |        | 450W    | 21026      | 20316            |                  |       |        |
| <b>PD-47803L</b> | 3 Light     | Linear | 64W     | 3004       | 2902             |                  |       |        |
| <b>PD-47805L</b> | 5 Light     |        | 107W    | 5006       | 4837             |                  |       |        |
| <b>PD-47814L</b> | 14 Light    |        | 300W    | 14018      | 13544            |                  |       |        |
| <b>PD-47823L</b> | 23 Light    |        | 493W    | 23029      | 22251            |                  |       |        |

Example: **PD-47805R-CH**  
See complementary piece on page 89 + 136


## SQUARE CANOPY

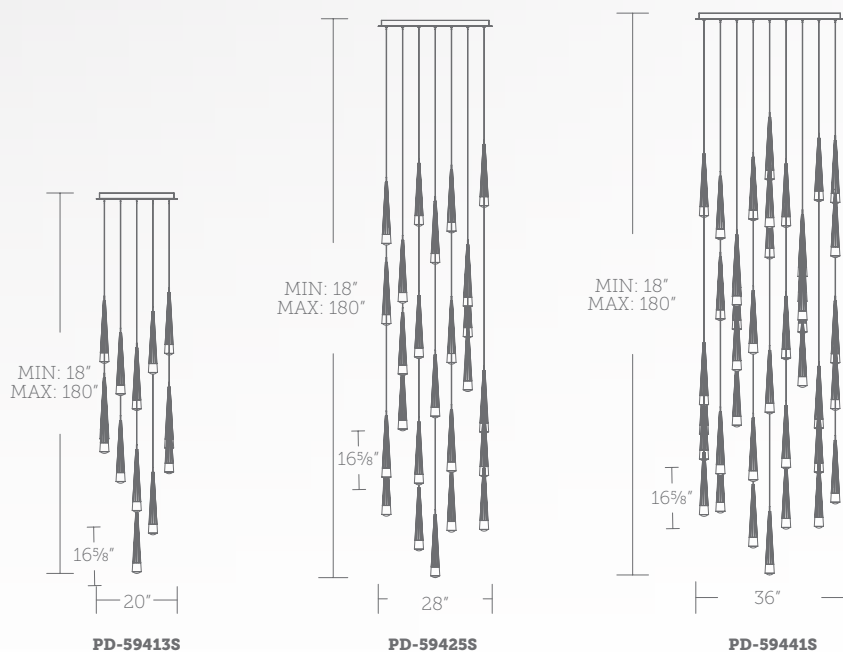

## LINEAR CANOPY

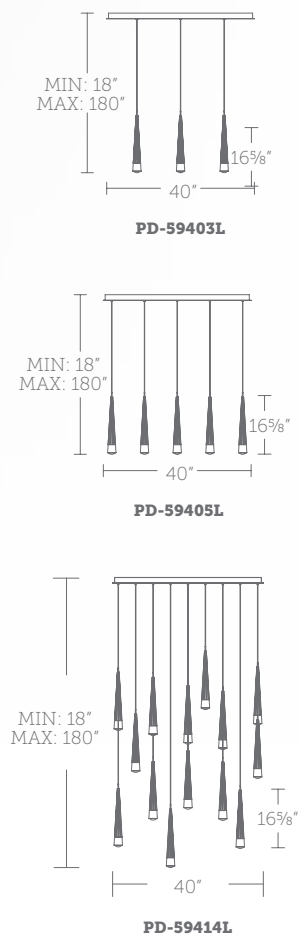

## ROUND CANOPY

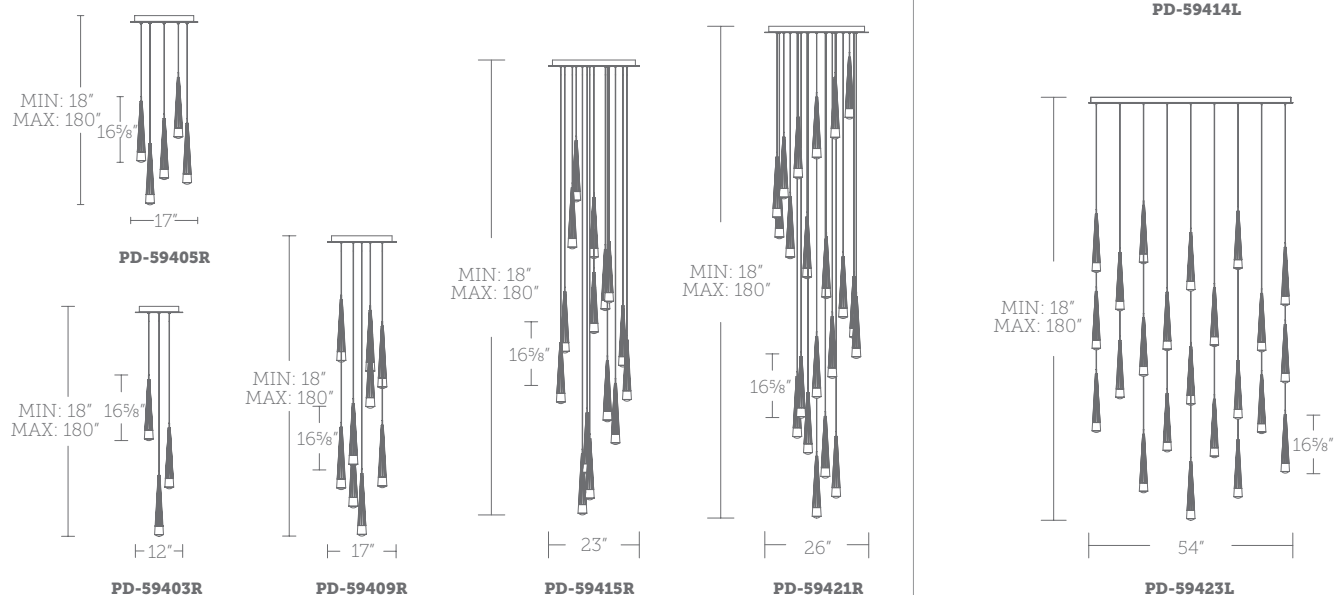




- V-groove flared glass is encircled by a band of metal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Canopy conceals a proprietary 120V/277V driver

| CCT   | CRI | Voltage   | Dimming      | Rated Life      |
|-------|-----|-----------|--------------|-----------------|
| 2700K | 90  | 120V/277V | ELV<br>TRIAC | 50,000<br>hours |
| 3000K |     |           |              |                 |
| 3500K |     |           |              |                 |
| 4000K |     |           |              |                 |


| Model No.        | # of Lights | Canopy | Wattage | LED Lumens | Delivered Lumens | Finish                              | Min   | Max    |
|------------------|-------------|--------|---------|------------|------------------|-------------------------------------|-------|--------|
| <b>PD-59413S</b> | 13 Light    | Square | 104W    | 7839       | 6751             | <b>AB</b><br><b>BK</b><br><b>CH</b> | 18.0" | 180.0" |
| <b>PD-59425S</b> | 25 Light    |        | 200W    | 15075      | 12983            |                                     |       |        |
| <b>PD-59441S</b> | 41 Light    |        | 328W    | 24723      | 21291            |                                     |       |        |
| <b>PD-59403R</b> | 3 Light     |        | 24W     | 1809       | 1558             |                                     |       |        |
| <b>PD-59405R</b> | 5 Light     | Round  | 40W     | 3015       | 2597             |                                     |       |        |
| <b>PD-59409R</b> | 9 Light     |        | 72W     | 5427       | 4674             |                                     |       |        |
| <b>PD-59415R</b> | 15 Light    |        | 120W    | 9045       | 7790             |                                     |       |        |
| <b>PD-59421R</b> | 21 Light    | Linear | 168W    | 12663      | 10905            |                                     |       |        |
| <b>PD-59403L</b> | 3 Light     |        | 24W     | 1809       | 1558             |                                     |       |        |
| <b>PD-59405L</b> | 5 Light     |        | 40W     | 3015       | 2597             |                                     |       |        |
| <b>PD-59414L</b> | 14 Light    |        | 112W    | 8442       | 7270             |                                     |       |        |
| <b>PD-59423L</b> | 23 Light    |        | 184W    | 13869      | 11944            |                                     |       |        |

Example: **PD-59423L-AB**  
See complementary piece on page 101



## SQUARE CANOPY

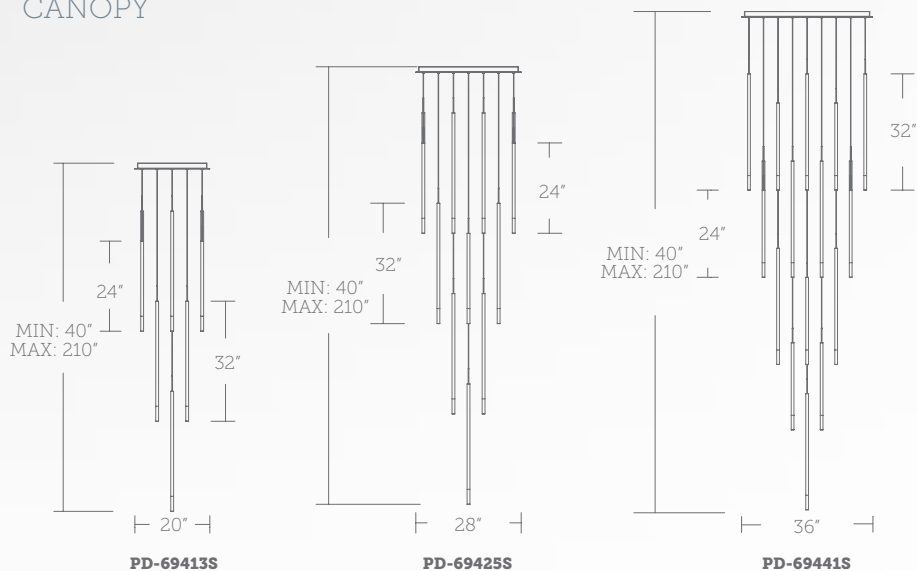




## LINEAR CANOPY

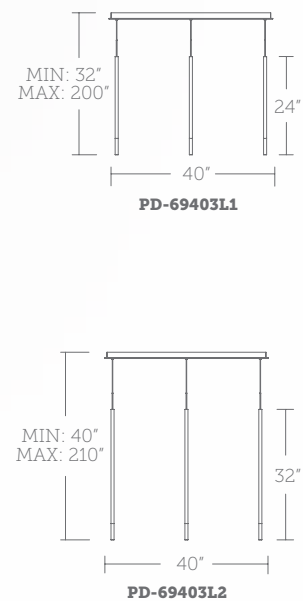

## ROUND CANOPY

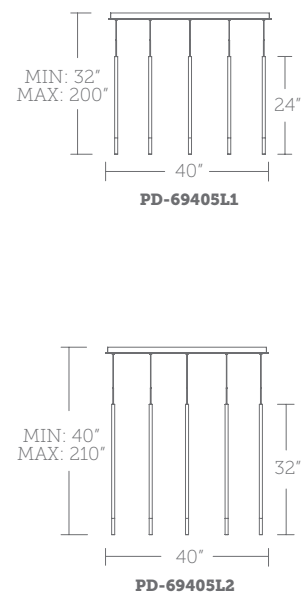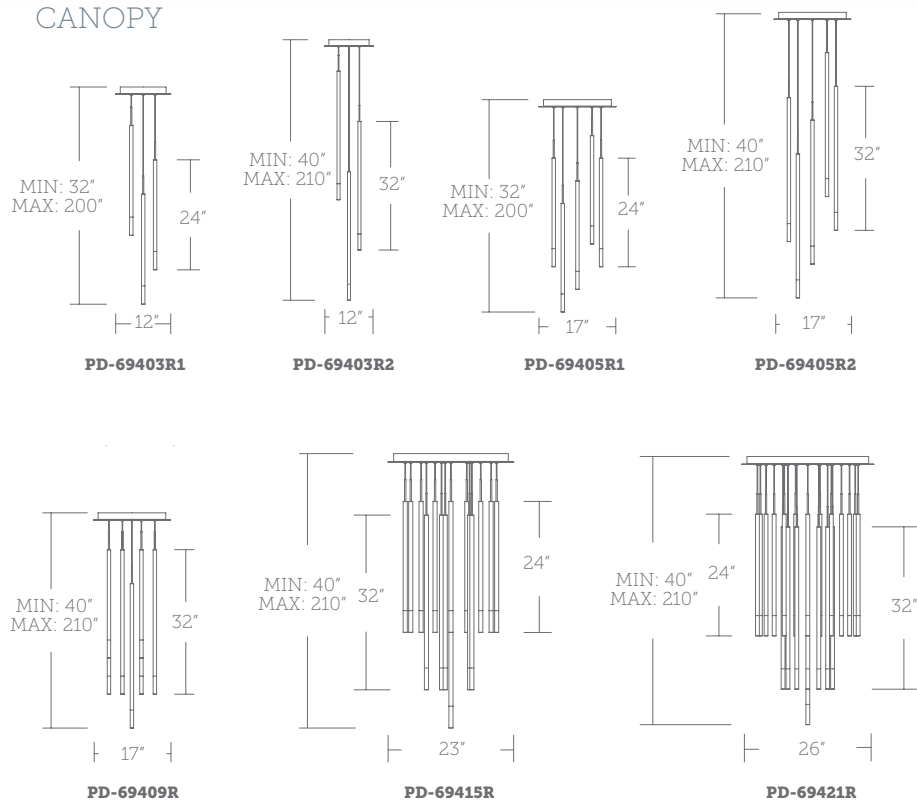



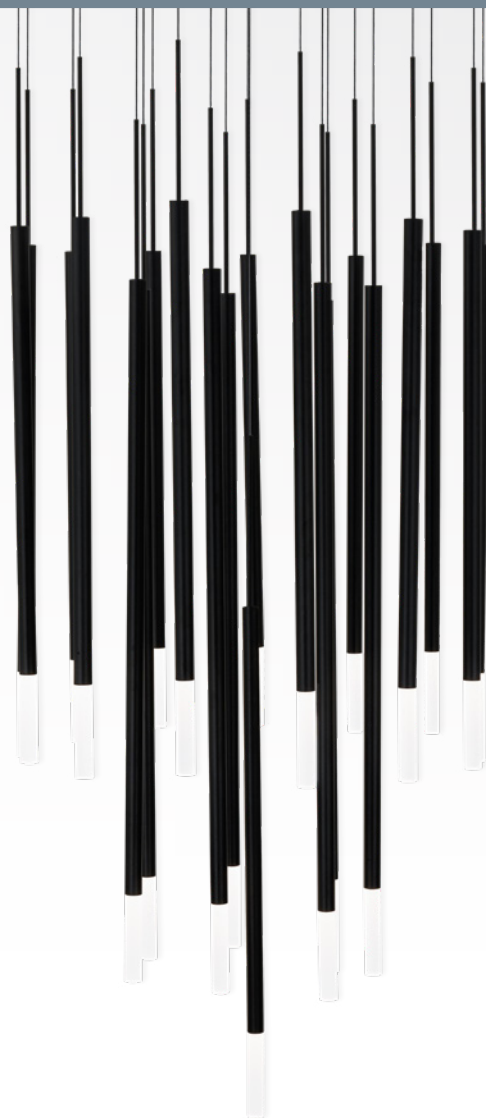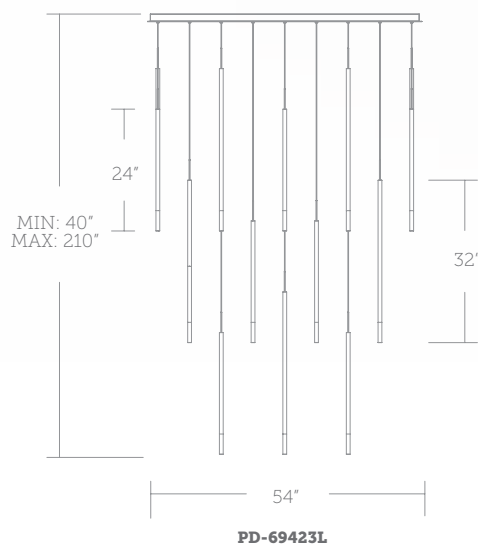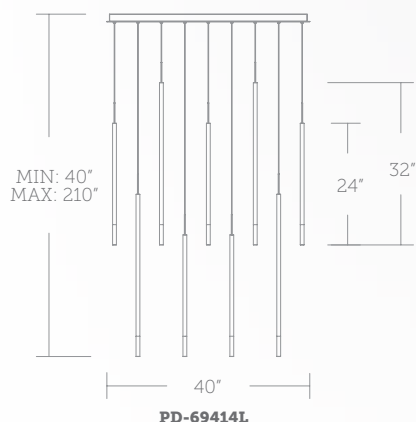

- Refined metallic pendant is tipped with an acrylic diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Canopy conceals a proprietary 120V/277V driver

| CCT                              | CRI | Voltage   | Dimming      | Rated Life      |
|----------------------------------|-----|-----------|--------------|-----------------|
| 2700K<br>3000K<br>3500K<br>4000K | 90  | 120V/277V | ELV<br>TRIAC | 50,000<br>hours |


| Model No.         | # of Lights | Element Length | Canopy | Wattage | LED Lumens | Delivered Lumens | Finish | Min   | Max    |
|-------------------|-------------|----------------|--------|---------|------------|------------------|--------|-------|--------|
| <b>PD-69413S</b>  | 13 Light    | 24" & 32"      | Square | 62W     | 5895       | 2862             | BK     | 40.0" | 210.0" |
| <b>PD-69425S</b>  | 25 Light    | 24" & 32"      |        | 118W    | 10916      | 5300             |        |       |        |
| <b>PD-69441S</b>  | 41 Light    | 24" & 32"      |        | 195W    | 18340      | 8904             |        |       |        |
| <b>PD-69403R1</b> | 3 Light     | 24"            | Round  | 15W     | 1528       | 740              | BK     | 32.0" | 200.0" |
| <b>PD-69403R2</b> | 3 Light     | 32"            |        | 15W     | 1528       | 740              |        | 40.0" | 210.0" |
| <b>PD-69405R1</b> | 5 Light     | 24"            |        | 21W     | 2183       | 1060             |        | 32.0" | 200.0" |
| <b>PD-69405R2</b> | 5 Light     | 32"            | Linear | 21W     | 2183       | 1060             | BK     | 40.0" | 210.0" |
| <b>PD-69409R</b>  | 9 Light     | 32"            |        | 43W     | 4366       | 2120             |        | 40.0" | 210.0" |
| <b>PD-69415R</b>  | 15 Light    | 24" & 32"      |        | 70W     | 6550       | 3180             |        | 40.0" | 210.0" |
| <b>PD-69421R</b>  | 21 Light    | 24" & 32"      | Linear | 100W    | 9606       | 4660             | BK     | 40.0" | 210.0" |
| <b>PD-69403L1</b> | 3 Light     | 24"            |        | 15W     | 1528       | 740              |        | 32.0" | 200.0" |
| <b>PD-69403L2</b> | 3 Light     | 32"            |        | 15W     | 1528       | 740              |        | 40.0" | 210.0" |
| <b>PD-69405L1</b> | 5 Light     | 24"            | Linear | 21W     | 2183       | 1060             | BK     | 32.0" | 200.0" |
| <b>PD-69405L2</b> | 5 Light     | 32"            |        | 21W     | 2183       | 1060             |        | 40.0" | 210.0" |
| <b>PD-69414L</b>  | 14 Light    | 24" & 32"      |        | 70W     | 6550       | 3180             |        | 40.0" | 210.0" |
| <b>PD-69423L</b>  | 23 Light    | 24" & 32"      |        | 110W    | 10261      | 4982             |        | 40.0" | 210.0" |

Example: **PD-69421R-BK**  
See complementary piece on page 109


# VORNADO MULTI-LIGHT




## ROUND CANOPY




**PD-84903R**




**PD-84915R**



**PD-84905R**

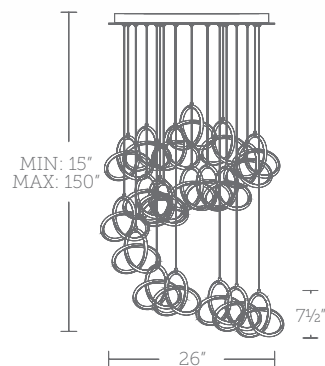

**PD-84921R**

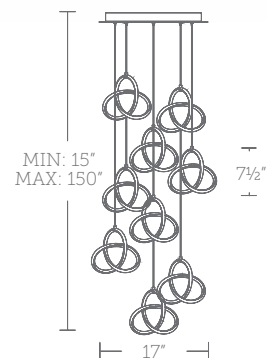

**PD-84909R**



- Seamless curves of metal embrace silicon diffusers
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Omnidirectional diffused illumination
- Hand-crafted, asymmetric & seamless construction, variation expected
- Canopy conceals a proprietary universal 120V/277V driver


| CCT   | CRI | Voltage   | Dimming      | Rated Life   |
|-------|-----|-----------|--------------|--------------|
| 3000K | 90  | 120V/277V | ELV<br>TRIAC | 50,000 hours |

| Model No.        | # of Lights | Canopy | Wattage | LED Lumens | Delivered Lumens | Finish           | Min   | Max    |
|------------------|-------------|--------|---------|------------|------------------|------------------|-------|--------|
| <b>PD-84903R</b> | 3 Light     | Round  | 44W     | 2708       | 2383             | <b>BK<br/>CH</b> | 15.0" | 150.0" |
| <b>PD-84905R</b> | 5 Light     |        | 77W     | 4463       | 4061             |                  |       |        |
| <b>PD-84909R</b> | 9 Light     |        | 138W    | 8034       | 7505             |                  |       |        |
| <b>PD-84915R</b> | 15 Light    |        | 230W    | 13390      | 12509            |                  |       |        |
| <b>PD-84921R</b> | 21 Light    |        | 321W    | 18746      | 17513            |                  |       |        |


Example: **PD-84903R-CH**

See complementary piece on page 110, 111 + 174


## ROUND CANOPY




**PD-19403R**




**PD-19405R**



**PD-19415R**

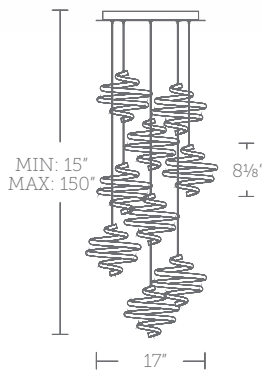

**PD-19409R**



**PD-19421R**



- Whirling in space, curves of illumination are backed by a black frame
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Canopy conceals a proprietary universal 120V/277V driver

| Model No.        | # of Lights | Canopy | Wattage | LED Lumens | Delivered Lumens | Finish    | Min   | Max    |
|------------------|-------------|--------|---------|------------|------------------|-----------|-------|--------|
| <b>PD-19403R</b> | 3 Light     | Round  | 63W     | 3219       | 2897             | <b>BK</b> | 15.0" | 150.0" |
| <b>PD-19405R</b> | 5 Light     |        | 101W    | 4963       | 4621             |           |       |        |
| <b>PD-19409R</b> | 9 Light     |        | 187W    | 8934       | 8318             |           |       |        |
| <b>PD-19415R</b> | 15 Light    |        | 315W    | 14685      | 13556            |           |       |        |
| <b>PD-19421R</b> | 21 Light    |        | 439W    | 20383      | 18142            |           |       |        |

Example: **PD-19405R-BK**

See complementary piece on page 111

| CCT                              | CRI | Voltage   | Dimming      | Rated Life      |
|----------------------------------|-----|-----------|--------------|-----------------|
| 2700K<br>3000K<br>3500K<br>4000K | 90  | 120V/277V | ELV<br>TRIAC | 50,000<br>hours |







# Pendants + Chandeliers

Providing an even layer of energy-efficient illumination for modern interiors and exteriors, dweLED debuts an innovative selection of LED pendants and chandeliers. From free-flowing silhouettes and solid drum profiles to multi-armed eclectic and geometric designs, these luminaires are ideal for mid-upscale homes, multi-family and assisted living residences, as well as hospitality applications.




# ARAGON

## MINI PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Faux Spanish Alabaster. Like real stone, each piece is unique

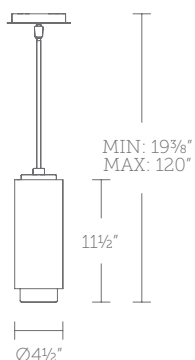

| Model No.       | Size | CCT                                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish    | Dimensions |      |       | Min   | Max    |
|-----------------|------|------------------------------------|-----|----------|---------|------------|------------------|-----------|--------------|-----------|------------|------|-------|-------|--------|
|                 |      |                                    |     |          |         |            |                  |           |              |           | L"         | W"   | H"    |       |        |
| <b>PD-49512</b> | 12"  | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 120/277V | 15W     | 1533       | 680              | ELV TRIAC | 50,000 hours | <b>WT</b> | 4.5"       | 4.5" | 12.5" | 20.0" | 120.0" |

Example: **PD-49512-30-WT**





“A gleaming mini-pendant is artfully designed from faux Spanish Alabaster and opal glass, creating a beautifully patterned, soft glow.”




# BALANCE BEAM

## LINEAR PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 360 degree illumination
- Adjustable silicone strap

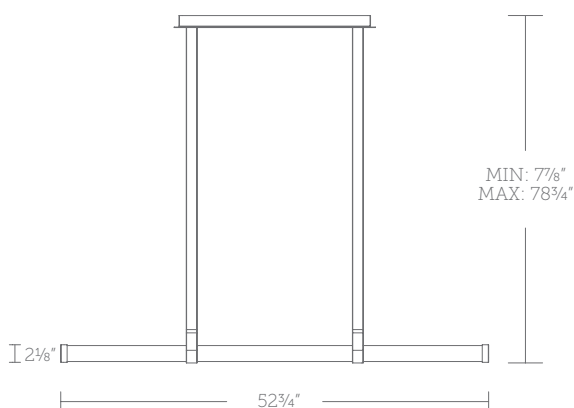

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish    | Dimensions |      |      | Min   | Max   |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|-----------|------------|------|------|-------|-------|
|                 |      |                                                      |     |          |         |            |                  |                       |                 |           | L"         | W"   | H"   |       |       |
| <b>PD-97552</b> | 52"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 41W     | 5000       | 1921             | ELV<br>TRIAC<br>0-10V | 54,000<br>hours | <b>BK</b> | 52.0"      | 2.0" | 2.0" | 10.0" | 80.0" |

Example: **PD-97552-30-BK**





“Light Layers. Silicone straps balance a slim clear bar enclosing a double layer of illumination.”




# BASTONE

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Contracts and extends for an adjustable length for customized look
- Up and downwards illumination

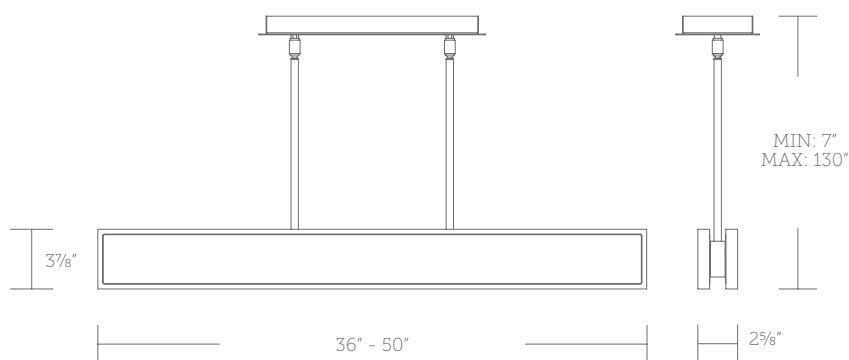

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish                 | Dimensions |      |      | Min  | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|------------------------|------------|------|------|------|--------|
|                 |      |                                                      |     |          |         |            |                  |                       |                 |                        | L"         | W"   | H"   |      |        |
| <b>PD-99450</b> | 50"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 36W     | 2000       | 1476             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>BK</b><br><b>BN</b> | 36.3"      | 2.6" | 3.9" | 7.0" | 130.0" |

Example: **PD-99450-30-BK**

See complementary piece on page 132 + 242





“Rectangular forms radiate LED illumination both upward and downward. Adjust the length effortlessly by sliding the sections apart to fit your table or space. Its seamless design exudes sharp, modern style.”




# BRACELET

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Thin powered aircraft cables provide ultra- clean look

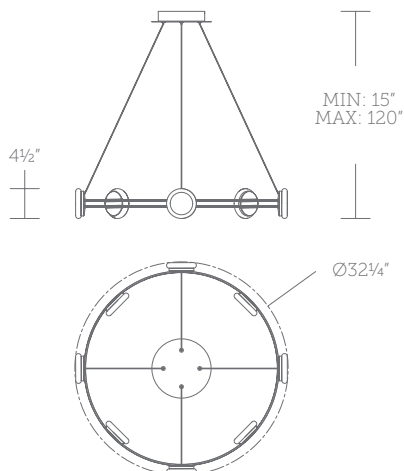

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish                 | Dimensions |       |      | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|------------------------|------------|-------|------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |                       |                 |                        | L"         | W"    | H"   |       |        |
| <b>PD-65532</b> | 32"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 57W     | 5320       | 4157             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>AB</b><br><b>BC</b> | 32.3"      | 32.3" | 4.5" | 15.0" | 120.0" |

Example: **PD-65532-30-BC**





“Charming. Circles of light are set in an all-around design on a gleaming bracelet-inspired frame.”





# CAROUSEL

## CHANDELIER



- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy
- Aluminum hardware with etched diffuser

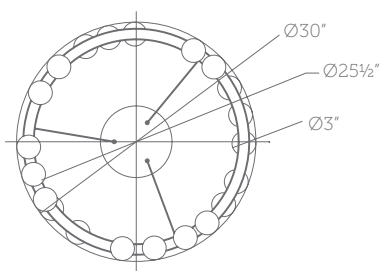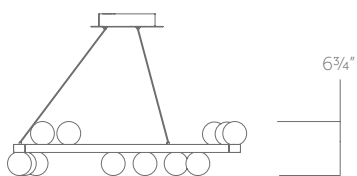

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish                 | Dimensions |       |      | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|------------------------|------------|-------|------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |                       |                 |                        | L"         | W"    | H"   |       |        |
| <b>PD-21528</b> | 28"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 42W     | 4533       | 3865             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>AB</b><br><b>BK</b> | 28.0"      | 28.0" | 3.0" | 30.0" | 188.0" |

Example: **PD-21528-30-AB**





“Merry-go-round. Opaque globes float up and down around a simple band, casting soft illumination throughout the room.”






# CLOAK

## MINI PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field

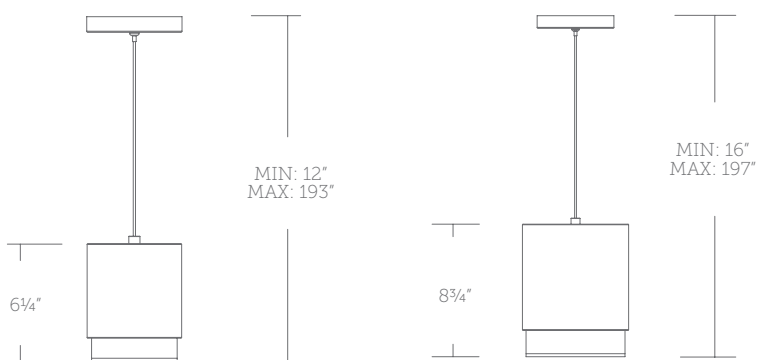

| Model No.       | Size | CCT                                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish           | Dimensions |      |      |       |        |
|-----------------|------|------------------------------------|-----|----------|---------|------------|------------------|-----------|--------------|------------------|------------|------|------|-------|--------|
|                 |      |                                    |     |          |         |            |                  |           |              |                  | L"         | W"   | H"   | Min   | Max    |
| <b>PD-58506</b> | 6"   | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 120/277V | 15W     | 1259       | 884              | ELV TRIAC | 50,000 hours | <b>BK<br/>WT</b> | 4.6"       | 4.6" | 6.3" | 12.0" | 193.0" |
| <b>PD-58509</b> | 9"   |                                    |     |          | 21W     | 1934       | 1505             |           |              |                  | 6.8"       | 6.8" | 9.1" | 16.0" | 197.0" |

Example: **PD-58506-30-BK**



“Tubular. An opaque tube surrounds an acrylic shade, directing illumination in a downward design.”






# CLOSE ENCOUNTERS

## MINI PENDANT



- 2 light sources with sensor control
- Dimming function with sensor control

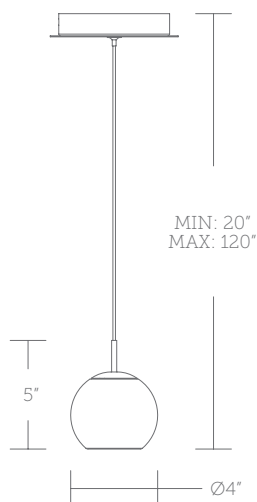

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |      |              |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|------|--------------|
|                 |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"   | Min Max      |
| <b>PD-61506</b> | 6"   | 3000K | 90  | 120V    | 8W      | 624        | 483              | N/A     | 50,000 hours | <b>WT</b> | 4.0"       | 4.0" | 6.0" | 20.0" 120.0" |

Example: **PD-61506-WT**





*“A glass globe shade with an open base is gracefully suspended from a cord. Soft ambient light is diffused to the sides while the space below enjoys focused downlighting. Turn on, off and dim with a hand wave within three inches of the fixture.”*




# CYLLINDRA

## MINI PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field

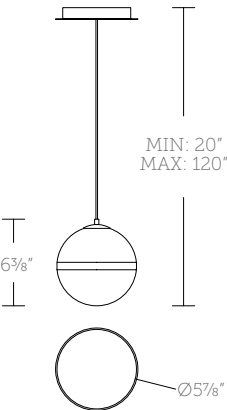

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |      | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"   |       |        |
| <b>PD-77506</b> | 6"   | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 14W     | 6896       | 897              | ELV<br>TRIAC | 50,000<br>hours | <b>AB</b><br><b>BC</b> | 6.0"       | 6.0" | 6.0" | 20.0" | 120.0" |

Example: **PD-77506-30-AB**

See complementary piece on page 10-11





“ *Equatorial Division. A translucent glass sphere divided by a single metallic band captures a clean, modern aesthetic. Suspended from a minimalist disc ceiling mount, a slender cord extends to a dish accent perched at the top of the orb, adding a touch of elegance to the design.* ”






# DESMOND

## LINEAR PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select temperature or adjust in field
- Up and downwards illumination

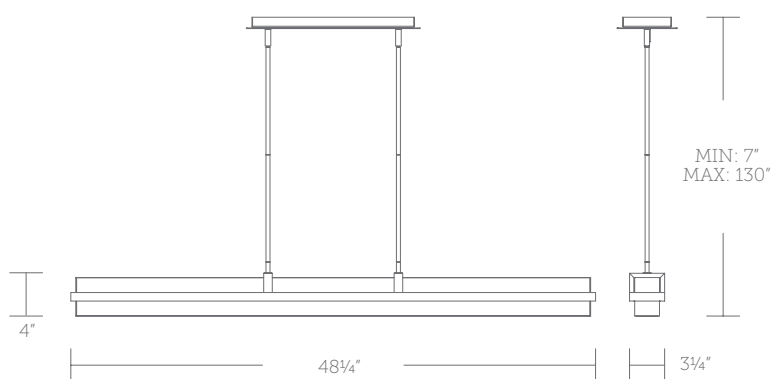

| Model No.       | Size | CCT                                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish       | Dimensions |      |      | Min  | Max    |
|-----------------|------|------------------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|--------------|------------|------|------|------|--------|
|                 |      |                                    |     |          |         |            |                  |                       |                 |              | L"         | W"   | H"   |      |        |
| <b>PD-41548</b> | 48"  | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 120-277V | 41W     | 3317       | 2025             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>BK/AB</b> | 48.0"      | 3.0" | 3.5" | 8.0" | 130.0" |

Example: **PD-41548-30-BK/AB**



“*Light Line. This linear pendant showcases a slim, black rectangular shade accented with luxurious aged brass detailing. Its minimalist mounting hardware and slender rod suspension create a floating effect by LEDs clean, uniform glow through a crisp white diffuser.*”




# DOMA

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Featuring an opaline outer glass and opal inner glass

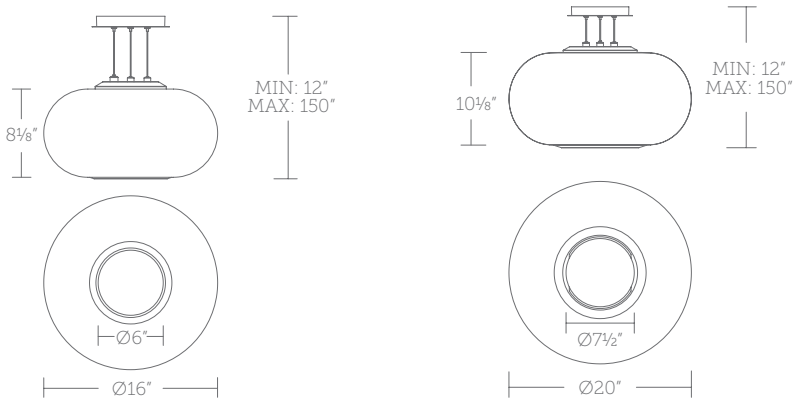

| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |       |       | Min   | Max    |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|-------|-------|-------|--------|
|                 |      |                          |     |          |         |            |                  |              |                 |           | L"         | W"    | H"    |       |        |
| <b>PD-48516</b> | 16"  | -27<br>-30<br>-35<br>-40 | 90  | 120/277V | 20W     | 1520       | 1216             | ELV<br>TRIAC | 50,000<br>hours | <b>BK</b> | 16.0"      | 16.0" | 9.0"  | 12.0" | 150.0" |
| <b>PD-48520</b> | 20"  | -27<br>-30<br>-35<br>-40 |     |          | 29W     | 2100       | 1620             |              |                 |           | 20.0"      | 20.0" | 11.1" |       |        |

Example: **PD-48520-30-BK**

See complementary piece on page 196





“ *Inner Light. A thick etched glass cylinder inside a misty opaline glass orb creates a luminous space for light and shadow to play across.* ”




# DYCE

## PENDANT



- Construction: Aluminum hardware
- Spin-on round canopy with minimal hardware

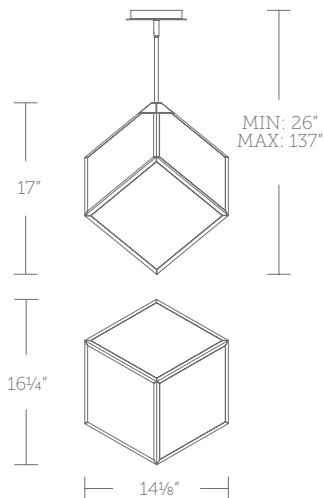

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------|--------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |           |              |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-43517</b> | 17"  | 3000K | 90  | 120/277V | 11W     | 1000       | 322              | ELV TRIAC | 50,000 hours | <b>BK</b> | 14.1"      | 14.1" | 16.9" | 26.0" | 137.0" |

Example: **PD-43517-BK**





“ *High Roller. Ripple glass held within a distinctive metal cube brings a playful air to the Dyce pendant. Hang in multiples above a kitchen island or bar for a winning look.* ”






# GRILLE

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy

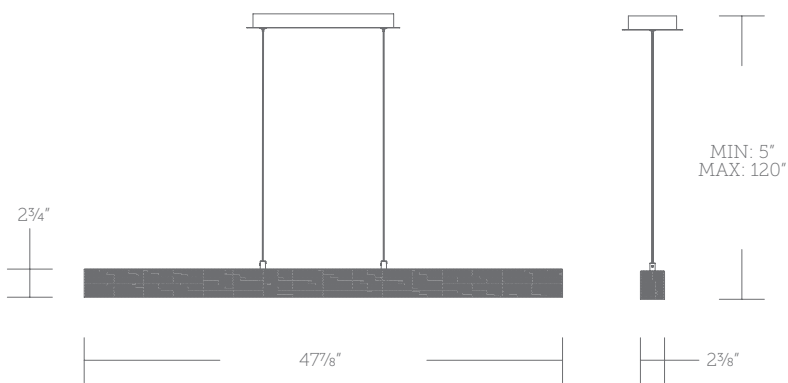

| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish    | Dimensions |      |      | Min  | Max    |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|-----------|------------|------|------|------|--------|
|                 |      |                          |     |          |         |            |                  |                       |                 |           | L"         | W"   | H"   |      |        |
| <b>PD-57548</b> | 48"  | -27<br>-30<br>-35<br>-40 | 90  | 120-277V | 54W     | 2132       | 1157             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>BK</b> | 47.3"      | 2.5" | 2.8" | 5.0" | 120.0" |

Example: **PD-57548-30-BK**

See complementary piece on page 198



“ A perforated linear shade offers additional visual interest from tiny pinpoints of illumination. A slim bar of light floats effortlessly above surfaces, casting diffuse illumination in slender style. ”






# GROHLE

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Top and bottom bands for illumination
- Driver concealed within the canopy

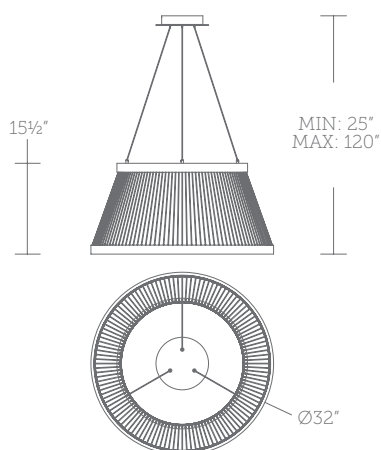

| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish    | Dimensions |       |      | Min   | Max    |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|-----------|------------|-------|------|-------|--------|
|                 |      |                          |     |          |         |            |                  |                       |                 |           | L"         | W"    | H"   |       |        |
| <b>PD-55532</b> | 32"  | -27<br>-30<br>-35<br>-40 | 90  | 120-277V | 5W      | 3743       | 2052             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>BK</b> | 31.1"      | 31.1" | 3.0" | 25.0" | 120.0" |

Example: **PD-55532-30-BK**





“ In a novel take on a drum shade, Grohle features fabric strings supporting two rings of LED illumination. Even tempos of light are delivered from its modern profile. ”




# HELMET

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Ability to move arches for custom look

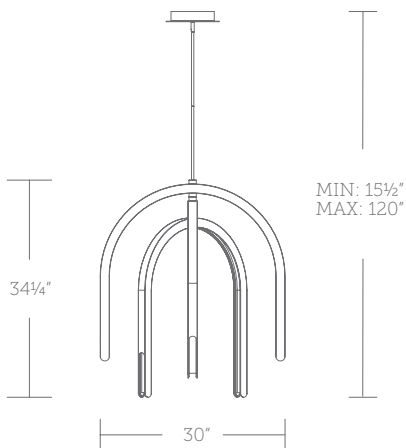

| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish                 | Dimensions |      |       | Min   | Max    |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|------------------------|------------|------|-------|-------|--------|
|                 |      |                          |     |          |         |            |                  |                       |                 |                        | L"         | W"   | H"    |       |        |
| <b>PD-93534</b> | 34"  | -27<br>-30<br>-35<br>-40 | 90  | 120-277V | 56W     | 4376       | 2052             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>AB</b><br><b>BK</b> | 30.0"      | 1.5" | 34.3" | 15.5" | 120.0" |

Example: **PD-93534-30-AB**





“ Movable arches lined with light connect on a center stem. Adjust as desired to fit your space. ”






# HOOPLA

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Hand crafted frame with flexible diffuser. Expect variation in overall dimensions

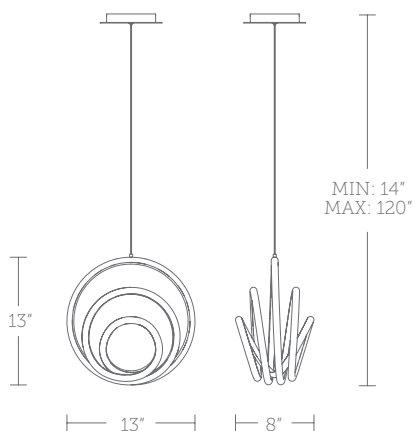

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |       | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|-------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"    |       |        |
| <b>PD-81513</b> | 13"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 28W     | 2336       | 1537             | ELV<br>TRIAC | 50,000<br>hours | <b>AB</b><br><b>BK</b> | 13.0"      | 7.8" | 13.0" | 14.0" | 120.0" |

Example: **PD-81513-30-BK**



“ Loopy. A fusion of elegant rings illuminate space with the glow of integrated LED. ”




# HOURLASS

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field

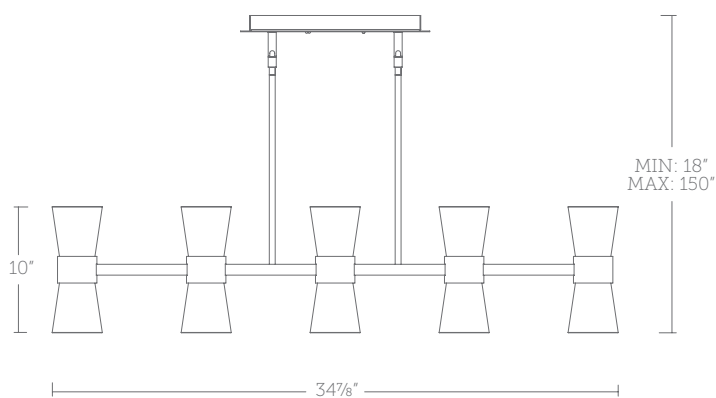

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                              | Dimensions |      |      | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-------------------------------------|------------|------|------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                                     | L"         | W"   | H"   |       |        |
| <b>PD-91536</b> | 36"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 28W     | 2300       | 1877             | ELV<br>TRIAC | 54,000<br>hours | <b>AB</b><br><b>BK</b><br><b>BN</b> | 36.0"      | 3.1" | 7.0" | 18.0" | 150.0" |

Example: **PD-91536-30-BK**

See complementary piece on page 118 + 150





“ Days of Our Lives. Like sand through an hourglass, graceful flared shades are lined with soft white. When illuminated, it casts a warm, diffused glow that accentuates its elegant curves. ”




# HUXLEY

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Driver concealed within the canopy

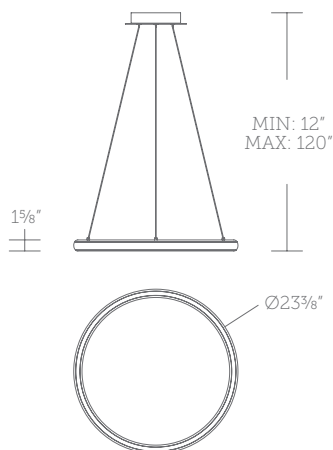

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |       |      | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|-------|------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |           | L"         | W"    | H"   |       |        |
| <b>PD-56523</b> | 23"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 49W     | 2453       | 1872             | ELV<br>TRIAC | 50,000<br>hours | <b>BC</b> | 23.4"      | 23.4" | 1.5" | 12.0" | 120.0" |


Example: **PD-56523-30-BC**





“Simplicity is the ultimate sophistication. The understated black chrome silhouette of Huxley holds a perfect circle of LED light, diffusing it downwards in a comfortable glow.”



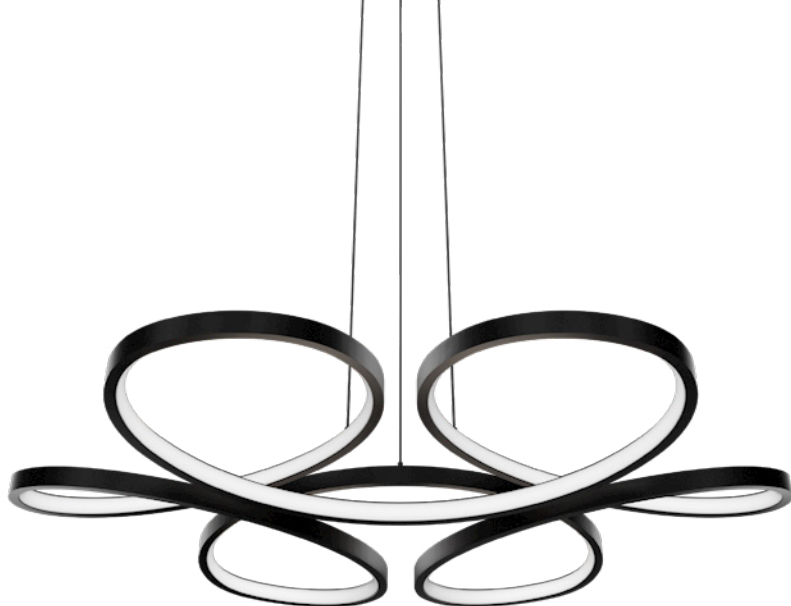


# KLOVER

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Low profile, adjustable powered aircraft cables for an ultra-clean look

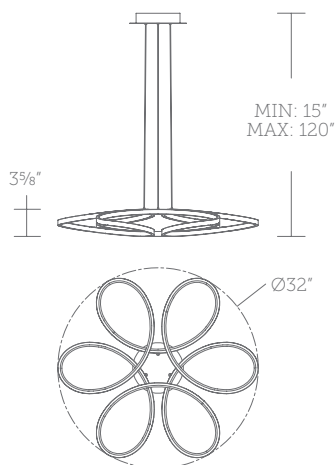

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish    | Dimensions |       |      | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|-----------|------------|-------|------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |                       |                 |           | L"         | W"    | H"   |       |        |
| <b>PD-59532</b> | 32"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 53W     | 3729       | 2626             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>BK</b> | 32.0"      | 32.0" | 3.9" | 15.0" | 120.0" |

Example: **PD-59532-30-BK**





“ Swirls of metal backed by a soft silicone diffuser creates the whimsical silhouette of Klover. Graceful petals cast warm illumination, delighting onlookers below. ”






# OYSTER

## PENDANT



- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

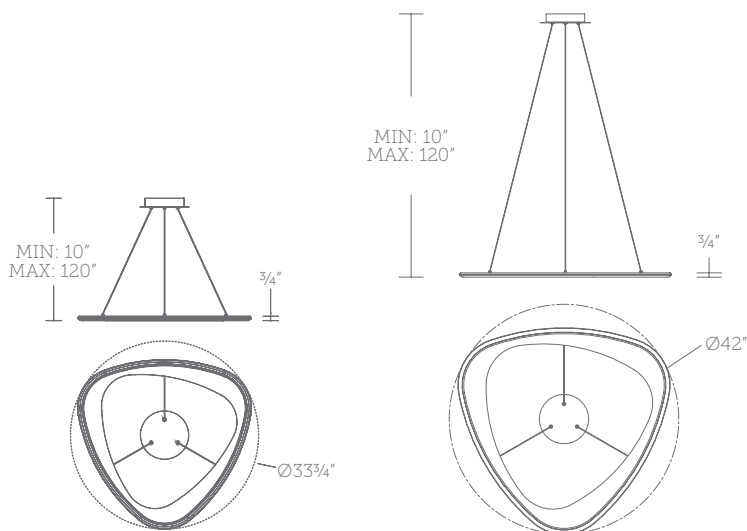

| Model No.       | Size      | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish                       | Dimensions |       |      |              |
|-----------------|-----------|------------------------------------------------------|-----|----------|---------|------------|------------------|-----------|--------------|------------------------------|------------|-------|------|--------------|
|                 |           |                                                      |     |          |         |            |                  |           |              |                              | L"         | W"    | H"   | Min Max      |
| <b>PD-41433</b> | 33"       | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 38W     | 2642       | 1644             | ELV TRIAC | 50,000 hours | <b>AB (NEW)</b><br><b>BC</b> | 33.0"      | 33.0" | 0.8" | 10.0" 120.0" |
| <b>PD-41442</b> | 42" (NEW) |                                                      |     |          | 57W     | 3500       | 2744             |           |              |                              | 42.0"      | 42.0" |      |              |

Example: **PD-41442-30-AB**





“Organic in nature, a white diffuser undulates within a band of black. Uniquely flowing, this pendant supplies contemporary interiors with warm LED light.”




# PEDISTAL


## MINI PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Adjustable beam angle 15-48 degrees
- White finish with accent of aged brass

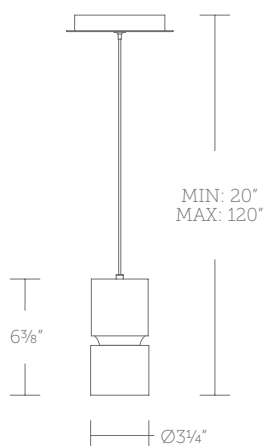

Adjustable beam angles  
from 15° to 48°



| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |      | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |           | L"         | W"   | H"   |       |        |
| <b>PD-60506</b> | 6"   | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 15W     | 766        | 659              | ELV<br>TRIAC | 50,000<br>hours | <b>WT</b> | 6.0"       | 6.0" | 6.5" | 20.0" | 120.0" |

Example: **PD-60506-30-WT**





“Two canisters adjoin in a minimalist design. LEDs create a soft column of light below, offering a functional way to light surfaces.”






# PIN UP

## MINI PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Up and downwards illumination

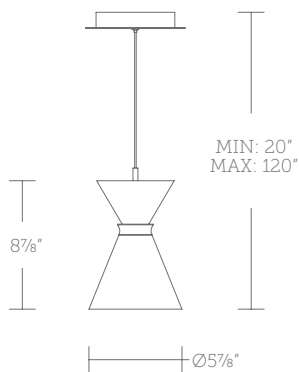

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                       | Dimensions |      |      | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------------|------------|------|------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                              | L"         | W"   | H"   |       |        |
| <b>PD-57108</b> | 8"   | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 15W     | 619        | 493              | ELV<br>TRIAC | 50,000<br>hours | <b>AB/BK</b><br><b>BK/AB</b> | 5.9"       | 5.9" | 8.1" | 20.0" | 120.0" |

Example: **PD-57108-30-BK/AB**

See complementary piece on page 190



“Cinched at the waist. Nostalgic of 1950’s fashion and attire, a dual conical design delivers a splash of uplight and focused down light. The top cone nestles inside the banded lower cone, each illuminating from an open end.”




# QUATTRO

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select temperature or adjust in field

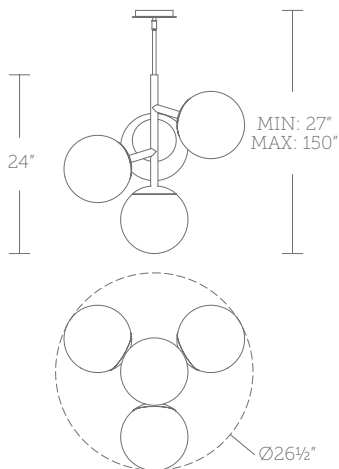

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |       |       | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|-------|-------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                        | L"         | W"    | H"    |       |        |
| <b>PD-23527</b> | 27"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 29W     | 2720       | 2303             | ELV<br>TRIAC | 50,000<br>hours | <b>AB</b><br><b>BK</b> | 26.8"      | 26.8" | 21.5" | 27.0" | 150.0" |

Example: **PD-23527-30-BK**





“ Spaced Out. Misty glass globes offset one another around a substantial center stem, offering a warm glow to the surrounding air. ”




# SATALITE

## LINEAR PENDANT



- Construction: Aluminum hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field

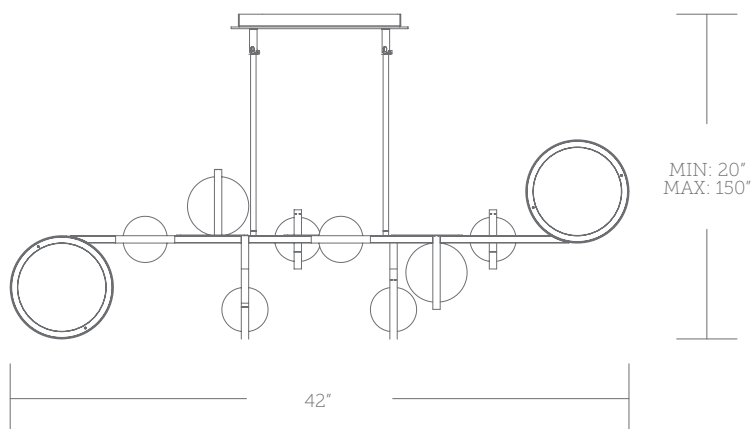

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish    | Dimensions |       |       | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|-----------|------------|-------|-------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |                       |                 |           | L"         | W"    | H"    |       |        |
| <b>PD-83542</b> | 42"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 41W     | 4678       | 2694             | ELV<br>TRIAC<br>0-10V | 54,000<br>hours | <b>BK</b> | 42.1"      | 12.7" | 13.5" | 20.0" | 150.0" |

Example: **PD-83542-30-BK**



“ Satalite delivers an otherworldly glow from etched opal globes orbiting a central axis. Wrapped in bands of metal and dramatic in scale, the pendant makes a celestial statement in your space. ”






# SUPER STAR

## MINI PENDANT

NEW



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Rotatable K5 Crystal with a touch of brass between each crystal

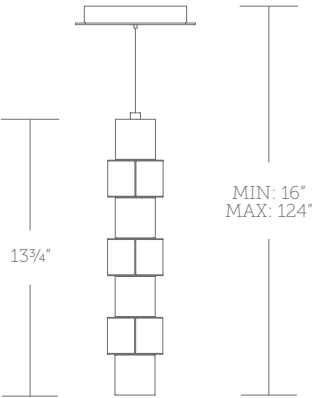

| Model No. | Size | CCT | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish | Dimensions |      |       | Min   | Max    |
|-----------|------|-----|-----|----------|---------|------------|------------------|-----------|--------------|--------|------------|------|-------|-------|--------|
|           |      |     |     |          |         |            |                  |           |              |        | L"         | W"   | H"    |       |        |
| PD-15514  | 14"  | -27 | 90  | 120/277V | 21W     | 700        | 432              | ELV TRIAC | 50,000 hours | BK     | 2.0"       | 2.0" | 13.8" | 16.0" | 124.0" |
|           |      | -30 |     |          |         |            |                  |           |              |        |            |      |       |       |        |
|           |      | -35 |     |          |         |            |                  |           |              |        |            |      |       |       |        |
|           |      | -40 |     |          |         |            |                  |           |              |        |            |      |       |       |        |

Example: PD-15514-30-BK



“ Squared. Faceted crystal and metal alternate in a linear silhouette. Individually rotate the crystal boxes to create your own dancing beams of light. ”






# TRIBECA

## PENDANT



- Construction: Aluminum hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field

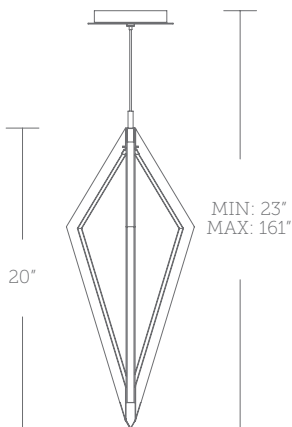

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |       |       |        |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|-------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"    | Min   | Max    |
| <b>PD-53520</b> | 20"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 14W     | 1500       | 379              | ELV<br>TRIAC | 50,000<br>hours | <b>AB</b><br><b>BK</b> | 9.0"       | 9.0" | 19.9" | 23.0" | 161.0" |

Example: **PD-53520-30-AB**





“ Three harmoniously aligned triangles emit soft LED illumination. Tribeca’s unique ring arrangement brings an added dimension to this angular pendant. ”




# TRIOLET

## PENDANT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select temperature or adjust in field
- Up and downwards illumination

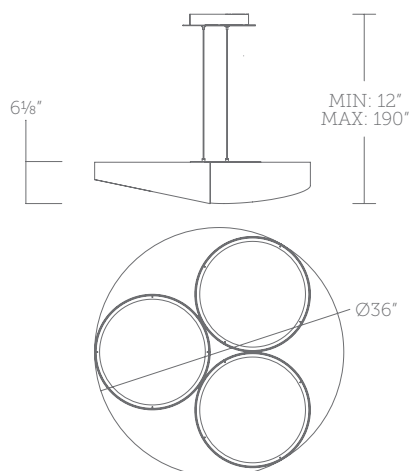

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish    | Dimensions |       |      | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|-----------|------------|-------|------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |                       |                 |           | L"         | W"    | H"   |       |        |
| <b>PD-54536</b> | 36"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 37W     | 3412       | 2344             | ELV<br>TRIAC<br>0-10V | 42,000<br>hours | <b>BK</b> | 36.0"      | 36.0" | 6.0" | 12.0" | 190.0" |

Example: **PD-54536-30-BK**






“ A trio of light ensconced within slim circular bands casts up and down illumination. Triolet lives large within a minimalist form factor, making a statement in contemporary spaces. ”



## ACTION MINI PENDANT

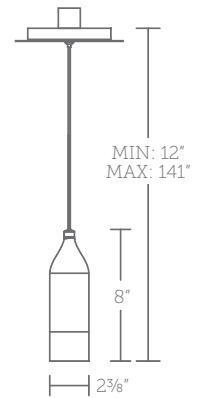


- Can be mounted on a sloped ceiling
- Thin powered aircraft cables provide an ultra-clean look
- Title 24 option available for special order (120-277V) installs within a canopy
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish                 | Dimensions |      |      | Min   | Max    |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|------------------------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |                       |              |                        | L"         | W"   | H"   |       |        |
| <b>PD-76908</b> | 8"   | 3000K | 90  | 120-277V | 8.5W    | 980        | 686              | ELV<br>TRIAC<br>0-10V | 50,000 hours | <b>AB</b><br><b>BK</b> | 2.4"       | 2.4" | 8.0" | 12.0" | 141.0" |

Example: **PD-76908-AB**

## ALLERON LINEAR PENDANT


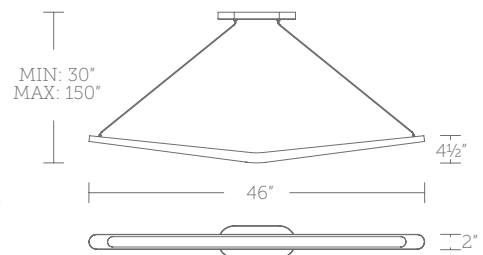


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Pill shaped canopy with minimal hardware
- Driver concealed within the canopy

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |      |      | Min   | Max    |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|--------------|------------------------|------------|------|------|-------|--------|
|                 |      |                                                      |     |          |         |            |                  |              |              |                        | L"         | W"   | H"   |       |        |
| <b>PD-13446</b> | 46"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 37 W    | 1720       | 1547             | ELV<br>0-10V | 50,000 hours | <b>BK</b><br><b>BN</b> | 46.0"      | 2.0" | 4.5" | 30.0" | 150.0" |

Example: **PD-13446-30-BN**

# ATLAS CHANDELIER

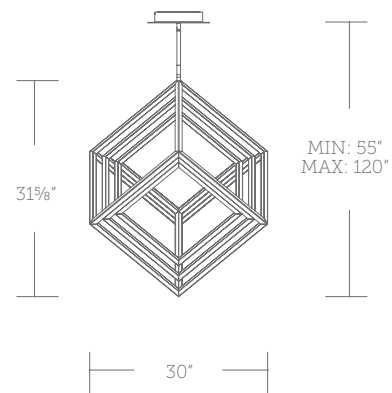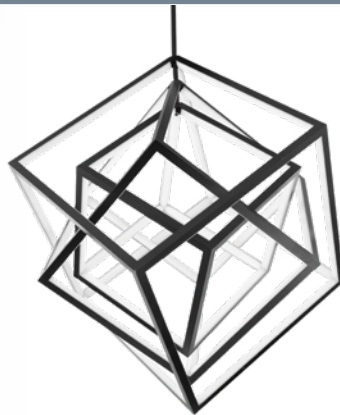


- Cubes rotate independently for creative display options
- Three 12" and one 6" downrods included
- PD-51050-BK for special order only
- Quick spin-on canopy design with minimal hardware for easy installation
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |       | Min   | Max    |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"    | H"    |       |        |
| <b>PD-51030</b> | 30"  | 3500K | 90  | 120-277V | 32W     | 4500       | 1894             | ELV     | 50,000 hours | <b>BK</b> | 30.0"      | 26.0" | 31.6" | 55.0" | 120.0" |
| <b>PD-51041</b> | 41"  |       |     |          | 53W     | 5600       | 3300             | TRIAC   |              |           | 41.6"      | 35.3" | 42.8" |       |        |
| <b>PD-51050</b> | 50"  |       |     |          | 90W     | 6500       | 3733             | 0-10V   |              |           | 50.0"      | 42.4" | 52.8" |       |        |

Example: **PD-51041-BK**

# BANDED MINI PENDANT



- Thin powered cables provide an ultra-clean look
- Up and down illuminations
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish          | Dimensions |      |      | Min   | Max    |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|-----------------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |                 |              |                 | L"         | W"   | H"   |       |        |
| <b>PD-68909</b> | 9"   | 3000K | 90  | 120-277V | 21.6W   | 1387       | 1017             | ELV TRIAC 0-10V | 60,000 hours | <b>AB BK BN</b> | 5.0"       | 5.0" | 9.3" | 13.0" | 122.0" |

Example: **PD-68909-AB**

See complementary piece on page 6-7



## BOLLA MINI PENDANT



- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |           | L"         | W"   | H"   | Min   | Max    |
| <b>PD-67209</b> | 9"   | 3000K | 90  | 120/277V | 8W      | 950        | 564              | ELV<br>0-10V | 50,000 hours | <b>CH</b> | 5.9"       | 5.9" | 8.9" | 14.0" | 120.0" |

Example: **PD-67209-CH**

## CABOT LINEAR PENDANT



- Contracts and extends for an adjustable length and customized look
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

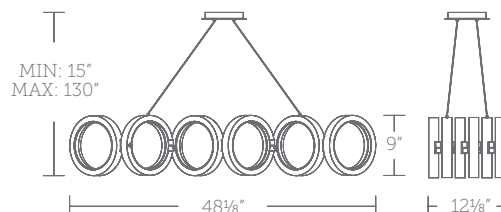


| Model No.       | Size | CCT                      | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |       |        |
|-----------------|------|--------------------------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|-------|--------|
|                 |      |                          |     |         |         |            |                  |              |              |           | L"         | W"   | H"   | Min   | Max    |
| <b>PD-53448</b> | 48"  | -27<br>-30<br>-35<br>-40 | 90  | 120 VAC | 40 W    | 2560       | 901              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 48.0"      | 9.0" | 9.0" | 15.0" | 130.0" |

Example: **PD-53448-30-BK**

# CAPPE PENDANT



- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

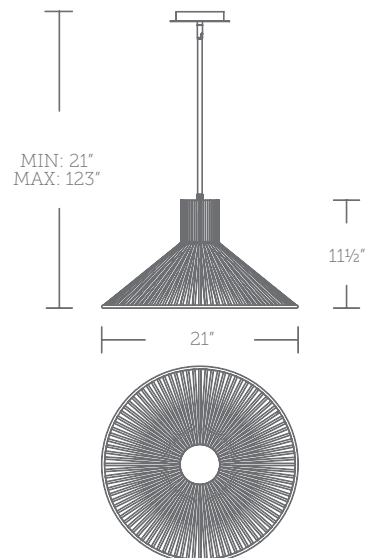


| Model No.       | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |       |       |       |        |
|-----------------|------|------------|-----|---------|---------|------------|------------------|--------------|-----------------|-----------|------------|-------|-------|-------|--------|
|                 |      |            |     |         |         |            |                  |              |                 |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-17421</b> | 21"  | <b>-27</b> | 90  | 120 VAC | 15 W    | 1300       | 501              | ELV<br>0-10V | 50,000<br>hours | <b>BK</b> | 21.0"      | 21.0" | 11.5" | 21.0" | 123.0" |
|                 |      | <b>-30</b> |     |         |         |            |                  |              |                 |           |            |       |       |       |        |
|                 |      | <b>-35</b> |     |         |         |            |                  |              |                 |           |            |       |       |       |        |
|                 |      | <b>-40</b> |     |         |         |            |                  |              |                 |           |            |       |       |       |        |

Example: **PD-17421-30-BK**

# CARAFE PENDANT




- Downlight with PE shade
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

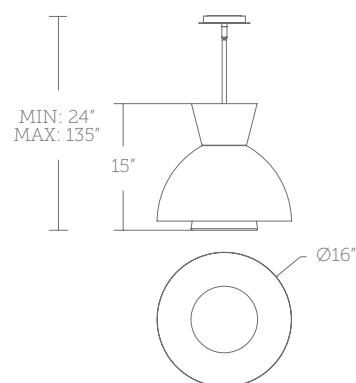

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |                 |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-23316</b> | 16"  | 3000K | 90  | 120/277V | 29W     | 1090       | 781              | ELV<br>0-10V | 50,000<br>hours | <b>BK</b> | 16.0"      | 16.0" | 15.0" | 24.0" | 135.0" |

Example: **PD-23316-BK**

## CHANDRA MINI PENDANT

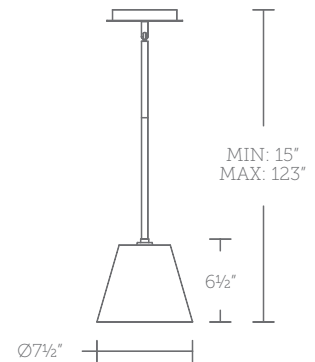


- Downlight with clear glass shade
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish           | Dimensions |      |      |       |        |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|-----------------|------------------|------------|------|------|-------|--------|
|                 |      |       |     |         |         |            |                  |              |                 |                  | L"         | W"   | H"   | Min   | Max    |
| <b>PD-87208</b> | 8"   | 3000K | 90  | 120 VAC | 15W     | 958        | 382              | ELV<br>0-10V | 50,000<br>hours | <b>BK<br/>BN</b> | 7.5"       | 7.5" | 6.5" | 15.0" | 123.0" |

Example: **PD-87208-BK**

## CHANDRA MINI PENDANT

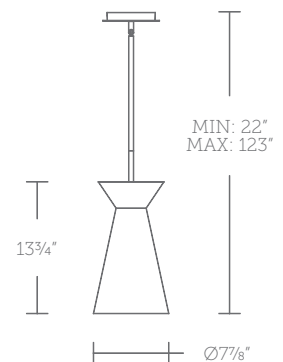


- Downlight with clear glass shade
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish           | Dimensions |      |       |       |        |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|-----------------|------------------|------------|------|-------|-------|--------|
|                 |      |       |     |         |         |            |                  |              |                 |                  | L"         | W"   | H"    | Min   | Max    |
| <b>PD-87214</b> | 14"  | 3000K | 90  | 120 VAC | 12W     | 725        | 207              | ELV<br>0-10V | 50,000<br>hours | <b>AB<br/>BK</b> | 7.9"       | 7.9" | 13.8" | 22.0" | 123.0" |

Example: **PD-87214-AB**



# CHANTILLY PENDANT

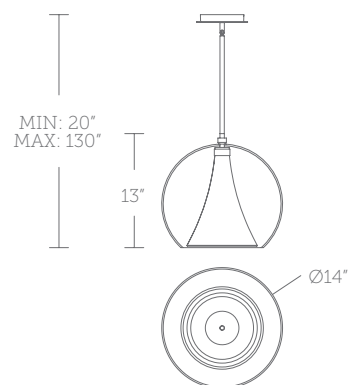


- Downlight with faux Spanish Alabaster interior and clear glass exterior
- Faux Spanish Alabaster. Like real stone, each piece is unique
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-25314</b> | 14"  | 3000K | 90  | 120/277V | 15W     | 1482       | 1106             | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 14.0"      | 14.0" | 13.0" | 20.0" | 130.0" |

Example: **PD-25314-BK**

# COCHERE PENDANT

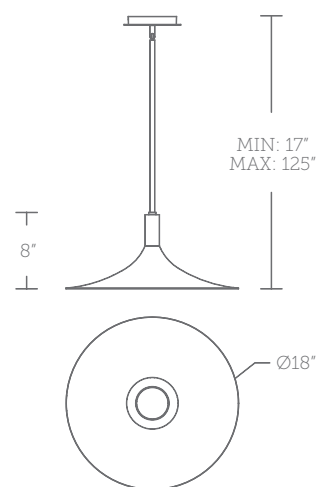


- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish          | Dimensions |       |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |                 | L"         | W"    | H"   | Min   | Max    |
| <b>PD-97218</b> | 18"  | 3000K | 90  | 120/277V | 15W     | 1500       | 907              | ELV<br>0-10V | 50,000 hours | <b>BK/GO/AB</b> | 18.0"      | 18.0" | 8.0" | 17.0" | 125.0" |

Example: **PD-97218-BK/GO/AB**

## CORKSCREW LINEAR PENDANT

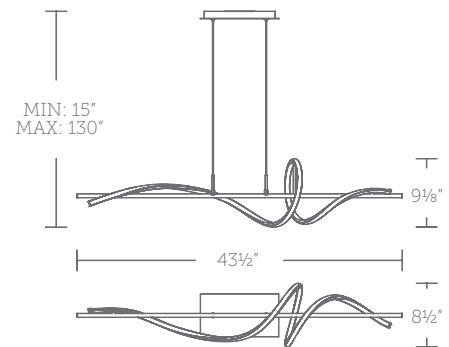


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Rectangular canopy with minimal hardware
- Driver concealed within the canopy

| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |      | Min   | Max    |
|-----------------|------|------------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|------|-------|--------|
|                 |      |            |     |          |         |            |                  |              |                 |           | L"         | W"   | H"   |       |        |
| <b>PD-39443</b> | 43"  | <b>-27</b> | 90  | 120-277V | 38 W    | 2862       | 1785             | ELV<br>0-10V | 50,000<br>hours | <b>BK</b> | 43.5"      | 8.5" | 9.1" | 15.0" | 130.0" |
|                 |      | <b>-30</b> |     |          |         |            |                  |              |                 |           |            |      |      |       |        |
|                 |      | <b>-35</b> |     |          |         |            |                  |              |                 |           |            |      |      |       |        |
|                 |      | <b>-40</b> |     |          |         |            |                  |              |                 |           |            |      |      |       |        |

Example: **PD-39443-30-BK**

See complementary piece on page 116

## CORSO PENDANT

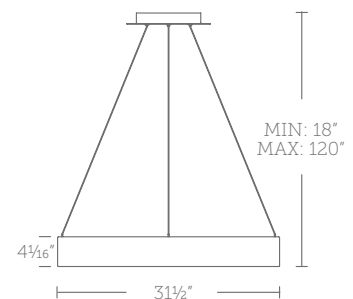


- Minimalist look with no visible power cord
- Even illumination with no hotspots
- Cable suspension carrying low voltage may be field shortened
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |       |      | Min   | Max    |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |                 |           | L"         | W"    | H"   |       |        |
| <b>PD-33718</b> | 18"  | 3000K | 80  | 120-277V | 22W     | 1495       | 940              | ELV<br>TRIAC | 75,000<br>hours | <b>AL</b> | 18.0"      | 18.0" | 6.3" | 15.0" | 120.0" |
| <b>PD-33732</b> | 32"  |       |     |          | 88W     | 6340       | 4435             |              |                 | <b>BK</b> | 31.5"      | 31.5" | 4.1" |       |        |
| <b>PD-33743</b> | 43"  |       |     |          | 125W    | 11115      | 7300             |              |                 | <b>WT</b> | 42.5"      | 42.5" | 4.4" |       |        |

Example: **PD-33732-BK**

See complementary piece on page 206

# CRATER MINI PENDANT

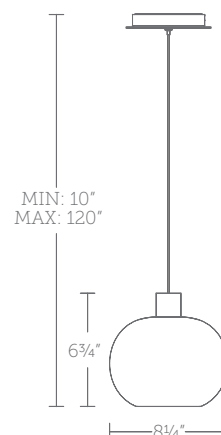


- Clear glass with bubbled acrylic diffuser at the center with balancing pin adjuster
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish    | Dimensions |      |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------|--------------|-----------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |           |              |           | L"         | W"   | H"   | Min   | Max    |
| <b>PD-98908</b> | 8"   | 3500K | 90  | 120-277V | 6W      | 338        | 315              | ELV TRIAC | 50,000 hours | <b>AB</b> | 8.3"       | 8.3" | 6.8" | 10.0" | 120.0" |

Example: **PD-98908-AB**

# CRESCENT MINI PENDANT

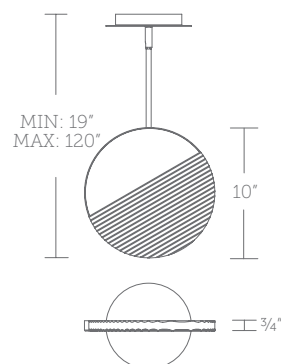

- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology



| Model No.       | Size | CCT                                                  | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish    | Dimensions |      |       |       |        |
|-----------------|------|------------------------------------------------------|-----|---------|---------|------------|------------------|-----------|--------------|-----------|------------|------|-------|-------|--------|
|                 |      |                                                      |     |         |         |            |                  |           |              |           | L"         | W"   | H"    | Min   | Max    |
| <b>PD-25410</b> | 10"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120 VAC | 11 W    | 590        | 532              | ELV 0-10V | 50,000 hours | <b>AB</b> | 10.0"      | 0.8" | 10.0" | 19.0" | 120.0" |

Example: **PD-25410-30-AB**

See complementary piece on page 164



## DIVERGENCE CHANDELIER

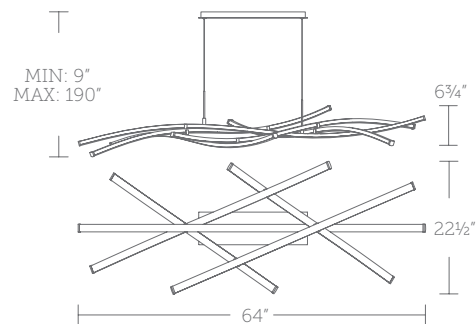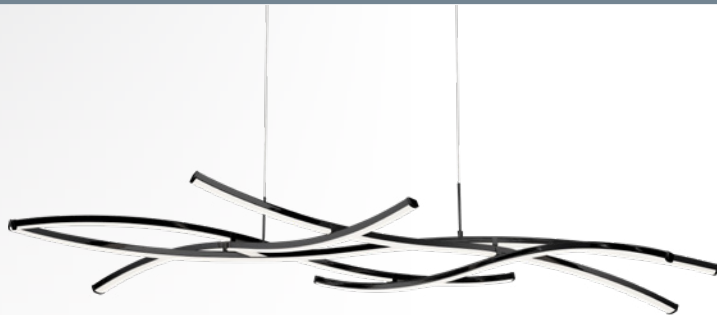


- Downlight illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"    | H"   | Min   | Max    |
| <b>PD-60944</b> | 44"  | 3000K | 90  | 120-277V | 86W     | 7458       | 4613             | ELV     | 50,000 hours | <b>BK</b> | 43.8"      | 43.8" | 5.5" | 10.0" | 181.0" |
| <b>PD-60964</b> | 64"  |       |     |          | 78W     | 8550       | 3880             | 0-10V   |              | <b>CH</b> | 64.0"      | 22.4" | 6.8" | 9.0"  | 190.0" |

Example: **PD-60964-BK**

## DOME MINI PENDANT

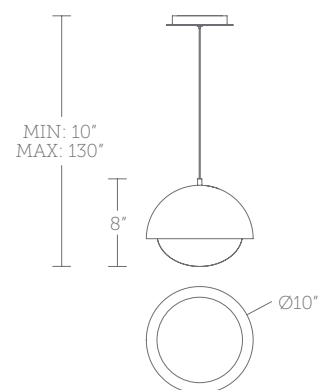


- Downlight with black exterior and gold interior
- Layered acrylic shade with etched interior and clear exterior
- Low profile, adjustable powered aircraft cables for an ultra-clean look with matching color
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish       | Dimensions |       |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|--------------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |              | L"         | W"    | H"   | Min   | Max    |
| <b>PD-37310</b> | 10"  | 3000K | 90  | 120/277V | 8W      | 658        | 394              | ELV<br>0-10V | 50,000 hours | <b>BK/GO</b> | 10.0"      | 10.0" | 8.0" | 10.0" | 130.0" |

Example: **PD-37310-BK/GO**

# DOUBLE ENTENDRE LINEAR PENDANT

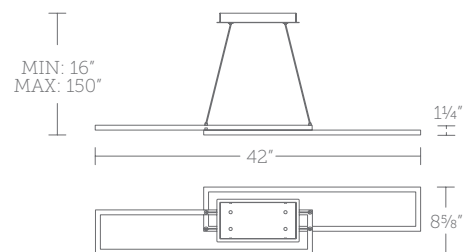


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Rectangular canopy with minimal hardware
- Driver concealed within the canopy

| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish       | Dimensions |      |      |              |
|-----------------|------|------------|-----|----------|---------|------------|------------------|--------------|-----------------|--------------|------------|------|------|--------------|
|                 |      |            |     |          |         |            |                  |              |                 |              | L"         | W"   | H"   | Min Max      |
| <b>PD-81442</b> | 42"  | <b>-27</b> | 90  | 120-277V | 33 W    | 2902       | 1386             | ELV<br>0-10V | 50,000<br>hours | <b>BK/AB</b> | 42.0"      | 8.6" | 1.3" | 16.0" 150.0" |
|                 |      | <b>-30</b> |     |          |         |            |                  |              |                 |              |            |      |      |              |
|                 |      | <b>-35</b> |     |          |         |            |                  |              |                 |              |            |      |      |              |
|                 |      | <b>-40</b> |     |          |         |            |                  |              |                 |              |            |      |      |              |

Example: **PD-81442-30-BK/AB**

# ECHO MINI PENDANT



- Downlight with wispy opal glass diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- ACLED driverless technology


| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |      |              |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|------|--------------|
|                 |      |       |     |         |         |            |                  |              |                 |           | L"         | W"   | H"   | Min Max      |
| <b>PD-41210</b> | 10"  | 3000K | 90  | 120 VAC | 11W     | 509        | 366              | ELV<br>0-10V | 73,000<br>hours | <b>BN</b> | 9.5"       | 9.5" | 8.5" | 13.0" 127.0" |

Example: **PD-41210-BN**

## EFFERVESCENT LINEAR PENDANT



- Clear acrylic diffuser with bark texture interior
- Downlight illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look, black aircraft cable for BK finish and clear aircraft cable for AL finish
- Quick slide-on canopy design with minimal hardware for easy installation
- Can be mounted on sloped ceiling
- Driver concealed within the canopy

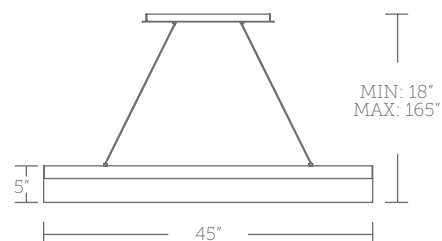


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |                  | L"         | W"   | H"   | Min   | Max    |
| <b>PD-97145</b> | 45"  | 3000K | 90  | 120/277V | 33W     | 4150       | 2907             | ELV<br>0-10V | 50,000 hours | <b>AL<br/>BK</b> | 45.0"      | 2.5" | 5.0" | 18.0" | 165.0" |

Example: **PD-97145-AL**

## ELEMENTUM MINI PENDANT



- Twist lock glass attachment
- Slope ceiling adaptable. Hang straight swivel up to 90 degrees
- Three 12" and one 6" downrods included (additional downrods available)
- Evenly lit etched opal glass
- Simple form, big impact
- Driver installs within the Junction Box, driver dimension: 3.4" x 1.6" x 1.3"

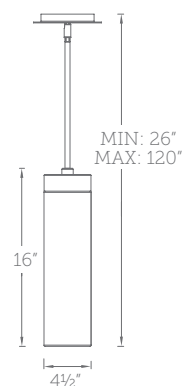

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"   | H"    | Min   | Max    |
| <b>PD-26611</b> | 11"  | 3000K | 90  | 120-277V | 16W     | 1187       | 971              | ELV     | 65,000 hours | <b>SN</b> | 3.5"       | 3.5" | 11.0" | 16.0" | 120.0" |
| <b>PD-26616</b> | 16"  |       |     |          | 21W     | 1769       | 1369             |         |              |           | 4.5"       | 4.5" | 16.0" |       |        |

Example: **PD-26616-SN**


Special Order: For 2700K add "-27"; 3500K add "-35"; before finish PD-26616-27-SN



# FERROUS CHANDELIER



- Adjustable arms for a customized look
- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

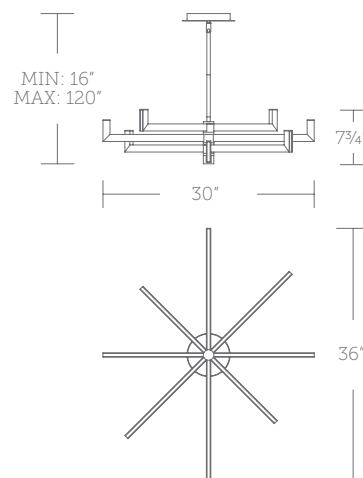


| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish    | Dimensions |       |      |              |
|-----------------|------|------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|-----------|------------|-------|------|--------------|
|                 |      |            |     |          |         |            |                  |                       |                 |           | L"         | W"    | H"   | Min Max      |
| <b>PD-33436</b> | 36"  | <b>-27</b> | 90  | 120-277V | 40 W    | 2300       | 1615             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>BK</b> | 36.0"      | 30.0" | 7.5" | 16.0" 120.0" |
|                 |      | <b>-30</b> |     |          |         |            |                  |                       |                 |           |            |       |      |              |
|                 |      | <b>-35</b> |     |          |         |            |                  |                       |                 |           |            |       |      |              |
|                 |      | <b>-40</b> |     |          |         |            |                  |                       |                 |           |            |       |      |              |

Example: **PD-33436-30-BK**

# FLARE PENDANT





- 360 degree illumination
- Thin powered cables provide an ultra-clean look
- Driver concealed within the canopy

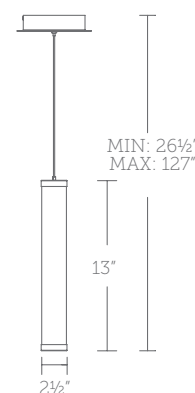

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish    | Dimensions |      |       |              |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|-----------------|-----------|------------|------|-------|--------------|
|                 |      |       |     |          |         |            |                  |                       |                 |           | L"         | W"   | H"    | Min Max      |
| <b>PD-70913</b> | 13"  | 3000K | 90  | 120-277V | 11W     | 1099       | 745              | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>BN</b> | 2.5"       | 2.5" | 13.0" | 26.5" 127.0" |
| <b>PD-70925</b> | 25"  |       |     |          | 27W     | 2426       | 1700             |                       |                 |           |            |      | 25.0" | 38.5" 139.0" |
| <b>PD-70937</b> | 37"  |       |     |          | 37W     | 3801       | 2637             |                       |                 |           |            |      | 37.0" | 50.5" 151.0" |
| <b>PD-70945</b> | 45"  |       |     |          | 42W     | 4254       | 2853             |                       |                 |           |            |      | 45.1" | 58.5" 159.0" |

Example: **PD-70913-BN**

## FRAME PENDANT

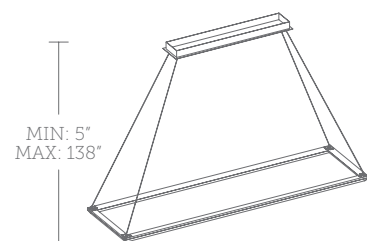


- Thin color matched powered aircraft cables and hardware
- Crisp mitered joints
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |      |      |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|------|------|--------|
|                 |      |       |     |          |         |            |                  |              |              |           | L"         | W"    | H"   | Min  | Max    |
| <b>PD-29858</b> | 58"  | 3000K | 90  | 120-277V | 58W     | 7160       | 5800             | ELV<br>TRIAC | 50,000 hours | <b>BK</b> | 58.0"      | 16.0" | 1.3" | 5.0" | 138.0" |

Example: **PD-29858-BK**

## GAZE MINI PENDANT



- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy


| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |       |       |       |        |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|--------------|------------------------|------------|-------|-------|-------|--------|
|                 |      |                          |     |          |         |            |                  |              |              |                        | L"         | W"    | H"    | Min   | Max    |
| <b>PD-23412</b> | 12"  | -27<br>-30<br>-35<br>-40 | 90  | 120/277V | 12 W    | 570        | 485              | ELV<br>0-10V | 50,000 hours | <b>BK</b><br><b>BN</b> | 12.0"      | 12.0" | 15.3" | 30.0" | 118.0" |

Example: **PD-23412-30-BN**

# GEOMETRIX PENDANT



- Omnidirectional illumination with silicone diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

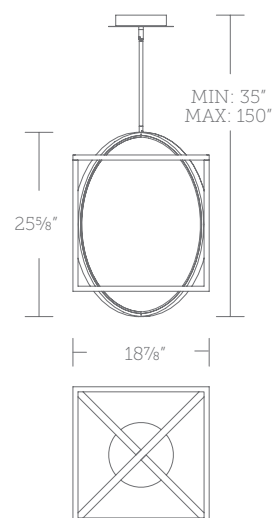


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-57317</b> | 17"  | 3000K | 90  | 120/277V | 28W     | 2149       | 1092             | ELV     | 50,000 hours | <b>BK</b> | 12.6"      | 12.6" | 17.0" | 27.0" | 140.0" |
| <b>PD-57327</b> | 26"  |       |     |          | 35W     | 2715       | 1380             | 0-10V   |              |           | 18.9"      | 18.9" | 25.6" | 35.0" | 150.0" |

Example: **PD-57327-BK**

# HOUDINI CHANDELIER



- Three 12" and one 6" downrods included (additional downrods available)
- Solid edge acrylic diffuser in cylindrical shade
- Multiple orientation options for desired look
- Slope ceiling adaptable. Hang straight swivel up to 90 degrees
- Driver concealed within the canopy

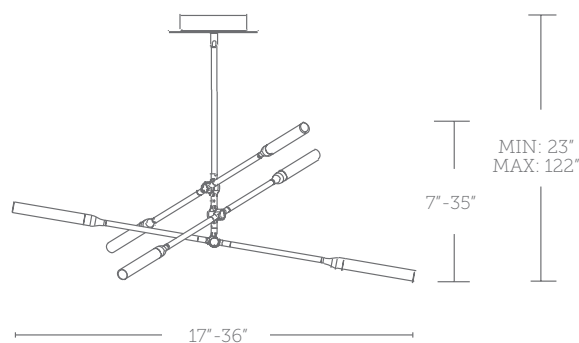


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish       | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|--------------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |         |              |              | L"         | W"    | H"    | Min   | Max    |
| <b>PD-55912</b> | 55"  | 3000K | 90  | 120-277V | 31W     | 1370       | 427              | ELV     | 36,000 hours | <b>BK/AB</b> | 55.3"      | 46.7" | 20.3" | 27.0" | 125.0" |
| <b>PD-55906</b> | 35"  |       |     |          | 16W     | 685        | 796              |         |              |              | 36.4"      | 30.8" | 14.8" | 23.0" | 122.0" |

Example: **PD-55906-BK/AB**



## ICE CUBE MINI PENDANT




- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                              | Dimensions |      |      | Min   | Max    |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-------------------------------------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |         |              |                                     | L"         | W"   | H"   |       |        |
| <b>PD-29308</b> | 8"   | 2700K | 90  | 120/277V | 15W     | 1149       | 919              | ELV     | 50,000 hours | <b>AB</b><br><b>BK</b><br><b>BN</b> | 6.6"       | 6.6" | 7.6" | 15.0" | 120.0" |
|                 |      | 3000K |     |          |         |            |                  |         |              |                                     |            |      |      |       |        |
|                 |      | 3500K |     |          |         |            |                  |         |              |                                     |            |      |      |       |        |
|                 |      | 4000K |     |          |         |            |                  |         |              |                                     |            |      |      |       |        |

Example: **PD-29308-BK**

See complementary piece on page 10-11

## ILLUSION PENDANT

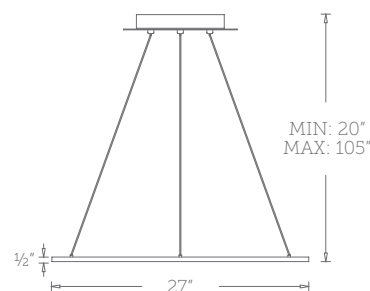


- Ultra thin 1/2" thick edge-lit disc
- Edge-lit panel illuminates up & down
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming     | Rated Life   | Finish    | Dimensions |       |      | Min   | Max    |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-------------|--------------|-----------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |             |              |           | L"         | W"    | H"   |       |        |
| <b>PD-31727</b> | 27"  | 3000K | 90  | 120-277V | 57W     | 5253       | 2616             | ELV         | 44,000 hours | <b>TT</b> | 27.0"      | 27.0" | 0.5" | 20.0" | 105.0" |
| <b>PD-31735</b> | 35"  |       |     |          | 88W     | 7391       | 4743             | TRIAC 0-10V |              |           | 35.0"      | 35.0" |      | 25.0" | 100.0" |

Example: **PD-31727-TT**

# INTERLACE MINI PENDANT

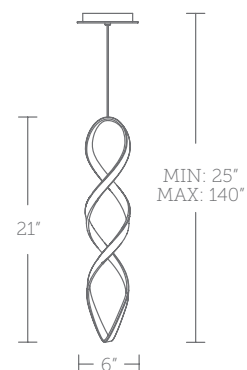


- Twist aluminum light source
- All direction illumination with frosted silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |      |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------------|------------|------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |                        | L"         | W"   | H"    | Min   | Max    |
| <b>PD-47821</b> | 21"  | 3000K | 90  | 120/277V | 21W     | 2200       | 1126             | ELV<br>0-10V | 50,000 hours | <b>BK</b><br><b>CH</b> | 5.1"       | 5.1" | 21.0" | 25.0" | 140.0" |

Example: **PD-47821-BK**

See complementary piece on page 12-13 + 136

# INTERLACE PENDANT

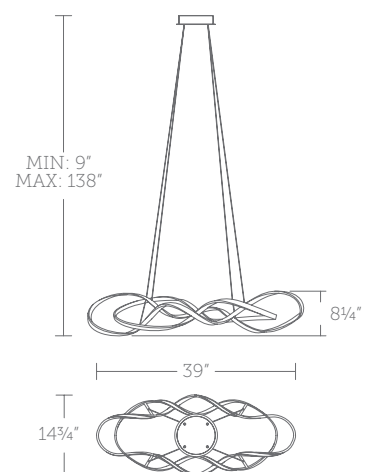


- Two seamless interlocked loops
- Thin powered cables provide an ultra-clean look
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                 | Dimensions |       |      |      |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|------------------------|------------|-------|------|------|--------|
|                 |      |       |     |          |         |            |                  |         |              |                        | L"         | W"    | H"   | Min  | Max    |
| <b>PD-47828</b> | 28"  | 3000K | 90  | 120-277V | 55W     | 4853       | 4797             | TRIAC   | 54,000 hours | <b>BK</b><br><b>CH</b> | 28.0"      | 28.0" | 3.5" | 9.0" | 137.8" |
| <b>PD-47839</b> | 39"  |       |     |          | 57W     | 4734       | 3302             |         |              |                        | 39.0"      | 14.8" | 8.3" |      |        |

Example: **PD-47839-BK**

See complementary piece on page 12-13 + 136

## KNOT MINI PENDANT

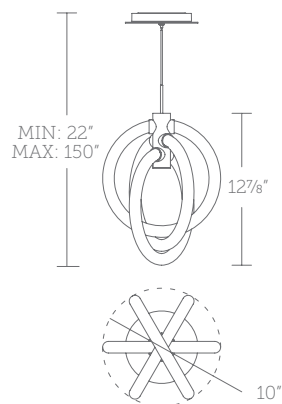

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |       |       |       |        |
|-----------------|------|------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|-------|-------|-------|--------|
|                 |      |            |     |          |         |            |                  |              |                 |                        | L"         | W"    | H"    | Min   | Max    |
| <b>PD-27413</b> | 13"  | <b>-27</b> | 90  | 120/277V | 27 W    | 4000       | 2045             | ELV<br>0-10V | 50,000<br>hours | <b>AB</b><br><b>BK</b> | 10.0"      | 10.0" | 12.9" | 22.0" | 150.0" |
|                 |      | <b>-30</b> |     |          |         |            |                  |              |                 |                        |            |       |       |       |        |
|                 |      | <b>-35</b> |     |          |         |            |                  |              |                 |                        |            |       |       |       |        |
|                 |      | <b>-40</b> |     |          |         |            |                  |              |                 |                        |            |       |       |       |        |

Example: **PD-27413-30-AB**

## KONE MINI PENDANT




- Thin powered cables provide an ultra-clean look
- Can be mounted on a sloped ceiling
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"   | Min   | Max    |
| <b>PD-72006</b> | 6"   | 3000K | 90  | 120-277V | 11W     | 1000       | 255              | ELV<br>0-10V | 50,000<br>hours | <b>BK</b><br><b>SN</b> | 6.5"       | 6.5" | 5.4" | 10.0" | 118.0" |

Example: **PD-72006-SN**



# LACEY PENDANT





- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish       | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|--------------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |         |              |              | L"         | W"    | H"    | Min   | Max    |
| <b>PD-45316</b> | 16"  | 3000K | 90  | 120/277V | 20W     | 884        | 633              | ELV     | 54,000 hours | <b>BK/GO</b> | 15.9"      | 15.9" | 15.1" | 25.0" | 121.0" |
| <b>PD-45322</b> | 22"  |       |     |          | 29W     | 1663       | 1003             | 0-10V   |              |              | 22.0"      | 22.0" | 22.0" | 31.0" |        |

Example: **PD-45322-BK/GO**

# LACEY PENDANT

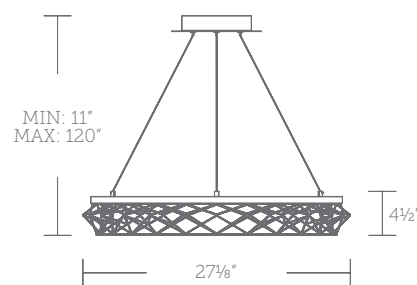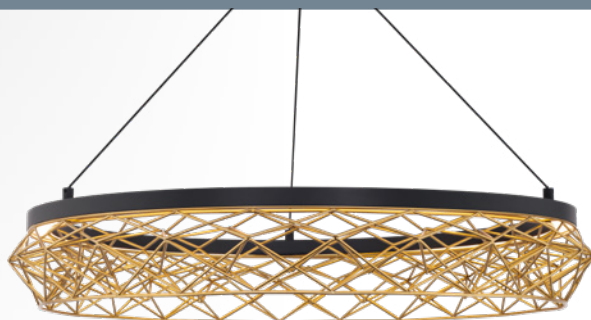


- Downward illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish       | Dimensions |       |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|--------------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |                 |              |              | L"         | W"    | H"   | Min   | Max    |
| <b>PD-45427</b> | 27"  | 3000K | 90  | 120-277V | 54 W    | 5148       | 1596             | ELV TRIAC 0-10V | 50,000 hours | <b>BK/GO</b> | 27.1"      | 27.1" | 4.5" | 11.0" | 120.0" |
|                 |      |       |     |          |         |            |                  |                 |              |              |            |       |      |       |        |

Example: **PD-45427-BK/GO**

# LOOPHOLE LINEAR PENDANT

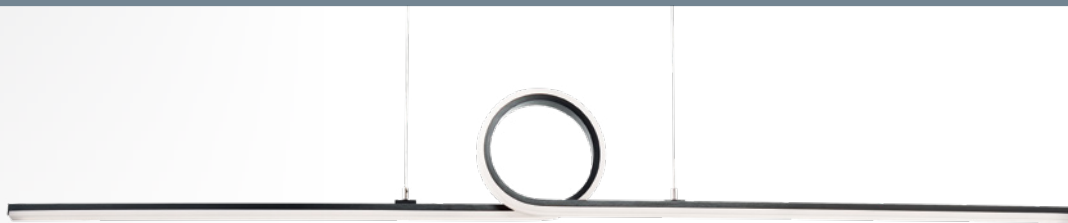

- Fasteners maintain tension to hold fixture level
- Thin powered cables provide an ultra-clean look
- Suspension height can be adjusted easily with quick release
- Mountable on a sloped wall
- Driver concealed within the canopy

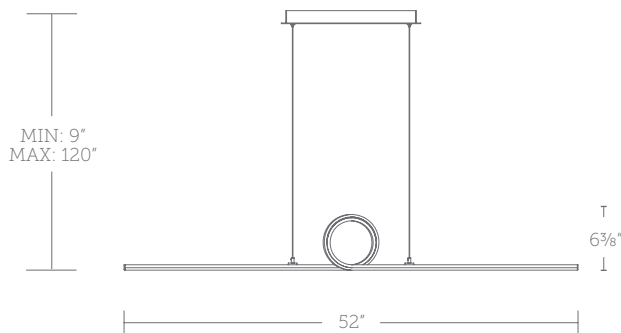

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |      |      |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|------|------|--------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"   | H"   | Min  | Max    |
| <b>PD-23852</b> | 52"  | 3000K | 90  | 120-277V | 42W     | 4261       | 2733             | ELV     | 50,000 hours | <b>BK</b> | 52.0"      | 2.4" | 6.4" | 9.0" | 120.0" |



Example: **PD-23852-BK**

See complementary piece on page 139

# MAMBA PENDANT



- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

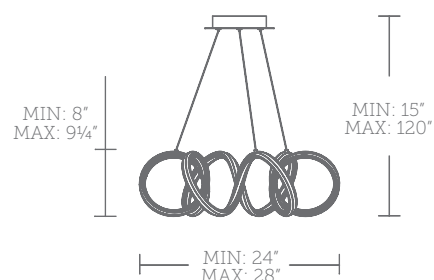

**PD-71226**


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |       |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |                  | L"         | W"    | H"   | Min   | Max    |
| <b>PD-71226</b> | 26"  | 3000K | 90  | 120-277V | 49W     | 3869       | 2145             | ELV<br>0-10V | 50,000 hours | <b>BK<br/>BN</b> | 26.0"      | 26.0" | 8.5" | 15.0" | 120.0" |

Example: **PD-71226-BK**

# MARGARITE CHANDELIER



- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on sloped ceiling
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

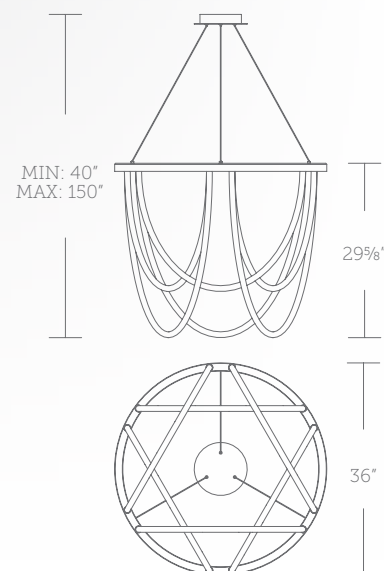


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |                 |              |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-89436</b> | 36"  | 3000K | 90  | 120-277V | 40 W    | 4200       | 3520             | ELV TRIAC 0-10V | 50,000 hours | <b>BK</b> | 36.0"      | 36.0" | 29.2" | 40.0" | 150.0" |

Example: **PD-89436-BK**

# MARISE MINI PENDANT



- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

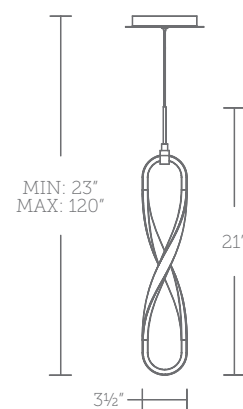

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish       | Dimensions |      |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------|--------------|--------------|------------|------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |           |              |              | L"         | W"   | H"    | Min   | Max    |
| <b>PD-79221</b> | 21"  | 3000K | 90  | 120/277V | 11W     | 900        | 462              | ELV 0-10V | 50,000 hours | <b>BK CH</b> | 3.5"       | 0.9" | 21.0" | 23.0" | 120.0" |

Example: **PD-79221-CH**


See complementary piece on page 167



## MARQUES PENDANT



- Twist aluminum light bar with frosted silicon diffuser
- Illumination to all directions
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on sloped ceiling
- Driver concealed within the canopy

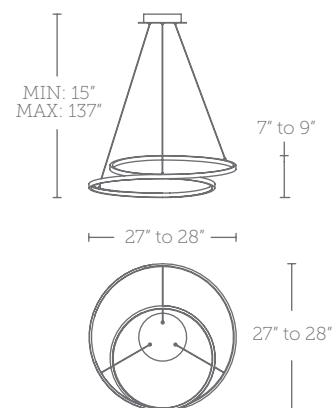

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish                 | Dimensions |       |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|------------------------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |                       |              |                        | L"         | W"    | H"   | Min   | Max    |
| <b>PD-83128</b> | 28"  | 3000K | 90  | 120-277V | 47W     | 3330       | 1686             | ELV<br>TRIAC<br>0-10V | 50,000 hours | <b>AB</b><br><b>BK</b> | 28.0"      | 28.0" | 9.0" | 15.0" | 137.0" |


Example: **PD-83128-AB**

See complementary piece on page 168 + 213

## MOBIUS PENDANT



- Handcrafted, free flowing mobius strip of light. Variation expected.
- May be mounted on a sloped ceiling
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

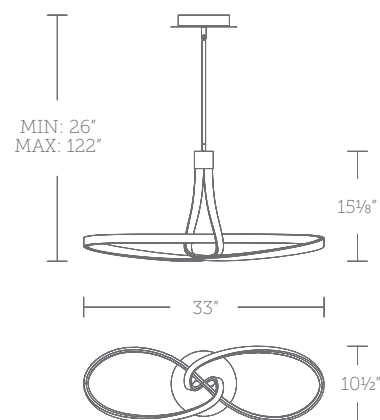

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |                        | L"         | W"    | H"    | Min   | Max    |
| <b>PD-35433</b> | 33"  | 3000K | 90  | 120-277V | 35 W    | 3500       | 2325             | ELV<br>0-10V | 50,000 hours | <b>BK</b><br><b>CH</b> | 33.0"      | 10.5" | 15.1" | 26.0" | 122.0" |


Example: **PD-35433-CH**

See complementary piece on page 214

# MOONSTONE MINI PENDANT



- Downlight with faux Spanish Alabaster exterior and opal glass shade
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Faux Spanish Alabaster. Like real stone, each piece is unique
- Driver concealed within the canopy

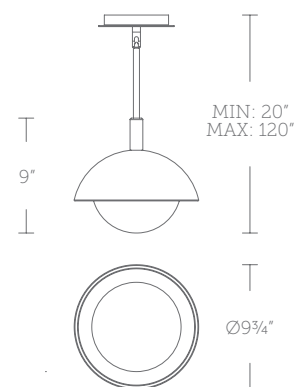

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"   | H"   | Min   | Max    |
| <b>PD-43310</b> | 10"  | 3000K | 90  | 120/277V | 11W     | 815        | 641              | ELV     | 50,000 hours | <b>BK</b> | 9.8"       | 9.8" | 9.0" | 20.0" | 120.0" |


Example: **PD-43310-BK**

See complementary piece on page 214

# MORAE PENDANT



- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

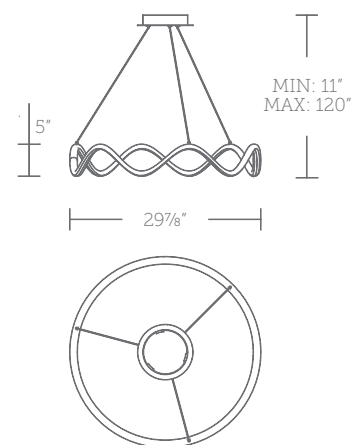


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish       | Dimensions |       |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|--------------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |                 |              |              | L"         | W"    | H"   | Min   | Max    |
| <b>PD-33230</b> | 30"  | 3000K | 90  | 120-277V | 42W     | 3300       | 1987             | ELV TRIAC 0-10V | 50,000 hours | <b>BK BN</b> | 29.9"      | 29.9" | 5.0" | 11.0" | 120.0" |

Example: **PD-33230-BN**

See complementary piece on page 96

## MORAE PENDANT

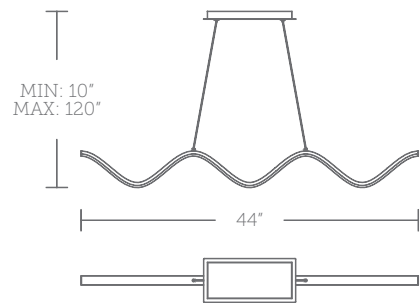


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"   | Min   | Max    |
| <b>PD-33244</b> | 44"  | 3000K | 90  | 120/277V | 36W     | 2500       | 1512             | ELV<br>0-10V | 50,000<br>hours | <b>BK</b><br><b>BN</b> | 44.0"      | 1.1" | 5.1" | 10.0" | 120.0" |

Example: **PD-33244-BK**

See complementary piece on page 95

## NIVEOUS PENDANT



- Mouth blown etched opal glass provides even illumination
- Slope ceiling adaptable. Hang straight swivel up to 90 degrees
- Three 12 inch and one 6 inch downrods included (additional downrods available)
- Driver installs within the Junction Box, driver dimension: 3" x 1.3" x 1.2"

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                              | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|-----------------|-------------------------------------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |                 |                                     | L"         | W"    | H"    | Min   | Max    |
| <b>PD-52310</b> | 10"  | 3000K | 90  | 120-277V | 13W     | 1444       | 1083             | ELV<br>TRIAC | 70,000<br>hours | <b>AB</b><br><b>BN</b><br><b>WT</b> | 10.0"      | 10.0" | 10.0" | 19.0" | 108.0" |
| <b>PD-52313</b> | 13"  |       |     |          |         | 1437       | 1078             |              |                 |                                     | 13.8"      | 13.8" | 13.8" | 22.0" |        |


Example: **PD-52310-AB**

Special Order: For 2700K add "-27"; 3500K add "-35"; before finish PD-52310-35-AB

See complementary piece on page 215



## OHM MINI PENDANT




- Thin powered cables with matching color
- Can be mounted on a sloped ceiling
- Quick spin-on canopy design with minimal hardware for easy installation
- Driver installs within the Junction Box, driver dimension: 2.6" x 1.4" x 0.9"

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |      |        |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|------|--------|
|                 |      |       |     |         |         |            |                  |              |              |           | L"         | W"   | H"   | Min  | Max    |
| <b>PD-13006</b> | 6"   | 3000K | 90  | 120 VAC | 13W     | 1200       | 553              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 5.5"       | 5.5" | 1.0" | 6.0" | 120.0" |

Example: **PD-13006-BK**

## PARALLAX CHANDELIER

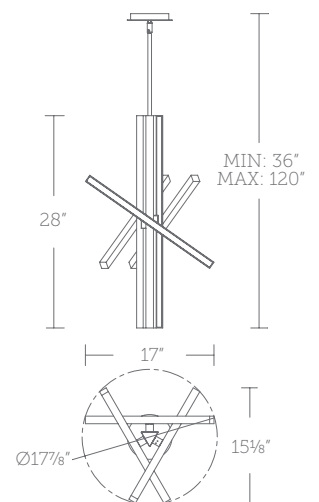

- Rotatable arms for desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-73128</b> | 28"  | 3000K | 90  | 120/277V | 27W     | 1758       | 1106             | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 17.0"      | 15.1" | 28.0" | 36.0" | 120.0" |


Example: **PD-73128-BK**

See complementary piece on page 98, 99, 142, 143, 215 + 216

## PARALLAX CHANDELIER



- Rotatable light bar to create desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on sloped ceiling
- Driver concealed within the canopy

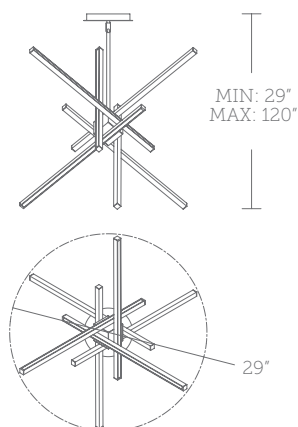

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish                  | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|-------------------------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |                 |              |                         | L"         | W"    | H"    | Min   | Max    |
| <b>PD-73129</b> | 29"  | 3000K | 90  | 120-277V | 37W     | 2071       | 1332             | ELV TRIAC 0-10V | 50,000 hours | <b>AB<br/>BK<br/>BN</b> | 28.8"      | 28.8" | 25.0" | 29.0" | 120.0" |
| <b>PD-73139</b> | 39"  |       |     |          | 42W     | 2265       | 1502             |                 |              |                         | 38.8"      | 38.8" | 32.0" | 38.0" |        |


Example: **PD-73139-AB**

See complementary piece on page 97, 99, 142, 143, 215 + 216

## PARALLAX CHANDELIER



- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

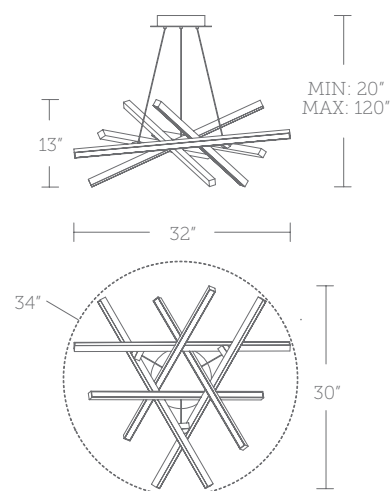


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |                 |              |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-73134</b> | 34"  | 3000K | 90  | 120-277V | 42W     | 2645       | 1664             | ELV TRIAC 0-10V | 50,000 hours | <b>BK</b> | 32.0"      | 30.0" | 13.0" | 20.0" | 120.0" |

Example: **PD-73134-BK**

See complementary piece on page 97, 99, 142, 143, 215 + 216

# PARALLAX LINEAR PENDANT

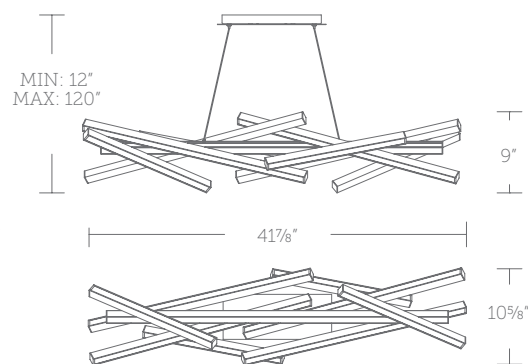

PATENTED  
DESIGN


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                              | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|-----------------|-------------------------------------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |                 |                                     | L"         | W"    | H"    | Min   | Max    |
| <b>PD-73142</b> | 42"  | 3000K | 90  | 120/277V | 39 W    | 2294.4     | 1522             | ELV<br>0-10V | 50,000<br>hours | <b>AB</b><br><b>BK</b><br><b>BN</b> | 41.9"      | 10.6" | 9.0"  | 12.0" | 120.0" |
| <b>PD-73155</b> | 55"  |       |     |          | 44W     | 2496       | 1657             |              |                 |                                     | 55.0"      | 13.6" | 10.9" | 30.0" |        |

Example: **PD-73142-BN**

See complementary piece on page 97, 98, 142, 143, 215 + 216

# PARK AVENUE MINI PENDANT



- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Square canopy with minimal hardware
- May be mounted on a sloped ceiling
- Heathered white fabric encased in a rectangular frame
- Driver concealed within the canopy



| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"    | Min   | Max    |
| <b>PD-33312</b> | 12"  | 3000K | 90  | 120/277V | 8W      | 434        | 289              | ELV<br>0-10V | 50,000<br>hours | <b>AB</b><br><b>BK</b> | 9.0"       | 9.1" | 12.4" | 18.0" | 120.0" |

Example: **PD-33312-BK**

See complementary piece on page 100



## PARK AVENUE PENDANT

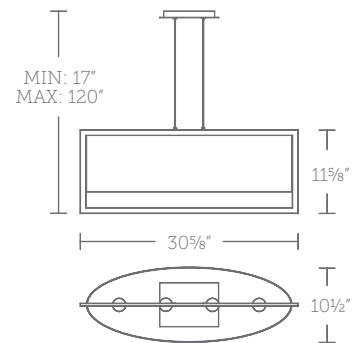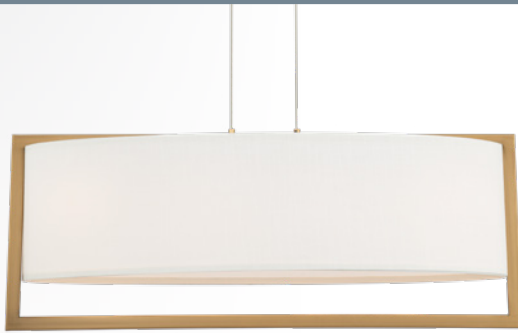


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Rectangular canopy with minimal hardware
- May be mounted on a sloped ceiling
- Heathered white fabric encased in a rectangular frame
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |                        | L"         | W"    | H"    | Min   | Max    |
| <b>PD-33331</b> | 31"  | 3000K | 90  | 120/277V | 29W     | 1367       | 946              | ELV<br>0-10V | 50,000 hours | <b>AB</b><br><b>BK</b> | 30.6"      | 10.5" | 11.6" | 17.0" | 120.0" |

Example: **PD-33331-AB**

See complementary piece on page 99

## PAVILION PENDANT

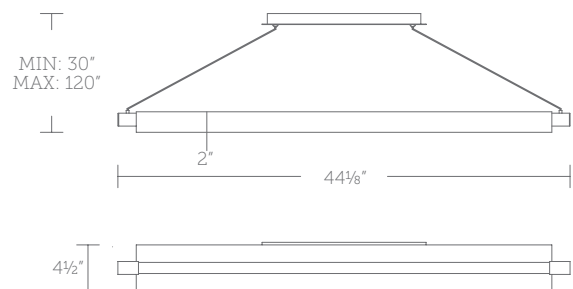


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish       | Dimensions |      |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|--------------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |                       |              |              | L"         | W"   | H"   | Min   | Max    |
| <b>PD-65244</b> | 44"  | 3000K | 90  | 120-277V | 30W     | 2240       | 1772             | ELV<br>TRIAC<br>0-10V | 50,000 hours | <b>BK/AB</b> | 44.1"      | 4.5" | 2.0" | 30.0" | 120.0" |

Example: **PD-65244-BK/AB**

# QUILL MINI PENDANT

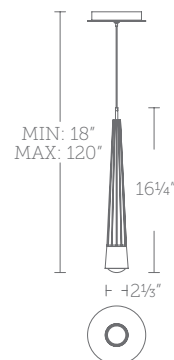


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                              | Dimensions |      |       |              |
|-----------------|------|------------|-----|----------|---------|------------|------------------|--------------|-----------------|-------------------------------------|------------|------|-------|--------------|
|                 |      |            |     |          |         |            |                  |              |                 |                                     | L"         | W"   | H"    | Min Max      |
| <b>PD-59416</b> | 16"  | <b>-27</b> | 90  | 120/277V | 8 W     | 670        | 577              | ELV<br>0-10V | 50,000<br>hours | <b>AB</b><br><b>BK</b><br><b>CH</b> | 2.3"       | 2.3" | 16.3" | 18.0" 120.0" |
|                 |      | <b>-30</b> |     |          |         |            |                  |              |                 |                                     |            |      |       |              |
|                 |      | <b>-35</b> |     |          |         |            |                  |              |                 |                                     |            |      |       |              |
|                 |      | <b>-40</b> |     |          |         |            |                  |              |                 |                                     |            |      |       |              |

Example: **PD-59416-30-CH**

See complementary piece on page 14-15

# ROCKABILLY PENDANT

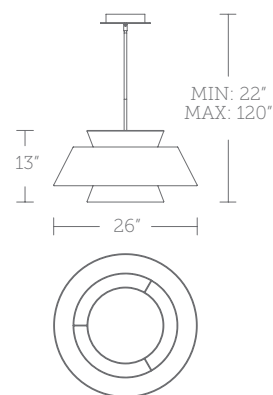


- Dual color fabric shade
- Downlight illumination with acrylic diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Quick spin-on canopy design with minimal hardware for easy installation
- Slope ceiling adaptable. Hang straight swivel up to 90 degrees
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |       |       |              |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|-------|-------|--------------|
|                 |      |       |     |          |         |            |                  |              |                 |           | L"         | W"    | H"    | Min Max      |
| <b>PD-75126</b> | 26"  | 3000K | 90  | 120/277V | 25W     | 2350       | 880              | ELV<br>0-10V | 54,000<br>hours | <b>BK</b> | 26.0"      | 26.0" | 13.0" | 22.0" 120.0" |

Example: **PD-75126-BK**

## SINCLAIR MINI PENDANT




- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Square canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish       | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|--------------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |              | L"         | W"    | H"    | Min   | Max    |
| <b>PD-73210</b> | 10"  | 3000K | 90  | 120/277V | 14W     | 1300       | 664              | ELV<br>0-10V | 50,000 hours | <b>BK/GL</b> | 10.3"      | 10.3" | 10.3" | 15.0" | 120.0" |

Example: **PD-73210-BK/GL**

## SINCLAIR CHANDELIER

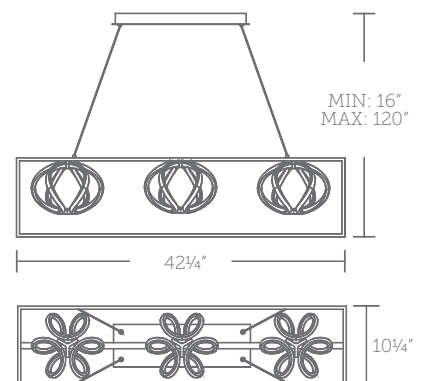

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish       | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|--------------|------------|-------|-------|-------|--------|
|                 |      |       |     |         |         |            |                  |              |              |              | L"         | W"    | H"    | Min   | Max    |
| <b>PD-73242</b> | 42"  | 3000K | 90  | 120 VAC | 44W     | 4300       | 2136             | ELV<br>0-10V | 50,000 hours | <b>BK/GL</b> | 42.3"      | 10.3" | 10.3" | 16.0" | 120.0" |


Example: **PD-73242-BK/GL**



# SIRIUS PENDANT



- Up and downlight with recessed silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on sloped ceiling
- Driver concealed within the canopy

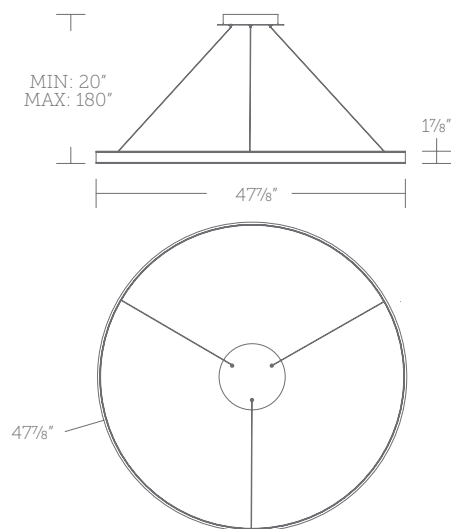


| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                                           | Dimensions |       |      |             |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|--------------------------------------------------|------------|-------|------|-------------|
|                 |      |       |     |         |         |            |                  |              |              |                                                  | L"         | W"    | H"   | Min Max     |
| <b>PD-81118</b> | 18"  | 3000K | 90  | 120 VAC | 36W     | 2493       | 1217             | ELV<br>0-10V | 50,000 hours | <b>AB</b><br><b>AL</b><br><b>BK</b><br><b>WT</b> | 18.0"      | 18.0" | 1.6" | 8.0" 120.0" |
| <b>PD-81124</b> | 24"  |       |     |         | 49W     | 3480       | 1721             |              |              |                                                  | 24.0"      | 24.0" |      |             |
| <b>PD-81131</b> | 31"  |       |     |         | 69W     | 4763       | 2057             |              |              |                                                  | 31.0"      | 31.0" |      |             |
| <b>PD-81148</b> | 48"  |       |     |         | 100 W   | 5330       | 2594             |              |              |                                                  | 47.9"      | 47.9" |      |             |

Example: **PD-81148-AB**

# SOLARIS PENDANT




- Three 12" and one 6" downrods included (additional downrods available)
- Slope ceiling adaptable. Hang straight swivel up to 90 degrees
- Can be mounted as semi-flush or pendant
- Driver concealed within the canopy

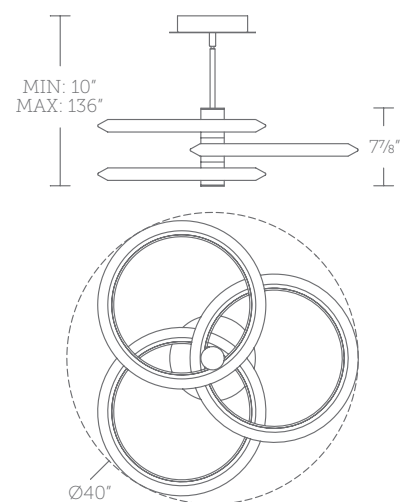

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish    | Dimensions |       |      |              |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|-----------|------------|-------|------|--------------|
|                 |      |       |     |          |         |            |                  |                       |              |           | L"         | W"    | H"   | Min Max      |
| <b>PD-94940</b> | 40"  | 3000K | 90  | 120-277V | 31W     | 2098       | 1329             | ELV<br>TRIAC<br>0-10V | 50,000 hours | <b>AB</b> | 40.0"      | 40.0" | 7.9" | 10.0" 136.0" |

Example: **PD-94940-AB**

## SOLITAIRE PENDANT

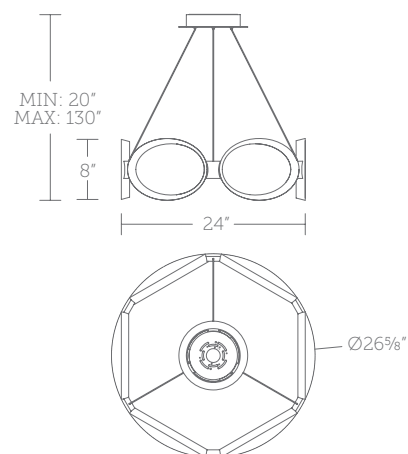


- Omnidirectional illumination with silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish                 | Dimensions |       |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|------------------------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |                       |              |                        | L"         | W"    | H"   | Min   | Max    |
| <b>PD-21324</b> | 24"  | 3000K | 90  | 120-277V | 45W     | 4175       | 2024             | ELV<br>TRIAC<br>0-10V | 54,000 hours | <b>AB</b><br><b>BK</b> | 24.0"      | 24.0" | 8.0" | 20.0" | 130.0" |

Example: **PD-21324-BK**

See complementary piece on page 172

## SOLO PENDANT

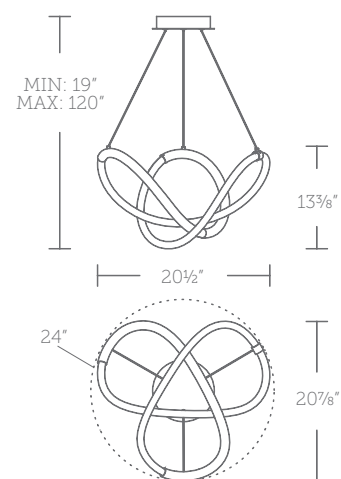



- Light source with etched acrylic tube exterior and silicone interior
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |                        | L"         | W"    | H"    | Min   | Max    |
| <b>PD-19324</b> | 24"  | 3000K | 90  | 120/277V | 29W     | 5075       | 2462             | ELV<br>0-10V | 54,000 hours | <b>AB</b><br><b>BK</b> | 23.6"      | 23.6" | 13.4" | 19.0" | 120.0" |

Example: **PD-19324-AB**

See complementary piece on page 105

# SOLO PENDANT

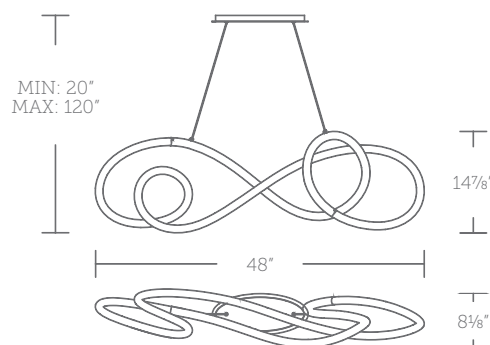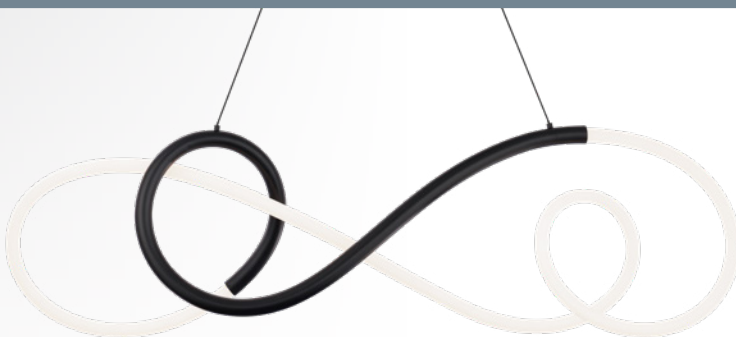



- Light source with etched acrylic tube exterior and silicone interior
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Oval canopy with minimal hardware
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish                 | Dimensions |      |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|------------------------|------------|------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |                       |              |                        | L"         | W"   | H"    | Min   | Max    |
| <b>PD-19348</b> | 48"  | 3000K | 90  | 120-277V | 45W     | 6685       | 3243             | ELV<br>TRIAC<br>0-10V | 54,000 hours | <b>AB</b><br><b>BK</b> | 48.0"      | 8.1" | 14.9" | 20.0" | 120.0" |

Example: **PD-19348-BK**

See complementary piece on page 104

# STACK CHANDELIER

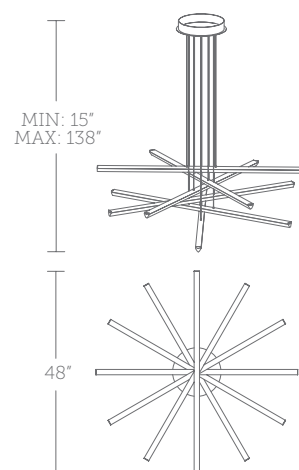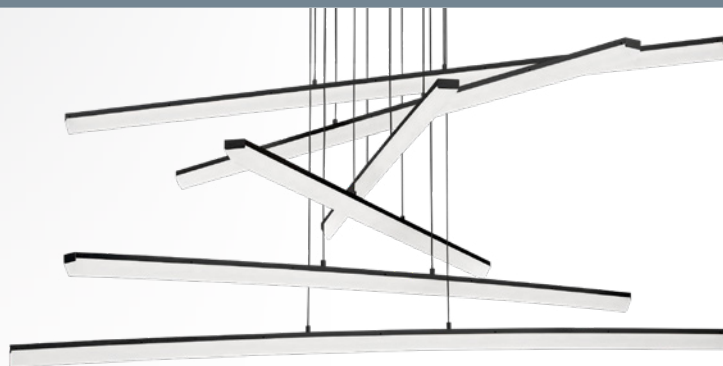


- Height and slope of each pendant strip can be individually adjusted for personalized creative display
- Thin color matched powered aircraft cables and hardware
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-29803</b> | 48"  | 3000K | 90  | 120-277V | 42W     | 4938       | 3950             | ELV<br>TRIAC | 50,000 hours | <b>BK</b> | 48.0"      | 48.0" | 5.3"  | 8.0"  | 138.0" |
| <b>PD-29806</b> |      |       |     |          | 84W     | 9876       | 7990             |              |              |           |            |       | 17.5" | 15.0" |        |
| <b>PD-29809</b> |      |       |     |          | 126W    | 14814      | 11850            |              |              |           |            |       | 21.3" | 20.5" |        |

Example: **PD-29806-BK**



## STRUM PENDANT

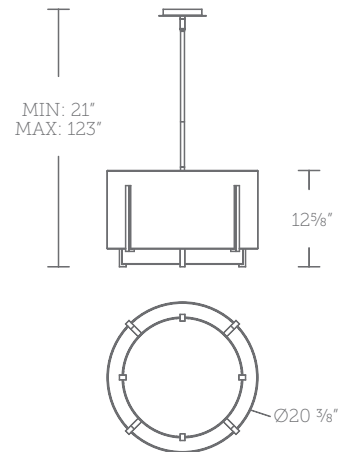


- Downlight with two layers of heathered white fabric shade and acrylic diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- ACLED driverless technology

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |         |         |            |                  |         |              |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-35320</b> | 20"  | 3000K | 90  | 120 VAC | 24W     | 1348       | 877              | ELV     | 50,000 hours | <b>BK</b> | 20.4"      | 20.4" | 13.0" | 21.0" | 123.0" |

Example: **PD-35320-BK**

## SWERVE CHANDELIER

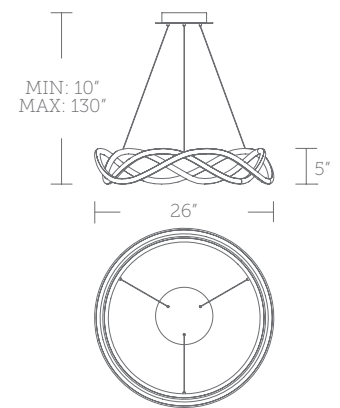

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy


| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |      |       |        |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|------|-------|--------|
|                 |      |                          |     |          |         |            |                  |              |              |           | L"         | W"    | H"   | Min   | Max    |
| <b>PD-67426</b> | 26"  | -27<br>-30<br>-35<br>-40 | 90  | 120-277V | 20 W    | 2100       | 1260             | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 26.0"      | 26.0" | 5.0" | 10.0" | 130.0" |

Example: **PD-67426-30-BK**

# TIGHTROPE PENDANT




- Omnidirectional diffused illumination
- Adjustable silicone diffuser to create desired look
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on rectangular canopy design with minimal hardware
- May be mounted on a sloped ceiling
- Driver concealed within the canopy

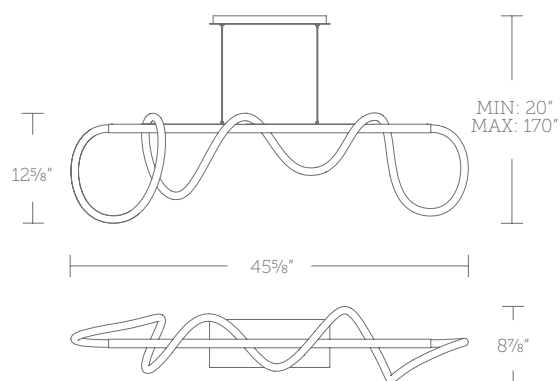


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish    | Dimensions |      |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|-----------|------------|------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |                       |              |           | L"         | W"   | H"    | Min   | Max    |
| <b>PD-35246</b> | 46"  | 3000K | 90  | 120-277V | 30W     | 4000       | 2736             | ELV<br>TRIAC<br>0-10V | 50,000 hours | <b>BK</b> | 45.6"      | 8.9" | 12.6" | 20.0" | 170.0" |

Example: **PD-35246-BK**

# TRAP PENDANT

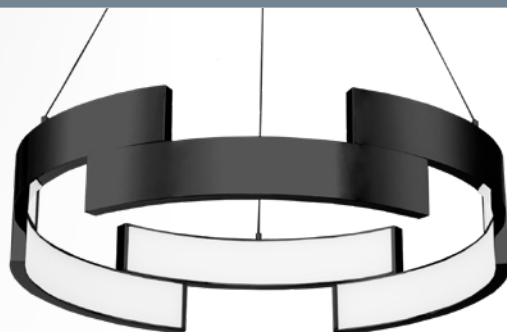

- Thin coated-shield wiring for clean look
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy




| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |              |           | L"         | W"    | H"   | Min   | Max    |
| <b>PD-95827</b> | 27"  | 3000K | 90  | 120-277V | 65W     | 4759       | 4293             | ELV<br>TRIAC | 50,000 hours | <b>BK</b> | 27.0"      | 27.0" | 6.0" | 10.0" | 146.0" |

Example: **PD-95827-BK**

# TUSK MINI PENDANT



- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

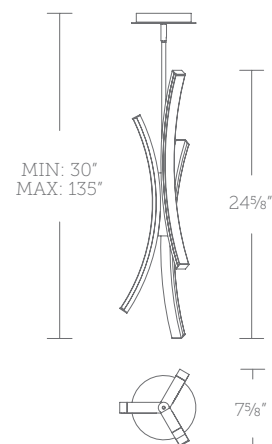


| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |       |       |        |
|-----------------|------|------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|-------|-------|--------|
|                 |      |            |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"    | Min   | Max    |
| <b>PD-29425</b> | 25"  | <b>-27</b> | 90  | 120/277V | 15 W    | 1350       | 720              | ELV<br>0-10V | 50,000<br>hours | <b>BK</b><br><b>BN</b> | 7.6"       | 7.6" | 25.0" | 30.0" | 135.0" |
|                 |      | <b>-30</b> |     |          |         |            |                  |              |                 |                        |            |      |       |       |        |
|                 |      | <b>-35</b> |     |          |         |            |                  |              |                 |                        |            |      |       |       |        |
|                 |      | <b>-40</b> |     |          |         |            |                  |              |                 |                        |            |      |       |       |        |

Example: **PD-29425-30-BK**

See complementary piece on page 173

# VIDA PENDANT



- Frosted polycarbonate diffuser conceals LEDs within the shade, preserving an open to the ceiling mystique
- Cable suspension carrying low voltage may be field shortened
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |              |                 |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-72718</b> | 18"  | 3000K | 90  | 120-277V | 33W     | 2450       | 1755             | ELV<br>TRIAC | 82,000<br>hours | <b>BK</b> | 18.0"      | 18.0" | 9.0"  | 20.0" | 127.0" |
| <b>PD-72724</b> | 24"  |       |     |          | 43W     | 3235       | 2385             |              |                 |           | 24.0"      | 24.0" | 12.0" | 23.0" | 130.0" |


Example: **PD-72718-BK**



# VIGGO MINI PENDANT



- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.3" x 1.1"

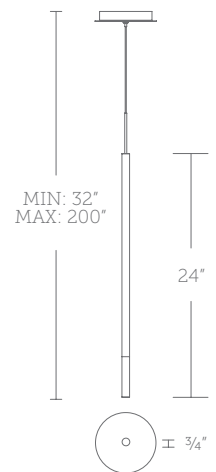

| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish    | Dimensions |      |       |       |        |
|-----------------|------|------------|-----|----------|---------|------------|------------------|-----------------|--------------|-----------|------------|------|-------|-------|--------|
|                 |      |            |     |          |         |            |                  |                 |              |           | L"         | W"   | H"    | Min   | Max    |
| <b>PD-69424</b> | 24"  | <b>-27</b> | 90  | 120-277V | 8 W     | 655        | 291              | ELV TRIAC 0-10V | 50,000 hours | <b>BK</b> | 0.8"       | 0.8" | 24.0" | 32.0" | 200.0" |
| <b>PD-69432</b> | 32"  | <b>-30</b> |     |          |         |            |                  |                 |              |           |            |      | 32.0" | 40.0" | 210.0" |
|                 |      | <b>-35</b> |     |          |         |            |                  |                 |              |           |            |      |       |       |        |
|                 |      | <b>-40</b> |     |          |         |            |                  |                 |              |           |            |      |       |       |        |


Example: **PD-69424-30-BK**

See complementary piece on page 16-17

# VOLO LINEAR PENDANT




- Ultra thin pendant for the discerning minimalist
- Frosted diffuser provides even illumination
- Cable suspension carrying low voltage may be field shortened
- TRIAC dimming not available for PD-22775
- Driver concealed within the canopy

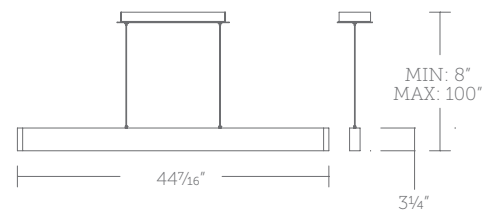

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish                 | Dimensions |      |      |      |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|------------------------|------------|------|------|------|--------|
|                 |      |       |     |          |         |            |                  |                 |              |                        | L"         | W"   | H"   | Min  | Max    |
| <b>PD-22744</b> | 44"  | 3000K | 90  | 120-277V | 23W     | 1988       | 1491             | ELV TRIAC 0-10V | 54,000 hours | <b>AL</b><br><b>BK</b> | 44.5"      | 1.5" | 3.3" | 8.0" | 100.0" |
| <b>PD-22754</b> | 54"  |       |     |          | 30W     | 3387       | 2540             | ELV TRIAC       |              |                        | 54.0"      |      |      |      |        |
| <b>PD-22775</b> | 75"  |       |     |          | 44W     | 4087       | 3045             | ELV TRIAC       |              |                        | 74.5"      |      |      |      |        |

Example: **PD-22744-AL**

## VORNADO MINI PENDANT

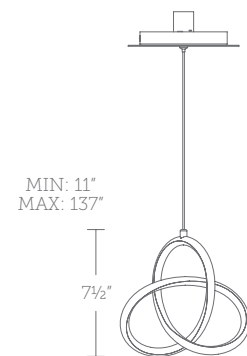


- Hand-crafted, asymmetric & seamless construction, variation expected
- Thin powered cables provide an ultra-clean look
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish                 | Dimensions |      |      |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|------------------------|------------|------|------|-------|--------|
|                 |      |       |     |          |         |            |                  |                       |              |                        | L"         | W"   | H"   | Min   | Max    |
| <b>PD-84907</b> | 7"   | 3000K | 90  | 120-277V | 15.2W   | 851        | 775              | ELV<br>TRIAC<br>0-10V | 54,000 hours | <b>BK</b><br><b>CH</b> | 7.4"       | 7.4" | 7.4" | 11.0" | 137.0" |

Example: **PD-84907-BK**

See complementary piece on page 18, 111 + 174

## VORNADO CHANDELIER




- Free flowing mobius strip of light
- Simple yet dynamic statement piece
- Each piece is hand crafted. Expect slight variations.
- Frosted extruded diffuser creates even illumination
- Assembled with a frosted joint clip, with optional chrome clip included
- Cable suspension carrying low voltage may be field shortened
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish                 | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|------------------------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |                       |              |                        | L"         | W"    | H"    | Min   | Max    |
| <b>PD-87720</b> | 20"  |       |     |          | 31W     | 2825       | 2075             | ELV<br>TRIAC          | 60,000 hours | <b>BK</b><br><b>CH</b> | 20.0"      | 18.0" | 9.0"  | 13.0" | 128.0" |
| <b>PD-87723</b> | 23"  | 3000K | 90  | 120-277V | 48W     | 5106       | 3312             | ELV<br>TRIAC          |              |                        | 23.0"      | 22.0" | 10.0" | 14.5" | 131.0" |
| <b>PD-87735</b> | 35"  |       |     |          | 47.7W   | 5278       | 3397             | ELV<br>TRIAC<br>0-10V |              |                        | 35.0"      | 14.0" | 12.0" | 16.5" | 132.0" |

Example: **PD-87735-BK**

See complementary piece on page 18, 111 + 174

# VORNADO CHANDELIER

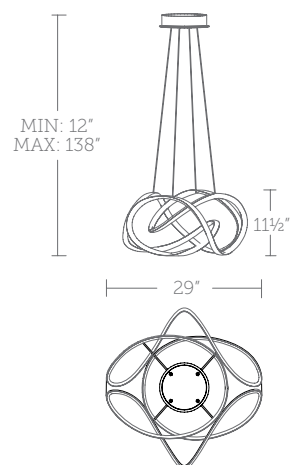


- Hand-crafted, asymmetric & seamless construction, variation expected
- Thin powered cables provide an ultra-clean look
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |       |       |        |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|-------|-------|-------|--------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"    | H"    | Min   | Max    |
| <b>PD-87729</b> | 29"  | 3000K | 90  | 120-277V | 87W     | 7766       | 5375             | ELV     | 50,000 hours | <b>CH</b> | 29.0"      | 27.3" | 11.5" | 12.0" | 137.8" |
| <b>PD-87741</b> | 41"  |       |     |          | 88W     | 7818       | 5861             | TRIAC   |              |           | 41.0"      | 15.8" | 14.4" | 18.4" |        |

Example: **PD-87729-CH**

See complementary piece on page 18, 110 + 174

# WHIRL MINI PENDANT



- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |       |        |
|-----------------|------|------------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|-------|--------|
|                 |      |            |     |          |         |            |                  |              |              |           | L"         | W"   | H"   | Min   | Max    |
| <b>PD-19408</b> | 8"   | <b>-27</b> | 90  | 120/277V | 21 W    | 1103       | 1027             | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 8.3"       | 8.3" | 8.1" | 14.0" | 130.0" |
|                 |      | <b>-30</b> |     |          |         |            |                  |              |              |           |            |      |      |       |        |
|                 |      | <b>-35</b> |     |          |         |            |                  |              |              |           |            |      |      |       |        |
|                 |      | <b>-40</b> |     |          |         |            |                  |              |              |           |            |      |      |       |        |


Example: **PD-19408-30-BK**

See complementary piece on page 19







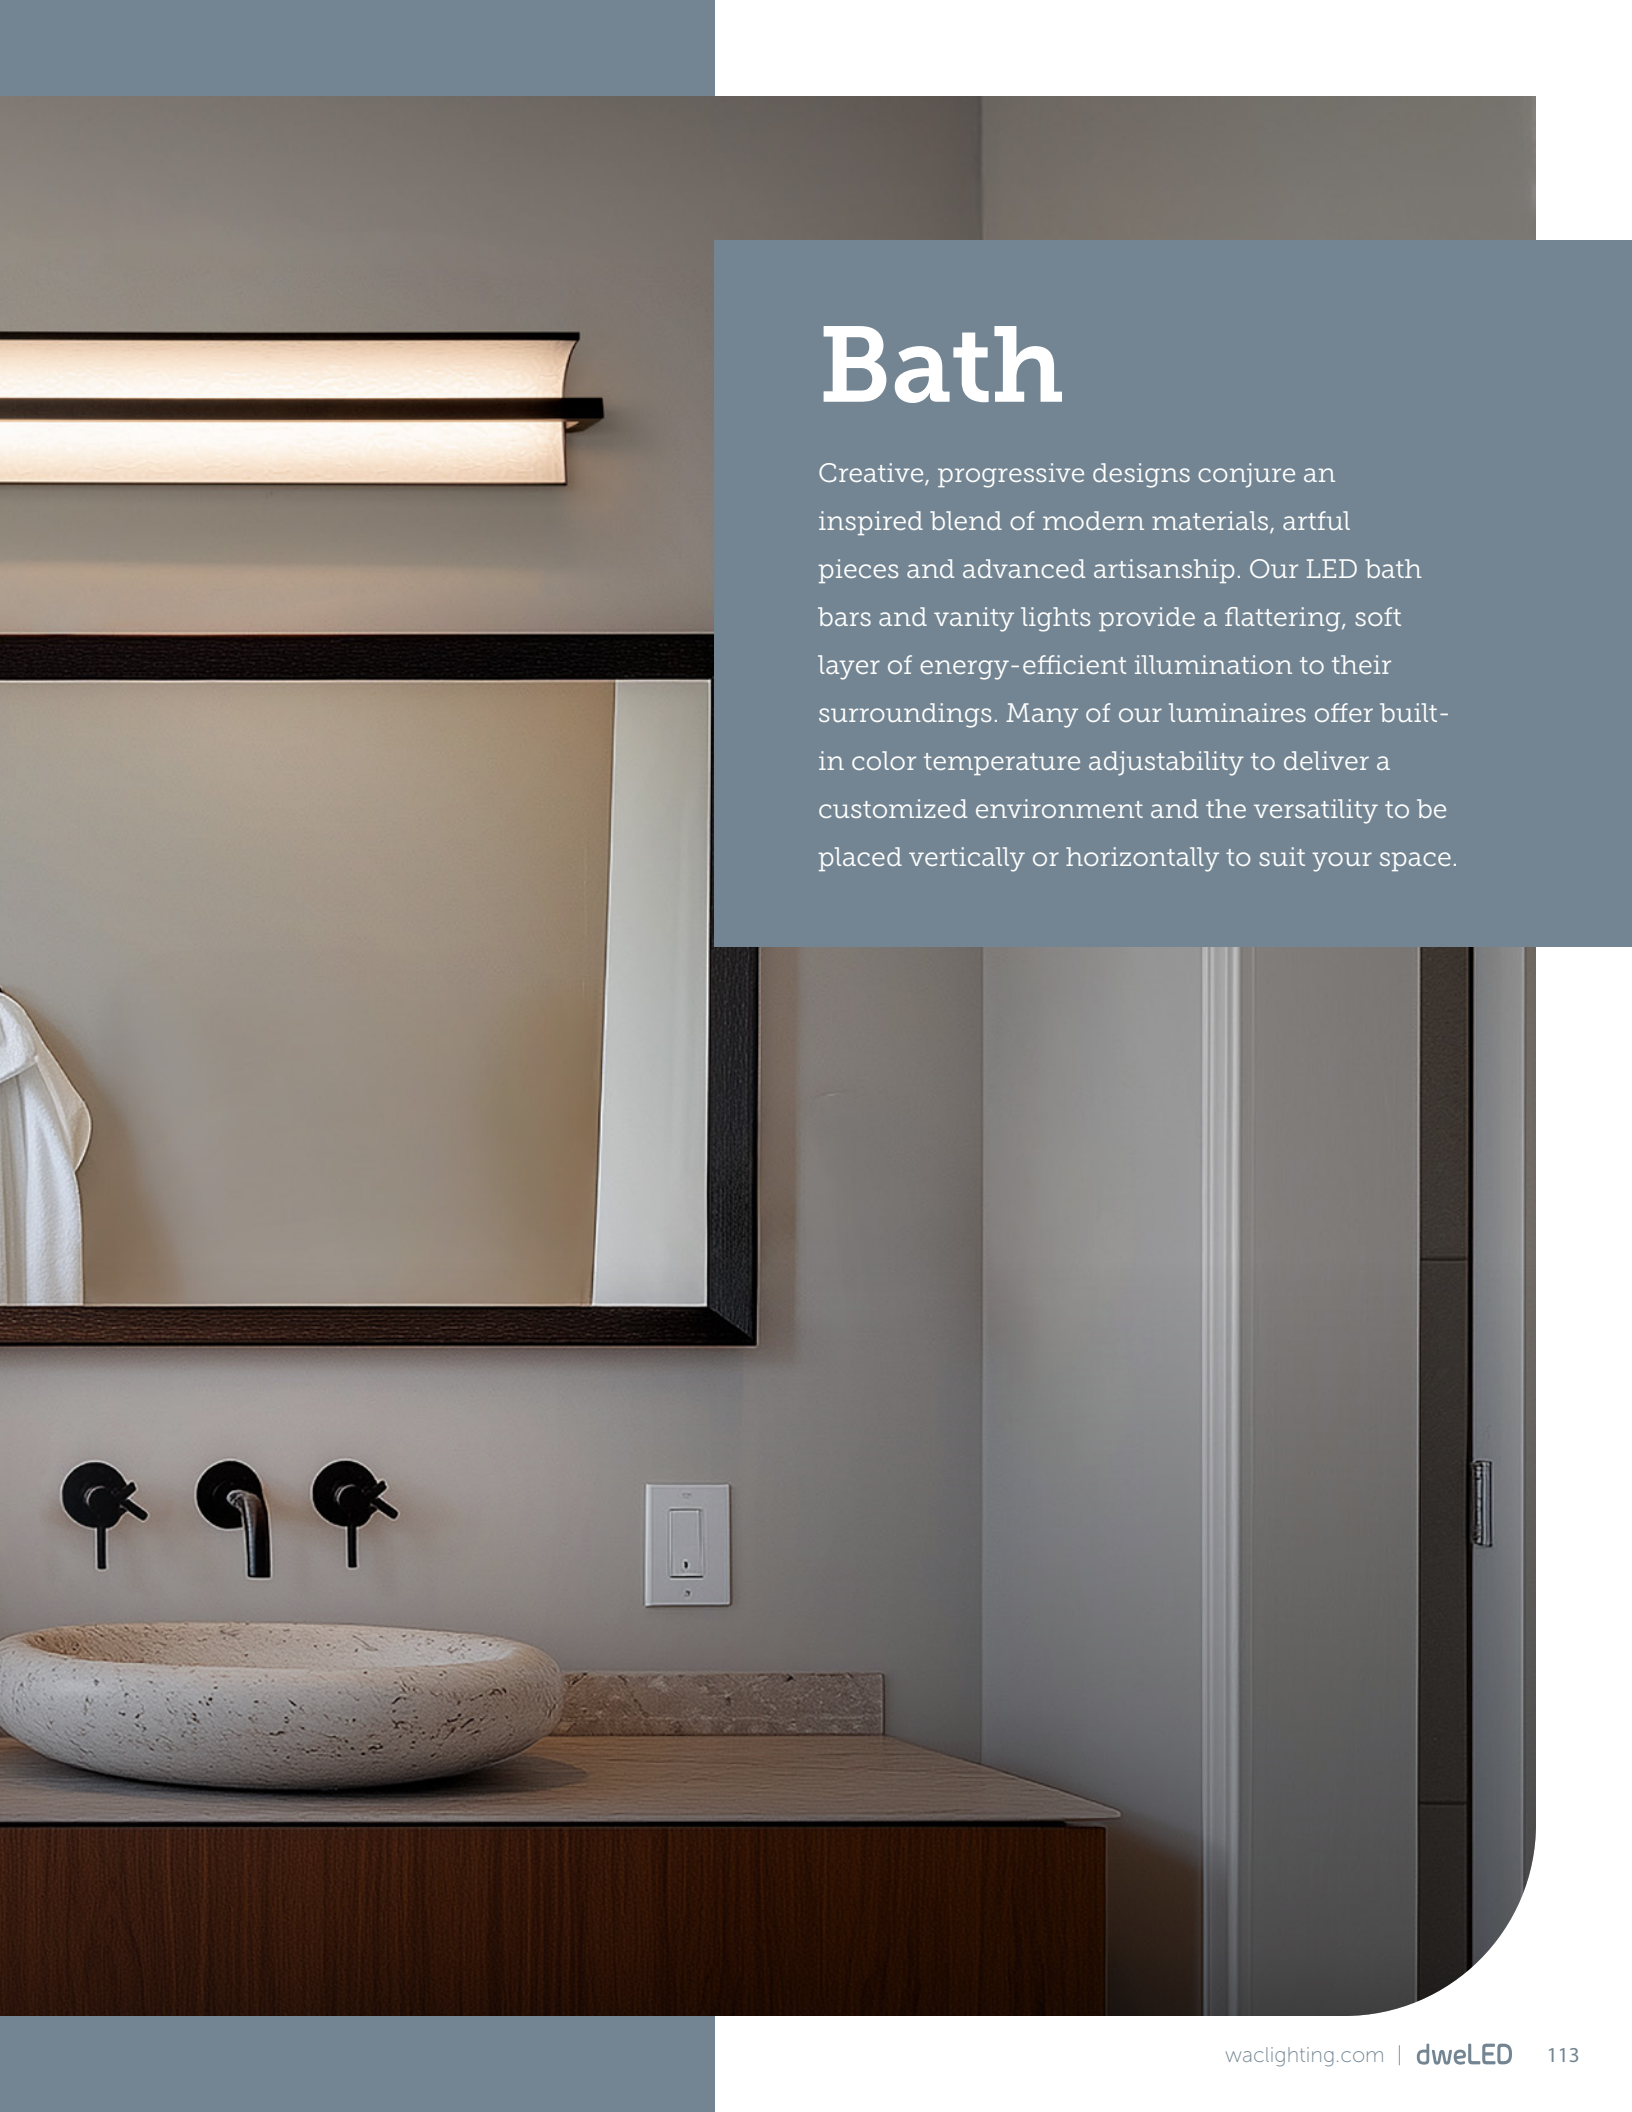

# Bath

Creative, progressive designs conjure an inspired blend of modern materials, artful pieces and advanced artisanship. Our LED bath bars and vanity lights provide a flattering, soft layer of energy-efficient illumination to their surroundings. Many of our luminaires offer built-in color temperature adjustability to deliver a customized environment and the versatility to be placed vertically or horizontally to suit your space.





# BOULEVARD

## BATH + WALL LIGHT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Decorative conversion plate to accommodate standard 4" junction box is included
- Can be mounted on wall in all orientations

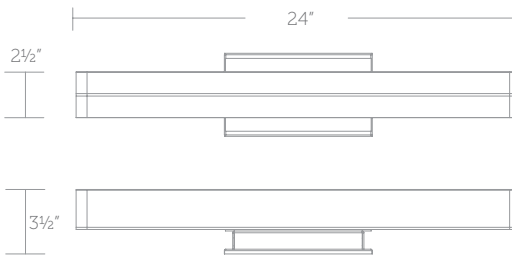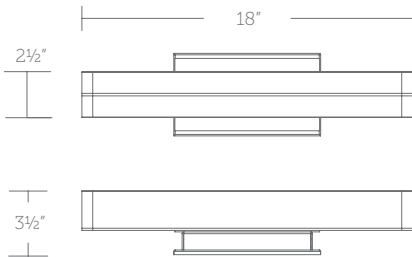

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |      |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"   |
| <b>WS-62518</b> | 18"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 15W     | 1200       | 989              | ELV<br>TRIAC | 54,000<br>hours | <b>AB</b><br><b>BN</b> | 18.0"      | 3.3" | 4.0" |
| <b>WS-62524</b> | 24"  |                                                      |     |          | 20W     | 1800       | 1422             |              |                 |                        | 24.0"      |      |      |

Example: **WS-62518-30-BN**





“End to End. A triangular clear diffuser encases a rod of LEDs, emitting a generous and even expression of illumination.”





# CORKSCREW

## BATH + WALL LIGHT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Can be mounted on ceiling or wall in all orientations

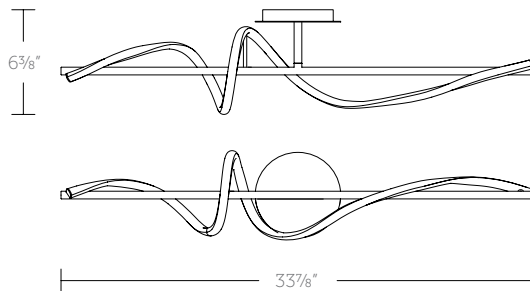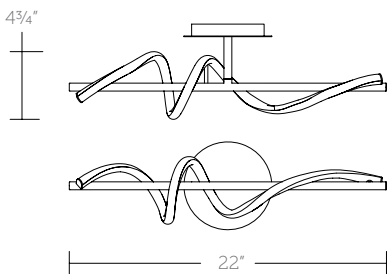

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |      |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |           | L"         | W"   | H"   |
| <b>WS-39422</b> | 22"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 20W     | 1508       | 1067             | ELV<br>TRIAC | 50,000<br>hours | <b>BK</b> | 22.0"      | 6.9" | 5.5" |
| <b>WS-39434</b> | 34"  |                                                      |     |          | 29W     | 2061       | 1453             |              |                 |           | 33.9"      | 7.5" | 6.1" |

Example: **WS-39434-30-BK**

See complementary piece on page 80





“ A playful band of light spirals around a linear bar. This looped structure delivers artful style along with a soft layer of multi-directional illumination. ”






# HOURLGLASS

## BATH + WALL LIGHT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Can be mounted on wall in all orientations

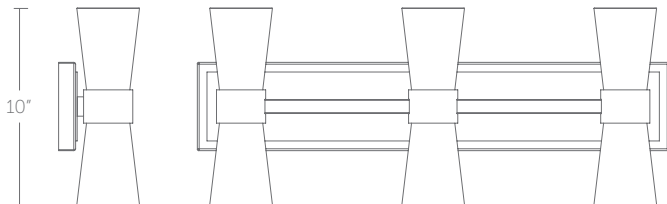

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                              | Dimensions |      |       |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-------------------------------------|------------|------|-------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                                     | L"         | W"   | H"    |
| <b>WS-91524</b> | 24"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 21W     | 1700       | 1396             | ELV<br>TRIAC | 54,000<br>hours | <b>AB</b><br><b>BK</b><br><b>BN</b> | 24.0"      | 4.0" | 10.0" |

Example: **WS-91524-30-BK**

See complementary piece on page 52 + 150



“ Days of Our Lives. Like sand through an hourglass, graceful flared shades are lined with soft white. When illuminated, it casts a warm, diffused glow that accentuates its elegant curves. ”




# RIPPLE

## BATH + WALL LIGHT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations

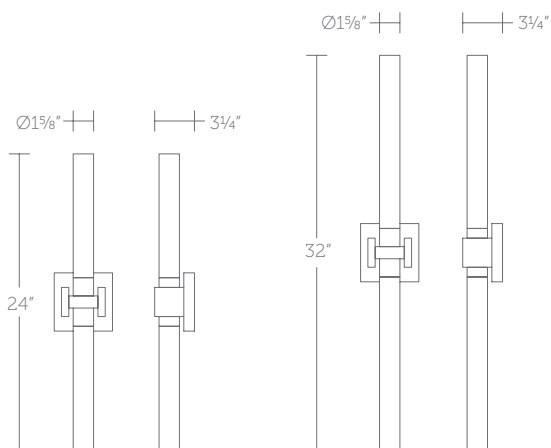

| Model No.       | Size | CCT                                                  | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish                 | Dimensions |      |       |
|-----------------|------|------------------------------------------------------|-----|---------|---------|------------|------------------|-----------|--------------|------------------------|------------|------|-------|
|                 |      |                                                      |     |         |         |            |                  |           |              |                        | L"         | W"   | H"    |
| <b>WS-85524</b> | 24"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120 VAC | 15W     | 449        | 374              | ELV TRIAC | 50,000 hours | <b>AB</b><br><b>BN</b> | 1.6"       | 3.3" | 24.0" |
| <b>WS-85532</b> | 32"  |                                                      |     |         | 19W     | 562        | 467              |           |              |                        |            |      | 32.0" |

Example: **WS-85524-30-BN**





“A glimmering bar of textured glass makes a luminous impression. Its sleek square metal wall plate anchors a cylindrical metal collar holding the lightbar in place.”




# SHARD

## BATH + WALL LIGHT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Reflective texture panel
- Can be mounted on wall in all orientations

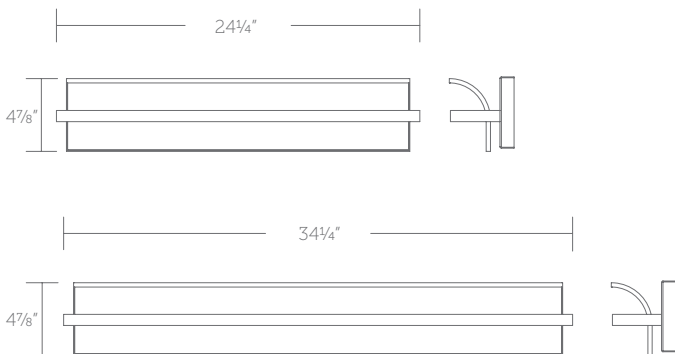

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |      |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"   |
| <b>WS-79524</b> | 24"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 20W     | 750        | 506              | ELV<br>TRIAC | 50,000<br>hours | <b>BK</b><br><b>BN</b> | 24.3"      | 4.8" | 4.3" |
| <b>WS-79534</b> | 34"  |                                                      |     |          | 27W     | 900        | 710              |              |                 |                        | 34.3"      |      |      |

Example: **WS-79524-30-BK**





“ A textured reflective panel in a simple curve is held by a slim bar. Dedicated LED light sources within its frame enhances the translucent slab of patterned acrylic with a warm glow. ”







# SKATE

## BATH + WALL LIGHT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations

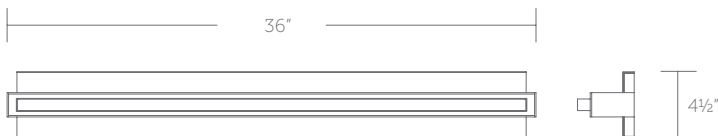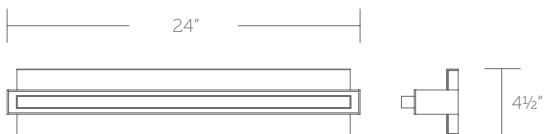


| Model No.       | Size | CCT                      | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish           | Dimensions |      |       |
|-----------------|------|--------------------------|-----|---------|---------|------------|------------------|-----------|--------------|------------------|------------|------|-------|
|                 |      |                          |     |         |         |            |                  |           |              |                  | L"         | W"   | H"    |
| <b>WS-80524</b> | 24"  | -27<br>-30<br>-35<br>-40 | 90  | 120 VAC | 11W     | 1500       | 398              | ELV TRIAC | 50,000 hours | <b>BK<br/>BN</b> | 4.5"       | 4.0" | 24.0" |
| <b>WS-80536</b> | 36"  |                          |     |         | 20W     | 2000       | 755              |           |              |                  |            |      | 36.0" |

Example: **WS-80524-30-BK**



“ Icy. A textured slab glides into a banded frame. LEDs underneath shine through the acrylic bar, creating sparkling illumination. ”





# SPECTACLE

BATH + WALL LIGHT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Decorative conversion plate to accommodate standard 4" junction box is included
- Can be mounted on wall in all orientations

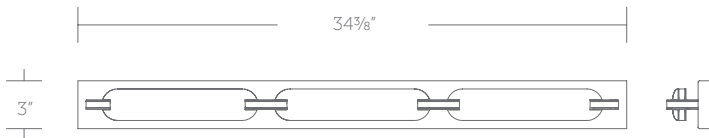

| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish       | Dimensions |      |      |
|-----------------|------|------------|-----|----------|---------|------------|------------------|-----------------|--------------|--------------|------------|------|------|
|                 |      |            |     |          |         |            |                  |                 |              |              | L"         | W"   | H"   |
| <b>WS-71524</b> | 24"  | <b>-27</b> | 90  | 120-277V | 17W     | 700        | 357              | ELV TRIAC 0-10V | 50,000 hours | <b>AB BN</b> | 24.0"      | 3.1" | 3.0" |
|                 |      | <b>-30</b> |     |          |         |            |                  |                 |              |              |            |      |      |
|                 |      | <b>-35</b> |     |          |         |            |                  |                 |              |              |            |      |      |
| <b>WS-71534</b> | 34"  | <b>-40</b> |     |          | 21W     | 900        | 546              |                 |              |              | 34.4"      |      |      |

Example: **WS-71524-30-BN**





“Cool Shades. Two illuminated ovals on a rectangular backplate create a unique design for the Bath + Wall Light.”




# STRAIGHTAWAY

## BATH + WALL LIGHT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Decorative conversion plate to accommodate standard 4" junction box is included
- Can be mounted on wall in all orientations



| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish       | Dimensions |      |      |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|-----------|--------------|--------------|------------|------|------|
|                 |      |                          |     |          |         |            |                  |           |              |              | L"         | W"   | H"   |
| <b>WS-51524</b> | 24"  | -27<br>-30<br>-35<br>-40 | 90  | 120-277V | 18.5W   | 1665       | 916              | ELV TRIAC | 50,000 hours | <b>BK BN</b> | 24.0"      | 3.0" | 2.8" |
| <b>WS-51532</b> | 32"  |                          |     |          | 24.5W   | 2205       | 1213             |           |              |              | 32.0"      |      |      |


Example: **WS-51532-30-BN**





“Clean and Simple. A rounded linear silhouette features and white diffuser adorned with triangular end caps and square backplate designed to provide abundant and balanced light through an understated aesthetic.”




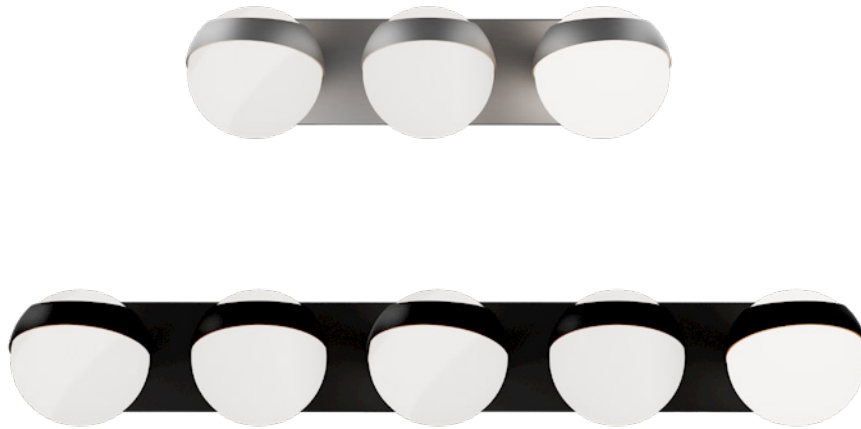


# TRIPOLI

## BATH + WALL LIGHT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Rotatable heads for customized look
- Can be mounted on wall in all orientations

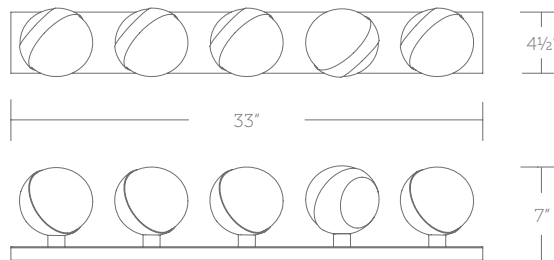


| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |       |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|-------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"    |
| <b>WS-87520</b> | 20"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 16W     | 1500       | 649              | ELV<br>TRIAC | 50,000<br>hours | <b>BK</b><br><b>BN</b> | 20.0"      | 7.0" | 4.5"  |
| <b>WS-87533</b> | 33"  |                                                      |     |          | 22W     | 2000       | 1056             |              |                 |                        | 5.0"       |      | 33.0" |

Example: **WS-87520-30-BK**



“Go Glam. With Hollywood-inspired sense of style, a bold pairing of metal and opal glass globes adds luxe flair to spaces as it diffuses a lovely and welcoming layer of light.”

# BASTONE BATH + WALL SCONCE

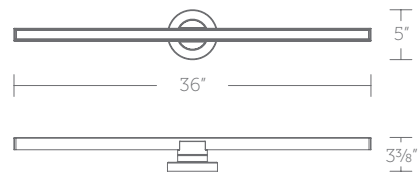

- Light source offers 360 degree rotation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish           | Dimensions |      |      |
|-----------------|------|------------|-----|---------|---------|------------|------------------|--------------|-----------------|------------------|------------|------|------|
|                 |      |            |     |         |         |            |                  |              |                 |                  | L"         | W"   | H"   |
| <b>WS-99426</b> | 26"  | -27<br>-30 | 90  | 120 VAC | 23 W    | 2245       | 924              | ELV<br>0-10V | 50,000<br>hours | <b>BK<br/>BN</b> | 26.0"      | 3.4" | 5.0" |
| <b>WS-99436</b> | 36"  | -35<br>-40 |     |         | 26 W    | 2783       | 1078             |              |                 |                  | 36.0"      |      |      |

Example: **WS-99436-30-BK**

See complementary piece on page 26 + 242

# BLISS BATH + WALL SCONCE



- Conversion plate for 4" J box included
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life      | Finish    | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|-----------------|-----------|------------|------|------|
|                 |      |       |     |         |         |            |                  |         |                 |           | L"         | W"   | H"   |
| <b>WS-79622</b> | 22"  | 3000K | 90  | 120 VAC | 31W     | 2600       | 1500             | ELV     | 50,000<br>hours | <b>PN</b> | 22.0"      | 2.9" | 3.5" |
| <b>WS-79628</b> | 28"  |       |     |         | 40W     | 3600       | 2365             |         |                 |           | 28.0"      |      |      |
| <b>WS-79636</b> | 36"  |       |     |         | 47W     | 4100       | 2800             |         | 45,000<br>hours |           | 36.0"      |      |      |

Example: **WS-79622-PN**

Special Order: For 2700K add "-27"; 3500K add "-35"; before finish WS-79622-27-PN

For 277V special order, add "F" before the finish: WS-79622F-PN



# BRINK BATH + WALL SCONCE



- Conversion plate for 4" J box included
- Adjustable backplate
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish           | Dimensions |      |      |
|-----------------|------|----------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------|------------|------|------|
|                 |      |                            |     |          |         |            |                  |              |                 |                  | L"         | W"   | H"   |
| <b>WS-77612</b> | 12"  | <b>-27<br/>-30<br/>-35</b> | 90  | 120-277V | 11W     | 935        | 779              | ELV<br>TRIAC | 85,000<br>hours | <b>AL<br/>BK</b> | 12.6"      | 2.8" | 3.0" |
| <b>WS-77618</b> | 18"  |                            |     |          | 16W     | 1330       | 910              |              |                 |                  | 18.0"      |      |      |
| <b>WS-77624</b> | 24"  |                            |     |          | 21W     | 1785       | 1330             |              |                 |                  | 24.0"      |      |      |
| <b>WS-77636</b> | 36"  |                            |     |          | 30W     | 2561       | 1985             |              |                 |                  | 36.0"      |      |      |

Example: **WS-77618-30-AL**

# DARCY BATH + WALL SCONCE




- Silk screen mitered tempered glass diffuser
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life      | Finish    | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|-----------------|-----------|------------|------|------|
|                 |      |       |     |         |         |            |                  |         |                 |           | L"         | W"   | H"   |
| <b>WS-38024</b> | 24"  | 3000K | 90  | 120 VAC | 34W     | 3800       | 1733             | ELV     | 50,000<br>hours | <b>BN</b> | 24.0"      | 3.1" | 5.0" |
| <b>WS-38036</b> | 36"  |       |     |         | 45W     | 5000       | 2383             |         |                 |           | 36.0"      |      |      |

Example: **WS-38024-BN**

## ELEMENTUM BATH + WALL SCONCE



- A streamlined luminaire sealed to meet healthcare facility requirements
- 13" can only be mounted vertically
- Title 24 may not be available for all finishes, check for availability
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on wall in all orientations



| Model No.      | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                 | Dimensions |      |       |
|----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|------------------------|------------|------|-------|
|                |      |       |     |         |         |            |                  |         |              |                        | L"         | W"   | H"    |
| <b>WS-7213</b> | 13"  |       |     |         | 13W     | 1118       | 885              |         |              |                        |            |      | 13.5" |
| <b>WS-7222</b> | 22"  | 2700K | 90  | 120 VAC | 26W     | 2119       | 1590             | ELV     | 80,000 hours | <b>BN</b><br><b>CH</b> | 4.5"       | 3.5" | 22.0" |
| <b>WS-7230</b> | 30"  |       |     |         | 30W     | 2925       | 1937             |         |              | <b>CH</b>              |            |      | 30.0" |

Example: **WS-7222-CH**

Special Order: For 3000K add "-30"; 3500K add "-35"; before finish WS-7222-35-CH

For 277V special order, add "F" before the finish: WS-7222F-CH

## ENIGMATIC BATH + WALL SCONCE

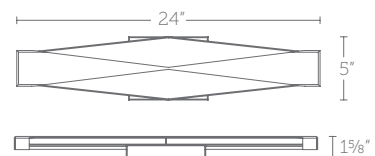


- Side lit with light guide material
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                                    | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|----------------------------------------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|
|                 |      |                                        |     |          |         |            |                  |              |              |           | L"         | W"   | H"   |
| <b>WS-59324</b> | 24"  | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120/277V | 11W     | 895        | 382              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 24.0"      | 1.6" | 5.0" |

Example: **WS-59324-30-BK**

# ESPRIT BATH + WALL SCONCE



- LED modules positioned closer to diffuser for broader spread of illumination
- Driver installs within the Junction Box, driver dimension: 2.9" x 1.4" x 1.2"
- Can be mounted on wall in all orientations


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-69815</b> | 15"  | 3000K | 90  | 120-277V | 11W     | 845        | 778              | ELV     | 50,000 hours | <b>BN</b> | 4.5"       | 3.1" | 15.0" |
| <b>WS-69826</b> | 26"  |       |     |          | 20W     | 1784       | 1255             |         |              |           | 26.0"      |      | 4.5"  |

Example: **WS-69826-BN**

# FALLON BATH + WALL SCONCE



- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations




| Model No.       | Size | CCT                     | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |      |      |
|-----------------|------|-------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------------|------------|------|------|
|                 |      |                         |     |         |         |            |                  |              |              |                        | L"         | W"   | H"   |
| <b>WS-53223</b> | 23"  | 2700K<br>3000K<br>3500K | 90  | 120 VAC | 15W     | 1250       | 1044             | ELV<br>0-10V | 54,000 hours | <b>BK</b><br><b>BN</b> | 22.5"      | 4.0" | 3.0" |
|                 |      |                         |     |         |         |            |                  |              |              |                        |            |      |      |

Example: **WS-53223-BK**



## INTERLACE BATH + WALL SCONCE




- Seamless interlocked loops
- Hand-crafted extruded aluminum with composite diffuser into wavy design
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|-----------|------------|------|------|
|                 |      |       |     |          |         |            |                  |                 |              |           | L"         | W"   | H"   |
| <b>WS-47828</b> | 28"  | 3000K | 90  | 120-277V | 21W     | 1565       | 1174             | ELV TRIAC 0-10V | 50,000 hours | <b>CH</b> | 27.5"      | 5.1" | 6.3" |
| <b>WS-47838</b> | 38"  |       |     |          | 28W     | 2183       | 1637             |                 |              |           | 37.5"      | 5.6" | 6.4" |

Example: **WS-47828-CH**

See complementary piece on page 12-13 + 89

## INTERLOK BATH + WALL SCONCE

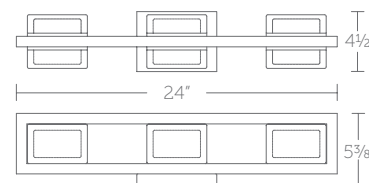


- Thick walled glass diffusers
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT                                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|------------------------------------|-----|----------|---------|------------|------------------|-----------|--------------|-----------|------------|------|------|
|                 |      |                                    |     |          |         |            |                  |           |              |           | L"         | W"   | H"   |
| <b>WS-77424</b> | 24"  | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 120/277V | 18 W    | 2542       | 1398             | ELV 0-10V | 50,000 hours | <b>BN</b> | 24.0"      | 5.4" | 4.5" |
| <b>WS-77436</b> | 36"  |                                    |     |          | 25 W    | 3438       | 1891             |           |              |           | 36.0"      |      |      |

Example: **WS-77424-30-BN**

# JAGGER BATH + WALL SCONCE

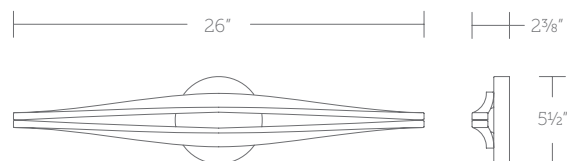


- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |      |      |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|--------------|------------------------|------------|------|------|
|                 |      |                          |     |          |         |            |                  |              |              |                        | L"         | W"   | H"   |
| <b>WS-71426</b> | 26"  | -27<br>-30<br>-35<br>-40 | 90  | 120/277V | 20 W    | 1758       | 1055             | ELV<br>0-10V | 50,000 hours | <b>BK</b><br><b>BN</b> | 26.0"      | 2.4" | 5.5" |

Example: **WS-71426-30-BK**

# JULIET BATH + WALL SCONCE

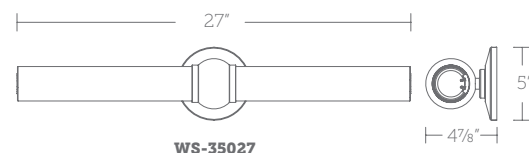

**WS-35027**




- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                                           | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|--------------------------------------------------|------------|------|------|
|                 |      |       |     |         |         |            |                  |         |              |                                                  | L"         | W"   | H"   |
| <b>WS-35020</b> | 20"  | 3000K | 90  | 120 VAC | 27W     | 2059       | 1439             | ELV     | 50,000 hours | <b>AB</b><br><b>BK</b><br><b>BN</b><br><b>CH</b> | 20.0"      | 4.9" | 5.0" |
| <b>WS-35027</b> | 27"  |       |     |         | 34W     | 2778       | 1983             |         |              |                                                  | 27.0"      |      |      |

Example: **WS-35027-AB**

## LEVEL BATH + WALL SCONCE


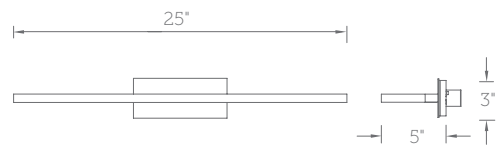


- Adjustable backplate
- Conversion plate for 4" J box included
- WS-85618 is ADA compliant, low profile design
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                  | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-------------------------|------------|------|------|
|                 |      |       |     |          |         |            |                  |         |              |                         | L"         | W"   | H"   |
| <b>WS-85618</b> | 18"  | 3500K | 90  | 120-277V | 16W     | 1300       | 865              | ELV     | 54,000 hours | <b>AL<br/>BK<br/>WT</b> | 19.0"      | 4.0" | 3.0" |
| <b>WS-85624</b> | 24"  |       |     |          | 21W     | 1735       | 1255             |         |              |                         | 25.0"      | 5.0" |      |
| <b>WS-85636</b> | 36"  |       |     |          | 30W     | 2561       | 1762             |         |              |                         | 37.0"      |      |      |

Example: **WS-85624-AL**

## LINE BATH + WALL SCONCE

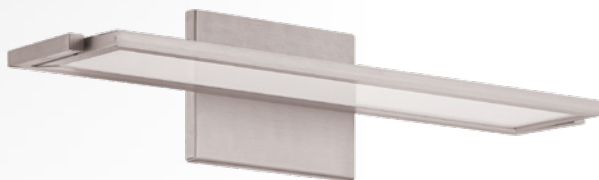

- Vertical or horizontal mount with 330 degree adjustment
- Super thin, 5/8" edge-lit LED panel
- Transformer installs within the Junction Box, transformer dimension: 2.0" x 1.4" x 1.0"
- Can be mounted on ceiling or wall in all orientations


| Model No.      | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |      |
|----------------|------|------------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|------|
|                |      |            |     |         |         |            |                  |         |              |           | L"         | W"   | H"   |
| <b>WS-6718</b> | 18"  | <b>-30</b> | 90  | 120 VAC | 17W     | 1109       | 1109             | ELV     | 80,000 hours | <b>AL</b> | 18.0"      | 5.0" | 4.0" |
| <b>WS-6724</b> | 24"  |            |     |         | 22W     | 1478       | 1140             |         |              |           | 24.0"      |      |      |

Example: **WS-6718-30-AL**

For 277V, add "F" before the color temperature: WS-6718F-30-AL



# LOCKE BATH + WALL SCONCE



- Unique, faceted diamond-shaped backplate
- Up and downlight illumination
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |       |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|------|-------|
|                 |      |       |     |         |         |            |                  |              |              |                  | L"         | W"   | H"    |
| <b>WS-30018</b> | 18"  | 3000K | 90  | 120 VAC | 21W     | 1580       | 1270             | ELV          | 50,000 hours | <b>AB<br/>BN</b> | 4.5"       | 4.9" | 18.1" |
| <b>WS-30024</b> | 24"  |       |     |         | 32 W    | 2937       | 2291             | ELV<br>0-10V |              |                  | 24.0"      | 4.6" | 4.9"  |

Example: **WS-30024-AB**

# LOOPHOLE BATH + WALL SCONCE




- Omnidirectional illumination
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|-----------------|------|----------------------------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                 |      |                            |     |          |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-61326</b> | 26"  | <b>-27<br/>-30<br/>-35</b> | 90  | 120/277V | 24W     | 1475       | 946              | ELV     | 50,000 hours | <b>BK</b> | 3.1"       | 5.5" | 26.0" |
| <b>WS-61334</b> | 34"  |                            |     |          | 29W     | 1805       | 1211             | 0-10V   |              |           |            |      | 34.0" |

Example: **WS-61326-30-BK**

See complementary piece on page 92

## MELODY BATH + WALL SCONCE

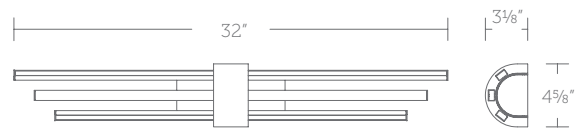


- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish       | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|--------------|------------|------|------|
|                 |      |       |     |          |         |            |                  |                 |              |              | L"         | W"   | H"   |
| <b>WS-15422</b> | 22"  | 3000K | 90  | 120-277V | 11 W    | 605        | 484              | ELV TRIAC 0-10V | 50,000 hours | <b>BK BN</b> | 22.0"      | 3.1" | 4.6" |
| <b>WS-15432</b> | 32"  |       |     |          | 14 W    | 775        | 621              |                 |              |              | 32.0"      |      |      |

Example: **WS-15432-BN**

## MINIBAR BATH + WALL SCONCE




- Front light with acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish       | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|-----------|--------------|--------------|------------|------|------|
|                 |      |       |     |         |         |            |                  |           |              |              | L"         | W"   | H"   |
| <b>WS-75318</b> | 18"  | 2700K | 90  | 120 VAC | 19W     | 1985       | 1213             | ELV 0-10V | 60,000 hours | <b>BK BN</b> | 18.0"      | 3.8" | 5.5" |
| <b>WS-75328</b> | 28"  | 3500K |     |         | 24W     | 2550       | 1557             |           |              |              | 28.0"      |      |      |

Example: **WS-75318-BN**

# MUSEO BATH + WALL SCONCE




- Faux Spanish Alabaster enclosure
- Up and downlight with etched acrylic diffuser
- Snap-on easy installation
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|------|
|                 |      |       |     |          |         |            |                  |              |                 |           | L"         | W"   | H"   |
| <b>WS-65118</b> | 18"  | 3000K | 90  | 120/277V | 17W     | 1769       | 1181             | ELV<br>0-10V | 54,000<br>hours | <b>WT</b> | 18.0"      | 2.5" | 5.0" |
| <b>WS-65128</b> | 28"  |       |     |          | 33W     | 3079       | 2028             |              |                 |           | 28.0"      |      |      |

Example: **WS-65128-WT**

# MYLIE BATH + WALL SCONCE

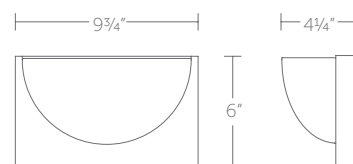

- Front light and downlight for close to wall illumination
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life      | Finish    | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|-----------------|-----------|------------|------|------|
|                 |      |       |     |         |         |            |                  |         |                 |           | L"         | W"   | H"   |
| <b>WS-27010</b> | 10"  | 3000K | 90  | 120 VAC | 17W     | 890        | 655              | ELV     | 54,000<br>hours | <b>AB</b> | 9.8"       | 4.3" | 6.0" |

Example: **WS-27010-AB**



# NIGHTSTICK BATH + WALL SCONCE




- Multiple sizes to meet numerous applications
- Decorative plate to cover up to a standard 4" junction box is included
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish           | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|------------------|------------|------|------|
|                 |      |       |     |         |         |            |                  |         |              |                  | L"         | W"   | H"   |
| <b>WS-35819</b> | 19"  | 3000K | 90  | 120 VAC | 17W     | 1276       | 787              | ELV     | 54,000 hours | <b>AL<br/>WT</b> | 19.1"      | 2.2" | 1.3" |
| <b>WS-35825</b> | 25"  |       |     |         | 22W     | 1708       | 1054             |         |              |                  | 25.1"      |      |      |
| <b>WS-35837</b> | 37"  |       |     |         | 34W     | 2585       | 1595             |         |              |                  | 37.1"      |      |      |
| <b>WS-35849</b> | 49"  |       |     |         | 44W     | 3399       | 2097             |         |              |                  | 48.9"      |      |      |
| <b>WS-35861</b> | 61"  |       |     |         | 53W     | 3610       | 2228             |         |              |                  | 61.1"      |      |      |
| <b>WS-35873</b> | 73"  |       |     |         | 64W     | 4912       | 3031             |         |              |                  | 73.1"      |      |      |

Example: **WS-35819-WT**

# PARALLAX BATH + WALL SCONCE

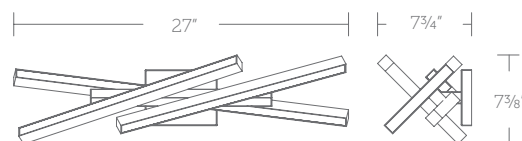

- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|--------------------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|
|                 |      |                    |     |          |         |            |                  |              |              |           | L"         | W"   | H"   |
| <b>WS-73120</b> | 20"  | <b>-27</b>         | 90  | 120/277V | 20W     | 1287       | 726              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 20.0"      | 7.9" | 7.0" |
| <b>WS-73127</b> | 27"  | <b>-30<br/>-35</b> |     |          | 28W     | 1826       | 1045             |              |              |           | 27.0"      | 7.8" | 7.4" |

Example: **WS-73127-30-BK**

See complementary piece on page 97, 98, 99, 143, 215 + 216

# PARALLAX BATH + WALL SCONCE



- Downlight illumination
- Conversion plate included to accommodate 4" junction box
- 3CCT (2700K/3000K/3500K) selectable switch
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                              | Dimensions |      |      |
|-----------------|------|----------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|-------------------------------------|------------|------|------|
|                 |      |                                        |     |         |         |            |                  |              |              |                                     | L"         | W"   | H"   |
| <b>WS-73117</b> | 18"  | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120 VAC | 6W      | 263        | 185              | ELV<br>0-10V | 54,000 hours | <b>BK</b><br><b>BN</b><br><b>CH</b> | 18.0"      | 5.0" | 2.8" |
| <b>WS-73123</b> | 24"  | <b>-27</b><br><b>-30</b><br><b>-35</b> |     |         | 11W     | 542        | 378              |              |              |                                     | 24.0"      |      |      |

Example: **WS-73117-30-BN**

See complementary piece on page 97, 98, 99, 142, 215 + 216

# PARALLAX BATH + WALL SCONCE




- Front light illumination
- Conversion plate included to accommodate 4" junction box
- 3CCT (2700K/3000K/3500K) selectable switch
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                              | Dimensions |      |      |
|-----------------|------|----------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|-------------------------------------|------------|------|------|
|                 |      |                                        |     |         |         |            |                  |              |              |                                     | L"         | W"   | H"   |
| <b>WS-73118</b> | 18"  | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120 VAC | 6W      | 271        | 189              | ELV<br>0-10V | 54,000 hours | <b>BK</b><br><b>BN</b><br><b>CH</b> | 18.0"      | 1.6" | 2.8" |
| <b>WS-73124</b> | 24"  | <b>-27</b><br><b>-30</b><br><b>-35</b> |     |         |         | 393        | 295              |              |              |                                     | 24.0"      |      |      |

Example: **WS-73118-30-BK**

See complementary piece on page 97, 98, 99, 142, 215 + 216

## PEEKABOO BATH + WALL SCONCE




- Diffused omnidirectional illumination
- Interchangeable center plate, choose from aged brass or brushed nickel
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                       | Dimensions |      |      |
|-----------------|------|-----|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------------|------------|------|------|
|                 |      |     |     |          |         |            |                  |              |                 |                              | L"         | W"   | H"   |
| <b>WS-83422</b> | 22"  | -27 | 90  | 120/277V | 20 W    | 1765       | 1272             | ELV<br>0-10V | 50,000<br>hours | <b>BK/AB</b><br><b>BK/BN</b> | 22.0"      | 1.9" | 4.8" |
| <b>WS-83432</b> | 32"  | -30 |     |          |         |            |                  |              |                 |                              | 32.0"      |      |      |
|                 |      | -35 |     |          |         |            |                  |              |                 |                              |            |      |      |
|                 |      | -40 |     |          |         |            |                  |              |                 |                              |            |      |      |

Example: **WS-83432-30-BK/BN**

## REPOSE BATH + WALL SCONCE

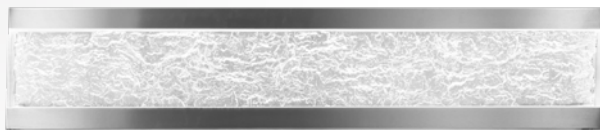

- Clear acrylic diffuser with bark texture interior
- Edge-lit with up and down light
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish    | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|-----------------|-----------|------------|------|------|
|                 |      |       |     |          |         |            |                  |                       |                 |           | L"         | W"   | H"   |
| <b>WS-34027</b> | 27"  | 3500K | 90  | 120-277V | 26W     | 1493       | 1356             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>AL</b> | 27.0"      | 3.4" | 5.9" |
| <b>WS-34037</b> | 37"  |       |     |          | 32W     | 2122       | 1785             |                       |                 |           | 37.0"      |      |      |

Example: **WS-34027-AL**



# STRIP BATH + WALL SCONCE



- Co-extruded clear and white acrylic provides substance, luminosity and optical efficacy
- Conversion plate for 4" junction box included
- Adjustable backplate
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"

| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|------------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|------|
|                 |      |            |     |          |         |            |                  |         |              |           | L"         | W"   | H"   |
| <b>WS-63718</b> | 18"  | <b>-27</b> | 90  | 120-277V | 15W     | 1470       | 1223             | ELV     | 54,000 hours | <b>AL</b> | 18.0"      | 1.6" | 3.0" |
| <b>WS-63724</b> | 24"  | <b>-30</b> |     |          | 20W     | 2002       | 1616             |         |              |           | 24.0"      |      |      |
| <b>WS-63736</b> | 36"  | <b>-35</b> |     |          | 29W     | 3089       | 2407             |         |              |           | 36.0"      |      |      |

Example: **WS-63724-30-AL**

# STYX BATH + WALL SCONCE




- One-directional light with etched acrylic diffuser
- Adjustable backplate
- Conversion plate included to accommodate 4" junction box
- 3CCT (2700K/3000K/3500K) selectable switch
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                 |      |       |     |          |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>WS-41119</b> | 19"  | 2700K | 90  | 120/277V | 16W     | 1247       | 688              | ELV<br>0-10V | 50,000 hours | <b>AL<br/>BK</b> | 18.6"      | 2.5" | 3.0" |
| <b>WS-41125</b> | 25"  | 3000K |     |          | 19W     | 1421       | 824              |              |              |                  | 24.6"      |      |      |
| <b>WS-41137</b> | 37"  | 3500K |     |          | 28W     | 2247       | 1301             |              |              |                  | 36.6"      |      |      |

Example: **WS-41125-BK**

## SVELTE BATH + WALL SCONCE

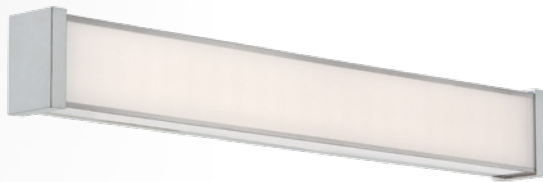


- 5mm thick mitered glass with ceramic glaze
- Conversion plate for 4 inch J box included
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

| Model No.      | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish           | Dimensions |      |      |
|----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|------------------|------------|------|------|
|                |      |       |     |         |         |            |                  |         |              |                  | L"         | W"   | H"   |
| <b>WS-7316</b> | 16"  | 2700K | 90  | 120 VAC | 24.4W   | 2310       | 1134             | ELV     | 80,000 hours | <b>BN<br/>CH</b> | 16.5"      | 2.1" | 3.1" |
| <b>WS-7322</b> | 22"  |       |     |         | 34.2W   | 2980       | 1632             |         |              |                  | 22.5"      |      |      |
| <b>WS-7334</b> | 34"  |       |     |         | 53.5W   | 4852       | 2134             |         |              |                  | 34.5"      |      |      |

Example: **WS-7322-CH**

Special Order: For 3000K add "-30"; 3500K add "-35"; before finish WS-7322-35-CH

## TWO FOLD BATH + WALL SCONCE

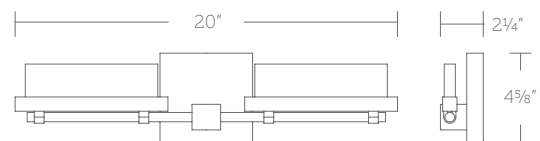

- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish       | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|--------------|------------|------|------|
|                 |      |       |     |          |         |            |                  |              |              |              | L"         | W"   | H"   |
| <b>WS-91420</b> | 20"  | 3000K | 90  | 120/277V | 17 W    | 1800       | 1017             | ELV<br>0-10V | 50,000 hours | <b>BK/AB</b> | 20.0"      | 2.3" | 4.7" |
| <b>WS-91427</b> | 27"  |       |     |          | 19 W    | 2000       | 1162             |              |              |              | 27.0"      |      |      |

Example: **WS-91420-BK/AB**

# VIEW BATH + WALL SCONCE





- Back lit with etched acrylic diffuser
- Conversion plate included to accommodate 4" junction box
- 3CCT (2700K/3000K/3500K) selectable switch
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology

| Model No.       | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|------------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|
|                 |      |            |     |         |         |            |                  |              |              |           | L"         | W"   | H"   |
| <b>WS-89120</b> | 20"  | <b>-27</b> | 90  | 120 VAC | 10W     | 805        | 574              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 20.0"      | 7.0" | 3.0" |
| <b>WS-89128</b> | 28"  | <b>-30</b> |     |         | 16W     | 1412       | 684              |              |              |           | 28.0"      |      |      |

Example: **WS-89120-30-BK**

# VISTA BATH + WALL SCONCE

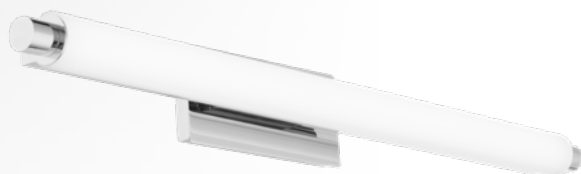

- Adjustable backplate
- Co-extruded clear and white acrylic provides substance, luminosity and optical efficacy
- Spot free linear illumination
- Conversion plate for 4" junction box included
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"   | H"   |
| <b>WS-40720</b> | 20"  | 3000K | 90  | 120-277V | 15W     | 1385       | 1216             | ELV     | 54,000 hours | <b>AL</b> | 20.0"      | 3.0" | 3.0" |
| <b>WS-40726</b> | 26"  |       |     |          | 20W     | 1710       | 1578             |         |              |           | 26.0"      |      |      |

Example: **WS-40720-CH**





A photograph of a modern interior space, likely a hallway or staircase area. On the left, a wooden staircase railing with horizontal slats is visible. Below it, a potted plant with green leaves sits on a surface. The wall is light-colored and features a long, narrow, illuminated rectangular fixture. The lighting is soft and ambient, creating a warm atmosphere. The right side of the image is overlaid with a dark blue-grey semi-transparent box containing white text.

# Indoor Sconces

Groundbreaking innovations in LED, materials engineering, and creative optical design pave the way for endless possibilities for striking wall luminaires. Our sophisticated and compact LED wall fixtures can be paired with your home's distinctive architectural elements while delivering an attractive, ambient glow. Shape the decor of your space with sleek modern pieces perfect for various tasks in simple yet appealing silhouettes.




# HOURLASS

## WALL SCONCE



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Can be mounted on wall in all orientations

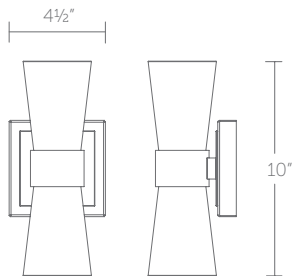

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                              | Dimensions |      |       |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-------------------------------------|------------|------|-------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                                     | L"         | W"   | H"    |
| <b>WS-91510</b> | 10"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 8.5W    | 700        | 531              | ELV<br>TRIAC | 54,000<br>hours | <b>AB</b><br><b>BK</b><br><b>BN</b> | 4.5"       | 4.0" | 10.0" |

Example: **WS-91510-30-BK**

See complementary piece on page 52 + 118





“ Days of Our Lives. Like sand through an hourglass, graceful flared shades are lined with soft white. When illuminated, it casts a warm, diffused glow that accentuates its elegant curves. ”




# LANKY

## WALL SCONCE



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Able to rotate 165 degrees
- Can be mounted on wall in all orientations
- Aluminum Hardware with PC diffuser

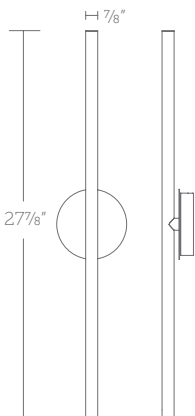


| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |       |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|-------|
|                 |      |                                                      |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"    |
| <b>WS-99527</b> | 27"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 12W     | 900        | 665              | ELV<br>TRIAC | 50,000<br>hours | <b>AB</b><br><b>BK</b> | 0.6"       | 2.2" | 27.0" |

Example: **WS-99527-30-BK**





“ In a long and lean silhouette, a slim bar of light diffuses a warm glow. ”

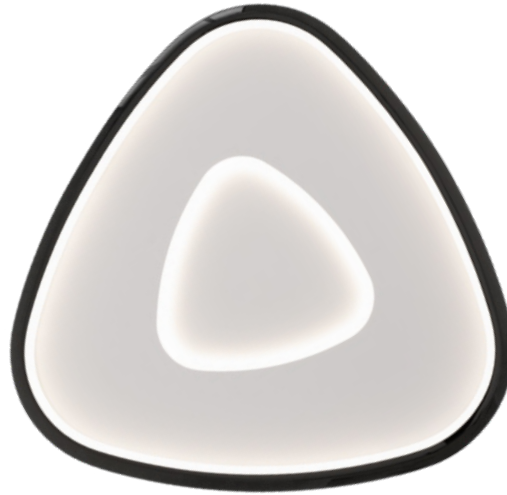


# MANDALA

## WALL SCONCE



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Can be mounted on ceiling or wall in all orientations

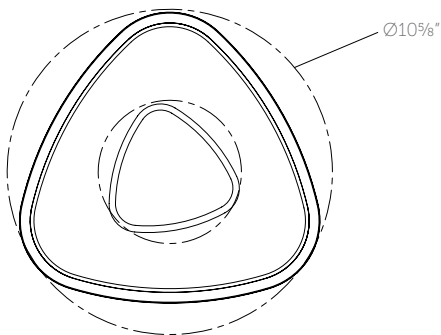

| Model No.       | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish                 | Dimensions |       |      |
|-----------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|------------------------|------------|-------|------|
|                 |      |                                                      |     |          |         |            |                  |                       |                 |                        | L"         | W"    | H"   |
| <b>WS-31524</b> | 24"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120-277V | 55W     | 3569       | 3090             | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>AB</b><br><b>BC</b> | 24.0"      | 24.0" | 2.4" |

Example: **WS-31524-30-AB**







“ Organic in nature, softly formed triangles seem to undulate as they cast a warm glow. ”




# ORBIX

## WALL SCONCE



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Can be mounted on wall in all orientations

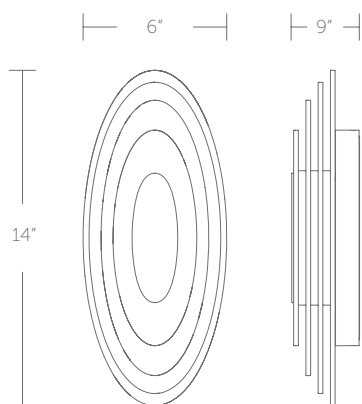

| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |       |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|-------|
|                 |      |                          |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"    |
| <b>WS-67514</b> | 14"  | -27<br>-30<br>-35<br>-40 | 90  | 120-277V | 20W     | 1300       | 971              | ELV<br>TRIAC | 50,000<br>hours | <b>AB</b><br><b>BK</b> | 6.0"       | 2.8" | 14.0" |

Example: **WS-67514-30-AB**







“A smooth, layered design of concentric rings frames a crisp central circle. Its low-profile construction minimizes bright horizontal glare while creating a gentle wall wash around the inner plate.”




# WRAPPE

## WALL SCONCE



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Can be mounted on wall in all orientations

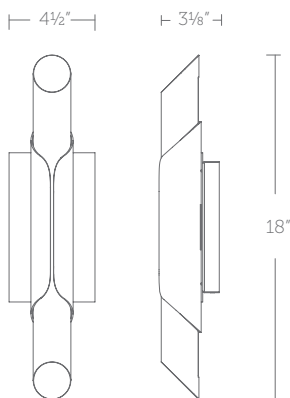

| Model No.       | Size | CCT                                                  | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |       |
|-----------------|------|------------------------------------------------------|-----|---------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|-------|
|                 |      |                                                      |     |         |         |            |                  |              |                 |                        | L"         | W"   | H"    |
| <b>WS-95518</b> | 18"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120 VAC | 15W     | 1300       | 617              | ELV<br>TRIAC | 54,000<br>hours | <b>AB</b><br><b>BK</b> | 4.5"       | 3.1" | 18.0" |

Example: **WS-95518-30-BK**








“ In a beautiful demonstration of form and function, a sleek band of metal wraps a cylinder of LED illumination. ”



## BLAKE WALL SCONCE





- Ambient and downward illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology

| Model No.       | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |       |
|-----------------|------|----------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|------|-------|
|                 |      |                                        |     |         |         |            |                  |              |              |           | L"         | W"   | H"    |
| <b>WS-85212</b> | 12"  | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120 VAC | 17W     | 1300       | 487              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 5.3"       | 3.8" | 12.0" |

Example: **WS-85212-30-BK**

## BLOK WALL SCONCE

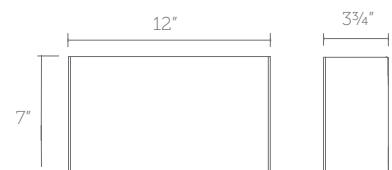

- Up & down light
- Emergency battery back up option (special order) is not title 20 compliant
- For emergency battery backup option, special order adding -EM: WS-25612-BK-EM
- Driver concealed within the fixture


| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                 | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|------------------------|------------|------|------|
|                 |      |       |     |          |         |            |                  |         |              |                        | L"         | W"   | H"   |
| <b>WS-25612</b> | 12"  | 3000K | 90  | 120-277V | 29W     | 1479       | 1162             | ELV     | 70,000 hours | <b>BK</b><br><b>WT</b> | 12.0"      | 3.8" | 7.0" |

Example: **WS-25612-WT**

Special Order: For 2700K add "-27"; 3500K add "-35"; before finish WS-25612-27-WT

For emergency battery, add -EM after the finish: WS-25612-WT-EM

## BOXI WALL SCONCE




- Up and downlight illumination
- 3CCT (2700K/3000K/3500K) selectable switch
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                         | Dimensions |      |      |
|-----------------|------|----------------------------|-----|---------|---------|------------|------------------|--------------|--------------|--------------------------------|------------|------|------|
|                 |      |                            |     |         |         |            |                  |              |              |                                | L"         | W"   | H"   |
| <b>WS-45105</b> | 5"   | <b>-27<br/>-30<br/>-35</b> | 90  | 120 VAC | 6W      | 288        | 116              | ELV<br>0-10V | 54,000 hours | <b>AB<br/>BK<br/>BN<br/>WT</b> | 4.8"       | 3.0" | 4.8" |

Example: **WS-45105-30-BK**

## CAMELOT WALL SCONCE




- Edge-lit LED illumination
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |       |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|------|-------|
|                 |      |       |     |         |         |            |                  |              |              |                  | L"         | W"   | H"    |
| <b>WS-61216</b> | 16"  | 3000K | 90  | 120 VAC | 10W     | 850        | 428              | ELV<br>0-10V | 50,000 hours | <b>AB<br/>BK</b> | 3.8"       | 2.3" | 16.0" |

Example: **WS-61216-AB**

## COLLETTE WALL SCONCE

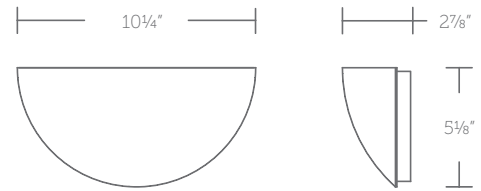


- Directional illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                              | Dimensions |      |      |
|-----------------|------|----------------------------------------|-----|---------|---------|------------|------------------|--------------|-----------------|-------------------------------------|------------|------|------|
|                 |      |                                        |     |         |         |            |                  |              |                 |                                     | L"         | W"   | H"   |
| <b>WS-59210</b> | 10"  | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120 VAC | 15W     | 1000       | 336              | ELV<br>0-10V | 50,000<br>hours | <b>AB</b><br><b>BK</b><br><b>WT</b> | 10.3"      | 2.9" | 5.1" |

Example: **WS-59210-30-AB**

## COLTRANE WALL SCONCE




- Silk screen mitered tempered glass diffuser on the top and frosted glass diffuser on the bottom
- Front and downlight illumination
- 3CCT (2700K/3000K/3500K) selectable switch
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy

| Model No.       | Size | CCT                                    | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |       |
|-----------------|------|----------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|-------|
|                 |      |                                        |     |          |         |            |                  |              |                 |                        | L"         | W"   | H"    |
| <b>WS-43114</b> | 14"  | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120/277V | 13W     | 1367       | 989              | ELV<br>0-10V | 60,000<br>hours | <b>AB</b><br><b>BK</b> | 5.3"       | 4.0" | 13.9" |

Example: **WS-43114-30-BK**



## CORBUSIER WALL SCONCE




- Super white mitered ceramic glazed glass
- Driver installs within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-42618</b> | 18"  | 3000K | 90  | 120-277V | 20W     | 1476       | 827              | ELV     | 85,000 hours | <b>SN</b> | 7.1"       | 3.4" | 15.0" |

Example: **WS-42618-SN**

Special Order: For 2700K add "-27"; 3500K add "-35"; before finish WS-42618-27-SN

## CORNICE WALL SCONCE

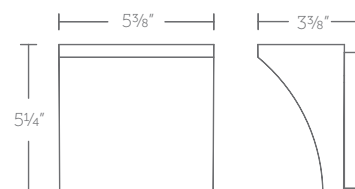


- Up and downlight illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Square canopy with minimal hardware
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|-----------------|------|----------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                 |      |                            |     |         |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>WS-57205</b> | 5"   | <b>-27<br/>-30<br/>-35</b> | 90  | 120 VAC | 15W     | 1200       | 400              | ELV<br>0-10V | 50,000 hours | <b>BK<br/>WT</b> | 5.4"       | 3.6" | 5.3" |

Example: **WS-57205-30-BK**

# CRESCENT WALL SCNCE




- Up and downward illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on wall vertically or upside down

| Model No.       | Size | CCT                                                  | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |       |
|-----------------|------|------------------------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|------|-------|
|                 |      |                                                      |     |         |         |            |                  |              |              |           | L"         | W"   | H"    |
| <b>WS-25410</b> | 10"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120 VAC | 11 W    | 532        | 508              | ELV<br>0-10V | 50,000 hours | <b>AB</b> | 10.0"      | 1.8" | 10.0" |

Example: **WS-25410-30-AB**

See complementary piece on page 81

# DUET WALL SCNCE




- Up and downlight illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |      |      |
|-----------------|------|----------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------------|------------|------|------|
|                 |      |                                        |     |         |         |            |                  |              |              |                        | L"         | W"   | H"   |
| <b>WS-55206</b> | 6"   | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120 VAC | 9.6W    | 1000       | 380              | ELV<br>0-10V | 50,000 hours | <b>BK</b><br><b>WT</b> | 5.5"       | 2.5" | 5.5" |

Example: **WS-55206-30-BK**

# FITZGERALD WALL SCONCE




- Fabric shade with top and bottom etched acrylic diffuser
- 3CCT (2700K/3000K/3500K) selectable switch
- WS-47116 is ADA compliant, low profile design
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |      |       |
|-----------------|------|----------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------------|------------|------|-------|
|                 |      |                                        |     |         |         |            |                  |              |              |                        | L"         | W"   | H"    |
| <b>WS-47108</b> | 8"   | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120 VAC | 13W     | 1100       | 737              | ELV<br>0-10V | 54,000 hours | <b>BK</b><br><b>BN</b> | 8.0"       | 4.1" | 11.0" |
| <b>WS-47116</b> | 16"  | <b>-27</b><br><b>-30</b><br><b>-35</b> |     |         | 16W     | 1400       | 885              |              |              |                        | 16.0"      | 4.0" | 12.0" |

Example: **WS-47108-30-BK**

# GLAMOUR WALL SCONCE





- Front light with opal diffuser
- Built in color temperature adjustability.  
Switch from 2700K/3000K/3500K
- 3CCT switch is installed in the canopy
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                 | Dimensions |      |       |
|-----------------|------|----------------------------------------|-----|---------|---------|------------|------------------|---------|--------------|------------------------|------------|------|-------|
|                 |      |                                        |     |         |         |            |                  |         |              |                        | L"         | W"   | H"    |
| <b>WS-53318</b> | 18"  | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120 VAC | 7W      | 577        | 226              | ELV     | 54,000 hours | <b>AB</b><br><b>BK</b> | 9.0"       | 4.0" | 18.0" |

Example: **WS-53318-30-AB**



## GREET WALL SCONCE




- Light source offers 360 degree rotation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|-----------------|------|------------------------------------|-----|----------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                 |      |                                    |     |          |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>WS-87407</b> | 7"   | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 120/277V | 8 W     | 630        | 488              | ELV<br>0-10V | 50,000 hours | <b>BK<br/>WT</b> | 7.1"       | 2.9" | 7.1" |

Example: **WS-87407-30-WT**

## LAYNE WALL SCONCE

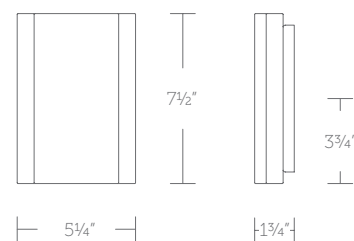


- Up and downlight illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|-----------------|------|----------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                 |      |                            |     |         |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>WS-81208</b> | 8"   | <b>-27<br/>-30<br/>-35</b> | 90  | 120 VAC | 11W     | 648        | 236              | ELV<br>0-10V | 54,000 hours | <b>BK<br/>BN</b> | 5.3"       | 1.8" | 7.5" |

Example: **WS-81208-30-BK**

# MANHATTAN WALL SCONCE



- Trimless fabric shade illuminates evenly
- Etched glass diffuser on the top and below
- Urban elegance and LED illumination softened with a fabric shade.
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology


| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                 | Dimensions |      |       |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|------------------------|------------|------|-------|
|                 |      |       |     |         |         |            |                  |         |              |                        | L"         | W"   | H"    |
| <b>WS-13107</b> | 7"   | 2700K | 90  | 120 VAC | 6W      | 284        | 168              | ELV     | 54,000 hours | <b>BN</b><br><b>BO</b> | 7.4"       | 2.8" | 9.0"  |
| <b>WS-13115</b> | 15"  |       |     |         | 10W     | 566        | 317              |         |              |                        | 15.0"      |      | 10.1" |

Example: **WS-13107-BN**

For 277V add "F" before the finish: WS-13107F-BN

See complementary piece on page 212

# MARISE WALL SCONCE

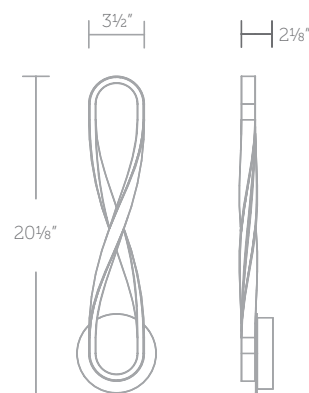


- Omnidirectional diffused illumination
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |      |       |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------------|------------|------|-------|
|                 |      |       |     |          |         |            |                  |              |              |                        | L"         | W"   | H"    |
| <b>WS-79220</b> | 20"  | 3000K | 90  | 120/277V | 11W     | 1000       | 462              | ELV<br>0-10V | 50,000 hours | <b>BK</b><br><b>CH</b> | 5.0"       | 2.1" | 20.1" |

Example: **WS-79220-BK**

See complementary piece on page 93

## MARQUES WALL SCONCE




- Ambient illumination
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |       |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------|------------|------|-------|
|                 |      |       |     |          |         |            |                  |              |              |                  | L"         | W"   | H"    |
| <b>WS-43413</b> | 13"  | 3000K | 90  | 120/277V | 28 W    | 2900       | 1163             | ELV<br>0-10V | 50,000 hours | <b>BK<br/>CH</b> | 13.0"      | 2.1" | 12.6" |

Example: **WS-43413-CH**

See complementary piece on page 94 + 213

## MAVEN WALL SCONCE

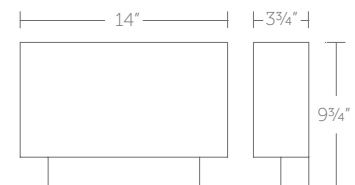


- Front and downlight for close wall illumination
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish           | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|------------------|------------|------|------|
|                 |      |       |     |         |         |            |                  |         |              |                  | L"         | W"   | H"   |
| <b>WS-21014</b> | 14"  | 3000K | 90  | 120 VAC | 23 W    | 1800       | 992              | ELV     | 60,000 hours | <b>BK<br/>BN</b> | 14.0"      | 3.8" | 9.8" |

Example: **WS-21014-BK**

# MOONGLOW WALL SCONCE




- Light source offers 360 degree rotation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT                                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|-----------------|------|------------------------------------|-----|----------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                 |      |                                    |     |          |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>WS-85407</b> | 7"   | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 120/277V | 8 W     | 619        | 446              | ELV<br>0-10V | 50,000 hours | <b>BK<br/>WT</b> | 7.1"       | 2.9" | 7.1" |

Example: **WS-85407-30-BK**

# MYTHICAL WALL SCONCE



- One-inch thick solid crystal with bubbles
- Up & down light
- Junction box conceals a proprietary universal 120V-220V-277V driver (12")
- ACLED driverless technology (13", 18" & 24") with 277V special order
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                 |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-12718</b> | 18"  | 3000K | 90  | 120 VAC | 16W     | 771        | 418              | ELV     | 54,000 hours | <b>PN</b> | 5.5"       | 2.3" | 18.0" |

Example: **WS-12718-PN**


For 277V, add "F" before the finish: WS-12718F-PN



## NOUVEAU WALL SCONCE



- Edge lit with etched acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

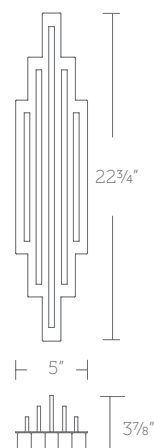


| Model No.       | Size | CCT                                    | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|----------------------------------------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|------|
|                 |      |                                        |     |          |         |            |                  |         |              |           | L"         | W"   | H"   |
| <b>WS-65323</b> | 23"  | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120/277V | 27W     | 2050       | 875              | ELV     | 50,000 hours | <b>BK</b> | 22.8"      | 3.9" | 5.0" |

Example: **WS-65323-30-BK**

## OGLE WALL SCONCE




- Omnidirectional illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on wall vertically or upside down

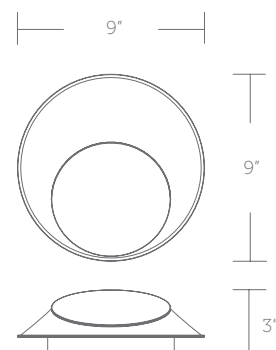

| Model No.       | Size | CCT                                                  | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|------------------------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|
|                 |      |                                                      |     |         |         |            |                  |              |              |           | L"         | W"   | H"   |
| <b>WS-93409</b> | 9"   | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120 VAC | 22 W    | 2180       | 820              | ELV<br>0-10V | 64,000 hours | <b>BK</b> | 9.0"       | 3.0" | 9.0" |

Example: **WS-93409-30-BK**

## POCKET WALL SCONCE




- Up and down illumination
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                         | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|--------------------------------|------------|------|------|
|                 |      |       |     |         |         |            |                  |         |              |                                | L"         | W"   | H"   |
| <b>WS-30907</b> | 7"   | 3000K | 90  | 120 VAC | 22W     | 1018       | 649              | ELV     | 50,000 hours | <b>AB<br/>BK<br/>BN<br/>WT</b> | 7.0"       | 2.9" | 5.6" |

Example: **WS-30907-BN**

## ROLAND WALL SCONCE

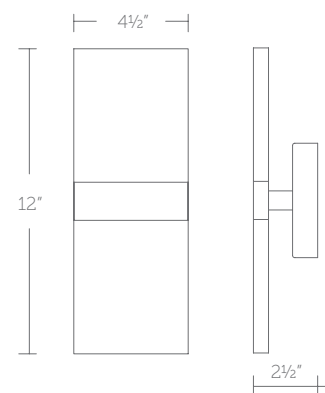


- Up and downlight illumination
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |       |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|-------|
|                 |      |       |     |          |         |            |                  |              |              |           | L"         | W"   | H"    |
| <b>WS-83212</b> | 12"  | 3000K | 90  | 120/277V | 15W     | 1103       | 680              | ELV<br>0-10V | 54,000 hours | <b>BK</b> | 4.5"       | 2.5" | 12.0" |

Example: **WS-83212-BK**

## SALTAIRE WALL SCONCE

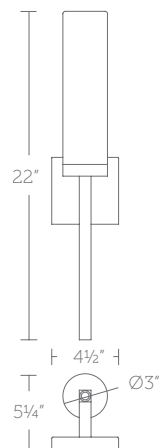


- Ambient and downlight with opal glass diffuser
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |       |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|-------|
|                 |      |       |     |          |         |            |                  |              |              |           | L"         | W"   | H"    |
| <b>WS-63322</b> | 22"  | 3000K | 90  | 120/277V | 20W     | 2135       | 1309             | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 4.5"       | 5.3" | 22.0" |

Example: **WS-63322-BK**

## SOLITAIRE WALL SCONCE



- Omnidirectional illumination
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |       |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------|------------|------|-------|
|                 |      |       |     |          |         |            |                  |              |              |                  | L"         | W"   | H"    |
| <b>WS-21413</b> | 13"  | 3000K | 90  | 120/277V | 14 W    | 1159       | 546              | ELV<br>0-10V | 50,000 hours | <b>AB<br/>BK</b> | 8.1"       | 3.1" | 13.1" |


Example: **WS-21413-AB**

See complementary piece on page 104

# TUSK WALL SCONCE



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy

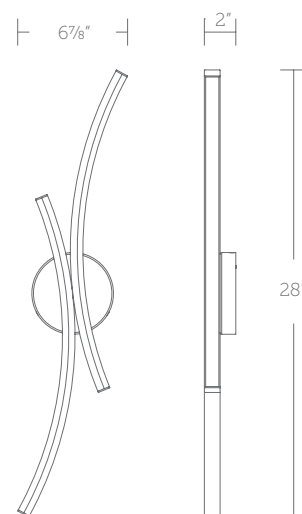

| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish           | Dimensions |      |      |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|------------------|------------|------|------|
|                 |      |                          |     |          |         |            |                  |              |                 |                  | L"         | W"   | H"   |
| <b>WS-29428</b> | 28"  | -27<br>-30<br>-35<br>-40 | 90  | 120/277V | 15 W    | 1253       | 670              | ELV<br>0-10V | 50,000<br>hours | <b>BK<br/>BN</b> | 28.0"      | 2.0" | 6.9" |


Example: **WS-29428-30-BN**

See complementary piece on page 108

# VESPERE WALL SCONCE



- Edge and back lit illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy



| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |       |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|-------|
|                 |      |                          |     |          |         |            |                  |              |                 |           | L"         | W"   | H"    |
| <b>WS-63412</b> | 12"  | -27<br>-30<br>-35<br>-40 | 90  | 120/277V | 12 W    | 1260       | 756              | ELV<br>0-10V | 50,000<br>hours | <b>BK</b> | 12.0"      | 3.0" | 12.0" |


Example: **WS-63412-30-BK**



## VOLGA WALL SCONCE




- Heathered greige fabric shade with etched acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy

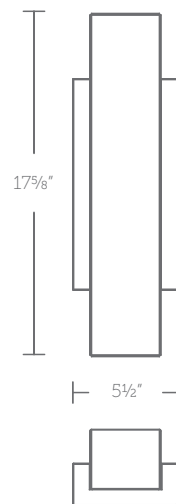

| Model No.       | Size | CCT                        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|-----------------|------|----------------------------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                 |      |                            |     |          |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-55318</b> | 18"  | <b>-27<br/>-30<br/>-35</b> | 90  | 120/277V | 19W     | 2146       | 630              | ELV     | 54,000 hours | <b>BK</b> | 5.5"       | 3.9" | 17.6" |

Example: **WS-55318-30-BK**

## VORNADO WALL SCONCE



- Hand-crafted, asymmetric & seamless construction, variation expected
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |       |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------|------------|------|-------|
|                 |      |       |     |          |         |            |                  |              |              |                  | L"         | W"   | H"    |
| <b>WS-84911</b> | 11"  | 3000K | 90  | 120/277V | 28 W    | 2900       | 1489             | ELV<br>0-10V | 50,000 hours | <b>BK<br/>CH</b> | 11.5"      | 5.8" | 10.8" |

Example: **WS-84911-BK**

See complementary piece on page 18, 110 + 111









# Task + Bedside

Both decorative and functional, dweLED swing arm luminaires make a stylish addition to a bedside or living area. Exuding ageless beauty and timeless charm, modern and retro designs boast metal wall mounts supporting an articulating arm, integral driver and convenient fingertip touch dimming. Our ADA compliant, energy efficient LED sconces are visually appealing, brilliant and engaging—the perfect choice for use in private and public spaces.






# FLAPP

## TASK LIGHT



- Fingertip touch on/off switch for dimming and 4CCT
- USB/USB-C port for charging

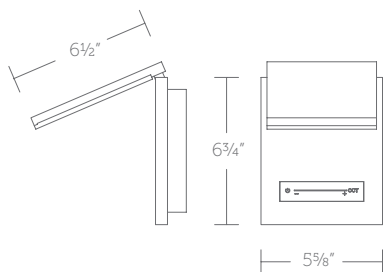

| Model No.       | Size | CCT                              | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                 | Dimensions |      |      |
|-----------------|------|----------------------------------|-----|---------|---------|------------|------------------|---------|--------------|------------------------|------------|------|------|
|                 |      |                                  |     |         |         |            |                  |         |              |                        | L"         | W"   | H"   |
| <b>BL-75506</b> | 6"   | 2700K<br>3000K<br>3500K<br>4000K | 90  | 120 VAC | 7W      | 200        | 113              | N/A     | 50,000 hours | <b>BK</b><br><b>BN</b> | 5.5"       | 1.8" | 6.5" |

Example: **BL-75506-BK**



“ Multi-Tasker. This task light offers a rotatable plane of illumination, USB and type C charging ports and a touch on-off switch for the ultimate in convenience. ”






# FLIPSIDE

## TASK LIGHT



- Fingertip touch on/off switch and dimming on the canopy
- USB/USB-C port for charging
- Light source is 330 degree horizontally and 110 degree vertically rotatable
- Can be mounted on wall in all orientations

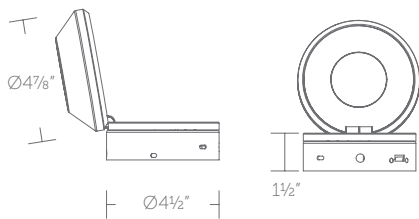

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                                           | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|--------------------------------------------------|------------|------|------|
|                 |      |       |     |         |         |            |                  |         |              |                                                  | L"         | W"   | H"   |
| <b>BL-13505</b> | 5"   | 3000K | 90  | 120 VAC | 13W     | 664        | 479              | N/A     | 54,000 hours | <b>AB</b><br><b>BK</b><br><b>BN</b><br><b>WT</b> | 4.9"       | 3.1" | 4.9" |

Example: **BL-13505-AB**



*“ Compact. This rotatable disc has a dual design. When closed, a front light offers ambient illumination. When opened the disc casts focused down light. ”*






# MANTEL

## TASK LIGHT



- Fingertip touch for on/off, dimming and 4CCT selection
- USB/USB-C port for charging

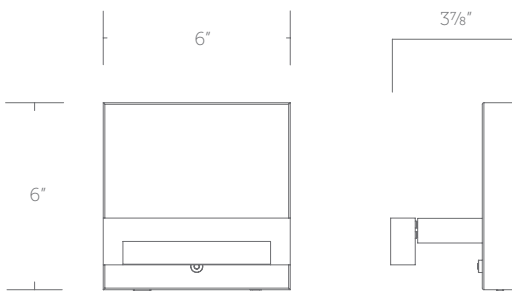

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                              | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-------------------------------------|------------|------|------|
|                 |      |       |     |          |         |            |                  |         |              |                                     | L"         | W"   | H"   |
| <b>BL-19506</b> | 6"   | 2700K | 90  | 120/277V | 11.6W   | 419        | 293              | N/A     | 50,000 hours | <b>AB</b><br><b>BK</b><br><b>BN</b> | 6.0"       | 3.9" | 6.0" |
|                 |      | 3000K |     |          |         |            |                  |         |              |                                     |            |      |      |
|                 |      | 3500K |     |          |         |            |                  |         |              |                                     |            |      |      |
|                 |      | 4000K |     |          |         |            |                  |         |              |                                     |            |      |      |

Example: **BL-19506-BK**



“ A shelf-like arm rotates as desired, delivering ample down lighting or angled spots of light from the adjustable shade. ”







# REED

## PICTURE LIGHT



- Light source rotates 150 degrees
- Simple, elegant slim profile design
- Conversion plate for 4" J box included
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver concealed within the canopy

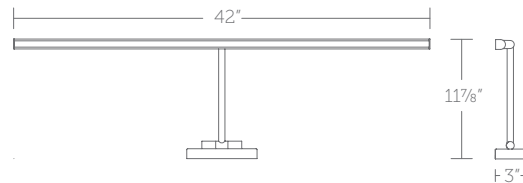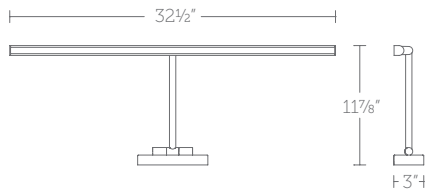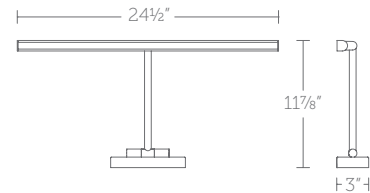

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish                                    | Dimensions |       |       |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|-------------------------------------------|------------|-------|-------|
|                 |      |       |     |          |         |            |                  |                 |              |                                           | L"         | W"    | H"    |
| <b>PL-11017</b> | 17"  | 3000K | 90  | 120-277V | 18W     | 569        | 380              | ELV TRIAC 0-10V | 50,000 hours | <b>AB (NEW)</b><br><b>BK</b><br><b>BN</b> | 16.5"      | 11.9" | 3.0"  |
| <b>PL-11025</b> | 25"  |       |     |          | 21W     | 825        | 544              |                 |              |                                           | 24.5"      |       |       |
| <b>PL-11033</b> | 33"  |       |     |          | 28W     | 1072       | 747              |                 |              |                                           | 32.5"      |       |       |
| <b>PL-11042</b> | 42"  |       |     |          | 30W     | 1618       | 1000             |                 |              |                                           | 42.0"      | 42.0" | 11.9" |

Example: **PL-11025-BN**






“ A rectangular wall mount and slender retention arm holds a slim LED diffuser strip, ensuring an even, well-distributed glow. ”



## ARNE SWING ARM

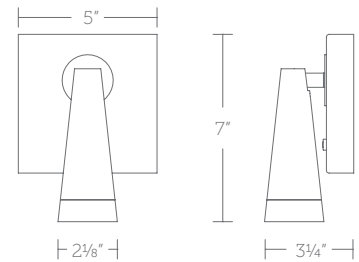


- Fingertip touch on/off switch and dimming on the canopy
- Light source offers 330 degree horizontal rotation and a 90 degree vertical tilt
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage     | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                 | Dimensions |      |      |
|-----------------|------|-------|-----|-------------|---------|------------|------------------|---------|--------------|------------------------|------------|------|------|
|                 |      |       |     |             |         |            |                  |         |              |                        | L"         | W"   | H"   |
| <b>BL-48007</b> | 7"   | 3000K | 90  | 100-240 VAC | 9W      | 416        | 179              | N/A     | 50,000 hours | <b>BK/AB<br/>BK/BN</b> | 5.0"       | 3.3" | 6.8" |

Example: **BL-48007-BK/BN**

## CHELSEA SWING ARM

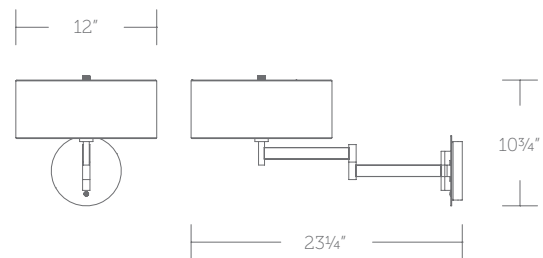


- Fabric shade with etched acrylic diffuser
- Articulated arm frictions into place
- Fingertip touch on/off switch and dimming on the canopy
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage     | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |       |
|-----------------|------|-------|-----|-------------|---------|------------|------------------|---------|--------------|-----------|------------|-------|-------|
|                 |      |       |     |             |         |            |                  |         |              |           | L"         | W"    | H"    |
| <b>BL-83023</b> | 23"  | 3000K | 90  | 100-240 VAC | 8W      | 1000       | 499              | N/A     | 50,000 hours | <b>BN</b> | 23.3"      | 12.0" | 10.8" |

Example: **BL-83023-BN**

# DUPLEX TASK LIGHT



- On/off toggle switch on the canopy
- Light source offers 330 degree horizontal rotation and a 90 degree vertical rotation
- USB port on the bottom of the canopy for charging
- Driver concealed within the canopy




USB port on the bottom of the canopy for charging

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                              | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-------------------------------------|------------|------|------|
|                 |      |       |     |         |         |            |                  |         |              |                                     | L"         | W"   | H"   |
| <b>BL-67305</b> | 5"   | 3000K | 90  | 120 VAC | 8W      | 1050       | 315              | N/A     | 54,000 hours | <b>AB</b><br><b>BK</b><br><b>BN</b> | 5.0"       | 6.3" | 5.3" |

Example: **BL-67305-BK**

# ELBO SWING ARM

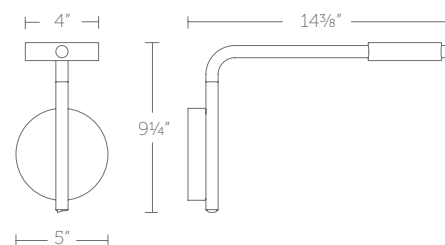

- On/off toggle switch on the bottom of the rod
- USB port on the bottom of the canopy for charging
- Light source offers 230 degree rotation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy



USB port on the bottom of the canopy for charging

On/off toggle switch at the base of the arm

| Model No.       | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                 | Dimensions |      |      |
|-----------------|------|----------------------------------------|-----|---------|---------|------------|------------------|---------|--------------|------------------------|------------|------|------|
|                 |      |                                        |     |         |         |            |                  |         |              |                        | L"         | W"   | H"   |
| <b>BL-73314</b> | 14"  | <b>-27</b><br><b>-30</b><br><b>-35</b> | 90  | 120V    | 8W      | 1210       | 363              | N/A     | 54,000 hours | <b>BK</b><br><b>WT</b> | 14.4"      | 5.0" | 9.3" |

Example: **BL-73314-30-WT**

## FLIP SWING ARM



- Bauhaus-style geometry in a left and right paired design
- Fingertip touch dimming on head
- 8 foot cord included for hard-wired and portable installation
- Two 12 inch cord covers included
- Driver concealed within the fixture

| Model No.       | Size | CCT   | CRI | Voltage     | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                  | Dimensions |      |      |
|-----------------|------|-------|-----|-------------|---------|------------|------------------|---------|--------------|-------------------------|------------|------|------|
|                 |      |       |     |             |         |            |                  |         |              |                         | L"         | W"   | H"   |
| <b>BL-1021R</b> | 22"  | 3000K | 85  | 100-240 VAC | 9W      | 489        | 315              | N/A     | 30,000 hours | <b>BK<br/>BZ<br/>TT</b> | 22.0"      | 4.5" | 4.5" |
| <b>BL-1021L</b> |      |       |     |             |         |            |                  |         |              |                         |            |      |      |

Example: **BL-1021R-TT**

## HEMMINGWAY PICTURE LIGHT





- Chronophoto™ Technology preserves artwork while providing vibrant color rendering
- Head rotates 90 degree up or down and extends out 14 1/2" from mounting surface
- For portable models, 8 foot cord & plug with 18 inch wire cover in matching finish included
- Transformer installs within the Junction Box, transformer dimension: 2.00" x 1.38" x 1.02"

| Model No.       | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                  | Dimensions |       |      |
|-----------------|------|------------|-----|---------|---------|------------|------------------|---------|--------------|-------------------------|------------|-------|------|
|                 |      |            |     |         |         |            |                  |         |              |                         | L"         | W"    | H"   |
| <b>PL-LED14</b> | 14"  | <b>-27</b> | 90  | 120 VAC | 9W      | 595        | 302              | ELV     | 70,000 hours | <b>BB<br/>PN<br/>RB</b> | 14.0"      | 10.2" | 5.1" |
| <b>PL-LED24</b> | 24"  |            |     |         | 17W     | 1186       | 605              |         |              |                         | 24.9"      | 14.5" |      |

Example: **PL-LED24-27-PN**



# HUDSON PICTURE LIGHT




- Conserves artwork while providing vibrant color rendering
- Head rotates 90 degree up or down
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish                 | Dimensions |       |      |
|-----------------|------|------------|-----|----------|---------|------------|------------------|-----------------------|-----------------|------------------------|------------|-------|------|
|                 |      |            |     |          |         |            |                  |                       |                 |                        | L"         | W"    | H"   |
| <b>PL-LED17</b> | 17"  | <b>-30</b> | 90  | 120-277V | 14W     | 1125       | 811              | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>AB</b><br><b>BK</b> | 17.0"      | 12.6" | 3.1" |
| <b>PL-LED23</b> | 23"  |            |     |          | 18W     | 1490       | 1078             |                       |                 |                        | 24.0"      |       |      |
| <b>PL-LED34</b> | 34"  |            |     |          | 24W     | 1992       | 1500             |                       |                 |                        | 34.0"      |       |      |

Example: **PL-LED34-30-AB**

# KEPLER SWING ARM

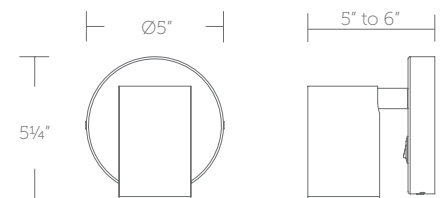


- On/off toggle switch on the canopy
- USB port on the bottom of the canopy for charging
- Light source offers 330 degree horizontal rotation and a 90 degree vertical tilt
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life      | Finish                                           | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|-----------------|--------------------------------------------------|------------|------|------|
|                 |      |       |     |          |         |            |                  |         |                 |                                                  | L"         | W"   | H"   |
| <b>BL-21205</b> | 5"   | 3000K | 90  | 120-277V | 8W      | 357        | 112              | N/A     | 80,000<br>hours | <b>AB</b><br><b>BK</b><br><b>BN</b><br><b>WT</b> | 5.0"       | 4.6" | 5.3" |

Example: **BL-21205-WT**

## LOYD SWING ARM

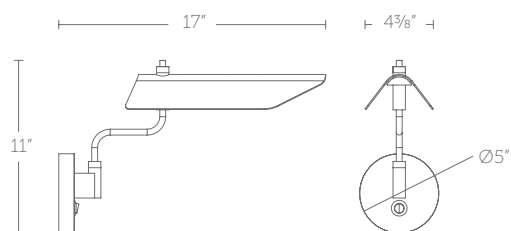


- On/off toggle switch on the canopy
- Light source offers 180 degree rotation
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish       | Dimensions |      |       |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|--------------|------------|------|-------|
|                 |      |       |     |          |         |            |                  |         |              |              | L"         | W"   | H"    |
| <b>BL-69317</b> | 17"  | 3000K | 90  | 120/277V | 11W     | 832.2      | 486              | N/A     | 50,000 hours | <b>BK/AB</b> | 17.0"      | 5.0" | 11.0" |

Example: **BL-69317-BK/AB**

## PIN UP SWING ARM

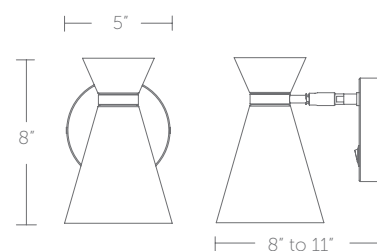


- On/off toggle switch on the canopy
- Light source is 330 degree horizontally and 90 degree vertically rotatable
- ACLED driverless technology

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish       | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|--------------|------------|------|------|
|                 |      |       |     |         |         |            |                  |              |              |              | L"         | W"   | H"   |
| <b>BL-57108</b> | 8"   | 3000K | 90  | 120 VAC | 11W     | 823        | 133              | ELV<br>0-10V | 54,000 hours | <b>BK/AB</b> | 5.3"       | 8.0" | 8.0" |

Example: **BL-57108-BK/AB**

See complementary piece on page 62

## SCOPE SWING ARM




- Fingertip touch on/off switch and dimming on the fixture
- Light source offers 330 degree horizontal rotation
- Fits 2" x 4" vertical switch box with conversion plate provided
- Surface mount or recessed mount
- 8 ft cord included for hard-wired and portable installation
- Driver concealed within the fixture

| Model No.       | Size | CCT   | CRI | Voltage     | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                  | Dimensions |      |      |
|-----------------|------|-------|-----|-------------|---------|------------|------------------|---------|--------------|-------------------------|------------|------|------|
|                 |      |       |     |             |         |            |                  |         |              |                         | L"         | W"   | H"   |
| <b>BL-29903</b> | 3"   | 3000K | 90  | 120-240 VAC | 9W      | 465        | 148              | N/A     | 50,000 hours | <b>BK<br/>BN<br/>WT</b> | 3.0"       | 7.0" | 2.9" |

Example: **BL-29903-BK**

## SPRIG SWING ARM

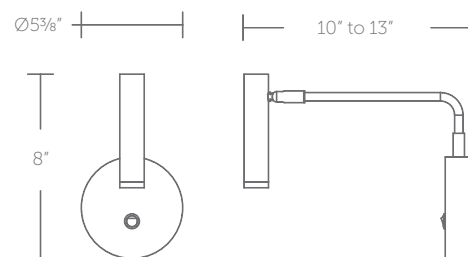


- On/off toggle switch on the canopy
- USB port on the bottom of the canopy for charging
- Arm offers 180 degree horizontal rotation
- Light source offers 300 degree horizontal rotation and a 180 degree vertical tilt
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                  | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|-------------------------|------------|------|------|
|                 |      |       |     |         |         |            |                  |              |              |                         | L"         | W"   | H"   |
| <b>BL-23210</b> | 10"  | 3000K | 90  | 120 VAC | 5W      | 400        | 286              | ELV<br>0-10V | 50,000 hours | <b>BK<br/>BN<br/>WT</b> | 4.4"       | 9.9" | 8.0" |

Example: **BL-23210-WT**

## STRETCH SWING ARM

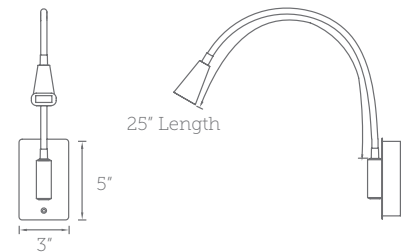


- Flexible rubber tube for aiming
- Fingertip touch dimming on head
- 8 foot cord included for hard-wired and portable installation
- Conversion plate for 4" junction box included
- Driver concealed within the canopy

| Model No.      | Size | CCT   | CRI | Voltage     | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                  | Dimensions |      |       |
|----------------|------|-------|-----|-------------|---------|------------|------------------|---------|--------------|-------------------------|------------|------|-------|
|                |      |       |     |             |         |            |                  |         |              |                         | L"         | W"   | H"    |
| <b>BL-1630</b> | 29"  | 3000K | 90  | 100-240 VAC | 8W      | 489        | 260              | N/A     | 30,000 hours | <b>BK<br/>TT<br/>WT</b> | 3.1"       | 2.1" | 28.8" |

Example: **BL-1630-BK**

## UPTOWN PICTURE LIGHT

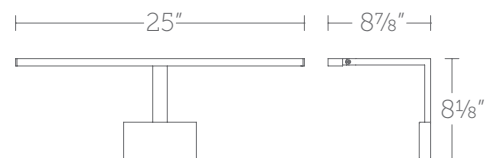


- Light source rotates 180 degrees
- Slim profile, contemporary design
- Conversion plate for 4" J box included
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming         | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------|--------------|-----------|------------|------|------|
|                 |      |       |     |          |         |            |                  |                 |              |           | L"         | W"   | H"   |
| <b>PL-S2017</b> | 17"  | 3000K | 90  | 120-277V | 13W     | 1048       | 883              | ELV TRIAC 0-10V | 50,000 hours | <b>BK</b> | 17.0"      | 8.9" | 8.1" |
| <b>PL-S2025</b> | 25"  |       |     |          | 16W     | 1326       | 926              |                 |              |           | 25.0"      |      |      |
| <b>PL-S2034</b> | 34"  |       |     |          | 25W     | 1772       | 1329             |                 |              |           | 34.0"      |      |      |

Example: **PL-S2025-BK**



# VIBE PICTURE LIGHT

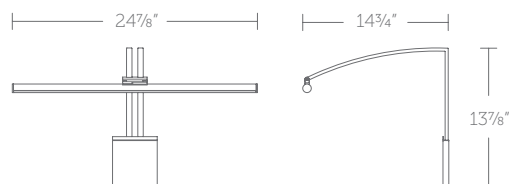


- Chronophoto™ Technology conserves artwork while providing vibrant color rendering
- Head rotates 35 degree up or down
- 110 degree beam angle
- Transformer installs within the Junction Box, transformer dimension: 2.0" x 1.4" x 1.0"


| Model No.       | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |       |
|-----------------|------|------------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|-------|-------|
|                 |      |            |     |         |         |            |                  |         |              |           | L"         | W"    | H"    |
| <b>PL-LED15</b> | 15"  | <b>-27</b> | 90  | 120 VAC | 10W     | 595        | 240              | ELV     | 70,000 hours | <b>BK</b> | 15.0"      | 15.0" | 14.0" |
| <b>PL-LED25</b> | 25"  |            |     |         | 17W     | 1186       | 535              |         |              |           | 25.0"      |       |       |
| <b>PL-LED37</b> | 37"  |            |     |         | 26W     | 1785       | 850              |         |              |           | 37.0"      |       |       |

Example: **PL-LED25-27-BK**

# WINK TASK LIGHT



- On/off toggle switch on the bottom of the canopy
- USB-C port on the bottom of the canopy for charging
- Light source offers 360 degree rotation
- Top and bottom illumination
- Driver concealed within the canopy




| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                 |      |       |     |         |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>BL-47406</b> | 6"   | 3000K | 90  | 120 VAC | 13 W    | 461        | 392              | ELV<br>0-10V | 50,000 hours | <b>BK<br/>WT</b> | 6.3"       | 3.9" | 6.3" |

Example: **BL-47406-WT**





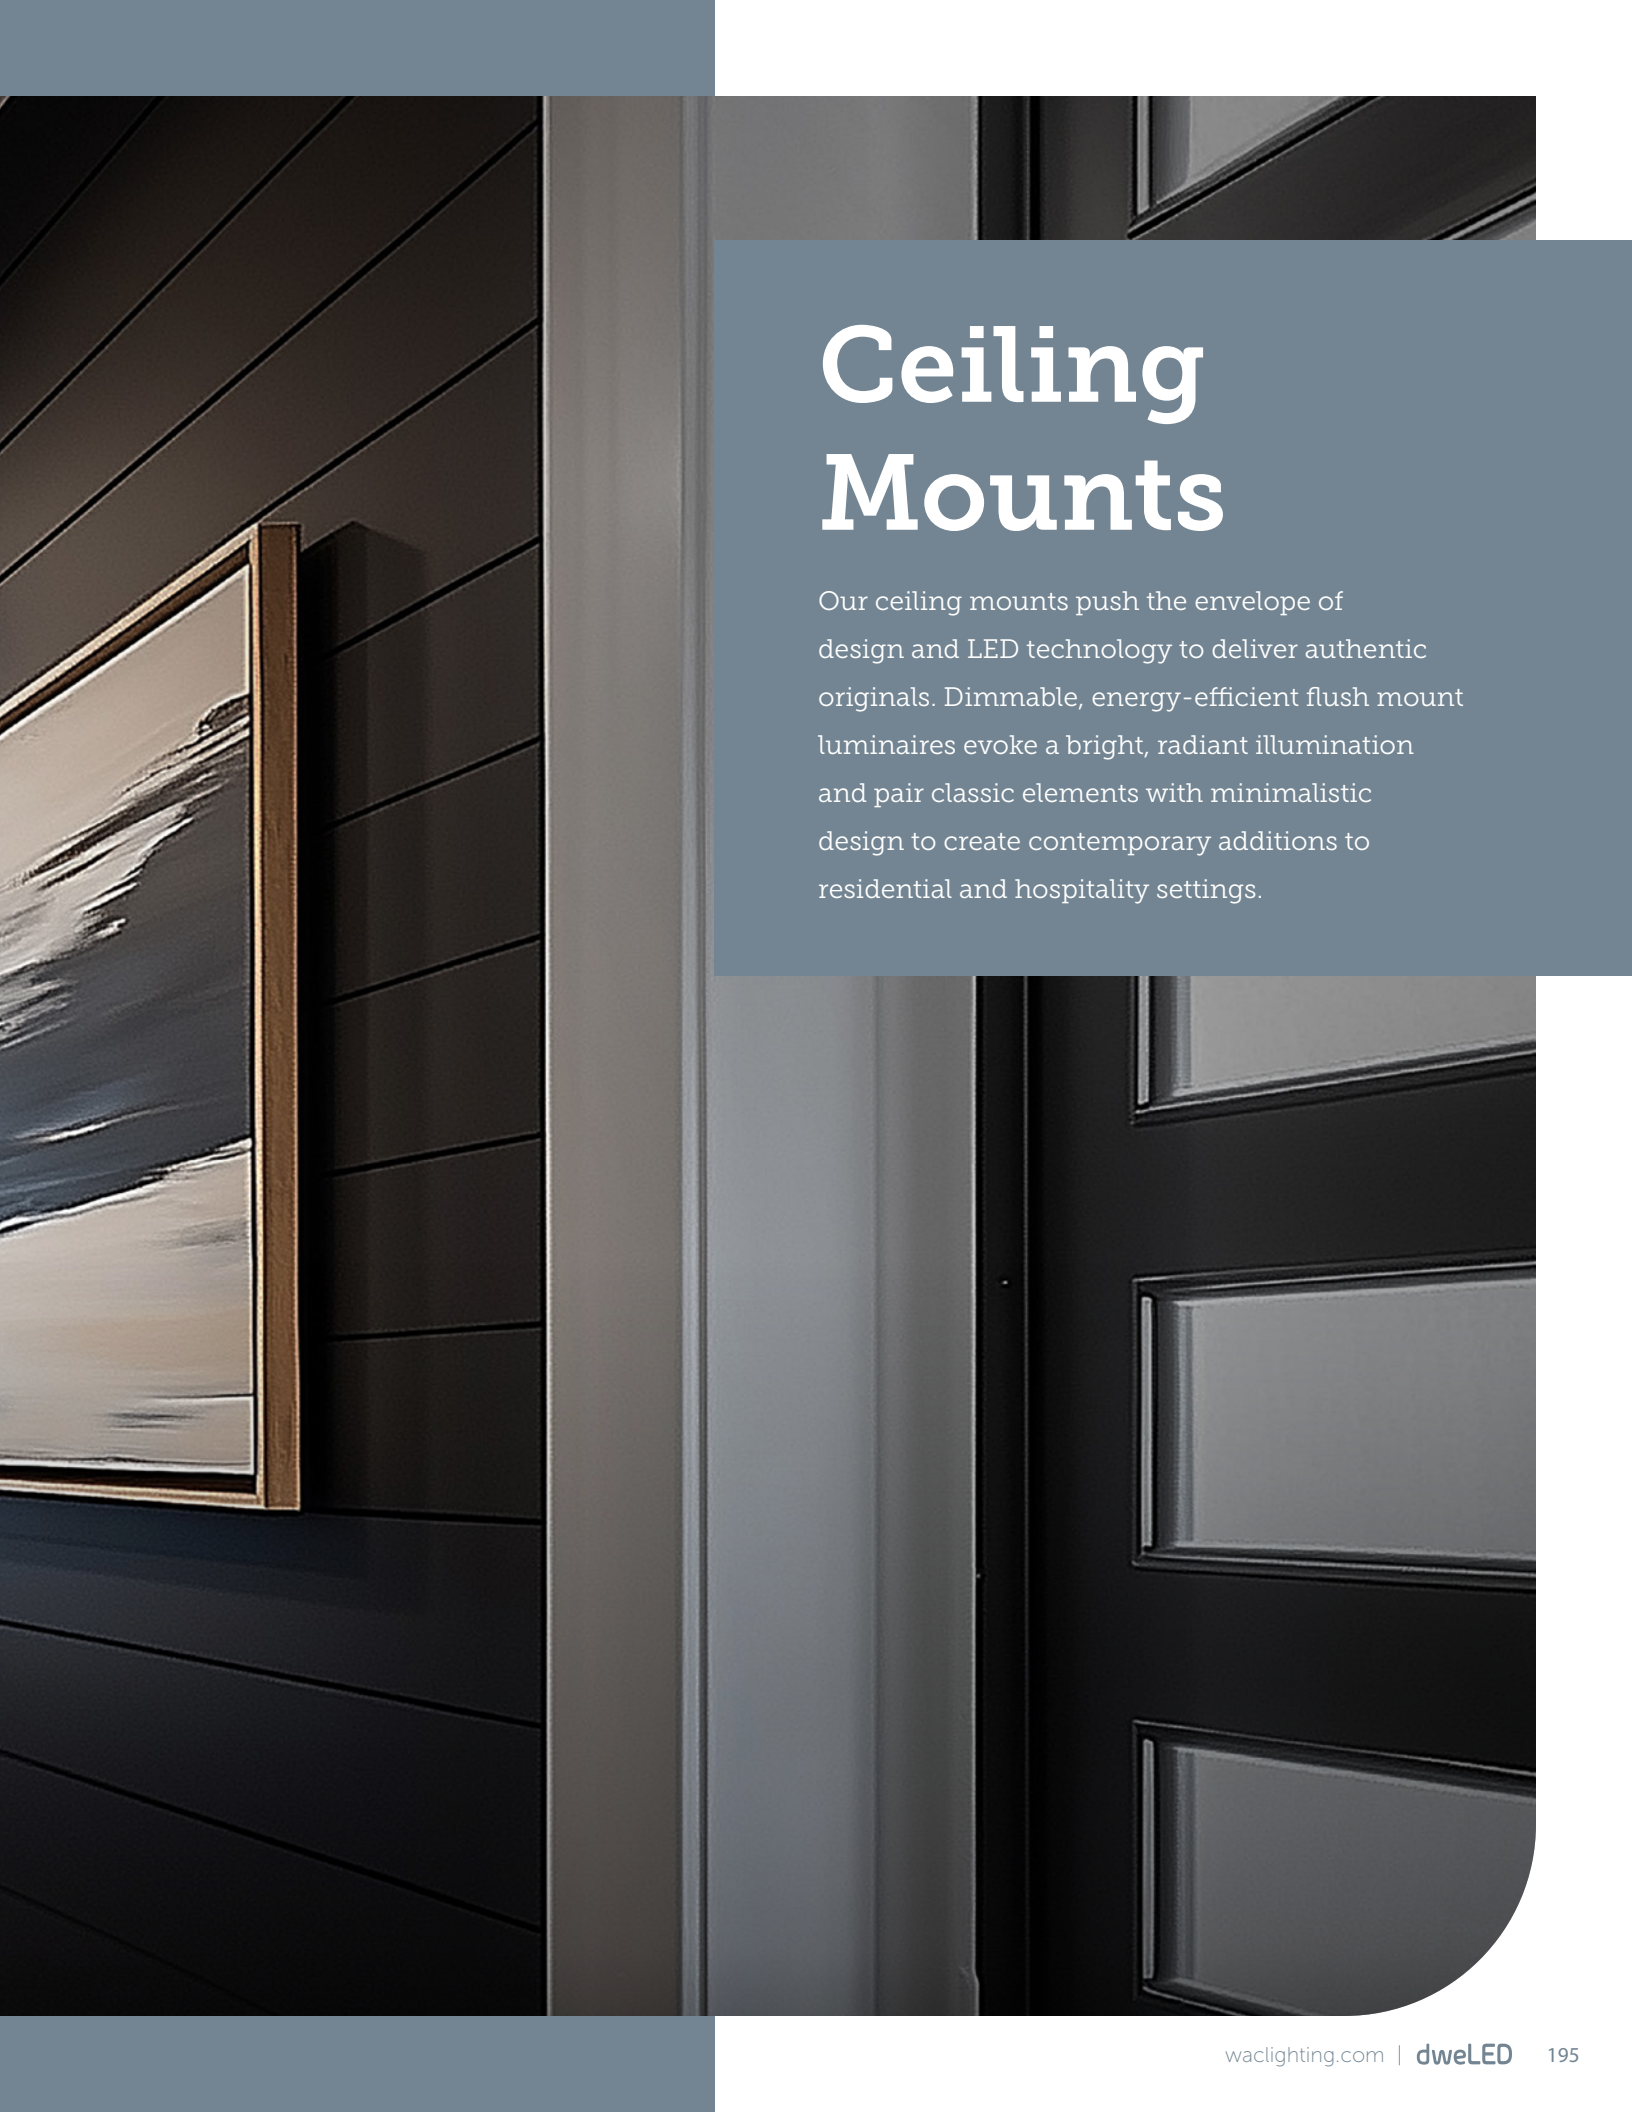

# Ceiling Mounts

Our ceiling mounts push the envelope of design and LED technology to deliver authentic originals. Dimmable, energy-efficient flush mount luminaires evoke a bright, radiant illumination and pair classic elements with minimalistic design to create contemporary additions to residential and hospitality settings.




# DOMA

## CEILING MOUNT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Featuring an opaline outer glass and opal inner glass
- ACLED driverless technology

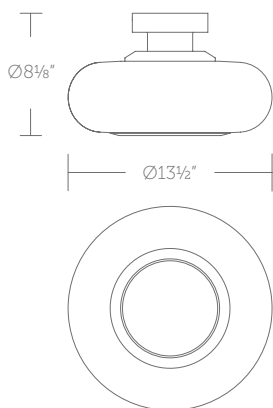

| Model No.       | Size | CCT                      | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |       |      |
|-----------------|------|--------------------------|-----|---------|---------|------------|------------------|--------------|-----------------|-----------|------------|-------|------|
|                 |      |                          |     |         |         |            |                  |              |                 |           | L"         | W"    | H"   |
| <b>FM-48513</b> | 13"  | -27<br>-30<br>-35<br>-40 | 90  | 120V    | 15W     | 1250       | 1046             | ELV<br>TRIAC | 50,000<br>hours | <b>BK</b> | 13.5"      | 13.5" | 8.2" |

Example: **FM-48513-30-BK**

See complementary piece on page 40





“ Inner Light. A thick etched glass cylinder inside an opaline glass orb creates a luminous space for light and shadow to play across. ”




# GRILLE

## CEILING MOUNT



- Construction: Metal Hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field

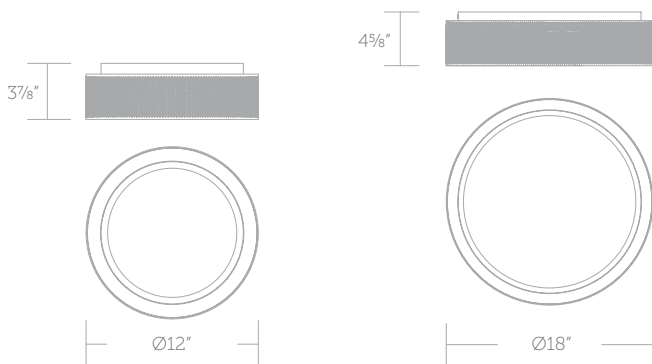

| Model No.       | Size | CCT        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish       | Dimensions |       |      |
|-----------------|------|------------|-----|----------|---------|------------|------------------|-----------|--------------|--------------|------------|-------|------|
|                 |      |            |     |          |         |            |                  |           |              |              | L"         | W"    | H"   |
| <b>FM-57512</b> | 12"  | <b>-27</b> | 90  | 120-277V | 21W     | 1061       | 645              | ELV TRIAC | 50,000 hours | <b>AB BK</b> | 12.0"      | 12.0" | 3.6" |
|                 |      | <b>-30</b> |     |          |         |            |                  |           |              |              |            |       |      |
|                 |      | <b>-35</b> |     |          |         |            |                  |           |              |              |            |       |      |
| <b>FM-57518</b> | 18"  | <b>-40</b> |     |          | 34W     | 2144       | 1486             |           |              |              | 18.0"      | 18.0" | 4.4" |

Example: **FM-57518-30-AB**

See complementary piece on page 44





“ A perforated metal shade offers additional visual interest from tiny pinpoints of illumination. Its frosted glass diffuser casts a lovely downward glow. ”




# PARTHENON

NEW

## CEILING MOUNT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Downlight with halo uplight
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

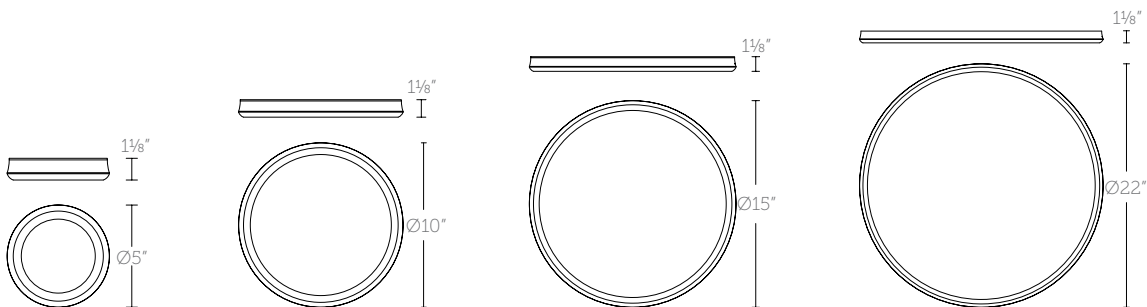


| Model No.       | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                                           | Dimensions |       |      |
|-----------------|------|------------|-----|---------|---------|------------|------------------|--------------|-----------------|--------------------------------------------------|------------|-------|------|
|                 |      |            |     |         |         |            |                  |              |                 |                                                  | L"         | W"    | H"   |
| <b>FM-37505</b> | 5"   | <b>-27</b> | 90  | 120 VAC | 11W     | 600        | 479              | ELV<br>TRIAC | 50,000<br>hours | <b>AB</b><br><b>BK</b><br><b>BN</b><br><b>WT</b> | 5.0"       | 5.0"  | 0.9" |
| <b>FM-37510</b> | 10"  | <b>-30</b> |     |         | 18W     | 1320       | 1023             |              |                 |                                                  | 10.0"      | 10.0" |      |
| <b>FM-37515</b> | 15"  | <b>-35</b> |     |         | 23W     | 1600       | 1191             |              |                 |                                                  | 15.0"      | 15.0" | 1.0" |
| <b>FM-37522</b> | 22"  | <b>-40</b> |     |         | 26W     | 2100       | 1534             |              |                 |                                                  | 22.0"      | 22.0" | 1.3" |

Example: **FM-37510-30-AB**





“Temple of Light. A rolled metalwork frame defines the ceiling with bold architectural elegance. Adding a touch of contrast and softening the glow, a creamy acrylic diffuser rests at the base, completing the design with understated refinement.”

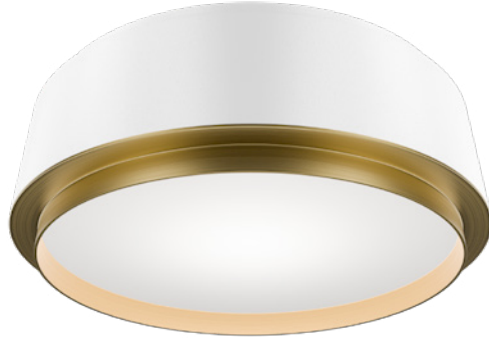


# SALVO

## CEILING MOUNT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

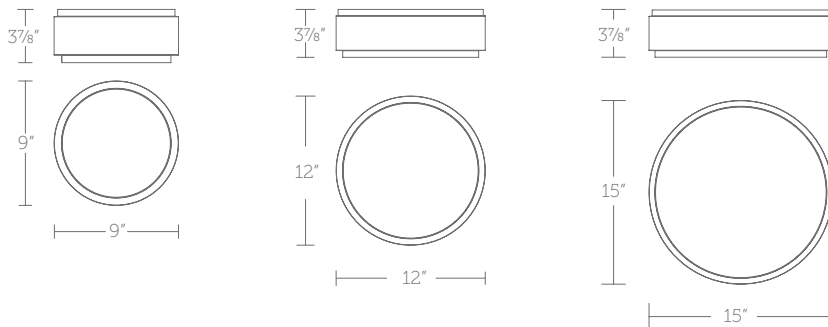

| Model No.       | Size | CCT                                | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |       |      |
|-----------------|------|------------------------------------|-----|---------|---------|------------|------------------|--------------|-----------------|------------------------|------------|-------|------|
|                 |      |                                    |     |         |         |            |                  |              |                 |                        | L"         | W"    | H"   |
| <b>FM-20509</b> | 9"   | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 18W     |         | 1600       | 425              | ELV<br>TRIAC | 50,000<br>hours | <b>BK/AB<br/>WT/AB</b> | 9.0"       | 9.0"  |      |
| <b>FM-20512</b> | 12"  |                                    |     | 27W     | 120V    | 2300       | 942              |              |                 |                        | 12.0"      | 12.0" | 4.0" |
| <b>FM-20515</b> | 15"  |                                    |     | 38W     |         | 3000       | 1739             |              |                 |                        | 15.0"      | 15.0" |      |


Example: **FM-20515-30-BK/AB**





“ An aged brass circlet within a black frame holds a creamy diffuser, offering soft ambient light to surfaces below. ”

## BONHAM CEILING MOUNT




- Omnidirectional illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT                                                  | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |      |
|-----------------|------|------------------------------------------------------|-----|---------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|------|
|                 |      |                                                      |     |         |         |            |                  |              |                 |           | L"         | W"   | H"   |
| <b>FM-95408</b> | 8"   | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120 VAC | 17 W    | 1400       | 809              | ELV<br>0-10V | 54,000<br>hours | <b>BN</b> | 8.0"       | 8.0" | 3.1" |

Example: **FM-95408-30-BN**

## CALIBER OUTDOOR CEILING MOUNT



- Driver concealed within the fixture

| Model No.        | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life      | Finish                                           | Dimensions |      |      |
|------------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|-----------------|--------------------------------------------------|------------|------|------|
|                  |      |       |     |          |         |            |                  |                       |                 |                                                  | L"         | W"   | H"   |
| <b>FM-W36607</b> | 7"   | 3000K | 90  | 120-277V | 11W     | 855        | 545              | ELV<br>TRIAC<br>0-10V | 50,000<br>hours | <b>AL</b><br><b>BK</b><br><b>BZ</b><br><b>WT</b> | 5.0"       | 5.0" | 7.1" |

Example: **FM-W36607-BK**


See complementary piece on page 243



## CHAPEAU CEILING MOUNT



- Fabric shade with glass diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

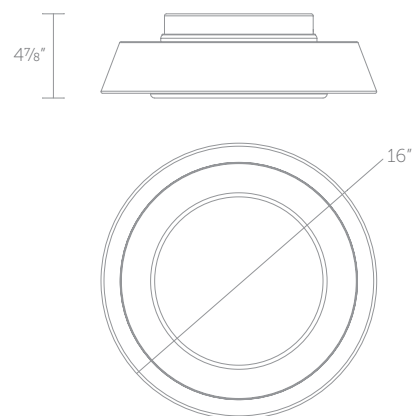


| Model No.       | Size | CCT                                | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |       |      |
|-----------------|------|------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|-------|------|
|                 |      |                                    |     |         |         |            |                  |              |              |                  | L"         | W"    | H"   |
| <b>FM-49416</b> | 16"  | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 120 VAC | 24 W    | 2580       | 1170             | ELV<br>0-10V | 50,000 hours | <b>BK<br/>WT</b> | 16.0"      | 16.0" | 4.9" |

Example: **FM-49416-30-BK**

## CHAUCER CEILING MOUNT




- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations



| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish    | Dimensions |       |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|-----------|------------|-------|------|
|                 |      |       |     |          |         |            |                  |                       |              |           | L"         | W"    | H"   |
| <b>FM-63216</b> | 16"  | 3000K | 90  | 120-277V | 24W     | 2200       | 1204             | ELV<br>TRIAC<br>0-10V | 50,000 hours | <b>BK</b> | 16.0"      | 16.0" | 5.6" |

Example: **FM-63216-BK**

## CONSTANTINE CEILING MOUNT

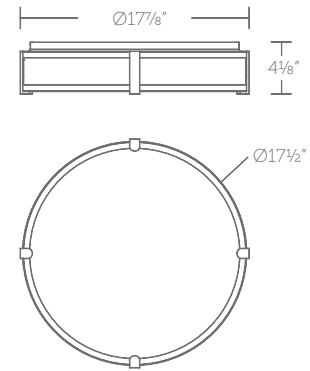


- Faux Spanish Alabaster. Like real stone, each piece is unique.
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|-------|------|
|                 |      |       |     |         |         |            |                  |         |              |           | L"         | W"    | H"   |
| <b>FM-27214</b> | 14"  | 3000K | 90  | 120 VAC | 24.4W   | 1779       | 1024             | ELV     | 50,000 hours | <b>AB</b> | 14.0"      | 14.0" | 4.1" |
| <b>FM-27218</b> | 18"  |       |     |         | 36.7W   | 2955       | 1515             | 0-10V   |              | <b>BK</b> | 17.9"      | 18.0" |      |

Example: **FM-27218-BK**

## CORSO CEILING MOUNT

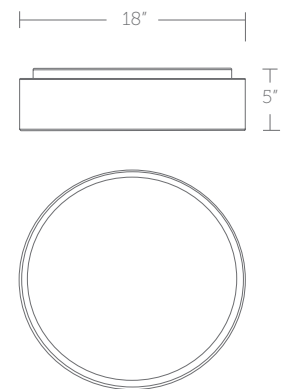


- Even illumination with no hotspots
- Driver concealed within the fixture
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish    | Dimensions |       |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|-----------|--------------|-----------|------------|-------|------|
|                 |      |       |     |          |         |            |                  |           |              |           | L"         | W"    | H"   |
| <b>FM-33718</b> | 18"  | 3000K | 90  | 120-277V | 25W     | 1675       | 728              | ELV TRIAC | 50,000 hours | <b>AL</b> | 18.0"      | 18.0" | 5.0" |

Example: **FM-33718-AL**

See complementary piece on page 80

# CRACKLE CEILING MOUNT

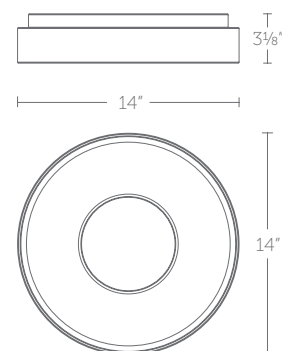


- Faux Spanish Alabaster. Like real stone, each piece is unique
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                 | Dimensions |       |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|------------------------|------------|-------|------|
|                 |      |       |     |         |         |            |                  |              |              |                        | L"         | W"    | H"   |
| <b>FM-97414</b> | 14"  | 3000K | 90  | 120 VAC | 26 W    | 2200       | 1057             | ELV<br>0-10V | 50,000 hours | <b>AB</b><br><b>BK</b> | 14.0"      | 14.0" | 3.1" |

Example: **FM-97414-AB**

# CUBOID OUTDOOR CEILING MOUNT




- Backlit with glass diffuser
- Chrome plate reflector
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.        | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |      |
|------------------|------|----------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|------|
|                  |      |                                        |     |         |         |            |                  |              |              |           | L"         | W"    | H"   |
| <b>FM-W71310</b> | 10"  | <b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120 VAC | 11W     | 800        | 369              | ELV<br>0-10V | 60,000 hours | <b>BK</b> | 10.0"      | 10.0" | 4.4" |

Example: **FM-W71310-30-BK**



## DICE CEILING MOUNT




- Etched 3/4" thick pressed glass diffuser with interior ceramic glaze
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.      | Size | CCT                        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish    | Dimensions |       |      |
|----------------|------|----------------------------|-----|---------|---------|------------|------------------|-----------|--------------|-----------|------------|-------|------|
|                |      |                            |     |         |         |            |                  |           |              |           | L"         | W"    | H"   |
| <b>FM-4006</b> | 6"   | <b>-27<br/>-30<br/>-35</b> | 90  | 120 VAC | 13W     | 1444       | 608              | ELV       | 45,000 hours | <b>BN</b> | 6.0"       | 6.0"  | 2.4" |
| <b>FM-4009</b> | 9"   |                            |     |         | 31W     | 2765       | 1037             |           |              |           | 9.0"       | 9.0"  | 2.8" |
| <b>FM-4012</b> | 12"  |                            |     |         | 30W     | 3128       | 1238             | ELV TRIAC |              |           | 12.0"      | 12.0" | 2.6" |

Example: **FM-4009-30-BN**

For 277V special order, add "F" before the color temperature: FM-4009F-30-BN

## DICE CEILING MOUNT




- Etched 3/4" thick pressed glass diffuser with interior ceramic glaze
- Transformer installs within the Junction Box, transformer dimension: 2.00" x 1.38" x 1.02"
- Can be mounted on ceiling or wall in all orientations

| Model No.      | Size | CCT                | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |      |
|----------------|------|--------------------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|------|
|                |      |                    |     |         |         |            |                  |         |              |           | L"         | W"   | H"   |
| <b>FM-4014</b> | 14"  | <b>-27<br/>-30</b> | 90  | 120 VAC | 31W     | 1356       | 640              | ELV     | 50,000 hours | <b>BN</b> | 14.0"      | 5.4" | 2.6" |

Example: **FM-4014-30-BN**

# DOT CEILING MOUNT




- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.        | Size | CCT                        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |       |      |
|------------------|------|----------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|-------|------|
|                  |      |                            |     |         |         |            |                  |              |              |                  | L"         | W"    | H"   |
| <b>FM-W57806</b> | 6"   | <b>-27<br/>-30<br/>-35</b> | 90  | 120 VAC | 10W     | 878        | 574              | ELV<br>0-10V | 50,000 hours | <b>BK<br/>SS</b> | 6.3"       | 6.3"  | 2.5" |
| <b>FM-W57809</b> | 9"   |                            |     |         | 17W     | 1571       | 1070             |              |              |                  | 8.9"       | 8.9"  |      |
| <b>FM-W57812</b> | 12"  |                            |     |         | 27W     | 2566       | 1482             |              |              |                  | 12.1"      | 12.1" |      |
| <b>FM-W57815</b> | 15"  |                            |     |         | 31W     | 2400       | 1773             |              |              |                  | 15.0"      | 15.0" |      |

Example: **FM-W57809-30-SS**

For 277V special order, add "F" before the color temperature: FM-W57809F-30-SS

# DOUBLE DECKER CEILING MOUNT




- Opal glass diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT                                | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish       | Dimensions |       |      |
|-----------------|------|------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|--------------|------------|-------|------|
|                 |      |                                    |     |         |         |            |                  |              |              |              | L"         | W"    | H"   |
| <b>FM-31414</b> | 14"  | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 120 VAC | 22 W    | 1800       | 963              | ELV<br>0-10V | 50,000 hours | <b>BK/AB</b> | 14.0"      | 14.0" | 3.0" |

Example: **FM-31414-30-BK/AB**

## DOWNTOWN OUTDOOR CEILING MOUNT




- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.        | Size | CCT                        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|------------------|------|----------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                  |      |                            |     |         |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>FM-W47205</b> | 5"   | <b>-30<br/>-35<br/>-40</b> | 90  | 120 VAC | 11.9W   | 950        | 647              | ELV<br>0-10V | 54,000 hours | <b>BK<br/>WT</b> | 5.0"       | 5.0" | 4.5" |

Example: **FM-W47205-30-BK**

## DOWNTOWN OUTDOOR CEILING MOUNT




- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.        | Size | CCT                        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|------------------|------|----------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                  |      |                            |     |         |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>FM-W47206</b> | 5"   | <b>-30<br/>-35<br/>-40</b> | 90  | 120 VAC | 11.9W   | 950        | 795              | ELV<br>0-10V | 54,000 hours | <b>BK<br/>WT</b> | 5.0"       | 5.0" | 4.5" |

Example: **FM-W47206-30-WT**

# GEOS CEILING MOUNT




- Super thin, edge-lit LED panel at less than an inch thick
- High lumen package great for high ceiling applications
- Twist-lock quick install mechanism
- Driver installs within the Junction Box, driver dimension: 3.5" x 1.4" x 1.2"
- Can be mounted on ceiling or wall in all orientations

| Model No.      | Size | CCT                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish           | Dimensions |       |      |
|----------------|------|--------------------|-----|----------|---------|------------|------------------|-----------------------|--------------|------------------|------------|-------|------|
|                |      |                    |     |          |         |            |                  |                       |              |                  | L"         | W"    | H"   |
| <b>FM-4610</b> | 10"  | <b>-27<br/>-30</b> | 80  | 120-277V | 12.8W   | 1266       | 783              | ELV<br>TRIAC<br>0-10V | 58,000 hours | <b>BR<br/>WT</b> | 10.3"      | 10.3" | 0.9" |

Example: **FM-4610-30-BR**

# GEOS CEILING MOUNT




- Super thin, edge-lit LED panel at less than an inch thick
- Twist-lock quick install mechanism
- Driver installs within the Junction Box, driver dimension: 2.8" x 1.6" x 1.2"
- Can be mounted on ceiling or wall in all orientations

| Model No.      | Size | CCT                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish           | Dimensions |       |      |
|----------------|------|--------------------|-----|----------|---------|------------|------------------|---------|--------------|------------------|------------|-------|------|
|                |      |                    |     |          |         |            |                  |         |              |                  | L"         | W"    | H"   |
| <b>FM-4615</b> | 15"  | <b>-27<br/>-30</b> | 90  | 120-277V | 30W     | 2355       | 1571             | ELV     | 50,000 hours | <b>BR<br/>WT</b> | 15.0"      | 15.0" | 0.9" |
| <b>FM-4622</b> | 22"  | <b>-27<br/>-30</b> |     |          | 44W     | 3785       | 2538             |         |              |                  | 22.1"      | 22.1" |      |

Example: **FM-4615-30-WT**



## HAWTHORNE OUTDOOR CEILING MOUNT




- Hammered glass panels on five sides
- Stainless steel textured reflector
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.        | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |      |
|------------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|------|
|                  |      |       |     |          |         |            |                  |              |              |           | L"         | W"    | H"   |
| <b>FM-W33113</b> | 13"  | 3000K | 90  | 120/277V | 20W     | 941        | 684              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 13.0"      | 13.0" | 4.5" |

Example: **FM-W33113-BK**

See complementary piece on page 247

## MANHATTAN SEMI-FLUSH MOUNT




- Trimless look with a modern upgrade
- Urban elegance & LED illumination softened with a fabric shade
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|------|
|                 |      |       |     |         |         |            |                  |              |              |           | L"         | W"    | H"   |
| <b>FM-13114</b> | 14"  | 2700K | 90  | 120 VAC | 31W     | 2450       | 2084             | ELV<br>0-10V | 50,000 hours | <b>BN</b> | 14.0"      | 14.0" | 5.0" |
| <b>FM-13120</b> | 20"  |       |     |         | 37W     | 2873       | 2442             |              |              |           | 20.0"      | 20.0" | 6.0" |
| <b>FM-13126</b> | 26"  |       |     |         | 41W     | 3575       | 3039             |              |              |           | 26.0"      | 26.0" | 7.0" |

Example: **FM-13114-BN**

See complementary piece on page 167

# MARQUES CEILING MOUNT

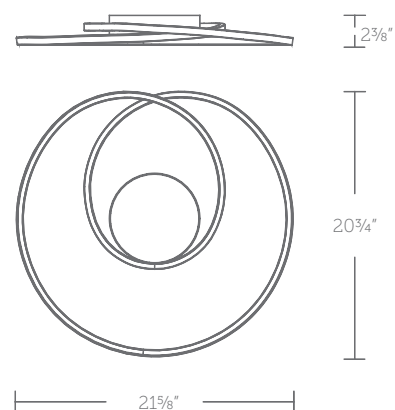


- Hand crafted frame with flexible diffuser. Expect variation in overall dimensions
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish                  | Dimensions |       |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|-----------|--------------|-------------------------|------------|-------|------|
|                 |      |       |     |         |         |            |                  |           |              |                         | L"         | W"    | H"   |
| <b>FM-43222</b> | 22"  | 3000K | 90  | 120 VAC | 41W     | 2300       | 1146             | ELV 0-10V | 50,000 hours | <b>BK<br/>BN<br/>CH</b> | 21.6"      | 20.8" | 2.4" |

Example: **FM-43222-CH**

See complementary piece on page 94 + 168

# MISO CEILING MOUNT

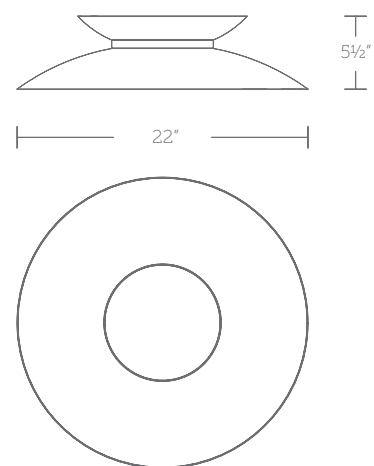


- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT                                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish    | Dimensions |       |      |
|-----------------|------|------------------------------------|-----|----------|---------|------------|------------------|-----------|--------------|-----------|------------|-------|------|
|                 |      |                                    |     |          |         |            |                  |           |              |           | L"         | W"    | H"   |
| <b>FM-11422</b> | 22"  | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 120/277V | 27 W    | 2600       | 1518             | ELV 0-10V | 50,000 hours | <b>BK</b> | 22.0"      | 22.0" | 5.5" |

Example: **FM-11422-30-BK**

## MOBIUS CEILING MOUNT

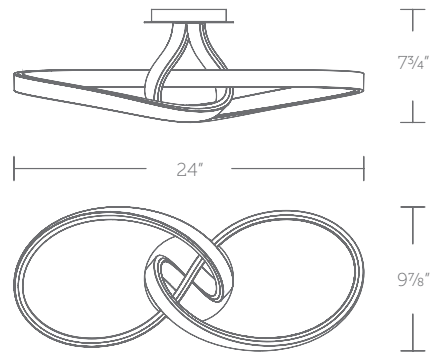


- Handcrafted, free flowing mobius strip of light. Variation expected.
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                 |      |       |     |          |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>FM-35424</b> | 24"  | 3000K | 90  | 120/277V | 28 W    | 3400       | 1979             | ELV<br>0-10V | 50,000 hours | <b>BK<br/>CH</b> | 24.0"      | 9.9" | 7.8" |

Example: **FM-35424-BK**

See complementary piece on page 94

## MOONSTONE CEILING MOUNT




- Faux Spanish Alabaster. Like real stone, each piece is unique
- Driver concealed within the canopy

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|
|                 |      |       |     |          |         |            |                  |              |              |           | L"         | W"   | H"   |
| <b>FM-43310</b> | 10"  | 3000K | 90  | 120/277V | 11 W    | 863        | 703              | ELV<br>0-10V | 55,000 hours | <b>BK</b> | 9.9"       | 9.9" | 7.8" |

Example: **FM-43310-BK**

See complementary piece on page 95

# NIVEOUS OUTDOOR CEILING MOUNT



- Spheres of pure light
- Mouth blown etched opal glass diffuser provides even illumination
- No transformer or driver required except 277V option (special order).
- 2700K /3500K for 6" and 9" options only (special order)
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations



| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |      |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"   |
| <b>FM-W52306</b> | 6"   | 3000K | 90  | 120 VAC | 10W     | 800        | 680              | ELV     | 45,000 hours | <b>WT</b> | 6.0"       | 6.0" | 6.0" |
| <b>FM-W52309</b> | 9"   |       |     |         | 18W     | 1600       | 1428             |         |              |           | 9.0"       | 9.0" | 9.0" |

Example: **FM-W52309-WT**

Special Order: For 2700K add "-27"; 3500K add "-35"; before finish FM-W52309-35-WT  
For 277V, add "F" before the finish: FM-W52309F-WT

See complementary piece on page 96

# PARALLAX CEILING MOUNT

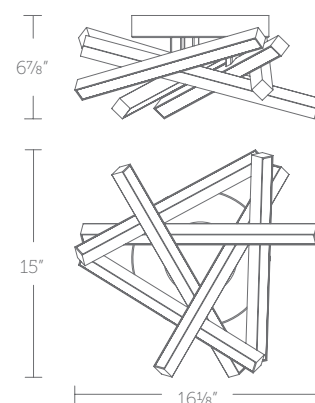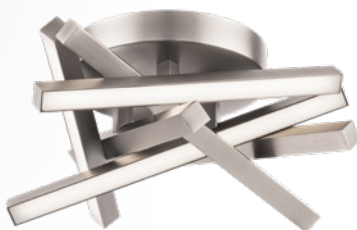

- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations



| Model No.       | Size | CCT                        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                  | Dimensions |       |      |
|-----------------|------|----------------------------|-----|----------|---------|------------|------------------|--------------|--------------|-------------------------|------------|-------|------|
|                 |      |                            |     |          |         |            |                  |              |              |                         | L"         | W"    | H"   |
| <b>FM-73116</b> | 16"  | <b>-27<br/>-30<br/>-35</b> | 90  | 120/277V | 28W     | 2150       | 1352             | ELV<br>0-10V | 50,000 hours | <b>BK<br/>BN<br/>CH</b> | 16.1"      | 15.0" | 6.9" |

Example: **FM-73116-30-BN**

See complementary piece on page 97, 98, 99, 142, 143 + 216



## PARALLAX CEILING MOUNT

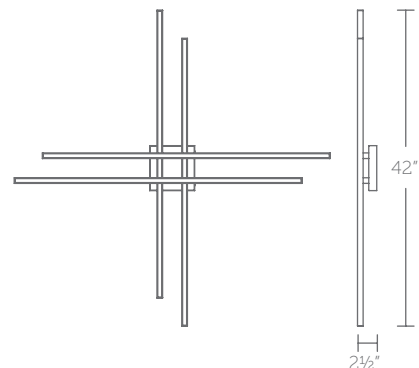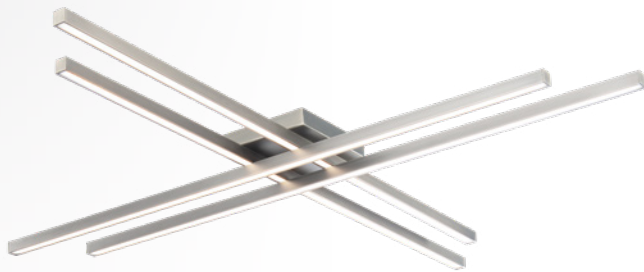


- 3CCT (2700K/3000K/3500K) selectable switch
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT                     | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |       |      |
|-----------------|------|-------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|-------|------|
|                 |      |                         |     |         |         |            |                  |              |              |                  | L"         | W"    | H"   |
| <b>FM-73132</b> | 32"  | 2700K<br>3000K<br>3500K | 90  | 120 VAC | 23W     | 1306       | 923              | ELV<br>0-10V | 50,000 hours | <b>BK<br/>BN</b> | 32.0"      | 32.0" | 2.5" |
| <b>FM-73142</b> | 42"  | 3500K                   |     |         | 34W     | 2006       | 1407             |              |              |                  | 42.0"      | 42.0" |      |

Example: **FM-73142-BN**

See complementary piece on page 97, 98, 99, 142, 143 + 215

## PEEK OUTDOOR CEILING MOUNT




- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Rotatable multi-axis gimbal ring
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.        | Size | CCT               | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|------------------|------|-------------------|-----|----------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                  |      |                   |     |          |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>FM-W45205</b> | 5"   | -30<br>-35<br>-40 | 90  | 120-277V | 9W      | 1000       | 856              | ELV<br>0-10V | 50,000 hours | <b>BK<br/>WT</b> | 4.9"       | 4.9" | 2.5" |

Example: **FM-W45205-30-WT**

# PINPOINT CEILING MOUNT

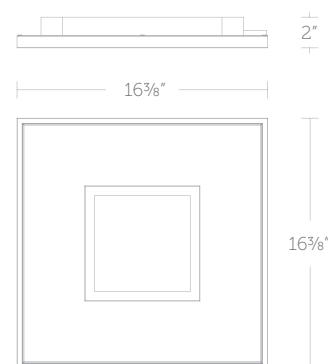


- Silver leaf detailing
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |      |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|------|
|                 |      |                          |     |          |         |            |                  |              |              |           | L"         | W"    | H"   |
| <b>FM-37415</b> | 15"  | -27<br>-30<br>-35<br>-40 | 90  | 120-277V | 38 W    | 1799       | 1135             | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 16.4"      | 16.4" | 2.2" |

Example: **FM-37415-30-BK**

# PINPOINT CEILING MOUNT

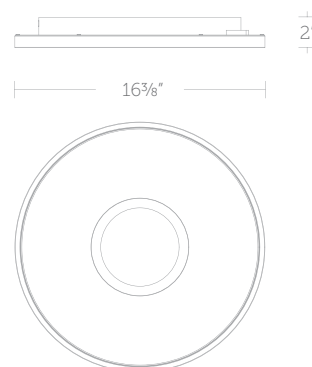


- Silver leaf detailing
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |      |
|-----------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|------|
|                 |      |                          |     |          |         |            |                  |              |              |           | L"         | W"    | H"   |
| <b>FM-37416</b> | 15"  | -27<br>-30<br>-35<br>-40 | 90  | 120-277V | 38 W    | 1823       | 1095             | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 16.4"      | 16.4" | 2.0" |

Example: **FM-37416-30-BK**

## SLICE CEILING MOUNT




- Etched 3/4" thick pressed glass diffuser with interior ceramic glaze
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

| Model No.      | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |      |
|----------------|------|------------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|-------|------|
|                |      |            |     |         |         |            |                  |         |              |           | L"         | W"    | H"   |
| <b>FM-4109</b> | 9"   | <b>-27</b> | 90  | 120 VAC | 17W     | 1794       | 720              | ELV     | 45,000 hours | <b>BN</b> | 9.0"       | 9.0"  | 2.5" |
| <b>FM-4111</b> | 11"  | <b>-30</b> |     |         | 26W     | 2759       | 1080             |         |              |           | 11.0"      | 11.0" | 3.0" |
| <b>FM-4115</b> | 14"  | <b>-35</b> |     |         | 25W     | 2729       | 1463             |         |              |           | 14.0"      | 14.0" | 2.5" |

Example: **FM-4111-30-BN**

For 277V special order, add "F" before the color temperature: FM-4111F-27-BN

## TAURUS CEILING MOUNT

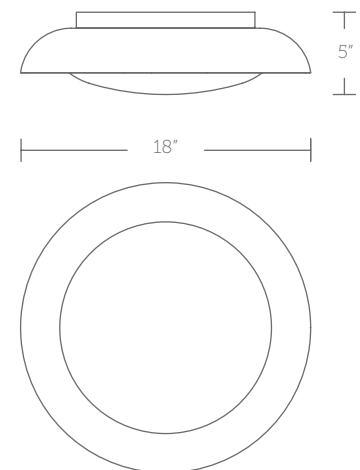


- Etched acrylic shade with easy spin-on installation
- 3CCT (2700K/3000K/3500K) selectable switch
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy

| Model No.       | Size | CCT                     | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish       | Dimensions |       |      |
|-----------------|------|-------------------------|-----|---------|---------|------------|------------------|--------------|--------------|--------------|------------|-------|------|
|                 |      |                         |     |         |         |            |                  |              |              |              | L"         | W"    | H"   |
| <b>FM-49118</b> | 18"  | 2700K<br>3000K<br>3500K | 90  | 120 VAC | 14W     | 1174       | 987              | ELV<br>0-10V | 60,000 hours | <b>BK/GO</b> | 17.9"      | 17.9" | 5.1" |

Example: **FM-49118-BK/GO**

# VAUGHAN CEILING MOUNT

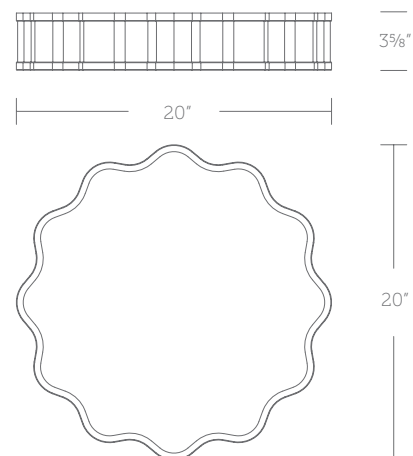


- Driver concealed within the canopy
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |      |
|-----------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|-------|------|
|                 |      |       |     |          |         |            |                  |         |              |           | L"         | W"    | H"   |
| <b>FM-67116</b> | 16"  | 3000K | 90  | 120/277V | 30W     | 2674       | 1904             | ELV     | 50,000 hours | <b>AB</b> | 16.0"      | 16.0" | 3.0" |
| <b>FM-67120</b> | 20"  |       |     | 120-277V | 40W     | 3600       | 2891             | 0-10V   |              | <b>BN</b> | 20.0"      | 20.0" | 3.6" |

Example: **FM-67120-AB**

# YORK CEILING MOUNT




- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

| Model No.       | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |       |      |
|-----------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|-------|------|
|                 |      |       |     |         |         |            |                  |         |              |           | L"         | W"    | H"   |
| <b>FM-45008</b> | 8"   | 3000K | 90  | 120 VAC | 15W     | 873        | 449              | ELV     | 50,000 hours | <b>AB</b> | 8.0"       | 8.0"  | 2.5" |
| <b>FM-45012</b> | 12"  |       |     |         | 27W     | 1845       | 1071             |         |              |           | 12.0"      | 12.0" |      |

Example: **FM-45012-AB**



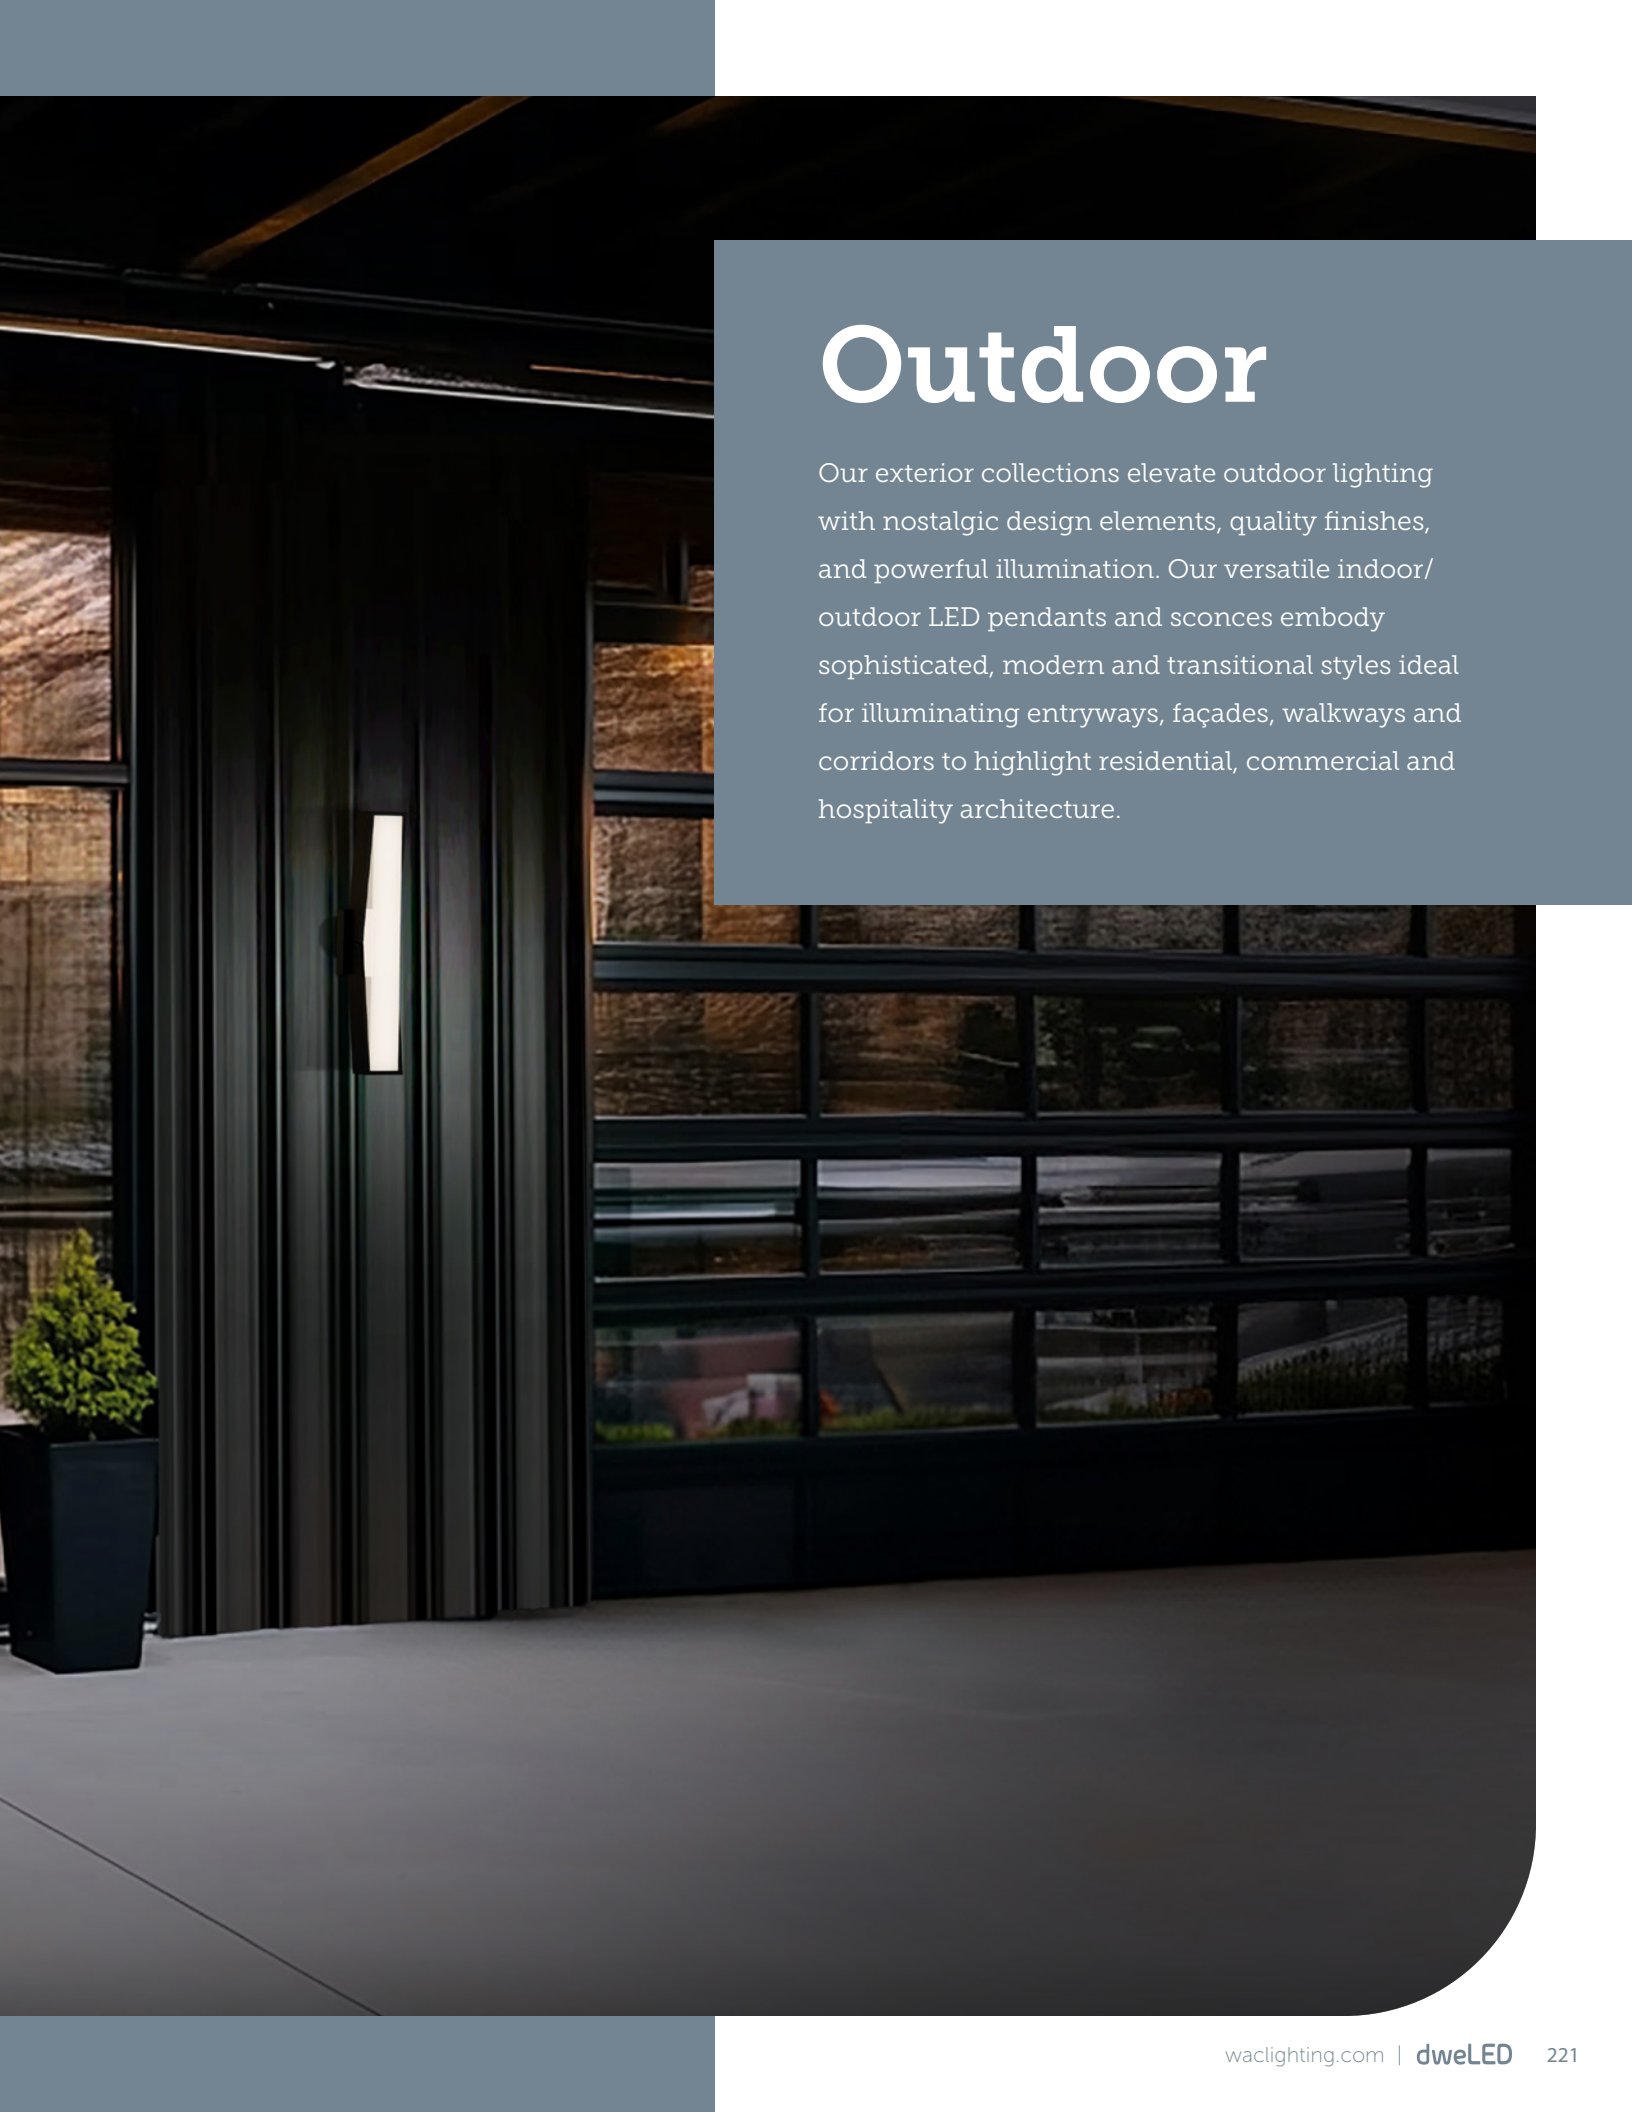

A photograph of a modern building entrance at night. The entrance features a large glass door with a dark frame. To the left of the door is a vertical light fixture with a rectangular opening. The interior of the building is visible through the glass, showing a stone wall and a staircase. The exterior is dark, and the ground in front of the entrance is a light-colored concrete or stone surface. The overall mood is sophisticated and modern.

# Outdoor

Our exterior collections elevate outdoor lighting with nostalgic design elements, quality finishes, and powerful illumination. Our versatile indoor/outdoor LED pendants and sconces embody sophisticated, modern and transitional styles ideal for illuminating entryways, façades, walkways and corridors to highlight residential, commercial and hospitality architecture.





# BEECH

## OUTDOOR WALL SCONCE



- Built in color temperature adjustability.  
Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Light engine is factory sealed for maximum protection from the elements
- Weather-resistant powder coated finish

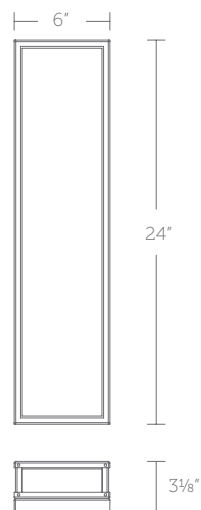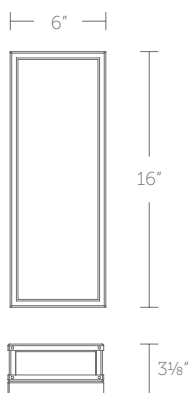

| Model No.        | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |       |
|------------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|-------|
|                  |      |                                                      |     |          |         |            |                  |              |                 |           | L"         | W"   | H"    |
| <b>WS-W89516</b> | 16"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 20W     | 1700       | 587              | ELV<br>TRIAC | 50,000<br>hours | <b>BK</b> | 6.0"       | 2.9" | 16.0" |
| <b>WS-W89524</b> | 24"  |                                                      |     |          | 29W     | 2517       | 912              |              |                 |           |            |      | 24.0" |

Example: **WS-W89516-30-BK**





“ A slab of bark-textured glass gives an organic feel to this otherwise sleek silhouette. Patterned illumination spills from its ruffled surface. ”






# JORDAN

## OUTDOOR WALL SCONCE



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Up and down backlight
- Option to pre-select color temperature or adjust in the field
- Light engine is factory sealed for maximum protection from the elements
- Weather-resistant powder coated finish
- Can be mounted on wall in all orientations

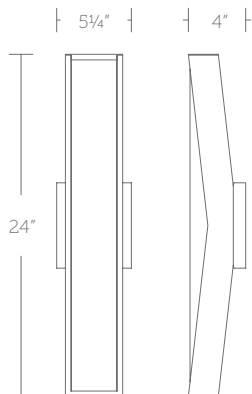

| Model No.        | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |       |
|------------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|-------|
|                  |      |                          |     |          |         |            |                  |              |                 |           | L"         | W"   | H"    |
| <b>WS-W63524</b> | 24"  | -27<br>-30<br>-35<br>-40 | 90  | 120/277V | 29W     | 2208       | 996              | ELV<br>TRIAC | 50,000<br>hours | <b>BK</b> | 5.3"       | 4.0" | 24.0" |

Example: **WS-W63524-30-BK**



“ A concave backplate holds an etched glass diffuser defined by a clear finish on both sides of the glass. This versatile outdoor sconce provides up, down and back illumination from its sleek profile. ”




# MANCHESTER

## OUTDOOR POST MOUNT



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Mounts on a 3" maximum diameter post (not included)
- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- Weather-resistant powder coated finish
- ACLED driverless technology



| Model No.        | Size | CCT                      | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |       |
|------------------|------|--------------------------|-----|---------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|-------|
|                  |      |                          |     |         |         |            |                  |              |                 |           | L"         | W"   | H"    |
| <b>PM-W33516</b> | 16"  | -27<br>-30<br>-35<br>-40 | 90  | 120 VAC | 13W     | 935        | 642              | ELV<br>TRIAC | 54,000<br>hours | <b>BK</b> | 7.0"       | 7.0" | 17.6" |

Example: **PM-W33516-30-BK**

See complementary piece on page 228-229





“ A thick hammered glass shade sends a textured glow from this modern post mount light. An open cage frame and clean geometric accents provides added style. ”






# MANCHESTER

## OUTDOOR WALL SCONCE



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Light engine is factory sealed for maximum protection from the elements
- Weather-resistant powder coated finish
- ACLED driverless technology

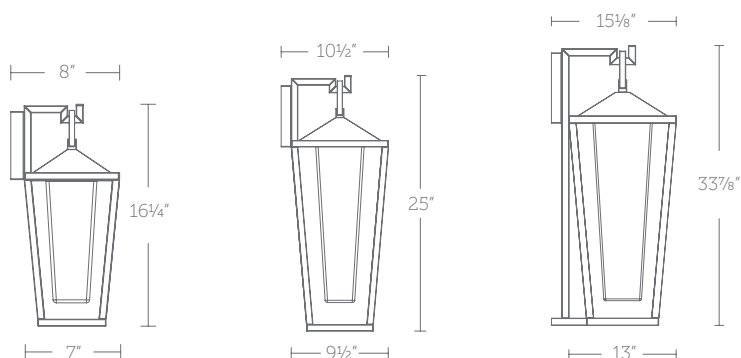

| Model No.        | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish    | Dimensions |       |       |
|------------------|------|------------|-----|---------|---------|------------|------------------|-----------|--------------|-----------|------------|-------|-------|
|                  |      |            |     |         |         |            |                  |           |              |           | L"         | W"    | H"    |
| <b>WS-W33516</b> | 16   | <b>-27</b> | 90  | 120 VAC | 13W     | 1000       | 670              | ELV TRIAC | 54,000 hours | <b>BK</b> | 7.0"       | 8.0"  | 16.3" |
| <b>WS-W33525</b> | 25"  | <b>-30</b> |     |         | 19W     | 1515       | 1033             |           |              |           | 9.5"       | 10.5" | 25.0" |
| <b>WS-W33534</b> | 34"  | <b>-35</b> |     |         | 25W     | 1996       | 1491             |           |              |           | 13.0"      | 15.1" | 33.9" |

Example: **WS-W33525-30-BK**

See complementary piece on page 226-227





“ A thick hammered glass shade sends a textured glow from this modern wall lantern. An open cage frame and clean geometric accents provides added style. ”






# MOLINE

## OUTDOOR WALL SCONCE



- Built in color temperature adjustability.  
Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Light engine is factory sealed for maximum protection from the elements
- Weather-resistant powder coated finish
- ACLED driverless technology

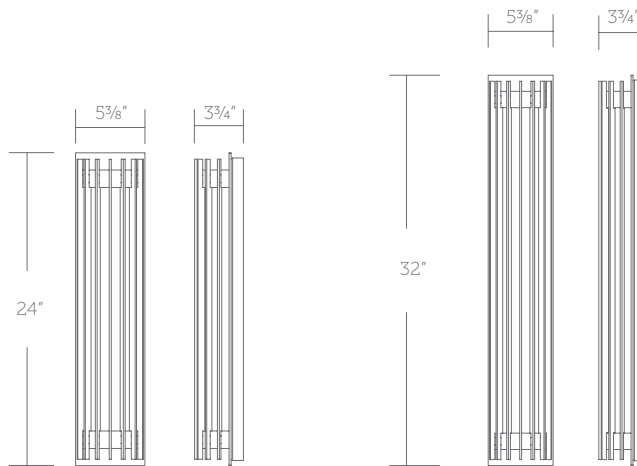

| Model No.        | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|------------|-----|---------|---------|------------|------------------|-----------|--------------|-----------|------------|------|-------|
|                  |      |            |     |         |         |            |                  |           |              |           | L"         | W"   | H"    |
| <b>WS-W17524</b> | 24"  | <b>-27</b> | 90  | 120 VAC | 30W     | 2824       | 685              | ELV TRIAC | 50,000 hours | <b>BK</b> | 5.3"       | 3.9" | 24.0" |
|                  |      | <b>-30</b> |     |         |         |            |                  |           |              |           |            |      |       |
|                  |      | <b>-35</b> |     |         |         |            |                  |           |              |           |            |      |       |
| <b>WS-W17532</b> | 32"  | <b>-40</b> |     |         | 44W     | 4087       | 925              |           |              |           | 5.3"       | 3.8" | 32.0" |

Example: **WS-W17532-30-BK**





“Crisp lines define this sophisticated wall light. Light shines through its banded diffuser creating a commanding presence on exteriors.”






# PISTON

## OUTDOOR WALL SCONCE




- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Light engine is factory sealed for maximum protection from the elements
- Weather-resistant powder coated finish
- ACLED driverless technology
- Up and downwards illumination



| Model No.        | Size | CCT                                                  | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |       |
|------------------|------|------------------------------------------------------|-----|---------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|-------|
|                  |      |                                                      |     |         |         |            |                  |              |                 |           | L"         | W"   | H"    |
| <b>WS-W32514</b> | 14"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120V    | 16W     | 1000       | 356              | ELV<br>TRIAC | 50,000<br>hours | <b>BK</b> | 6.0"       | 6.0" | 14.0" |

Example: **WS-W32514-30-BK**

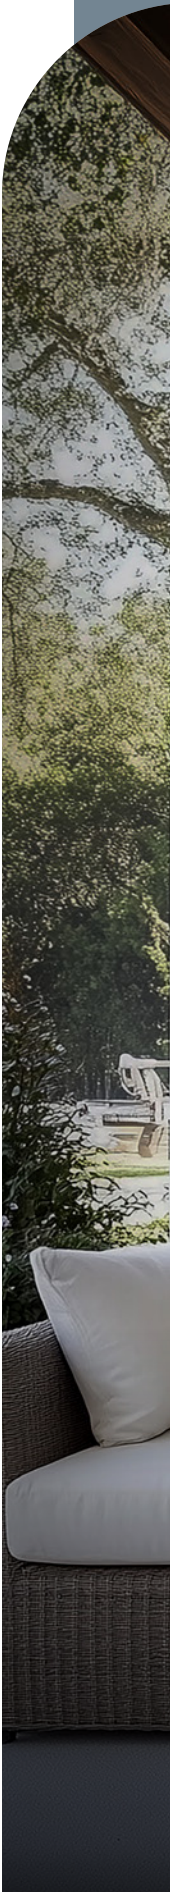



“ A smooth cylinder wraps around a corrugated tube. Light plays up and down its ridged silhouette through etched diffusers. ”




# WAVELET

## OUTDOOR WALL SCONCE



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Up and downwards illumination
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations

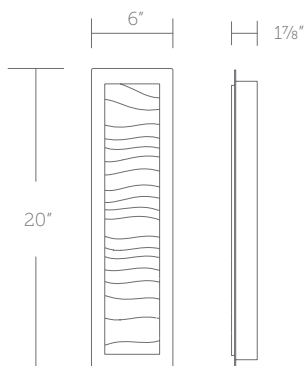

| Model No.        | Size | CCT                                                  | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |       |
|------------------|------|------------------------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|-------|
|                  |      |                                                      |     |          |         |            |                  |              |                 |           | L"         | W"   | H"    |
| <b>WS-W38520</b> | 20"  | <b>-27</b><br><b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 14W     | 800        | 515              | ELV<br>TRIAC | 50,000<br>hours | <b>BK</b> | 6.0"       | 1.8" | 20.0" |

Example: **WS-W38520-30-BK**






*“ Wavy patterned glass in a clean rectangular frame adds style and substance while delivering warm illumination into the night. ”*

## ALTERNATE OUTDOOR WALL SCONCE



- Top and bottom illumination
- Built in color temperature adjustability.  
Switch from 3000K/3500K/4000K
- Diamond shaped canopy can cover 4" round junction box and smaller
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on wall vertically or upside down

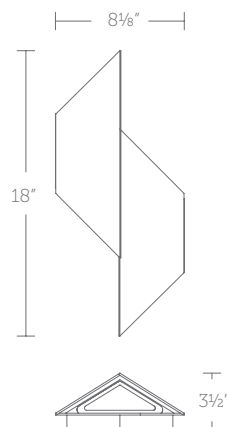


| Model No.        | Size | CCT                        | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|----------------------------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |                            |     |          |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W47318</b> | 18"  | <b>-30<br/>-35<br/>-40</b> | 90  | 120/277V | 12W     | 252        | 103              | ELV     | 52,000 hours | <b>BK</b> | 8.0"       | 3.5" | 18.0" |

Example: **WS-W47318-30-BK**

## AMHERST OUTDOOR PENDANT



- Downlight illumination
- Open bottom for ease of maintenance
- Three 12" and one 6" downrods included  
(additional downrods available)
- May be mounted on a sloped ceiling
- ACLED driverless technology


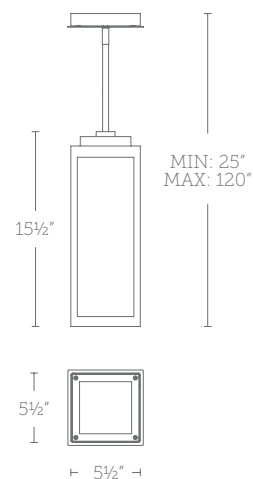


| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |              |              |           | L"         | W"   | H"    |
| <b>PD-W17216</b> | 21"  | 3000K | 90  | 120 VAC | 19W     | 1741       | 618              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 5.5"       | 5.5" | 15.5" |

Example: **PD-W17216-BK**

See complementary piece on page 237

# AMHERST OUTDOOR WALL SCONCE

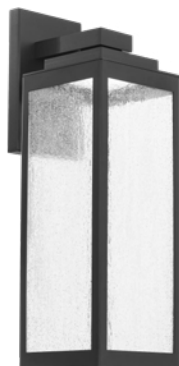


- Downlight illumination
- Open bottom for ease of maintenance
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |              |              |           | L"         | W"   | H"    |
| <b>WS-W17214</b> | 14"  | 3000K | 90  | 120 VAC | 16W     | 1426       | 366              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 5.0"       | 6.6" | 14.0" |
| <b>WS-W17218</b> | 18"  |       |     |         | 19W     | 1741       | 452              |              |              |           | 5.5"       | 7.1" | 18.0" |
| <b>WS-W17222</b> | 22"  |       |     |         | 20W     | 1843       | 490              |              |              |           | 6.5"       | 8.1" | 22.0" |

Example: **WS-W17218-BK**

See complementary piece on page 236

# ARCHETYPE OUTDOOR PENDANT

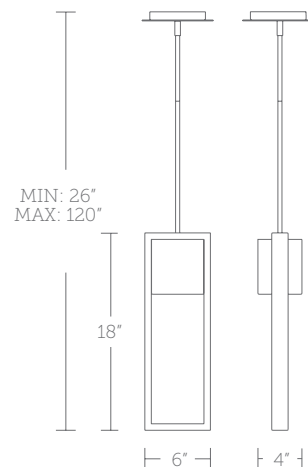

- ACLED driverless technology
- Downlight illumination
- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Weather-resistant powder coated finish


| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>PD-W15918</b> | 18"  | 3000K | 90  | 120 VAC | 10W     | 800        | 379              | ELV     | 54,000 hours | <b>BK</b> | 6.0"       | 4.0" | 18.0" |

Example: **PD-W15918-BK**

See complementary piece on page 238 + 239



## ARCHETYPE OUTDOOR WALL SCONCE




- Up and down light
- ACLED driverless technology
- Can be mounted on wall vertically or upside down

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W13918</b> | 18"  | 3000K | 90  | 120 VAC | 16W     | 1200       | 427              | ELV     | 54,000 hours | <b>BK</b> | 5.5"       | 2.8" | 18.0" |
| <b>WS-W13924</b> | 24"  |       |     |         | 22W     | 1600       | 775              |         | 60,000 hours |           | 7.0"       | 3.3" | 24.0" |

Example: **WS-W13924-BK**

See complementary piece on page 237 + 239

## ARCHETYPE OUTDOOR WALL SCONCE



- ACLED driverless technology
- Can be mounted on wall vertically or upside down

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W15912</b> | 12"  | 3000K | 90  | 120 VAC | 10W     | 800        | 331              | ELV     | 54,000 hours | <b>BK</b> | 5.5"       | 2.8" | 12.0" |
| <b>WS-W15918</b> | 18"  |       |     |         | 13W     | 1000       | 435              |         |              |           | 6.0"       |      | 18.0" |
| <b>WS-W15924</b> | 24"  |       |     |         | 16W     | 1200       | 571              |         |              |           | 7.0"       |      | 24.0" |


Example: **WS-W15918-BK**

See complementary piece on page 237 + 239

# ARCHETYPE OUTDOOR POST MOUNT



- Aluminum hardware with etched glass diffuser
- Mount on 3" maximum post (not included)
- ACLED driverless technology

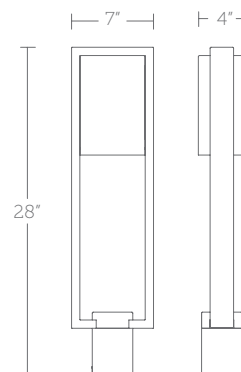

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>PM-W15928</b> | 28"  | 3000K | 90  | 120 VAC | 16W     | 1200       | 382              | ELV     | 54,000 hours | <b>BK</b> | 7.0"       | 4.0" | 28.0" |


Example: **PM-W15928-BK**

See complementary piece on page 238 + 239

# ARGO OUTDOOR WALL SCONCE



- Illumination on five sides with acrylic diffuser
- ACLED driverless technology
- Can be mounted on ceiling or wall in all orientations




| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |              |              |           | L"         | W"   | H"    |
| <b>WS-W39305</b> | 5"   | 3000K | 90  | 120 VAC | 10W     | 950        | 443              | ELV<br>0-10V | 60,000 hours | <b>BK</b> | 5.0"       | 4.3" | 5.0"  |
| <b>WS-W39310</b> | 10"  |       |     |         | 20W     | 2405       | 1121             |              |              |           |            |      | 10.4" |
| <b>WS-W39316</b> | 16"  |       |     |         | 30W     | 4310       | 2009             |              |              |           |            |      | 16.0" |

Example: **WS-W39310-BK**

## ARROW OUTDOOR WALL SCONCE



- Downward and backlit illumination
- Built in color temperature adjustability.  
Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy

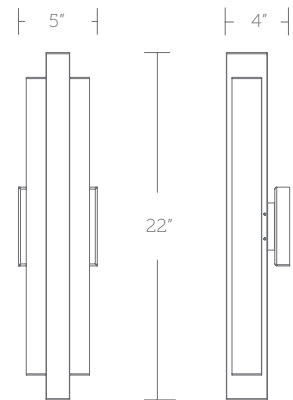


| Model No.        | Size | CCT                                | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|------------------------------------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|-------|
|                  |      |                                    |     |          |         |            |                  |              |              |           | L"         | W"   | H"    |
| <b>WS-W57422</b> | 22"  | <b>-27<br/>-30<br/>-35<br/>-40</b> | 90  | 120/277V | 28 W    | 1147       | 777              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 5.0"       | 4.0" | 22.0" |

Example: **WS-W57422-30-BK**

## ATLANTIS OUTDOOR WALL SCONCE



- 3CCT (3000K/3500K/4000K) selectable switch
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations




| Model No.        | Size | CCT                        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish           | Dimensions |      |      |
|------------------|------|----------------------------|-----|---------|---------|------------|------------------|--------------|--------------|------------------|------------|------|------|
|                  |      |                            |     |         |         |            |                  |              |              |                  | L"         | W"   | H"   |
| <b>WS-W27106</b> | 6"   | <b>-30<br/>-35<br/>-40</b> | 90  | 120 VAC | 8.4W    | 207        | 118              | ELV<br>0-10V | 54,000 hours | <b>BK<br/>WT</b> | 6.0"       | 3.4" | 6.0" |

Example: **WS-W27106-30-WT**



# BALANCE OUTDOOR WALL SCONCE




- 3CCT (3000K/3500K/4000K) selectable switch
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.        | Size | CCT                        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish           | Dimensions |      |      |
|------------------|------|----------------------------|-----|---------|---------|------------|------------------|--------------|-----------------|------------------|------------|------|------|
|                  |      |                            |     |         |         |            |                  |              |                 |                  | L"         | W"   | H"   |
| <b>WS-W25106</b> | 6"   | <b>-30<br/>-35<br/>-40</b> | 90  | 120 VAC | 11W     | 352        | 146              | ELV<br>0-10V | 54,000<br>hours | <b>BK<br/>WT</b> | 5.5"       | 2.0" | 5.5" |

Example: **WS-W25106-30-WT**

# BANDEAU OUTDOOR WALL SCONCE

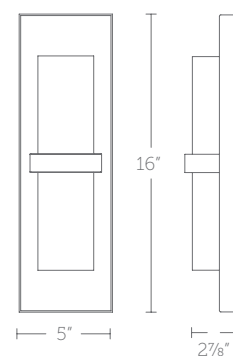

- Silk screen mitered tempered glass diffuser
- 3CCT (3000K/3500K/4000K) selectable switch
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall in all orientations


| Model No.        | Size | CCT        | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |       |
|------------------|------|------------|-----|---------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|-------|
|                  |      |            |     |         |         |            |                  |              |                 |           | L"         | W"   | H"    |
| <b>WS-W21110</b> | 10"  | <b>-30</b> | 90  | 120 VAC | 8W      | 600        | 171              | ELV<br>0-10V | 50,000<br>hours | <b>BK</b> | 4.5"       | 1.6" | 10.0" |
| <b>WS-W21116</b> | 16"  | <b>-35</b> |     |         | 20W     | 1200       | 640              |              |                 |           | 5.0"       | 2.8" | 16.0" |
| <b>WS-W21122</b> | 22"  | <b>-40</b> |     |         |         | 1600       | 739              |              |                 |           | 5.5"       | 3.0" | 22.0" |

Example: **WS-W21116-30-BK**

## BASTONE OUTDOOR WALL SCNCE



- Edge-lit LED illumination
- Built in color temperature adjustability.  
Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

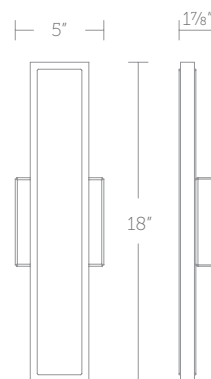


| Model No.        | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|-------|
|                  |      |                          |     |          |         |            |                  |              |              |           | L"         | W"   | H"    |
| <b>WS-W99418</b> | 18"  | -27<br>-30<br>-35<br>-40 | 90  | 120/277V | 30 W    | 1287       | 1066             | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 5.0"       | 1.9" | 18.0" |

Example: **WS-W99418-30-BK**

See complementary piece on page 132 + 242

## BLOCK OUTDOOR WALL SCNCE




- Weather-resistant finish
- Driver concealed within the fixture
- Can be mounted on wall in all orientations

| Model No.        | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |
|------------------|------|-------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|
|                  |      |       |     |          |         |            |                  |              |              |           | L"         | W"   | H"   |
| <b>WS-W61806</b> | 6"   | 3000K | 90  | 120-277V | 9W      | 615        | 540              | ELV<br>TRIAC | 50,000 hours | <b>AL</b> | 4.5"       | 3.5" | 6.1" |
| <b>WS-W61808</b> | 8"   |       |     |          | 15W     | 947        | 773              |              |              | <b>BK</b> |            |      | 8.1" |

Example: **WS-W61806-AL**

# CALIBER OUTDOOR PENDANT

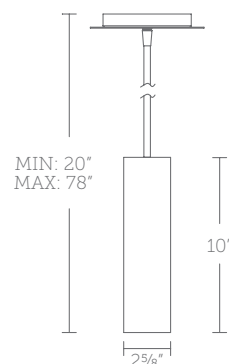


- Can be mounted on a sloped ceiling
- Three 12" and one 6" downrods included (additional downrods available)
- Integral swivel up to 90 degrees for sloped ceilings
- Down light only
- Driver concealed within the fixture

| Model No.        | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                                           | Dimensions |      |       |
|------------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|--------------------------------------------------|------------|------|-------|
|                  |      |       |     |          |         |            |                  |         |              |                                                  | L"         | W"   | H"    |
| <b>PD-W36610</b> | 10"  | 3000K | 90  | 120-277V | 12W     | 799        | 508              | ELV     | 75,000 hours | <b>AL</b><br><b>BK</b><br><b>BZ</b><br><b>WT</b> | 2.7"       | 2.7" | 10.0" |

Example: **PD-W36610-WT**

See complementary piece on page 204

# CALIBER OUTDOOR WALL SCONCE




- Discrete cylinder with minimal mounting hardware
- Weather-resistant powder coated finish
- WS-W36614 is up & down light, WS-W36610 is one direction
- Light engine is factory sealed for maximum protection from the elements
- Driver concealed within the fixture
- Can be mounted on wall vertically or horizontally

| Model No.        | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                              | Dimensions |      |       |
|------------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-------------------------------------|------------|------|-------|
|                  |      |       |     |          |         |            |                  |         |              |                                     | L"         | W"   | H"    |
| <b>WS-W36610</b> | 10"  | 3000K | 90  | 120-277V | 11W     | 735        | 560              | ELV     | 72,000 hours | <b>AL</b><br><b>BK</b><br><b>BZ</b> | 4.5"       | 3.7" | 10.0" |
| <b>WS-W36614</b> | 14"  |       |     |          | 21W     | 1500       | 1140             |         |              |                                     |            |      | 14.0" |

Example: **WS-W36614-BZ**

See complementary piece on page 204

## CASE OUTDOOR WALL SCONCE




- Weather-resistant finish for aluminum
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W47809</b> | 9"   | 3000K | 90  | 120 VAC | 13W     | 1040       | 411              | ELV     | 81,000 hours | <b>BK</b> | 5.5"       | 3.5" | 9.0"  |
| <b>WS-W47814</b> | 14"  |       |     |         | 22W     | 1644       | 885              |         |              |           |            |      | 14.0" |
| <b>WS-W47820</b> | 20"  |       |     |         | 34W     | 2560       | 1034             |         |              |           |            |      | 20.0" |

Example: **WS-W47820-BK**

For 277V special order, add "F" before the finish: WS-W47820F-BK

## CHAMBER OUTDOOR PENDANT

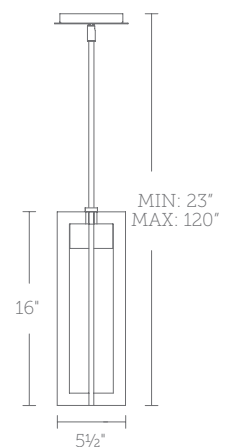

- Slope ceiling adaptable. Hang straight swivel up to 90 degrees
- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- Weather-resistant powder coated finish
- Three 12" and one 6" downrods included for customized length
- ACLED driverless technology

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish       | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|--------------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |              | L"         | W"   | H"    |
| <b>PD-W48616</b> | 16"  | 3000K | 90  | 120 VAC | 12W     | 1000       | 372              | ELV     | 50,000 hours | <b>BK BZ</b> | 5.5"       | 5.5" | 16.0" |


Example: **PD-W48616-BZ**

For 277V, add "F" before the finish: PD-W48616F-BZ

See complementary piece on page 245



# CHAMBER OUTDOOR WALL SCONCE



- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- Weather-resistant powder coated finish
- ACLED driverless technology
- Can be mounted on wall vertically or upside down


| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                 | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|------------------------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |                        | L"         | W"   | H"    |
| <b>WS-W48616</b> | 16"  | 3000K | 90  | 120 VAC | 12W     | 1000       | 255              | ELV     | 50,000 hours | <b>BK</b><br><b>BZ</b> | 6.4"       | 6.5" | 15.8" |
| <b>WS-W48620</b> | 20"  |       |     |         | 18W     | 1600       | 519              |         |              |                        | 7.0"       | 8.2" | 20.1" |
| <b>WS-W48625</b> | 25"  |       |     |         | 22W     | 1800       | 605              |         |              |                        | 8.5"       | 9.7" | 25.0" |

Example: **WS-W48616-BK**

For 277V, add "F" before the finish: WS-W48616F-BK

See complementary piece on page 244

# CHAMBER OUTDOOR POST MOUNT



- Mounts on a 3" maximum diameter post (not included)
- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- Weather-resistant powder coated finish
- ACLED driverless technology


| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                 | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|------------------------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |                        | L"         | W"   | H"    |
| <b>PM-W48620</b> | 20"  | 3000K | 90  | 120 VAC | 18W     | 1600       | 634              | ELV     | 44,000 hours | <b>BK</b><br><b>BZ</b> | 7.0"       | 7.0" | 20.3" |

Example: **PM-W48620-BK**

For 277V, add "F" before the finish: PM-W48620F-BK

See complementary piece on page 244

## EDGEY OUTDOOR WALL SCONCE




- Top and bottom illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- Can be mounted on wall vertically or upside down

| Model No.        | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish                              | Dimensions |      |       |
|------------------|------|----------------------------------------|-----|---------|---------|------------|------------------|--------------|--------------|-------------------------------------|------------|------|-------|
|                  |      |                                        |     |         |         |            |                  |              |              |                                     | L"         | W"   | H"    |
| <b>WS-W17310</b> | 10"  | <b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120 VAC | 13W     | 765        | 313              | ELV<br>0-10V | 60,000 hours | <b>AL</b><br><b>BK</b><br><b>WT</b> | 4.8"       | 2.8" | 10.0" |

Example: **WS-W17310-30-WT**

## FICTION OUTDOOR WALL SCONCE




- Front lit etched acrylic panel design
- Driver concealed within the fixture
- Can be mounted on wall vertically or upside down

| Model No.        | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |          |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W11914</b> | 14"  | 3000K | 90  | 120-277V | 15W     | 788        | 749              | ELV     | 50,000 hours | <b>BK</b> | 5.6"       | 2.4" | 14.1" |
| <b>WS-W11920</b> | 20"  |       |     |          | 20W     | 1666       | 798              | TRIAC   |              |           | 6.3"       |      | 20.0" |
| <b>WS-W11926</b> | 26"  |       |     |          |         | 2855       | 1138             | 0-10V   |              |           | 7.0"       |      | 26.0" |

Example: **WS-W11920-BK**

## FUSION OUTDOOR WALL SCONCE




- Hand craft pressed glass diffuser
- Up and downlight illumination from the light source
- Driver concealed within the canopy
- Can be mounted on wall in all orientations

| Model No.        | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|----------|---------|------------|------------------|---------|------------|-----------|------------|------|-------|
|                  |      |       |     |          |         |            |                  |         |            |           | L"         | W"   | H"    |
| <b>WS-W39114</b> | 14"  | 3000K | 90  | 120/277V | 13W     | 467        | 227              | ELV     | 54,000     | <b>BK</b> | 6.0"       | 3.9" | 13.9" |
| <b>WS-W39120</b> | 20"  |       |     |          | 21W     | 773        | 259              | 0-10V   | hours      |           | 7.3"       |      | 19.8" |

Example: **WS-W39120-BK**

## HAWTHORNE OUTDOOR WALL SCONCE




- Flat diamond hammered glass diffuser on four sides
- Open bottom for easy cleaning
- Downlight illumination from the light source
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |            |           | L"         | W"   | H"    |
| <b>WS-W33111</b> | 11"  | 3000K | 90  | 120 VAC | 11W     | 800        | 191              | ELV     | 54,000     | <b>BK</b> | 4.8"       | 5.0" | 11.0" |
| <b>WS-W33118</b> | 18"  |       |     |         | 16W     | 1200       | 281              | 0-10V   | hours      |           | 6.1"       | 6.5" | 18.0" |

Example: **WS-W33118-BK**

See complementary piece on page 212

## ICON OUTDOOR WALL SCONCE




- Weather-resistant powder coated finish
- Simple shape, simple idea, infinite applications
- Up & down light
- Shielded light source for great low-glare illumination
- Driver concealed within the fixture
- Can be mounted on wall in all orientations

| Model No.        | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish                  | Dimensions |      |       |
|------------------|------|-------|-----|----------|---------|------------|------------------|---------|--------------|-------------------------|------------|------|-------|
|                  |      |       |     |          |         |            |                  |         |              |                         | L"         | W"   | H"    |
| <b>WS-W54614</b> | 14"  | 3000K | 90  | 120-277V | 11W     | 845        | 458              | ELV     | 54,000 hours | <b>AL<br/>BK<br/>BZ</b> | 5.0"       | 3.3" | 14.0" |
| <b>WS-W54620</b> | 20"  |       |     |          |         | 847        | 478              |         |              |                         |            |      | 20.0" |

Example: **WS-W54614-BZ**

## LATITUDE OUTDOOR WALL SCONCE



- Classic architectural look that pairs well with a multitude of commercial applications
- Weather-resistant powder coated finishes
- Light engine factory sealed for maximum protection from the elements
- Etched opal glass diffuser provides even illumination
- Title 24 may not be available for all finishes, check for availability
- ACLED driverless technology
- Can be mounted on wall in all orientations


| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish           | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|------------------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |                  | L"         | W"   | H"    |
| <b>WS-W52610</b> | 10"  |       |     |         | 12W     | 765        | 415              |         |              |                  |            |      | 10.0" |
| <b>WS-W52614</b> | 14"  | 3000K | 90  | 120 VAC | 18W     | 1255       | 735              | ELV     | 50,000 hours | <b>BK<br/>BZ</b> | 6.0"       | 4.0" | 14.0" |
| <b>WS-W52620</b> | 20"  |       |     |         | 19W     | 1220       | 790              |         |              |                  |            |      | 20.0" |

Example: **WS-W52614-BZ**

For 277V, add "F" before the finish: WS-W52614F-BZ



## MOD OUTDOOR WALL SCONCE




- Weather-resistant powder coated finish
- Low profile with effective path illumination
- Light engine is factory sealed for maximum protection from the elements
- Driver concealed within the fixture
- Can be mounted on wall in all orientations

| Model No.        | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish                         | Dimensions |      |       |
|------------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|--------------------------------|------------|------|-------|
|                  |      |       |     |          |         |            |                  |                       |              |                                | L"         | W"   | H"    |
| <b>WS-W65607</b> | 6"   | 3000K | 90  | 120-277V | 17W     | 1165       | 622              | ELV<br>TRIAC<br>0-10V | 70,000 hours | <b>BK<br/>BZ<br/>GH<br/>WT</b> | 4.5"       | 3.5" | 14.0" |

Example: **WS-W65607-GH**

## NEST OUTDOOR WALL SCONCE




- Extruded aluminum louvers create a dramatic pattern of light to generate interest
- Weather-resistant powder coated finishes
- ACLED driverless technology

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W26712</b> | 12"  | 3000K | 90  | 120 VAC | 9W      | 208        | 165              | ELV     | 54,000 hours | <b>BZ</b> | 5.5"       | 5.0" | 12.0" |
| <b>WS-W26716</b> | 16"  |       |     |         | 13W     | 366        | 290              |         |              |           | 7.5"       | 6.5" | 16.0" |

Example: **WS-W26712-BZ**

## OBERON OUTDOOR WALL SCONCE





- Bent opal glass provides even illumination
- Weather-resistant powder coated finish
- ACLED driverless technology
- Can be mounted on wall in all orientations

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W45714</b> | 14"  | 3000K | 90  | 120 VAC | 20W     | 1865       | 685              | ELV     | 54,000 hours | <b>BK</b> | 6.0"       | 3.8" | 14.0" |
| <b>WS-W45720</b> | 20"  |       |     |         | 35W     | 1900       | 745              |         |              |           |            |      | 20.0" |
| <b>WS-W45726</b> | 26"  |       |     |         |         | 3273       | 1026             |         |              |           |            |      | 26.0" |

Example: **WS-W45714-BK**

For 277V, add "F" before the finish: WS-W45714F-BK

## PIQUE OUTDOOR WALL SCONCE

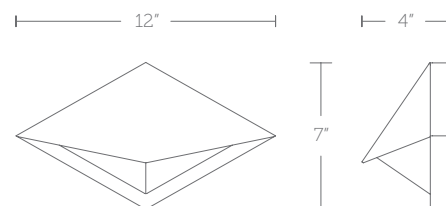

- Downlight illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy


| Model No.        | Size | CCT                      | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |      |      |
|------------------|------|--------------------------|-----|----------|---------|------------|------------------|--------------|--------------|-----------|------------|------|------|
|                  |      |                          |     |          |         |            |                  |              |              |           | L"         | W"   | H"   |
| <b>WS-W65412</b> | 12"  | -27<br>-30<br>-35<br>-40 | 90  | 120/277V | 12 W    | 890        | 540              | ELV<br>0-10V | 50,000 hours | <b>BK</b> | 12.0"      | 4.0" | 7.0" |

Example: **WS-W65412-30-BK**

# REVELS OUTDOOR WALL SCNCE




- Illumination on both sides with acrylic diffuser
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- 3CCT switch installs in the junction box
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology



| Model No.        | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|----------------------------------------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |                                        |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W13324</b> | 24"  | <b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120 VAC | 13W     | 300        | 193              | ELV     | 54,000 hours | <b>BK</b> | 5.0"       | 2.0" | 24.0" |
| <b>WS-W13336</b> | 36"  |                                        |     |         | 17W     | 400        | 256              |         |              |           |            |      | 36.0" |
| <b>WS-W13348</b> | 48"  |                                        |     |         | 24W     | 555        | 358              |         |              |           |            |      | 48.0" |
| <b>WS-W13360</b> | 60"  |                                        |     |         | 28W     | 665        | 428              |         |              |           |            |      | 60.0" |
| <b>WS-W13372</b> | 72"  |                                        |     |         |         | 850        | 547              |         |              |           |            |      | 72.0" |

Example: **WS-W13336-30-BK**

# ROCKPORT OUTDOOR WALL SCNCE

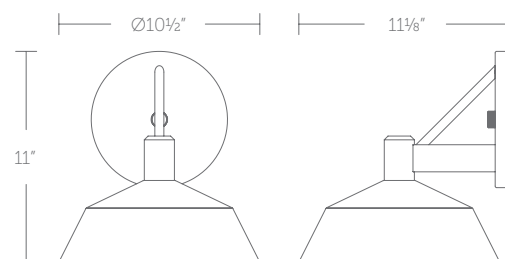


- Downlight illumination
- ACLED driverless technology

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life   | Finish    | Dimensions |       |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|--------------|--------------|-----------|------------|-------|-------|
|                  |      |       |     |         |         |            |                  |              |              |           | L"         | W"    | H"    |
| <b>WS-W77211</b> | 11"  | 3000K | 90  | 120 VAC | 17W     | 1346       | 763              | ELV<br>0-10V | 54,000 hours | <b>BK</b> | 10.5"      | 11.1" | 11.0" |

Example: **WS-W77211-BK**

## ROSLYN OUTDOOR WALL SCONCE



WS-W49319




- Downlight with clear hammered glass
- ACLED driverless technology

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W49314</b> | 14"  | 3000K | 90  | 120 VAC | 13W     | 1000       | 688              | ELV     | 54,000 hours | <b>BK</b> | 6.0"       | 6.1" | 14.0" |
| <b>WS-W49319</b> | 19"  |       |     |         | 16W     | 1247       | 858              | 0-10V   |              |           | 7.0"       | 7.0" | 19.0" |

Example: **WS-W49319-BK**

## SLANT OUTDOOR WALL SCONCE




- Aluminum body with glass lens
- Can be mounted on wall vertically or upside down
- ACLED driverless technology

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W14911</b> | 11"  | 3000K | 90  | 120 VAC | 7W      | 441        | 353              | ELV     | 50,000 hours | <b>BK</b> | 5.0"       | 3.3" | 10.6" |

Example: **WS-W14911-BK**



# SLEEPLESS OUTDOOR WALL SCONCE

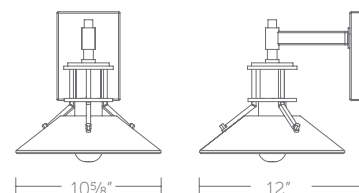


- Hammered seeded clear glass diffuser with spin on installation
- Driver concealed within the canopy

| Model No.        | Size | CCT   | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming               | Rated Life   | Finish       | Dimensions |       |       |
|------------------|------|-------|-----|----------|---------|------------|------------------|-----------------------|--------------|--------------|------------|-------|-------|
|                  |      |       |     |          |         |            |                  |                       |              |              | L"         | W"    | H"    |
| <b>WS-W43011</b> | 11"  | 3000K | 90  | 120-277V | 15W     | 700        | 417              | ELV<br>TRIAC<br>0-10V | 50,000 hours | <b>BK/AB</b> | 10.6"      | 12.0" | 11.3" |
| <b>WS-W43015</b> | 15"  |       |     |          | 19W     | 950        | 617              |                       |              |              | 14.0"      | 15.3" | 14.6" |

Example: **WS-W43011-BK/AB**

# SODOR OUTDOOR WALL SCONCE




- Weather-resistant powder coated finishes
- Light engine is factory sealed for maximum protection from the elements
- Heavy aluminum shade provides great glare cutoff
- ACLED driverless technology

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish           | Dimensions |       |      |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|------------------|------------|-------|------|
|                  |      |       |     |         |         |            |                  |         |              |                  | L"         | W"    | H"   |
| <b>WS-W15708</b> | 8"   | 3000K | 90  | 120 VAC | 9W      | 750        | 330              | ELV     | 54,000 hours | <b>BK<br/>BZ</b> | 8.0"       | 8.8"  | 5.4" |
| <b>WS-W15710</b> | 10"  |       |     |         | 12W     | 1200       | 561              |         |              |                  | 10.6"      | 11.3" | 6.9" |

Example: **WS-W15708-BZ**

## SPA OUTDOOR WALL SCONCE

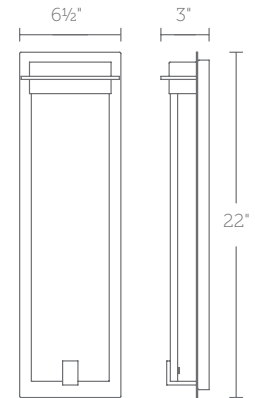


- Downlight illumination
- Hand poured art glass
- ACLED driverless technology

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming | Rated Life   | Finish    | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|---------|--------------|-----------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |         |              |           | L"         | W"   | H"    |
| <b>WS-W41716</b> | 16"  | 3000K | 90  | 120 VAC | 13W     | 375        | 191              | ELV     | 54,000 hours | <b>BZ</b> | 5.5"       | 3.1" | 16.0" |
| <b>WS-W41722</b> | 22"  |       |     |         |         | 365        | 171              |         |              |           | 6.5"       |      | 22.0" |

Example: **WS-W41722-BZ**

## STAG OUTDOOR WALL SCONCE

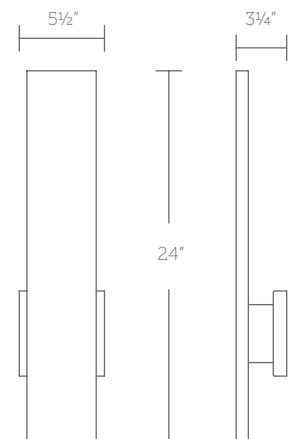


- Backlit with indirect illumination
- 3CCT (3000K/3500K/4000K) selectable switch
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology

| Model No.        | Size | CCT                | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming   | Rated Life   | Finish       | Dimensions |      |       |
|------------------|------|--------------------|-----|---------|---------|------------|------------------|-----------|--------------|--------------|------------|------|-------|
|                  |      |                    |     |         |         |            |                  |           |              |              | L"         | W"   | H"    |
| <b>WS-W29118</b> | 18"  | <b>-30</b>         | 90  | 120 VAC | 16W     | 1424       | 883              | ELV 0-10V | 54,000 hours | <b>AL BK</b> | 4.5"       | 2.5" | 18.0" |
| <b>WS-W29124</b> | 24"  | <b>-35<br/>-40</b> |     |         | 24 W    | 1650       | 1100             |           |              |              | 5.5"       | 3.3" | 24.0" |

Example: **WS-W29124-30-BK**

# STEAMPUNK OUTDOOR WALL SCONCE




- Downlight with mouth blown hammered glass diffuser
- ACLED driverless technology

| Model No.        | Size | CCT   | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish                 | Dimensions |      |       |
|------------------|------|-------|-----|---------|---------|------------|------------------|--------------|-----------------|------------------------|------------|------|-------|
|                  |      |       |     |         |         |            |                  |              |                 |                        | L"         | W"   | H"    |
| <b>WS-W24509</b> | 9"   | 3000K | 90  | 120 VAC | 11W     | 744        | 412              | ELV<br>0-10V | 80,000<br>hours | <b>BK</b><br><b>BZ</b> | 6.0"       | 7.1" | 9.5"  |
| <b>WS-W24513</b> | 13"  |       |     |         |         | 818        | 503              |              |                 |                        | 8.3"       | 9.4" | 12.8" |

Example: **WS-W24513-BK**

For 277V special order, add "F" before the finish: WS-W24513F-BK

# SUMMIT OUTDOOR WALL SCONCE

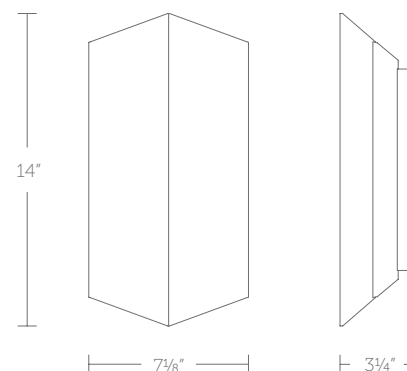


- Up and downlight illumination
- Built in color temperature adjustability.  
Switch from 3000K/3500K/4000K.
- Option to pre-select color temperature  
or adjust in the field
- ACLED driverless technology

| Model No.        | Size | CCT                                    | CRI | Voltage | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |       |
|------------------|------|----------------------------------------|-----|---------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|-------|
|                  |      |                                        |     |         |         |            |                  |              |                 |           | L"         | W"   | H"    |
| <b>WS-W49214</b> | 14"  | <b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120 VAC | 16W     | 1535       | 303              | ELV<br>0-10V | 54,000<br>hours | <b>BK</b> | 7.1"       | 3.3" | 14.0" |

Example: **WS-W49214-30-BK**

# VAIATION OUTDOOR WALL SCONCE



- Front, top and bottom illumination
- Ceramic silk-screen mitered glass diffuser
- Top and bottom light individually rotatable
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy

| Model No.        | Size | CCT                                    | CRI | Voltage  | Wattage | LED Lumens | Delivered Lumens | Dimming      | Rated Life      | Finish    | Dimensions |      |       |
|------------------|------|----------------------------------------|-----|----------|---------|------------|------------------|--------------|-----------------|-----------|------------|------|-------|
|                  |      |                                        |     |          |         |            |                  |              |                 |           | L"         | W"   | H"    |
| <b>WS-W15312</b> | 12"  | <b>-30</b><br><b>-35</b><br><b>-40</b> | 90  | 120/277V | 23W     | 1367       | 929              | ELV<br>0-10V | 50,000<br>hours | <b>BK</b> | 4.4"       | 6.4" | 12.5" |

Example: **WS-W15312-30-BK**



# ALPHABETICAL INDEX

## A

|                |               |
|----------------|---------------|
| ACTION .....   | 74            |
| ALLERON .....  | 74            |
| ALTERNATE..... | 236           |
| AMHERST.....   | 236, 237      |
| ARAGON.....    | 22            |
| ARCHETYPE..... | 237, 238, 239 |
| ARGO .....     | 239           |
| ARNE.....      | 186           |
| ARROW .....    | 240           |
| ATLANTIS.....  | 240           |
| ATLAS .....    | 75            |

## B

|                   |              |
|-------------------|--------------|
| BALANCE .....     | 241          |
| BALANCE BEAM..... | 24           |
| BANDEAU .....     | 241          |
| BANDED .....      | 6, 75        |
| BASTONE .....     | 26, 132, 242 |
| BEECH.....        | 222          |
| BLAKE.....        | 160          |
| BLISS .....       | 132          |
| BLOCK.....        | 242          |
| BLOK.....         | 160          |
| BOLLA .....       | 76           |
| BONHAM .....      | 204          |
| BOULEVARD .....   | 114          |
| BOXI .....        | 161          |
| BRACELET.....     | 28           |
| BRINK .....       | 133          |

## C

|                 |          |
|-----------------|----------|
| CABOT .....     | 76       |
| CALIBER .....   | 204, 243 |
| CAMELOT .....   | 161      |
| CAPPE.....      | 77       |
| CARAFE.....     | 77       |
| CAROUSEL .....  | 30       |
| CASE.....       | 244      |
| CHAMBER.....    | 244, 245 |
| CHANDRA .....   | 78       |
| CHANTILLY ..... | 79       |
| CHAPEAU.....    | 205      |
| CHAUCER .....   | 205      |
| CHELSEA.....    | 186      |

|                       |         |
|-----------------------|---------|
| CLOAK.....            | 32      |
| CLOSE ENCOUNTERS..... | 34      |
| COCHERE .....         | 79      |
| COLLETTE .....        | 162     |
| COLTRANE.....         | 162     |
| CONSTANTINE.....      | 206     |
| CORBUSIER.....        | 163     |
| CORKSCREW .....       | 80, 116 |
| CORNICE.....          | 163     |
| CORSO .....           | 80, 206 |
| CRACKLE.....          | 207     |
| CRATER.....           | 81      |
| CRESCENT.....         | 81, 164 |
| CUBOID .....          | 207     |
| CYLINDRA.....         | 8, 36   |

## D

|                      |         |
|----------------------|---------|
| DARCY.....           | 133     |
| DESMOND .....        | 38      |
| DICE .....           | 208     |
| DIVERGENCE.....      | 82      |
| DOMA.....            | 40, 196 |
| DOME .....           | 82      |
| DOT .....            | 209     |
| DOUBLE DECKER.....   | 209     |
| DOUBLE ENTENDRE..... | 83      |
| DOWNTOWN .....       | 210     |
| DUET.....            | 164     |
| DUPLEX.....          | 187     |
| DYCE.....            | 42      |

## E

|                    |         |
|--------------------|---------|
| ECHO.....          | 83      |
| EDGEY .....        | 246     |
| EFFERVESCENT ..... | 84      |
| ELBO .....         | 187     |
| ELEMENTUM.....     | 84, 134 |
| ENIGMATIC.....     | 134     |
| ESPRIT .....       | 135     |

## F

|                  |     |
|------------------|-----|
| FALLON.....      | 135 |
| FERROUS.....     | 85  |
| FICTION.....     | 246 |
| FITZGERALD ..... | 165 |

|               |     |
|---------------|-----|
| FLAPP .....   | 178 |
| FLARE .....   | 85  |
| FLIP.....     | 188 |
| FLIPSIDE..... | 180 |
| FRAME.....    | 86  |
| FUSION .....  | 247 |

## G

|                 |         |
|-----------------|---------|
| GAZE .....      | 86      |
| GEOMETRIX ..... | 87      |
| GEOS.....       | 211     |
| GLAMOUR .....   | 165     |
| GREET.....      | 166     |
| GRILLE.....     | 44, 198 |
| GROHLE.....     | 46      |

## H

|                  |              |
|------------------|--------------|
| HAWTHORNE.....   | 212, 247     |
| HELMET.....      | 48           |
| HEMMINGWAY ..... | 188          |
| HOOPLA .....     | 50           |
| HOUDINI.....     | 87           |
| HOURLASS.....    | 52, 118, 150 |
| HUDSON .....     | 189          |
| HUXLEY .....     | 54           |

## I

|                 |             |
|-----------------|-------------|
| ICE CUBE.....   | 10, 88      |
| ICON .....      | 248         |
| ILLUSION .....  | 88          |
| INTERLACE ..... | 12, 89, 136 |
| INTERLOK.....   | 136         |

## J

|              |     |
|--------------|-----|
| JAGGER.....  | 137 |
| JORDAN ..... | 224 |
| JULIET.....  | 137 |

## K

|             |     |
|-------------|-----|
| KEPLER..... | 189 |
| KLOVER..... | 56  |
| KNOT .....  | 90  |
| KONE .....  | 90  |

## L

|               |         |
|---------------|---------|
| LACEY.....    | 91      |
| LANKY.....    | 152     |
| LATITUDE..... | 248     |
| LAYNE.....    | 166     |
| LEVEL.....    | 138     |
| LINE.....     | 138     |
| LOCKE.....    | 139     |
| LOOPHOLE..... | 92, 139 |
| LOYD.....     | 190     |

## M

|                 |              |
|-----------------|--------------|
| MAMBA.....      | 92           |
| MANCHESTER..... | 226, 228     |
| MANDALA.....    | 154          |
| MANHATTAN.....  | 167, 212     |
| MANTEL.....     | 182          |
| MARGARITE.....  | 93           |
| MARISE.....     | 93, 167      |
| MARQUES.....    | 94, 168, 213 |
| MAVEN.....      | 168          |
| MELODY.....     | 140          |
| MINIBAR.....    | 140          |
| MISO.....       | 213          |
| MOBIUS.....     | 94, 214      |
| MOD.....        | 249          |
| MOLINE.....     | 230          |
| MOONGLOW.....   | 169          |
| MOONSTONE.....  | 95, 214      |
| MORAE.....      | 95, 96       |
| MUSEO.....      | 141          |
| MYLIE.....      | 141          |
| MYTHICAL.....   | 169          |

## N

|                 |         |
|-----------------|---------|
| NEST.....       | 249     |
| NIGHTSTICK..... | 142     |
| NIVEOUS.....    | 96, 215 |
| NOUVEAU.....    | 170     |

## O

|             |     |
|-------------|-----|
| OBERON..... | 250 |
| OGLE.....   | 170 |
| OHM.....    | 97  |
| ORBIX.....  | 156 |
| OYSTER..... | 58  |

## P

|                  |                                |
|------------------|--------------------------------|
| PARALLAX.....    | 97, 98, 99, 142, 143, 215, 216 |
| PARK AVENUE..... | 99, 100                        |
| PARTHENON.....   | 200                            |
| PAVILION.....    | 100                            |
| PEDISTAL.....    | 60                             |
| PEEK.....        | 216                            |
| PEEKABOO.....    | 144                            |
| PIN UP.....      | 62, 190                        |
| PINPOINT.....    | 217                            |
| PIQUE.....       | 250                            |
| PISTON.....      | 232                            |
| POCKET.....      | 171                            |

## Q

|              |         |
|--------------|---------|
| QUATTRO..... | 64      |
| QUILL.....   | 14, 101 |

## R

|                 |     |
|-----------------|-----|
| REED.....       | 184 |
| REPOSE.....     | 144 |
| REVELS.....     | 251 |
| RIPPLE.....     | 120 |
| ROCKABILLY..... | 101 |
| ROCKPORT.....   | 251 |
| ROLAND.....     | 171 |
| ROSLYN.....     | 252 |

## S

|                |          |
|----------------|----------|
| SALTAIRE.....  | 172      |
| SALVO.....     | 202      |
| SATALITE.....  | 66       |
| SCOPE.....     | 191      |
| SHARD.....     | 122      |
| SINCLAIR.....  | 102      |
| SIRIUS.....    | 103      |
| SKATE.....     | 124      |
| SLANT.....     | 252      |
| SLEEPLESS..... | 253      |
| SLICE.....     | 218      |
| SODOR.....     | 253      |
| SOLARIS.....   | 103      |
| SOLITAIRE..... | 104, 172 |
| SOLO.....      | 104, 105 |
| SPA.....       | 254      |
| SPECTACLE..... | 126      |
| SPRIG.....     | 191      |

|                   |     |
|-------------------|-----|
| STACK.....        | 105 |
| STAG.....         | 254 |
| STEAMPUNK.....    | 255 |
| STRAIGHTAWAY..... | 128 |
| STRETCH.....      | 192 |
| STRIP.....        | 145 |
| STRUM.....        | 106 |
| STYX.....         | 145 |
| SUMMIT.....       | 255 |
| SUPER STAR.....   | 68  |
| SVELTE.....       | 146 |
| SWERVE.....       | 106 |

## T

|                |          |
|----------------|----------|
| TAURUS.....    | 218      |
| TIGHTROPE..... | 107      |
| TRAP.....      | 107      |
| TRIBECA.....   | 70       |
| TRIOLET.....   | 72       |
| TRIPOLI.....   | 130      |
| TUSK.....      | 108, 173 |
| TWO FOLD.....  | 146      |

## U

|             |     |
|-------------|-----|
| UPTOWN..... | 192 |
|-------------|-----|

## V

|               |                   |
|---------------|-------------------|
| VAIATION..... | 256               |
| VAUGHAN.....  | 219               |
| VESPERE.....  | 173               |
| VIBE.....     | 193               |
| VIDA.....     | 108               |
| VIEW.....     | 147               |
| VIGGO.....    | 16, 109           |
| VISTA.....    | 147               |
| VOLGA.....    | 174               |
| VOLO.....     | 109               |
| VORNADO.....  | 18, 110, 111, 174 |

## W

|              |         |
|--------------|---------|
| WAVELET..... | 234     |
| WHIRL.....   | 19, 111 |
| WINK.....    | 193     |
| WRAPPE.....  | 158     |

## Y

|           |     |
|-----------|-----|
| YORK..... | 219 |
|-----------|-----|

# NUMERICAL INDEX

## B

|               |     |               |     |                |     |                |     |                |     |                 |     |
|---------------|-----|---------------|-----|----------------|-----|----------------|-----|----------------|-----|-----------------|-----|
| BL-1021L..... | 188 | FM-43310..... | 214 | PD-19421R..... | 19  | PD-35320.....  | 106 | PD-57108.....  | 62  | PD-69403R2..... | 17  |
| BL-1021R..... | 188 | FM-45008..... | 219 | PD-21324.....  | 104 | PD-35433.....  | 94  | PD-57317.....  | 87  | PD-69405L1..... | 17  |
| BL-13505..... | 180 | FM-45012..... | 219 | PD-21528.....  | 30  | PD-37310.....  | 82  | PD-57327.....  | 87  | PD-69405L2..... | 17  |
| BL-1630.....  | 192 | FM-4610.....  | 211 | PD-22744.....  | 109 | PD-39443.....  | 80  | PD-57548.....  | 44  | PD-69405R1..... | 17  |
| BL-19506..... | 182 | FM-4615.....  | 211 | PD-22754.....  | 109 | PD-41210.....  | 83  | PD-58506.....  | 32  | PD-69405R2..... | 17  |
| BL-21205..... | 189 | FM-4622.....  | 211 | PD-22775.....  | 109 | PD-41433.....  | 58  | PD-58509.....  | 32  | PD-69409R.....  | 17  |
| BL-23210..... | 191 | FM-48513..... | 196 | PD-23316.....  | 77  | PD-41442.....  | 58  | PD-59403L..... | 15  | PD-69413S.....  | 17  |
| BL-29903..... | 191 | FM-49118..... | 218 | PD-23412.....  | 86  | PD-41548.....  | 38  | PD-59403R..... | 15  | PD-69414L.....  | 17  |
| BL-47406..... | 193 | FM-49416..... | 205 | PD-23527.....  | 64  | PD-43310.....  | 95  | PD-59405L..... | 15  | PD-69415R.....  | 17  |
| BL-48007..... | 186 | FM-57512..... | 198 | PD-23852.....  | 92  | PD-43517.....  | 42  | PD-59405R..... | 15  | PD-69421R.....  | 17  |
| BL-57108..... | 190 | FM-57518..... | 198 | PD-25314.....  | 79  | PD-45316.....  | 91  | PD-59409R..... | 15  | PD-69423L.....  | 17  |
| BL-67305..... | 187 | FM-63216..... | 205 | PD-25410.....  | 81  | PD-45322.....  | 91  | PD-59413S..... | 15  | PD-69424.....   | 109 |
| BL-69317..... | 190 | FM-67116..... | 219 | PD-26611.....  | 84  | PD-45427.....  | 91  | PD-59414L..... | 15  | PD-69425S.....  | 17  |
| BL-73314..... | 187 | FM-67120..... | 219 | PD-26616.....  | 84  | PD-47803L..... | 13  | PD-59415R..... | 15  | PD-69432.....   | 109 |
| BL-75506..... | 178 | FM-73116..... | 215 | PD-27413.....  | 90  | PD-47803R..... | 13  | PD-59416.....  | 101 | PD-69441S.....  | 17  |
| BL-83023..... | 186 | FM-73132..... | 216 | PD-29303L..... | 11  | PD-47805L..... | 13  | PD-59421R..... | 15  | PD-70913.....   | 85  |

## F

|               |     |                |     |                |     |                |    |                 |     |                |     |
|---------------|-----|----------------|-----|----------------|-----|----------------|----|-----------------|-----|----------------|-----|
| FM-11422..... | 213 | FM-73142.....  | 216 | PD-29303R..... | 11  | PD-47805R..... | 13 | PD-59423L.....  | 15  | PD-70925.....  | 85  |
| FM-13114..... | 212 | FM-95408.....  | 204 | PD-29305L..... | 11  | PD-47809R..... | 13 | PD-59425S.....  | 15  | PD-70937.....  | 85  |
| FM-13120..... | 212 | FM-97414.....  | 207 | PD-29305R..... | 11  | PD-47813S..... | 13 | PD-59441S.....  | 15  | PD-70945.....  | 85  |
| FM-13126..... | 212 | FM-W33113..... | 212 | PD-29308.....  | 88  | PD-47814L..... | 13 | PD-59532.....   | 56  | PD-71226.....  | 92  |
| FM-20509..... | 202 | FM-W36607..... | 204 | PD-29309R..... | 11  | PD-47815R..... | 13 | PD-60506.....   | 60  | PD-72006.....  | 90  |
| FM-20512..... | 202 | FM-W45205..... | 216 | PD-29313S..... | 11  | PD-47821.....  | 89 | PD-60944.....   | 82  | PD-72718.....  | 108 |
| FM-20515..... | 202 | FM-W47205..... | 210 | PD-29314L..... | 11  | PD-47821R..... | 13 | PD-60964.....   | 82  | PD-72724.....  | 108 |
| FM-27214..... | 206 | FM-W47206..... | 210 | PD-29315R..... | 11  | PD-47823L..... | 13 | PD-61506.....   | 34  | PD-73128.....  | 97  |
| FM-27218..... | 206 | FM-W52306..... | 215 | PD-29321R..... | 11  | PD-47825S..... | 13 | PD-65244.....   | 100 | PD-73129.....  | 98  |
| FM-31414..... | 209 | FM-W52309..... | 215 | PD-29323L..... | 11  | PD-47828.....  | 89 | PD-65532.....   | 28  | PD-73134.....  | 98  |
| FM-33718..... | 206 | FM-W57806..... | 209 | PD-29325S..... | 11  | PD-47839.....  | 89 | PD-67209.....   | 76  | PD-73139.....  | 98  |
| FM-35424..... | 214 | FM-W57809..... | 209 | PD-29341S..... | 11  | PD-47841S..... | 13 | PD-67426.....   | 106 | PD-73142.....  | 99  |
| FM-37415..... | 217 | FM-W57812..... | 209 | PD-29425.....  | 108 | PD-48516.....  | 40 | PD-68903L.....  | 7   | PD-73155.....  | 99  |
| FM-37416..... | 217 | FM-W57815..... | 209 | PD-29803.....  | 105 | PD-48520.....  | 40 | PD-68903R.....  | 7   | PD-73210.....  | 102 |
| FM-37505..... | 200 | FM-W71310..... | 207 | PD-29806.....  | 105 | PD-49512.....  | 22 | PD-68905L.....  | 7   | PD-73242.....  | 102 |
| FM-37510..... | 200 |                |     | PD-29809.....  | 105 | PD-51030.....  | 75 | PD-68905R.....  | 7   | PD-75126.....  | 101 |
| FM-37515..... | 200 |                |     | PD-29858.....  | 86  | PD-51041.....  | 75 | PD-68909.....   | 75  | PD-76908.....  | 74  |
| FM-37522..... | 200 |                |     | PD-31727.....  | 88  | PD-51050.....  | 75 | PD-68909R.....  | 7   | PD-77503L..... | 9   |
| FM-4006.....  | 208 |                |     | PD-31735.....  | 88  | PD-52307.....  | 96 | PD-68913S.....  | 7   | PD-77503R..... | 9   |
| FM-4009.....  | 208 |                |     | PD-33230.....  | 95  | PD-52310.....  | 96 | PD-68914L.....  | 7   | PD-77505L..... | 9   |
| FM-4012.....  | 208 |                |     | PD-33244.....  | 96  | PD-52313.....  | 96 | PD-68915R.....  | 7   | PD-77505R..... | 9   |
| FM-4014.....  | 208 |                |     | PD-33312.....  | 99  | PD-53448.....  | 76 | PD-68921R.....  | 7   | PD-77506.....  | 36  |
| FM-4109.....  | 218 |                |     | PD-33331.....  | 100 | PD-53520.....  | 70 | PD-68923L.....  | 7   | PD-77509R..... | 9   |
| FM-4111.....  | 218 |                |     | PD-33436.....  | 85  | PD-54536.....  | 72 | PD-68925S.....  | 7   | PD-77513S..... | 9   |
| FM-4115.....  | 218 |                |     | PD-33718.....  | 80  | PD-55532.....  | 46 | PD-68941S.....  | 7   | PD-77514L..... | 9   |
| FM-43222..... | 213 |                |     | PD-33732.....  | 80  | PD-55906.....  | 87 | PD-69403L1..... | 17  | PD-77515R..... | 9   |
|               |     |                |     | PD-33743.....  | 80  | PD-55912.....  | 87 | PD-69403L2..... | 17  | PD-77521R..... | 9   |
|               |     |                |     | PD-35246.....  | 107 | PD-56523.....  | 54 | PD-69403R1..... | 17  | PD-77523L..... | 9   |

## P

|                 |     |                |     |                |     |                |     |                |     |                |     |
|-----------------|-----|----------------|-----|----------------|-----|----------------|-----|----------------|-----|----------------|-----|
| PD-77525S.....  | 9   | PL-LED15 ..... | 193 | WS-42618 ..... | 163 | WS-73127 ..... | 142 | WS-W11914..... | 246 | WS-W39310 ...  | 239 |
| PD-77541S.....  | 9   | PL-LED17 ..... | 189 | WS-43114 ..... | 162 | WS-7316 .....  | 146 | WS-W11920 .... | 246 | WS-W39316....  | 239 |
| PD-79221 .....  | 93  | PL-LED23.....  | 189 | WS-43413.....  | 168 | WS-7322.....   | 146 | WS-W11926 .... | 246 | WS-W41716 .... | 254 |
| PD-81118 .....  | 103 | PL-LED24.....  | 188 | WS-45105.....  | 161 | WS-7334.....   | 146 | WS-W13324....  | 251 | WS-W41722....  | 254 |
| PD-81124.....   | 103 | PL-LED25.....  | 193 | WS-47108 ..... | 165 | WS-75318 ..... | 140 | WS-W13336....  | 251 | WS-W43011....  | 253 |
| PD-81131 .....  | 103 | PL-LED34.....  | 189 | WS-47116 ..... | 165 | WS-75328 ..... | 140 | WS-W13348 .... | 251 | WS-W43015....  | 253 |
| PD-81148 .....  | 103 | PL-LED37.....  | 193 | WS-47828 ..... | 136 | WS-77424 ..... | 136 | WS-W13360 ...  | 251 | WS-W45714....  | 250 |
| PD-81442.....   | 83  | PM-W15928....  | 239 | WS-47838 ..... | 136 | WS-77436 ..... | 136 | WS-W13372....  | 251 | WS-W45720 ...  | 250 |
| PD-81513.....   | 50  | PM-W33516....  | 226 | WS-51524.....  | 128 | WS-77612.....  | 133 | WS-W13918 .... | 238 | WS-W45726 ...  | 250 |
| PD-83128.....   | 94  | PM-W48620....  | 245 | WS-51532.....  | 128 | WS-77618.....  | 133 | WS-W13924....  | 238 | WS-W47318....  | 236 |
| PD-83542.....   | 66  |                |     | WS-53223 ..... | 135 | WS-77624 ..... | 133 | WS-W14911....  | 252 | WS-W47809....  | 244 |
| PD-84903R ..... | 18  | <b>W</b>       |     | WS-53318.....  | 165 | WS-77636 ..... | 133 | WS-W15312 .... | 256 | WS-W47814....  | 244 |
| PD-84905R ..... | 18  | WS-12718 ..... | 169 | WS-55206 ..... | 164 | WS-79220 ..... | 167 | WS-W15708....  | 253 | WS-W47820 ...  | 244 |
| PD-84907 .....  | 110 | WS-13107 ..... | 167 | WS-55318.....  | 174 | WS-79524 ..... | 122 | WS-W15710 .... | 253 | WS-W48616 ...  | 245 |
| PD-84909R.....  | 18  | WS-13115 ..... | 167 | WS-57205 ..... | 163 | WS-79534 ..... | 122 | WS-W15912 .... | 238 | WS-W48620....  | 245 |
| PD-84915R.....  | 18  | WS-15422.....  | 140 | WS-59210 ..... | 162 | WS-79622.....  | 132 | WS-W15918 .... | 238 | WS-W48625....  | 245 |
| PD-84921R.....  | 18  | WS-15432.....  | 140 | WS-59324 ..... | 134 | WS-79628.....  | 132 | WS-W15924....  | 238 | WS-W49214 ...  | 255 |
| PD-87208 .....  | 78  | WS-21014.....  | 168 | WS-61216.....  | 161 | WS-79636 ..... | 132 | WS-W17214 .... | 237 | WS-W49314....  | 252 |
| PD-87214 .....  | 78  | WS-21413 ..... | 172 | WS-61326.....  | 139 | WS-80524.....  | 124 | WS-W17218 .... | 237 | WS-W49319....  | 252 |
| PD-87720.....   | 110 | WS-25410 ..... | 164 | WS-61334.....  | 139 | WS-80536.....  | 124 | WS-W17222....  | 237 | WS-W52610 ...  | 248 |
| PD-87723.....   | 110 | WS-25612.....  | 160 | WS-62518.....  | 114 | WS-81208 ..... | 166 | WS-W17310 .... | 246 | WS-W52614....  | 248 |
| PD-87729.....   | 111 | WS-27010 ..... | 141 | WS-62524 ..... | 114 | WS-83212.....  | 171 | WS-W17524....  | 230 | WS-W52620 ...  | 248 |
| PD-87735.....   | 110 | WS-29428.....  | 173 | WS-63322 ..... | 172 | WS-83422.....  | 144 | WS-W17532....  | 230 | WS-W54614....  | 248 |
| PD-87741 .....  | 111 | WS-30018 ..... | 139 | WS-63412.....  | 173 | WS-83432.....  | 144 | WS-W21110....  | 241 | WS-W54620 ...  | 248 |
| PD-89436 .....  | 93  | WS-30024.....  | 139 | WS-63718.....  | 145 | WS-84911.....  | 174 | WS-W21116....  | 241 | WS-W57422 ..   | 240 |
| PD-91536.....   | 52  | WS-30907.....  | 171 | WS-63724 ..... | 145 | WS-85212.....  | 160 | WS-W21122 ...  | 241 | WS-W61806 ...  | 242 |
| PD-93534.....   | 48  | WS-31524.....  | 154 | WS-63736 ..... | 145 | WS-85407 ..... | 169 | WS-W24509....  | 255 | WS-W61808 ...  | 242 |
| PD-94940 .....  | 103 | WS-34027 ..... | 144 | WS-65118 ..... | 141 | WS-85524.....  | 120 | WS-W24513....  | 255 | WS-W63524 ...  | 224 |
| PD-95827.....   | 107 | WS-34037 ..... | 144 | WS-65128.....  | 141 | WS-85532.....  | 120 | WS-W25106 ...  | 241 | WS-W65412....  | 250 |
| PD-97145 .....  | 84  | WS-35020.....  | 137 | WS-65323 ..... | 170 | WS-85618 ..... | 138 | WS-W26712....  | 249 | WS-W65607....  | 249 |
| PD-97218.....   | 79  | WS-35027.....  | 137 | WS-6718 .....  | 138 | WS-85624.....  | 138 | WS-W26716....  | 249 | WS-W77211....  | 251 |
| PD-97552.....   | 24  | WS-35819.....  | 142 | WS-6724.....   | 138 | WS-85636.....  | 138 | WS-W27106...   | 240 | WS-W89516 ...  | 222 |
| PD-98908 .....  | 81  | WS-35825 ..... | 142 | WS-67514.....  | 156 | WS-87407 ..... | 166 | WS-W29118 .... | 254 | WS-W89524 ...  | 222 |
| PD-99450 .....  | 26  | WS-35837 ..... | 142 | WS-69815 ..... | 135 | WS-87520 ..... | 130 | WS-W29124....  | 254 | WS-W99418 ...  | 242 |
| PD-W15918....   | 237 | WS-35849.....  | 142 | WS-69826.....  | 135 | WS-87533 ..... | 130 | WS-W32514....  | 232 |                |     |
| PD-W17216....   | 236 | WS-35861.....  | 142 | WS-71426.....  | 137 | WS-89120 ..... | 147 | WS-W33111....  | 247 |                |     |
| PD-W36610....   | 243 | WS-35873 ..... | 142 | WS-71524.....  | 126 | WS-89128 ..... | 147 | WS-W33118 ...  | 247 |                |     |
| PD-W48616....   | 244 | WS-38024.....  | 133 | WS-71534.....  | 126 | WS-91420 ..... | 146 | WS-W33516....  | 228 |                |     |
| PL-11017 .....  | 184 | WS-38036.....  | 133 | WS-7213 .....  | 134 | WS-91427.....  | 146 | WS-W33525 ...  | 228 |                |     |
| PL-11025.....   | 184 | WS-39422.....  | 116 | WS-7222.....   | 134 | WS-91510 ..... | 150 | WS-W33534 ...  | 228 |                |     |
| PL-11033.....   | 184 | WS-39434.....  | 116 | WS-7230 .....  | 134 | WS-91524.....  | 118 | WS-W36610 ...  | 243 |                |     |
| PL-11042.....   | 184 | WS-40720.....  | 147 | WS-73117.....  | 143 | WS-93409.....  | 170 | WS-W36614....  | 243 |                |     |
| PL-52017 .....  | 192 | WS-40726.....  | 147 | WS-73118 ..... | 143 | WS-95518.....  | 158 | WS-W38520 ...  | 234 |                |     |
| PL-52025.....   | 192 | WS-41119.....  | 145 | WS-73120.....  | 142 | WS-99426.....  | 132 | WS-W39114 .... | 247 |                |     |
| PL-52034.....   | 192 | WS-41125 ..... | 145 | WS-73123.....  | 143 | WS-99436.....  | 132 | WS-W39120 ...  | 247 |                |     |
| PL-LED14 .....  | 188 | WS-41137 ..... | 145 | WS-73124.....  | 143 | WS-99527 ..... | 152 | WS-W39305....  | 239 |                |     |



## Headquarters

Tel: 800.526.2588  
Fax: 800.526.2585

44 Harbor Park Dr  
Port Washington, NY 11050

## Distribution and Assembly Facilities

### South East

1600 Distribution Ct  
Lithia Springs, GA 30122

### Central

1700 South J Elmer Weaver Freeway  
Suite 100  
Cedar Hill, TX 75104

### West

1750 S Archibald Ave  
Ontario, CA 91761

Email [customs@wacighting.com](mailto:customs@wacighting.com) to learn more about our custom capabilities  
in large quantities. For up to date product specifications and assistance  
please visit [wacighting.com](http://wacighting.com) or call **1-800-526-2588**

dweLED technology and designs are protected by several patents and patent applications. dweLED will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe its patents are being infringed.

Copyright © 2025 dweLED. All rights reserved.  
This catalog is copyrighted and dweLED will use all measures available to it under the law against anyone who copies or derives from its copyrighted work.

dweLED retains the right to modify the design of its products at any time as part of the company's continuous improvement program. Please refer to our website for the latest product specifications.

dweLED™

