



WAC LIMITED[®]

2025





WAC LIMITED

Maximize desirability and minimize expenses with WAC LIMITED products designed to accommodate single-family or multi-family residential, apartment living, and large-scale hospitality projects.

A well-lit space elevates the perceived value of all finishes used and increases functionality of spaces while also minimizing maintenance and energy expenses. Dollar for dollar, quality lighting improves occupant experiences more than any other construction material. Our wide array of products covers kitchens, baths, bedrooms, closets, hallways, living rooms, laundry rooms and garages—all designed for safety and proven to last.

We also understand that installation costs are a major part of the value equation. As such, WAC LIMITED luminaires are engineered to reduce these costs.

DISC II




F-033L-BN



An energy efficient ceiling fan with a quiet DC motor and LED luminaire make Disc II 70% more efficient than conventional fans.

DISC II

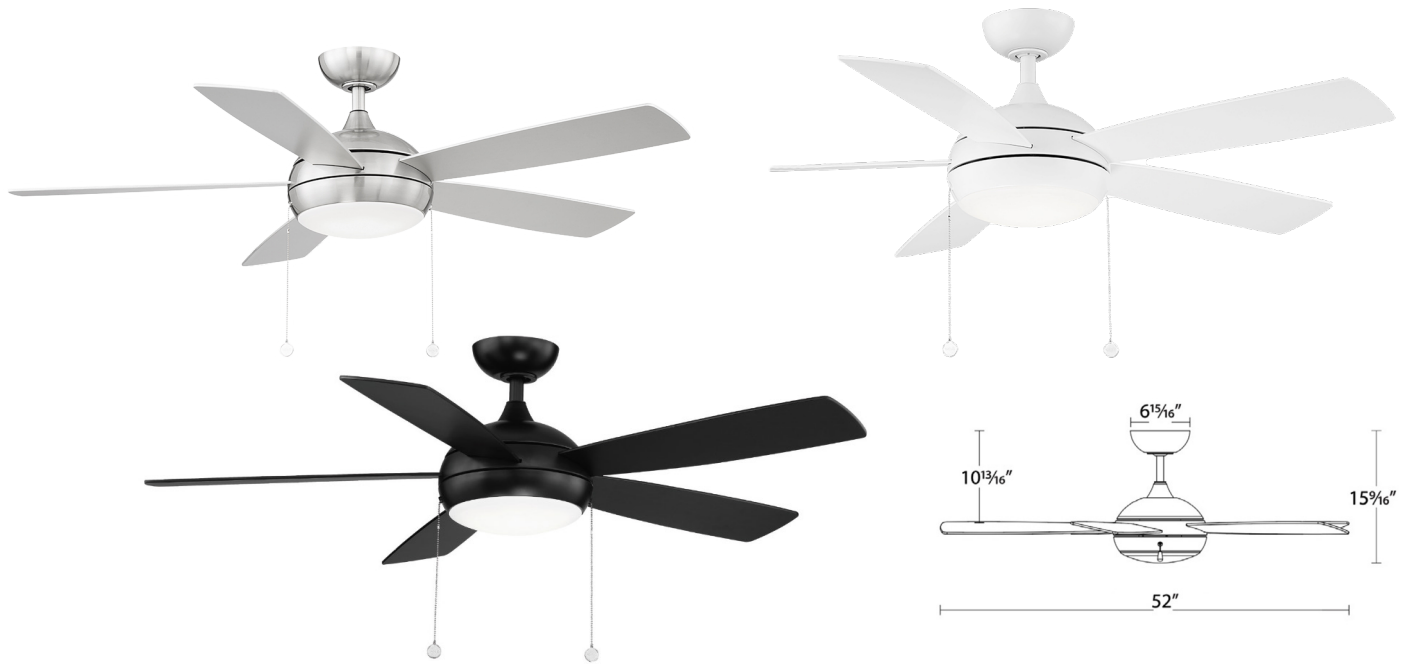

A streamlined look suited for bedrooms and living rooms. The sweep of the 52" blades efficiently creates a cooling effect and complements the silent DC motor.

Blade:	12° pitch, 52" sweep, plywood
Downrod:	¾" W x 4 ½" H included
Mounting Slope:	Up to 30° standard, 45° with optional Slope Ceiling Kit
Lead Wire:	80"
Hanging Weight:	18 lbs
Lumens/Delivered Lumens:	2520-2620/1692-1746
Total Power:	52W
LED Power:	26W
CRI:	90
Color Temperature:	2700K, 3000K, 4000K, 5000K
LED Rated Life:	50,000 hrs
LED Dimming:	100%-10% ELV/ TRIAC (Refer to online product page for dimming compatibility)

- 3-speed 120 x 15 DC motor for quiet and powerful operation
- Precision balanced blades for wobble-free operation
- Pull-chain operated and reversible from housing
- Fan is Energy Star rated
- Memory module—fan will recall last speed setting if switched off

Model	Housing	Blade
F-033L	BN	Brushed Nickel
	MB	Matte Black
	MW	Matte White

Example: **F-033L-BN**

ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	25W	17W
Airflow	5,032 CFM	3,964 CFM
Energy Costs*	-	\$5/yr
Efficiency	237 CFM/W	237 CFM/W

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day


ACCESSORIES sold separately

DC- Coupler	BN	Brushed Nickel
	MB	Matte Black
	MW	Matte White
SC- Slope Ceiling Kit	BN	Brushed Nickel
	MB	Matte Black
	MW	Matte White
DR- Downrods	12"	BN Brushed Nickel MB Matte Black MW Matte White
	18"	
	24"	
	36"	
	48"	
	60"	
	72"	

ATLANTIS



CALIFORNIA
JA8
TITLE 24

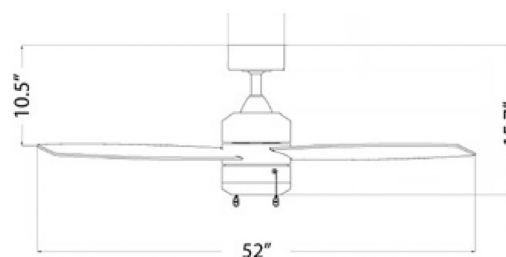

ATLANTIS offers a damp rated, high-value fan with three speed options and can be reversed from the housing. Enhance your interiors with the gently-curved shape of this elegant fan.

Blade:	13° pitch, 52" sweep, plywood
Downrod:	¾" W x 6" H included
Mounting Slope:	Up to 30° standard, 45° with optional Slope Ceiling Kit
Lead Wire:	80"
Hanging Weight:	18 lbs
Lumens/Delivered Lumens:	1600/708
Total Power:	83W
LED Power:	19.5W
CRI:	90
Color Temperature:	3000K
LED Rated Life:	50,000 hrs
LED Dimming:	100%-10% ELV/ TRIAC (Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 16 AC motor
- Pull chain operation
- Fan is reversible from housing

Model	Housing	Blade
F-072L	MB	Matte Black
	MW	Matte White

Example: **F-072L-MB**

ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	63W	40W
Airflow	5,001 CFM	3,717 CFM
Energy Costs*	-	\$11/yr
Efficiency	92 CFM/W	92 CFM/W

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day


ACCESSORIES *sold separately*

DC- Coupler		MB	Matte Black
		MW	Matte White
SC- Slope Ceiling Kit		MB	Matte Black
		MW	Matte White
DR- Downrods	12"	MB	Matte Black
	18"		
	24"		
	36"		
	48"		
	60"		
	72"	MW	Matte White

ATLANTIS FLUSH



CALIFORNIA
JA8
TITLE 24

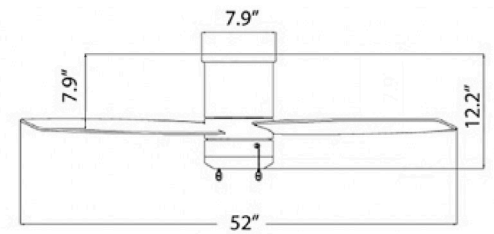

ATLANTIS FLUSH offers a damp rated, high-value fan with three speed options and can be reversed from the housing. Enhance your interiors with the gently-curved shape of this elegant fan.

Blade:	13° pitch, 52" sweep, plywood
Lead Wire	8"
Hanging Weight:	18 lbs
Lumens/Delivered Lumens:	1600/708
Total Power:	83W
LED Power:	19.5W
CRI:	90
Color Temperature:	3000K
LED Rated Life:	50,000 hrs
LED Dimming:	100%-10% ELV/ TRIAC (Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 16 AC motor
- Pull chain operation
- Fan is reversible from housing

Model	Housing	Blade	
F-073L	MB	Matte Black	Matte Black
	MW	Matte White	Matte White

Example: **F-073L-MB**

ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	63W	40W
Airflow	4,116 CFM	3,046 CFM
Energy Costs*	-	\$11/yr
Efficiency	75 CFM/W	75 CFM/W


Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day



QUADE



CALIFORNIA
JA8
TITLE 24

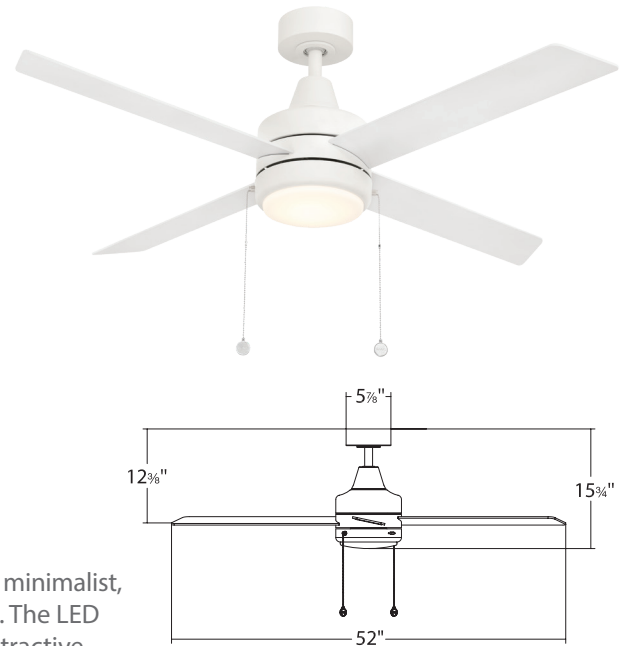

This four-blade, double pull chain ceiling fan offers a clean aesthetic. Its minimalist, industrial design is ideal for today's lofts, home offices, and bedrooms. The LED luminaire is offered in four CCTs with impressive light output. Three attractive housing and blade finish combinations are available. The 13-degree pitch on every blade moves the perfect amount of air when activated. A wide range of downrod lengths are available for different standard and slope ceiling heights.

Blade:	13 degrees 52
Downrod:	0.75 ID x 6"H
Mounting Slope:	Up to 30
Lead Wire:	80"
Hanging Weight:	15 lbs
Lumens/Delivered Lumens:	1991 - 2159 (Based on CCT) / 980
Total Power:	67W
LED Power:	21W
CRI:	90
Color Temperature:	2700K, 3000K, 4000K, 5000K (selectable)
LED Rated Life:	50,000 hrs
LED Dimming:	100%-10% ELV/ TRIAC (Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 20 AC motor
- Pull chain operation
- Fan is reversible from housing

Model	Housing	Blade
F-106L	BN	Brushed Nickel
	MB	Matte Black
	MW	Matte White

Example: **F-106L-MB**

ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	46W	31W
Airflow	4564 CFM	3431 CFM
Energy Costs*	-	\$9/yr
Efficiency	107 CFM/W	107 CFM/W

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day


ACCESSORIES *sold separately*

DC- Coupler	BN	Brushed Nickel
	MB	Matte Black
	MW	Matte White
SC- Slope Ceiling Kit	MB	Brushed Nickel
	MW	Matte Black
		Matte White
DR- Downrods	12"	BN Brushed Nickel MB Matte Black MW Matte White
	18"	
	24"	
	36"	
	48"	
	60"	
	72"	

HUG PULL CHAIN 44



CALIFORNIA
JA8
TITLE 24

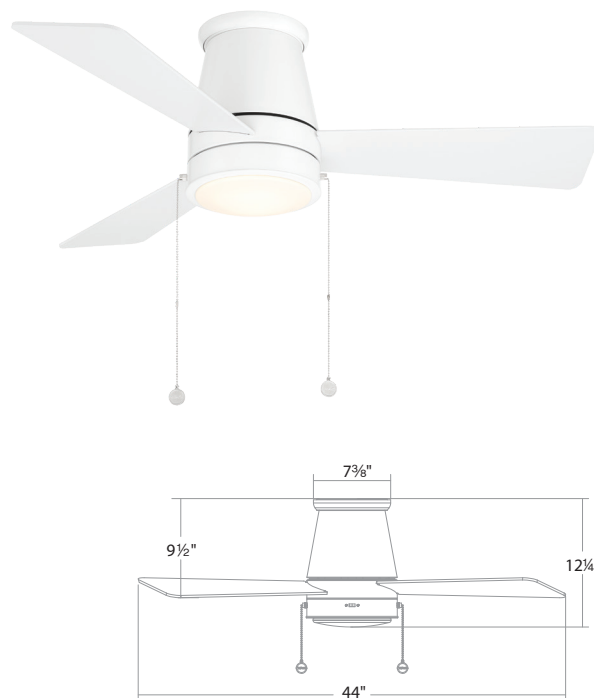

The Hug Pull Chain's handsome style enhances various designs, making it perfect for mid-size spaces, including bedrooms, mudrooms, and other areas throughout the home.

This three-blade, double-pull chain ceiling fan features a 13.5-degree pitch on every blade, which moves the perfect amount of air for any application. The round shade on the underside of the fan features an LED luminaire that offers a complete layer of light in four CCTs.

Blade:	13.5 degrees 44
Lead Wire	8"
Hanging Weight:	15.1lbs
Lumens/Delivered Lumens:	1991 - 2159 (Based on CCT) / 999
Total Power:	70W
LED Power:	21W
CRI:	90
Color Temperature:	2700K, 3000K, 4000K, 5000K (selectable)
LED Rated Life:	50,000 hrs
LED Dimming:	100%-10% ELV/ TRIAC (Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 18 AC motor
- Pull chain operation
- Fan is reversible from housing

Model	Housing		Blade
F-107L	BN	Brushed Nickel	Brushed Nickel
	MB	Matte Black	Matte Black
	MW	Matte White	Matte White
Example: F107L-MB			


ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	49W	28W
Airflow	4845 CFM	3048 CFM
Energy Costs*	-	\$8/yr
Efficiency	93 CFM/W	93 CFM/W

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day

HUG PULL CHAIN 52



CALIFORNIA
JA8
TITLE 24

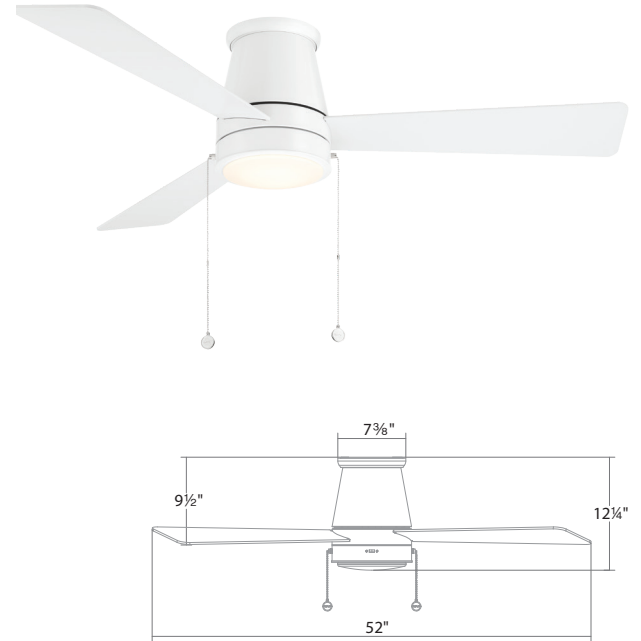

The Hug Pull Chain's handsome style enhances various designs, making it perfect for mid-size spaces, including bedrooms, mudrooms, and other areas throughout the home.

This three-blade, double-pull chain ceiling fan features a 13.5-degree pitch on every blade, which moves the perfect amount of air for any application. The round shade on the underside of the fan features an LED luminaire that offers a complete layer of light in four CCTs.

Blade:	13.5 degrees 52"
Lead Wire	8"
Hanging Weight:	15.7lbs
Lumens/Delivered Lumens:	1991 - 2159 (Based on CCT) / 999
Total Power:	73W
LED Power:	21W
CRI:	90
Color Temperature:	2700K, 3000K, 4000K, 5000K (selectable)
LED Rated Life:	50,000 hrs
LED Dimming:	100%-10% ELV/TRIAC (Refer to online product page for dimming compatibility)

- 3 fan speeds
- Silent 153 x 18 AC motor
- Pull chain operation
- Fan is reversible from housing


Model	Housing		Blade
F-108L	BN	Brushed Nickel	Brushed Nickel
	MB	Matte Black	Matte Black
	MW	Matte White	Matte White
Example: F108L-MB			

ENERGY GUIDE		
Standard	High Speed	Weighted Average
Electricity	52W	33W
Airflow	4921 CFM	3087 CFM
Energy Costs*	-	\$9/yr
Efficiency	93 CFM/W	93 CFM/W

Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day



CUT AND SECURELY RECONNECT WITH EASE

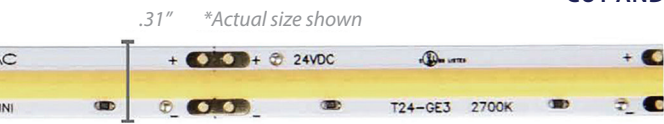

Input: 24VDC
Lumens: Up to 300 lm/ft
Rated Life: 50,000 hours



- Cut and re-connectable with secure screw terminal accessories
- May be cut every 2 inches
- Uniform illumination
- Seamless line of light

System	Lumens	Max Run	Wattage	Length	Length Description	Color Temp	CRI	Finish
T24-GE1	100+ lm/ft	40ft (60W), 40 ft (96W)	1.2W/ft	15	15 ft spool (incl. 2 pcs Tape to Tape Connector)	27 2700K	90	WT White
T24-GE2	200+ lm/ft	24ft (60W), 30ft (96W)	2.2W/ft	24	24 ft spool (incl. 4 pcs Tape to Tape Connector)	30 3000K		
T24-GE3	300+ lm/ft	15ft (60W), 24ft (96W)	3.9W/ft	100	100 ft spool (incl. 10 pcs Tape to Tape Connector)	35 3500K		
						40 4000K		

Example: **T24-GE3-15-27WT**



GEMINI KIT

This kit provides all the necessary components for seamless single-CCT linear lighting installations. Tailored for a quick and easy installation, these kits ensure optimal compatibility and an easy setup. Enhance your efficiency and eliminate guesswork with our curated installation kits, designed to deliver superior performance and reliability for any lighting project.





INCLUDES:

- Gemini Tape 300 24VDC 15ft
- Remote Power Supply 96W 24VDC
- Extension Cable 12ft White
- Power to Tape connector 10 pcs
- Tape to Tape connector 3 pcs

System	Lumens	Max Run	Wattage	Length	Color Temp	CRI	Finish
T24-GE3-15-27KIT	300+ lm/ft	15ft (60W), 24ft (96W)	3.9W/ft	15 ft spool	2700K	90	White
T24-GE3-15-30KIT					3000K		
T24-GE3-15-35KIT					3500K		

Example: **T24-GE3-15-30KIT**







POWER SUPPLY

	Type	Model	Dimension	Input	Output	Dimming
	Portable power supply	PS-24DC-60P-GE	4" x 2 3/16" x 1 1/2"	120V	24VDC 60W	Non Dimmable
	<ul style="list-style-type: none"> • Include 6' lead wire • Integral on-off switch 					
	Remote power supply	EN-BT60-24*	6 1/2" x 2 1/16" x 1 1/4"	120V	24VDC 60W	ELV
	<ul style="list-style-type: none"> • ELV Dimming 100%-10% • Include 6' lead wire 	EN-BT96-24*	6 1/2" x 2 1/16" x 1 1/4"	120V	24VDC 96W	ELV
	Remote power supply	PS-24DC-U60R-BT	8 13/16" x 2 1/16" x 1 1/4"	120V-277V	24VDC 60W	ELV/TRIAC
	<ul style="list-style-type: none"> • TRIAC, ELV Dimming 100%-1% • Universal Input, ≤ 0.9 pf 	PS-24DC-U96R-BT	8 13/16" x 2 1/16" x 1 1/4"	120V-277V	24VDC 96W	ELV/TRIAC
	Remote power supply	PS-24DC-U3X96R-BT	12" x 4 5/16" x 2"	120V-277V	24VDC 3 x 96W	ELV/TRIAC/0-10V
	<ul style="list-style-type: none"> • 3 x 96W outputs (288W total) • Include 3 x 6' lead wires 					



*Not compatible with Touch Panel and Motion Sensor (CT-6A-R2)

*Not compatible with iR sensor (IR-96-24VACDC)


ACCESSORIES FOR GEMINI TAPE

	Type	Model	Finish
	Tape to Tape Connector Connects tape sections (10 pieces per pack)	T24-BS-MM	CL Clear
	Power to Tape Connector Connects power cable to tape (10 pieces per pack)	T24-BS-PM	
	L Connector Connects tape sections (2 pieces per pack)	T24-BS-L	
	Flex Y Connector Connects tape sections and power feed Includes LED-T-B (1pc)	T24-BS-Y	BK Black WT White
	Flex X Connector Connects tape sections and power feed Includes LED-T-B (1pc)	T24-BS-X	
	Low Voltage Wiring Box Neatly house connections for up to 2 wires	LED-T-B	WT White


Example: **T24-BS-MM-CL**

	Type	Model	Finish	
	Joiner Cable Extend distance between tape sections	T24-BS-IC-002	2 in	BK Black WT White
		T24-BS-IC-006	6 in	
		T24-BS-IC-012	1 ft	
		T24-BS-IC-036	3 ft	
		T24-BS-IC-072	6 ft	
	Extension Cable Extends distance between tape sections and power supply (Includes LED-T-B (1 pc) & screw driver)	T24-BS-EX2-072	6 ft	
		T24-BS-EX2-144	12 ft	
		T24-BS-EX2-240	20 ft	
		T24-BS-EX2-480	40 ft	

Example: **T24-BS-EX2-240-WT**

	Model	Finish	Input/Output	L	W	H	Description
	IR-96-24VACDC-BK IR-96-24VACDC-WT	Black White	24V AC/DC 96W	1 3/8"	3/4"	3/8"	IR (Infrared) sensor switch works by turning the lights on when it becomes unobstructed. Can be surface mounted with bracket provided or double sided adhesive.

INDOOR ALUMINUM CHANNELS



SHALLOW ALUMINUM CHANNEL

LED-T-CH5-BK
LED-T-CH5-WT 5'
LED-T-CH5-AL

ADDITIONAL END CAPS


LED-T-CH5-EC-BK
LED-T-CH5-EC-WT 2 pcs
LED-T-CH5-EC-AL

Includes a diffuser, 2 end caps, and 5 screws.


**ALUMINUM CHANNEL
ADDITIONAL END CAPS**


LED-T-CH 5'
LED-T-CH-EC 2 pcs

Diffuses light from InvisiLED tape.
Includes a diffuser, 2 end caps, and 5 screws.


**45° ANGLED ALUMINUM CHANNEL
ADDITIONAL END CAPS**

LED-T-CH2 5'
LED-T-CH2-EC 2 pcs


Includes a diffuser, 2 end caps, and 5 screws.


**DEEP ALUMINUM CHANNEL
ADDITIONAL END CAPS**

LED-T-CH1 5'
LED-T-CH1-EC 2 pcs


Eliminates visible hot spots.
Includes a diffuser, 2 end caps, and 5 screws.

INDOOR MOUNTING ACCESSORIES


ALUMINUM RETROFIT CHANNEL


LED-T-RC 3 feet

Can be bent to create fixed curves or used as a glare shield.


CLEAR CHANNEL

LED-TO24-CH5 5 feet

Compatible with InvisiLED Lite+, Pro+, Pro2+ and Pro3 only.


FIXED ANGLE CHANNEL CLIP

LED-T-CL3-PT

Includes 2 pieces, 4 screws. Use to mount Aluminum Channel.


CLIP

LED-T-CL

For surfaces that are difficult to adhere.
Includes: 10 pcs plastic clips and 10 pcs screws. Compatible with InvisiLED Lite+, Pro+, Pro2+ and Pro3 only.


CURVE CLIP


LED-T-CL1

Clips to hold indoor InvisiLED tapes sections. Includes: 10 pcs plastic clips and 10 pcs screws. Compatible with InvisiLED Lite+, Pro+, Pro2+ and Pro3 only.


ADJUSTABLE CHANNEL CLIP

LED-T-CL2-PT

Includes 2 pieces, 4 screws. Used to mount Aluminum Channel.
Adjust 50° from center either way.





OPTICAL CHANNELS AND LENS ACCESSORIES



FROSTED DIFFUSER

LED-T-CH5-COV-FR 5'
LED-T-CH8-COV-FR 8'

Standard diffuser included with channel.




**SPOT OPTIC DEEP CHANNEL
ADDITIONAL END CAPS**

LED-T-CH3-SP 5'
LED-T-CH1-EC 2 pcs

Eliminates visible hot spots.
Includes a diffuser, 2 end caps, and 5 screws.


Spot 9° Beam Angle



SEMI-CLEAR DIFFUSER

LED-T-CH5-COV-SF 5'
LED-T-CH8-COV-SF 8'

Optional diffuser available, order separately.




**FLOOD OPTIC DEEP CHANNEL
ADDITIONAL END CAPS**

LED-T-CH3-FL 5'
LED-T-CH1-EC 2 pcs

Eliminates visible hot spots.
Includes a diffuser, 2 end caps, and 5 screws.


Flood 54° Beam Angle



BLACK DIFFUSER

LED-T-CH5-COV-BK 5'
LED-T-CH8-COV-BK 8'

Optional diffuser available, order separately.




**WIDE FLOOD OPTIC DEEP CHANNEL
ADDITIONAL END CAPS**


LED-T-CH3-WF 5'
LED-T-CH1-EC 2 pcs

Eliminates visible hot spots.
Includes a diffuser, 2 end caps, and 5 screws.

Wide Flood 84° Beam Angle



UNDER CABINET STRIP PLUG & PLAY

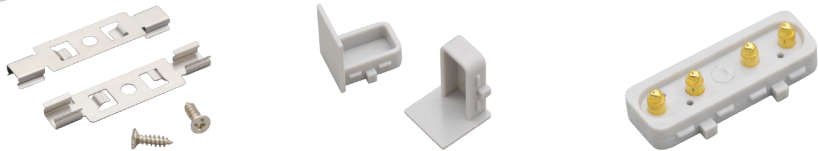


Accessories Included

Ideal for under cabinet lighting applications, our Strip Plug & Play fixture is easy to order and install. This low-profile luminaire is just 1/2" inch tall and 1/2" wide while delivering over 200 lumens per foot. For a clean architectural look, join the strips end-to-end seamlessly.


Input: 24VDC
Dimming: 100-10% ELV, 100-10% TRIAC
Rated Life: 50,000 hours

- Connect multiple pieces together for a seamless run
- Mount easily using clips, endcaps and joiner accessories
- Only need to purchase one length and one power supply for working system
- Construction: Aluminum with PC diffuser

		Model	Length	Wattage	Lumens	Color Temp	CRI	Finish
	LU	08	8"	3W	140	27 2700K 30 3000K	90	AL Aluminum BK Black
		20	20"	6W	360			
		40	40"	12W	700			

Example: LU-20-30-BK

POWER SUPPLY

	Type	Model	Dimension	Input	Output
	Portable power supply • Include 6' lead wire • Integral on-off switch	LU-2460D-P-BK	4" x 2 3/16" x 1 1/2"	120V	24VDC 60W
		LU-2420D-P-BK LU-2420D-P-WT	2 3/4" x 1 5/8" x 1 1/8"	100V-240V	24VDC 24W
	Remote power supply • Include 6' lead wire • TRIAC, ELV Dimming • Universal Input	LU-24DC060-UNV-RB2	8 13/16" x 2 1/16" x 2 1/4"	100V-277V	24VDC 60W
		LU-24DC096-UNV-RB2	8 13/16" x 2 1/16" x 2 1/4"	100V-277V	24VDC 96W

ACCESSORIES

	Type	Model	Length	Finish
	Joiner Cable Extend Distance between sections	LU-IC02 LU-IC06 LU-IC12 LU-IC36 LU-IC72	2" 6" 12" 3' 6'	Gray
		LU-I		
		LU-LE06 LU-LE72	6" 72"	
		MTB-01 MTB-01-WT		Black White
		LU-EC		Gray
	Fixed Base Mount strip light flush to surface	LU-FB		
		LU-AB		

BARLIGHT

50% OFF 100%



ROCKER SWITCH
ADJUSTS BETWEEN
50%, OFF, OR 100%



ALL-IN-ONE CCT SELECTABLE,
ADJUSTS BETWEEN
2700K, 3000K
OR 3500K

BARLIGHT

ALL-IN-ONE CCT SELECTABLE



Perfect for lighting kitchen counters, our 120V undercabinet Barlight with selectable 3 CCT technology and a High-Low switch to provide quality illumination for all tasks.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Rocker switch to adjust between 0%, 50%, or 100%
- Construction: aluminum with white PC diffuser

		Model	Length	Wattage	Max Lumens at 3000K	Color Temp	CRI	Finish
	BA-AC		08 8"	7W	355	CS 2700K 3000K 3500K	90	WT White
			18 18"	11W	600			
			24 24"	15W	910			
			30 30"	18W	1075			

Example: **BA-AC18-CS-WT**


	Model	Description	Length	Finish
	BA-I	"I" Connector BA-I		WT White
	BA-IC12 BA-IC24 BA-IC36	Interconnect Cable BA-IC	12" 24" 36"	
	BA-PC6	Power Cord	72"	







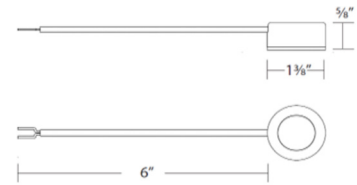

MINI PUCK LIGHT

An innovative undercabinet lighting solution that can be surface mounted or recessed mounted into cabinetry for a cleaner appearance, Mini Puck Lights deliver optimal ambient illumination in kitchens and other spaces.





Input: 24VAC or 24VDC
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours



- Install as surface mount or recessed mount
Compatible with portable wall plug or hardwired 24V driver/transformer
- Construction: die-cast Aluminum and PC diffuser
- Each fixture equipped with 6ft lead wires

	Model	Wattage	Lumens	Color Temp	CRI	Finish
	HR-LED10 1 single light	2W per light	95lm per light	30 3000K	90	BK Black WT White
	HR-LED10/6 Pack of 6 lights					
	HR-LED10/10 Pack of 10 lights					
	HR-LED10/6K Puck Light Kit: 6 wired lights, 1 multiple terminal block, and 24V Portable Power Supply					
Example: HR-LED10-30-BK						


COMPATIBLE 24VDC CLASS 2 POWER SUPPLY

	Model	Dimensions	Input	Output	Dimming	Finish
Portable Power Supply 	EN-2420D-P-BK EN-2420D-P-WT	2 3/4" x 1 5/8" x 1 1/8"	100V-240V	24VDC 24W	Non-Dimmable	Black White
Remote Power Supply 	EN-24DC060-UNV-RB2 EN-24DC096-UNV-RB2	8 13/16" x 2 1/16" x 2 1/4" 8 13/16" x 2 1/16" x 2 1/4"	100V-277V 100V-277V	24VDC 60W 24VDC 96W	TRIAC, ELV TRIAC, ELV	Black Black

COMPATIBLE 24VAC CLASS 2 POWER SUPPLY

	Model	Dimensions	Input	Output	Dimming	Finish
Portable Power Supply 	EN-2460-P-AR	2 3/4" x 1 5/8" x 1 3/4"	120V	24VAC 60W	Non-Dimmable	Black
Remote Power Supply 	EN-2460-RB2 EN-24100-RB2	6 1/2" x 1 5/8" x 1 1/4" 6 1/2" x 1 5/8" x 1 1/4"	120V 120V	24VAC 60W 24VAC 100W	ELV	Black Black

MULTIPLE TERMINAL BLOCK

	Model	Description	Finish
	MTB-01 MTB-01-WT	Multiple Terminal Block (Enclosure for up to 6 output connections)	Black White

PUCK LIGHT



Surface or Recessed Mounted

120V Direct Input
No Driver Required

BUILD A SYSTEM

Available with 3 CCT selectable color temperatures, finishes, and recessed or surface mounted options. Order single pucks or kits of multiple pucks to link together.

BEAUTIFULLY FINISHED CAST ALUMINUM



Black



Brushed Nickel



White

ALL-IN-ONE CCT SELECTABLE








PUCK LIGHT

A solid lighting solution for kitchen counters, our 120V undercabinet Puck Light with 3 CCT selectable technology provides quality illumination for all tasks.




Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Install as surface mount or recessed mount
- No driver required
- Construction: die-cast aluminum and PC diffuser



	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	HR-AC70 1 single wired light	4W	290	CS 2700K 3000K 3500K	90	BK Black BN Brushed Nickel WT White
	HR-AC71 1 single wired light and cord					
	HR-AC72 1 double wired light					
	HR-AC73 Puck light kit: 2 double wired lights, 1 single wired light, and cord	4W x 3	290 x 3			

Example: **HR-AC72-CS-BN**

	Model	Description	CRI	Finish
	HR-PC6	Power Cord	90	BK Black WT White
	HR-HWB	Hardware Box		
	HR-IC	12 24 36 Linking Cable		

Example: **HR-HWB-BK**



LOTOS 2" ADJUSTABLE LED RECESSED



CALIFORNIA
JA8
TITLE 24



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 2 1/4", driver: 1 1/4"
- 360° retractable pivot: downlight and adjustable
- Heavy gauge retention clips secure fixture to ceiling
- Installs into ceilings between 1/2" and 1 1/2" thick
- Minimum plenum space required: 4"
- Construction: steel with frosted TIR lens

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R2ERAR 2" Round Adjustable IC Rated, Airtight, Wet Location Listed	W 45°	6W	500	1203	930 3000K	90	WT White
	R2ESAR 2" Square Adjustable IC Rated, Airtight, Wet Location Listed							
	R2ESAR-2 2 Light Adjustable IC Rated, Airtight, Wet Location Listed		12W	500x2	1203x2			
	R2ESAR-3 3 Light Adjustable IC Rated, Airtight, Wet Location Listed		18W	500x3	1203x3			

Example: **R2ERAR-W930-WT**

LOTOS 4" & 6" ADJUSTABLE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



R4ERAR/R6ERAR



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 1 1/2", driver 1 1/4"
- 360° retractable pivot: downlight and adjustable
- Heavy gauge retention clips secure fixture to ceiling
- Installs into ceilings between 1/2" and 1 1/2" thick
- Minimum plenum space required: 4"
- Construction: steel with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R4ESAR 4" Square Adjustable	W 45°	9W	750	1050	2700K 3000K 3500K 4000K 5000K	90	WT White
	R4ERAR 4" Round Adjustable	W 45°	9W	800	1020			
	R6ERAR 6" Round Adjustable	W 45°	15W	1340	1896		90	BK Black WT White

Example: **R4ERAR-W9CS-WT**

- Installs into ceilings between 1/2" and 1 3/4" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours
- IC Rated, Airtight, Wet Location Listed

FIRE RATED	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Fire Rated	Finish
	R4ERAR 4" Round Adjustable	W 45°	9W	800	1020	2700K 3000K 3500K 4000K 5000K	90	F	WT White
	R6ERAR 6" Round Adjustable	W 45°	9W	1320	1896				

Example: **R6ERAR-W9CS-FWT**

Frame-In Kit (Optional Accessory)	Model	Notes
New Construction Frame	RER-FRAME	Suitable for joists ranging from 12" to 24" apart

LOTOS R 4" REGRESSED ADJUSTABLE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 1½", driver 1¼"
- 360° retractable pivot: downlight and adjustable
- Beam cutoff angle: 15°
- Heavy gauge retention clips secure fixture to ceiling
- Installs into ceilings between ½" and 1½" thick
- Minimum plenum space required: 4"
- Construction: steel with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R4ERA2R					2700K		
	4" Round Regressed Adjustable	W	50°	9W	775	750		
						9CS	90	BK Black
						3000K		WT White
						3500K		
						4000K		
						5000K		

Example: **R4ERA2R-W9CS-WT**

- Installs into ceilings between ½" and 1¼" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours
- IC Rated, Airtight, Wet Location Listed

FIRE RATED	Model	Beam	Wattage	Max Lumens	Max CBCP	Color Temp	CRI	Fire Rated	Finish
	R4ERA2R					2700K			
	4" Round Regressed Adjustable	W	50°	9W	775	750			
						9CS	90	F	WT White
						3000K			
						3500K			
						4000K			
						5000K			

Example: **R4ERA2R-W9CS-FWT**

Frame-In Kit (Optional Accessory)

New Construction Frame



Model

Notes

RER-FRAME

Suitable for joists ranging from 12" to 24" apart



LOTOS R 6" REGRESSED ADJUSTABLE RETROFIT



ALL-IN-ONE CCT SELECTABLE



Versatile and multifunctional, the Lotus R Downlights retrofit into 6-inch housings and are field adjustable up to 50 degrees in the regressed trim for quality, glare-free illumination. Offered as an All-In-One Five CCT Selectable luminaire, Lotos is ideal for recessed applications in multifamily homes, hotels, senior living and apartment buildings.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Compatible with most standard 6" recessed cans
- 360° retractable pivot: downlight and adjustable
- Beam cutoff angle: 30°
- Edison Base (E26) adapter included
- Maximum Tilt Angle: 50°
- Construction: steel with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

	Model	Beam	Wattage	Max Lumens	Color Temp	CRI	Finish
	R6DRAK 4" Round Regressed Adjustable	A 50°	13W	1270	2700K	9CS 90	BK Black WT White
					3000K		
					3500K		
					4000K		
					5000K		

Example: **R6DRAK-A9CS-WT**

LOTOS 4" & 6" ROUND LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 1", driver 1"
- Heavy gauge retention clips secures fixture to ceiling
- Installs into ceilings between ½" and 1½" thick
- Minimum plenum space required: 4"
- Construction: steel with translucent diffuser
- IC Rated, Airtight, Wet Location Listed

	Model	Beam	Wattage	Max Lumens	Color Temp	CRI	Finish
	R4ERDR 4" Round Downlight	W	8W	725	2700K 3000K 9CS 3500K 4000K 5000K	90	WT White
	R6ERDR 6" Round Downlight	W	14W	1200			

Example: **R4ERDR-W9CS-WT**

- Installs into ceilings between ½" and 1¾" thick
- Fire Rated - ASTM E119 and UL 263 certified for 2 hours
- IC Rated, Airtight, Wet Location Listed

FIRE RATED	Model	Beam	Wattage	Max Lumens	Color Temp	CRI	Fire Rated	Finish
	R4ERDR 4" Round Downlight	W	8W	725	2700K 3000K 9CS 3500K 4000K 5000K	90	F	WT White
	R6ERDR 6" Round Downlight	W	12W	1200				

Example: **R4ERDR-W9CS-FWT**

Frame-In Kit (Optional Accessory)

	Model	Notes
New Construction Frame	 RER-FRAME	Suitable for joists ranging from 12" to 24" apart

Example: **R6ERAR-W9CS-FWT**

LOTOS 4" & 6" SQUARE LED RECESSED



ALL-IN-ONE CCT SELECTABLE



Shallow profile LED that is designed to fit in furred down ceilings without sacrificing lumen output.

Input: 120-277V
Dimming: 100%-5% ELV, TRIAC
Rated Life: 50,000 hours

- Fixture height: 1", driver 1"
- Heavy gauge retention clips secures fixture to ceiling
- Installs into ceilings between ½" and 1½" thick
- Minimum plenum space required: 4"
- Construction: steel with translucent diffuser
- IC Rated, Airtight, Wet Location Listed

	Model	Beam	Wattage	Max Lumens	Color Temp	CRI	Finish
	R4ESDR 4" Square Downlight	W	8W	600	2700K 3000K	90	WT White
					9CS 3500K 4000K 5000K		
	R6ESDR 6" Square Downlight	W	14W	950	3500K 4000K 5000K	90	WT White

Example: **R4ESDR-W9CS-WT**

Frame-In Kit (Optional Accessory)

New Construction Frame



Model

RER-FRAME

Notes

Suitable for joists ranging from 12" to 24" apart


Example: **R6ERAR-W9CS-FWT**

POP-IN

4" LED RECESSED







ALL-IN-ONE CCT SELECTABLE



Minimum profile downlight with driver and electrical connection box attached to fixture.

Power: 12W
Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Electrical wiring box directly on the back of the fixture
- Available as a remodel or new construction
- Installs into ceilings between ½ and 1½" thick
- Construction: die-cast aluminum with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

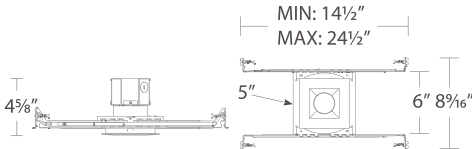	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R4DRDR Round Remodel	F 45°	1080	1309	2700K 3000K 9CS 3500K 4000K 5000K	90	BK Black WT White
	R4DRDN Round New construction						
	R4SDSR Square Remodel		1000	1256			
	R4SDSN Square New construction						

Example: **R4DRDR-F9CS-WT**


Frame-In Kit (Optional Accessory)

	Model	Color Temp
New Construction Frame	R4DRDN-FRAME	Ceiling thickness: ½" - 1 ½"



BLAZE 6" LED RECESSED


ALL-IN-ONE CCT SELECTABLE

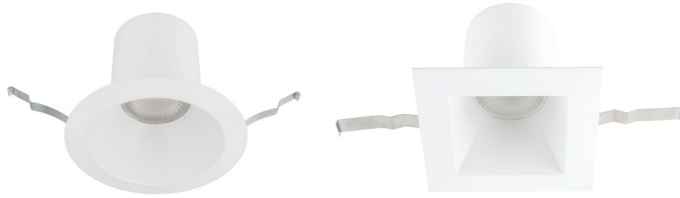

BLAZE 6" Round and Square.
5-CCT selectable downlight.

Power: 25W
Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Construction: die-cast aluminum with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

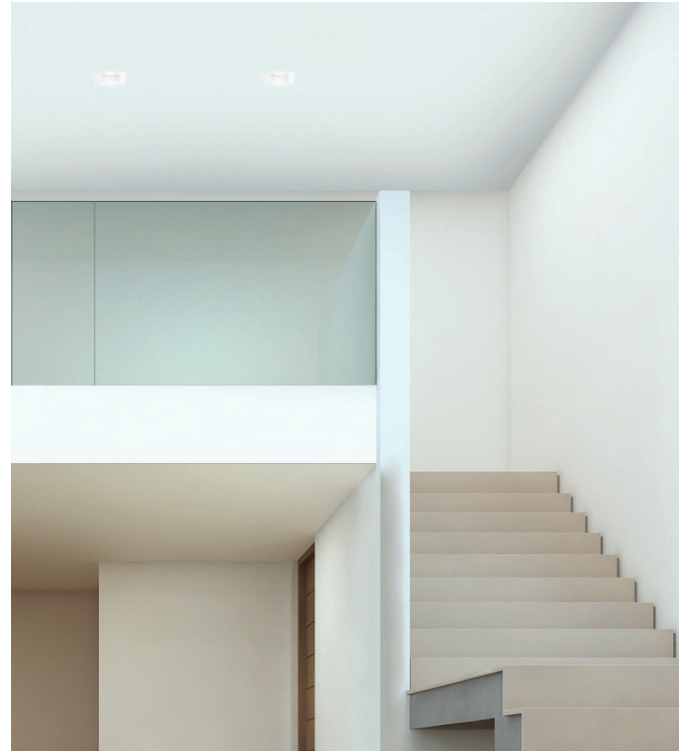

	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R6DRDR Round Remodel	F 55°	2485	2130	9CS 2700K 3000K 3500K 4000K 5000K	90	WT White
	R6DRDN Round New construction						
	R6DSDR Square Remodel		2360	2060			
	R6DSDN Square New Construction						
Example: R6DSDR-F9CS-WT							

Frame-In Kit (Optional Accessory)	Model	Color Temp
New Construction Frame	R6DRDN-FRAME	Ceiling thickness: 1/2" - 1 1/2"



KENRIC

3.5" LED RECESSED







ALL-IN-ONE CCT SELECTABLE




Deep regress for glare free light. 1 fixture provides downlight and adjustable functions. Housing is compatible with either round or square configuration.

Power: 15W
Input: 120-277V
Dimming: 100%-5% ELV, TRIAC and 0-10V
Rated Life: 50,000 hours

- 360° horizontal rotation, 30° vertical tilt
- Support plate included for remodel installation
- Low-profile, regressed LED for glare control
- Die-cast aluminum, white powder coat
- Driver included
- IC-rated & airtight

	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R3JRAL Round Remodel Downlight/Adjustable Trimless	W 36°	1450	3430	CS 2700K 3000K 3500K 4000K 5000K	90	WT White
	R3JSAL Square Remodel Downlight/Adjustable Trimless		1420	3425			
	R3JRAT Round Remodel Downlight/Adjustable Trim		1450	3430			
	R3JSAT Square Remodel Downlight/Adjustable Trim		1420	3425			

Example: **R3JRAL-WCS-WT**

Frame-In Kit (Optional Accessory)	Model	Notes
New Construction Frame	 R3JB-FRAME	Ceiling thickness: 1/2" - 1 1/2"

ION 2" LED RECESSED

ALL-IN-ONE CCT SELECTABLE





Minimum profile ION 2" Round and Square downlight with removable driver and electrical box.

Power: 9W
Input: 120V-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Available as a remodel or new construction
- Installs into ceilings between ½" and 1½" thick
- Construction: die-cast aluminum with frosted TIR lens
- IC Rated, Airtight, Wet Location Listed

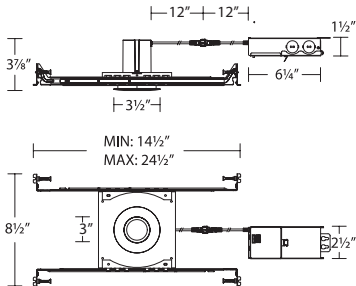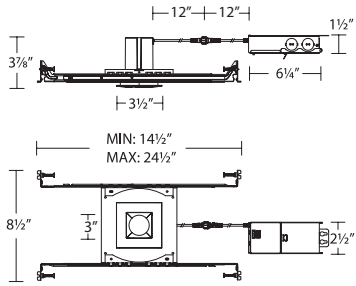

	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish			
	R2DRDR Round Remodel	F 30°	695	2140	9CS 2700K 3000K 3500K 4000K 5000K	90	WT White			
	R2DRDN Round New Construction									
	R2DSDR Square Remodel		695	2140						
	R2SDSN Square New Construction									

Example: **R2DRDR-F9CS-WT**

Frame-In Kit (Optional Accessory)	Model	Color Temp
New Construction Frame	R2DRDN-FRAME	Ceiling thickness: ½" - 1 ½"



PATRIOT 3" LED RECESSED



ALL-IN-ONE CCT SELECTABLE



5-CCT meets adjustability. 3" PATRIOT Recessed Downlight and Adjustable provide up to 1000 lumens, perfect for residential applications. An optional frame-in kit is available for all new construction installations.

Power: 12W
Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Available as a remodel or new construction
- Installs into ceilings between 1/2" and 1 1/2" thick
- Two beam angle options included: 45° beam film pre-installed, remove film for 25° narrow beam
- Construction: die-cast aluminum with reflector
- IC Rated, Airtight, Wet Location Listed

	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	Finish
	R3HRDR Round Remodel	F 25° 45°	1035	3045	9CS 2700K 3000K 3500K 4000K 5000K	90	WT White
	R3HRAR Round Adjustable Remodel		1000	3095			
	R3HSDR Square Remodel		1035	3045			
	R3HSAR Square Adjustable Remodel		1000	3095			

Example: **R3HRDR-F9CS-WT**

Frame-In Kit (Optional Accessory)	Model	Notes
New Construction Frame	 R3H-FRAME	Ceiling thickness: 1/2" - 1 1/2"

TWIST-N-LITE

LUMINAIRE SYSTEM



Quick and convenient. Easy to use and easy to install, our new Twist-N-Lite system offers a variety of surface mounts and pendant luminaires in five color temperatures and three finishes. The universal mounting base accommodates our complete suite of Twist-N-Lite products. The flexible design enables you to interchange the fixtures in the field to meet your various lighting applications. This energy-efficient engineering wonder offers dimmable options for high performance and a classic, minimalistic aesthetic. Select your color temperature, Twist it in and Turn it on. Elevating multifunctional illumination to a higher standard.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Installs over 3", 4" or combination 3/0, 4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser
- Shared canopy allows for easily swapping between fixtures without adjusting the mounting hardware
- All wiring and connections are made in the junction box prior to installing the mounting base and canopy

Quick Install: Mount and power any fixture in the Twist-N-Lite family by twisting it onto the canopy




TWIST-N-LITE

ALL-IN-ONE CCT SELECTABLE




- 45° flood beam angle



Model	Wattage	Max Lumens	Color Temp	CRI	Finish
FM-240103	12W	900	2700K	CS	90
			3000K		
			3500K		
			4000K		
			5000K		
					BK Black
					BN Brushed Nickel
					WT White

Example: **FM-240103-CS-WT**


- Dual-layer acrylic for frosted and even glow



Model	Wattage	Max Lumens	Color Temp	CRI	Finish
FM-240203	9W	550	2700K	CS	90
			3000K		
			3500K		
			4000K		
			5000K		
					BK Black
					BN Brushed Nickel
					WT White

Example: **FM-240203-CS-BK**

- Dual-layer acrylic for frosted and even look
- Retract or extend the cable by pressing on the cable gripper

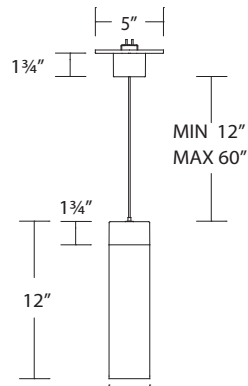

Model	Wattage	Max Lumens	Color Temp	CRI	Finish
PD-240212	13W	900	2700K	CS	90
			3000K		
			3500K		
			4000K		
			5000K		
					BK Black
					BN Brushed Nickel
					WT White

Example: **PD-240212-CS-BK**

TWIST-N-LITE


PATENTED

CALIFORNIA
JA8
TITLE 24

ALL-IN-ONE CCT SELECTABLE





Dual-layer acrylic for
frosted and even look




Model	Wattage	Max Lumens	Color Temp	CRI	Finish
FM-240209	22W	1500	2700K	90	BK Black BN Brushed Nickel WT White
			3000K		
			CS 3500K		
			4000K		
			5000K		

Example: **FM-240209-CS-BN**




Model	Wattage	Max Lumens	Color Temp	CRI	Finish
FM-250708	10W	720	2700K	90	BK Black BN Brushed Nickel WT White
			3000K		
			CS 3500K		
			4000K		
			5000K		

Example: **FM-250708-CS-BK**



Model	Wattage	Max Lumens	Color Temp	CRI	Finish
FM-250808	14W	800	2700K	90	BK Black BN Brushed Nickel WT White
			3000K		
			CS 3500K		
			4000K		
			5000K		

Example: **FM-250808-CS-BK**





Model	Wattage	Max Lumens	Color Temp	CRI	Finish
FM-250811	19W	1200	2700K	90	BK Black BN Brushed Nickel WT White
			3000K		
			CS 3500K		
			4000K		
			5000K		

Example: **FM-250811-CS-BK**


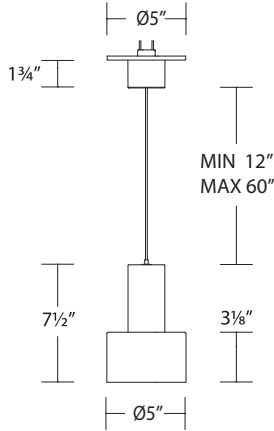
TWIST-N-LITE

ALL-IN-ONE CCT SELECTABLE


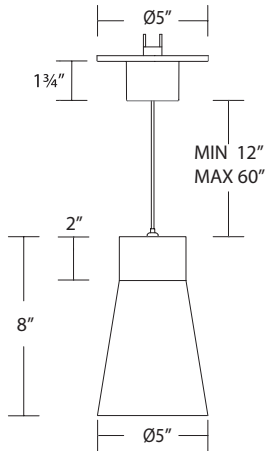


	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
 	FM-250905	10W	660	CS 2700K 3000K 3500K 4000K 5000K	90	BK Black BN Brushed Nickel WT White

Example: **FM-250905-CS-BK**

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
 	PD-250905	12W	850	CS 2700K 3000K 3500K 4000K 5000K	90	BK Black BN Brushed Nickel WT White

Example: **PD-250905-CS-BK**

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
 	PD-251005	12W	880	CS 2700K 3000K 3500K 4000K 5000K	90	BK Black BN Brushed Nickel WT White

Example: **PD-251005-CS-BK**



EDGELESS FLUSH MOUNT



ALL-IN-ONE CCT SELECTABLE



5"



8"



12"

Edgeless LED luminaires are designed with a low profile and slim trim. They are engineered for smooth, glare-free, consistent illumination. A welcome addition to ceilings and walls for various applications.



Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Size: 5", 8", 12"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	FM-240505	15W	1330	9CS 2700K 3000K 3500K 4000K 5000K	90	BK Black WT White
	FM-240508	20W	1985			
	FM-240512	30W	2750			

Example: **FM-240508-9CS-WT**





CALIFORNIA
JA8
TITLE 24



BLO • FLO • GLO

ALL-IN-ONE CCT SELECTABLE



BLO



Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Install over 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	FM-113	1600	22W	CS 2700K 3000K 3500K 4000K 5000K	90	WT White
	FM-115	2230	26W			

FLO



Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 24", 36", 48"
- Installation: wall and ceiling
- Construction: aluminum with translucent acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-224	1400	17W	CS 2700K 3000K 3500K 4000K 5000K	90	WT White
	WS-236	2250	28W			
	WS-248	2630	32W			

GLO



Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Install over 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	FM-211	1160	15W	CS 2700K 3000K 3500K 4000K 5000K	90	WT White
	FM-214	1660	22W			
	FM-216	2300	26W			

ROUND & SQUARE

5" LED CEILING OR WALL LUMINAIRE

CALIFORNIA
JA8
TITLE 24

At just 1/2" thick, these edge-lit flush mounts are fantastic when ceiling cavities are shallow. Mounting over standard size junction boxes, the broad illumination is perfect for lighting hallways and other narrow spaces. Available in a range of sizes, smaller styles are also wet location rated for use outdoors.

Input: 120V-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Size: 5"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: injection molded UV rated PC with translucent diffuser
- Suitable for outdoor and coastal regions

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	FM-05RN Round	12W	1050		90	BK Black BZ Bronze NI Nickel WT White
				930 3000K 935 3500K		
	FM-05SQ Square	12W	1030			BZ Bronze WT White











Example: **FM-05RN-930-WT**

ROUND & SQUARE



Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 7", 11", 15" (Round only)
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
 	FM-07RN Round	1100	15W	930 3000K 935 3500K	90	BK Black BN Brushed Nickel BZ Bronze WT White
 	FM-11RN Round	1525	20W			
 	FM-15RN Round	2550	28W			
 	FM-07SQ Square	1100	15W			BN Brushed Nickel BZ Bronze WT White
 	FM-11SQ Square	1650	20W			

Example: **FM-15RN-930-WT**

ROUND


 CALIFORNIA
JA8
 TITLE 24


ALL-IN-ONE CCT SELECTABLE



This large ceiling luminaire offers an impressive size that will make a design statement while providing soft, diffused light and comforting illumination. Its robust 3,100 lumens are deployed for great rooms and larger spaces with high ceilings, or it can light up an entire walk-in closet with a single fixture. With a minimalistic design that complements a broad array of décor styles, this sleek, curvaceous luminaire integrates form and function to brighten the environment uniformly. Advanced 5-CCT All-in-One Technology provides five color temperatures from warm 2700K to cool 5000K white light.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 24"
- Fixture height: 1¾"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	FM-252124	3100	45W	2700K	90	BK Black BZ Bronze WT White
				3000K		
				3500K		
				4000K		
				5000K		
				CS		

 Example: **FM-252124-CS-BK**



DEW

ALL-IN-ONE CCT SELECTABLE



Elegant as a graceful dewdrop, this traditional domed flush mount features an appealing modern look with a soft, sweeping acrylic lens. The impressive 18" size and robust 3,000-plus lumen output are ideal for illuminating spaces with high ceilings. This ceiling fixture embraces a warm ambiance, soft illumination, and comfort like no other.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 18"
- Fixture height: 4¼"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	FM-252218	3050	45W	2700K	90	BK Black BZ Bronze WT White
				3000K		
				3500K		
				4000K		
				5000K		
				Example: FM-252218-CS-WT		

I CAN'T BELIEVE IT'S NOT RECESSED



ALL-IN-ONE CCT SELECTABLE



Multiple mid-powered LEDs illuminate the acrylic diffuser uniformly without socket shadows, which are common in conventional flush mounts.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Imitates a traditional 6" line voltage recessed downlight with a – R30 light bulb
- Install into 4" junction box or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser
- Finished screw caps included to eliminate shadows

	Model	Max Lumens	Power	Color Temp	CRI	Finish
	FM-616G2	1050	16W	9CS	90	WT White

Example: **FM-616G2-9CS-WT**

DISC LED CEILING LIGHT & RECESSED RETROFIT



FM-306-9CS-WT



FM-306MS-930JB-WT

Install over a 3"
or 4" junction box
or pancake box



Retrofit over
a 4", 5" or 6"
recessed can



Multiple mid-powered LEDs uniformly illuminate the acrylic diffuser.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- FM-306MS: motion sensor keeps the fixture illuminated for 3 minutes -- before shutting off if no movement is detected
- Construction: aluminum with translucent diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish	
	FM-304	650	12W	930 3000K	90	WT White	Fits over a 4" recessed can or direct wire in a 3" or 4" junction box or pancake box
	FM-306	950	15W	9CS 2700K 3000K 3500K 4000K 5000K	90	WT White	Fits over a 5" to 6" recessed can or direct wire in a 3" or 4" junction box or pancake box
	FM-306MS Infrared Motion Sensor	1100	14W	930JB 3000K	90	WT White	Direct mount on a 3" or 4" junction box or pancake box
	FM-309	1725	23W	9CSJB 2700K 3000K 3500K 4000K 5000K	90	WT White	

Example: **FM-306-9CS-WT**



LITHIUM EM BATTERY BACKUP



ALL-IN-ONE CCT SELECTABLE



Convenient emergency battery backup button is discreet to maintain product appearance

The standard ceiling light and emergency battery backup ceiling fixture are nearly identical in two convenient sizes.

High light output, hidden hardware, and broad even illumination are the primary features of this sleek flush mount. Often used in hallways, dorm rooms, and bathrooms. Installation is a snap.

Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- During emergency mode, fixture will stay illuminated for 90 minutes at reduced power
- Install over 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with translucent diffuser

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	FM-200111	15W	1080	CS 2700K 3000K 3500K 4000K 5000K	90	BN Brushed Nickel
	FM-200115	25W	1815			
	FM-200115EM Emergency Back Up					
	FM-200118	31W	2410			
	FM-200118EM Emergency Back Up					

Example: **FM-200115-CS-BN**



METRO LED FLUSH MOUNT



Multiple mid-powered LEDs deliver soft illumination through translucent acrylic. Metro is available as a wall sconce or as a ceiling flush mount to meet a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 12", 18"
- Fixture height: 1 3/4"
- Install into 3", 4" or a combination 3/0-4/0 electrical box
- Construction: aluminum with dual layer acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish	
	FM-180112	1800	24W	30	3000K	90	BN Brushed Nickel CH Chrome
	FM-180118	2375	32W				

Example: FM-180118-30-BN

METRO



Multiple mid-powered LEDs deliver soft illumination through translucent acrylic. Metro is available as a wall sconce or as a ceiling flush mount to meet a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 20", 27", 37"
- Construction: aluminum with dual layer acrylic diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-180120	1150	16W	30 3000K	90	BN Brushed Nickel CH Chrome
	WS-180127	1450	20W			
	WS-180137	2130	28W			


Example: **WS-180127-30-BN**





REMI

ALL-IN-ONE CCT SELECTABLE

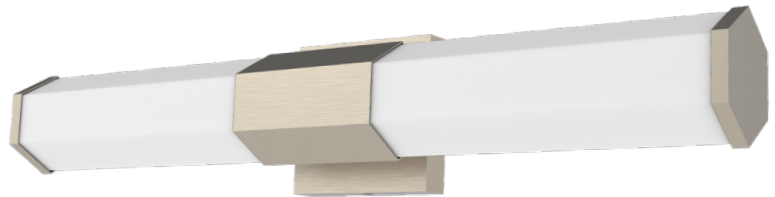

Finely crafted of white acrylic and aluminum, Remi delivers robust, flattering illumination as a vanity luminaire in an elegant bath or wall sconce that blends with any interior decor.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 16", 24"
- Construction: aluminum with acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-230116	900	18W	CS 2700K 3000K 3500K	90	BN Brushed Nickel BK Black
	WS-230124	1500	30W			

Example: **WS-230116-CS-BN**

STUDIO



CALIFORNIA
JA8
TITLE 24



ALL-IN-ONE CCT SELECTABLE



Sleek and contemporary. The Studio bath vanity offers a three-in-one LED CCT Selectable feature to create beautiful, flattering illumination for an updated aesthetic. Stylish and modern, the solid linear aluminum profile is durable and works well in various residential and hospitality settings.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 26"
- Construction: aluminum with acrylic diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-240926	1950	31W	CS 2700K 3000K 3500K	90	BN Brushed Nickel BK Black

Example: **WS-240926-CS-BK**

RAZOR


ALL-IN-ONE CCT SELECTABLE



A modern minimalist design evokes a unique mood and feel for any fine bath. The Razor bath vanity is a wall fixture with a contemporary design and a unique aluminum frame offered in Black and Brushed Nickel. The frosted diffuser deploys soft, flattering illumination for your own personal environment, creating a warm and relaxing setting. The three-in-one CCT selectable allows individual color temperature adjustment to suit one's personal preferences.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 28"
- Construction: aluminum with glass diffuser
- Can be mounted vertically or horizontally

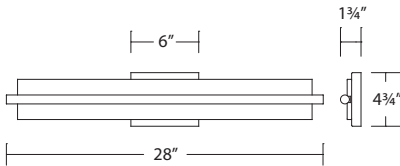	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-241128	835	20W	CS 2700K 3000K 3500K	90	BN Brushed Nickel
						BK Black
Example: WS-241128-CS-BN						

DEMI

ALL-IN-ONE CCT SELECTABLE



A compact but appealing design that blends well into contemporary bathrooms and powder rooms. This piece features a frosted glass diffuser for robust, flattering illumination in your sanctuary, where you perform most of your primping and prepping for the day ahead. The dimmable, three-in-one CCT selectable feature provides an option to adjust the color temperature of your choice.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 27"
- Construction: aluminum with glass diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-241227	1010	23W	2700K	90	BN Brushed Nickel
				3000K		BK Black
				3500K		

Example: WS-241227-CS-BK

SLIM



ALL-IN-ONE CCT SELECTABLE



Sleek and versatile with a modern architectural style. Slim is the perfect LED vanity light or wall sconce to provide a flattering glow for grooming in your fine bath.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 18", 24", 36"
- Construction: aluminum with acrylic diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-240818	1300	20W	CS 2700K 3000K 3500K 4000K 5000K	90	BN Brushed Nickel BK Black
	WS-240824	1700	24W			
	WS-240836	2200	30W			

Example: **WS-240824-CS-BK**



TURBO



A contemporary design provides soft diffused illumination through translucent acrylic. Turbo can be mounted vertically or horizontally to accommodate a variety of applications. Available in Chrome and Brushed Nickel to pair with popular bath hardware.

Input: 120-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 14", 24"
- Construction: aluminum with dual layer acrylic diffuser

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-180414	1000	12W	30 3000K	90	BN Brushed Nickel
				35 3500K		CH Chrome
	WS-180424	1570	18W			

Example: **WS-180414-35-BN**

FUSE


 CALIFORNIA
JA8
 TITLE 24


Sleek style with plated brushed nickel finished end caps and high-powered LEDs that provide broad ample illumination. Fuse can be mounted on walls or on the ceiling to suit a variety of applications and styles in current architectural design.

Input: 120V-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 16", 27", 37"
- Construction: aluminum with acrylic diffuser
- Installation: wall or ceiling, horizontally or vertically

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-180216	1025	16W	30 3000K	90	BN Brushed Nickel
	WS-180227	1450	20W			
	WS-180237	2025	28W			

Example: **WS-180216-30-BN**

LINK




This low-profile transitional wall sconce provides bountiful light and style. Link adds a clean, modern look to bath vanities and other decor. May be installed horizontally over a vanity or vertically as a sconce.

Input: 120V-277V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Sizes: 27", 37"
- Construction: aluminum with white acrylic diffuser
- Can be mounted vertically or horizontally

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-180327	1380	20W			
	WS-180337	1950	28W	30 3000K	90	BN Brushed Nickel
Example: WS-180337-30-BN						

The image shows an outdoor patio area at dusk. In the foreground, a round wooden table is surrounded by four modern, upholstered chairs. A small, glowing, mushroom-shaped table lamp sits on the table. The patio is covered by a dark, slatted roof. In the background, a building with large glass windows is visible, reflecting the warm interior lights. The overall atmosphere is cozy and modern.

Introducing our new indoor/outdoor table lamps to complement our expanding line of lighting fixtures. Perfect for design continuity both inside and out, enhance the atmosphere throughout your home with Rechargeable Battery-operated portables. Four stylish designs are available in a variety of colorful hues, including green, white, black, and bronze. Conical-shaped shades and sleek bases ensure a clean display with a tasteful layer of light on a patio table or around a hot tub. The stunning portables are ideal for optimal ambient illumination in outdoor homes and hospitality locations.

PORTABLE TABLE LAMPS - RECHARGEABLE



PLEAT



DARLA



CHANNING











CRYSTAL

Advanced CCT-select and rechargeable battery technologies allow you to choose color temperatures for any mood, from warm 2200K to 2700K to a cooler 3000 Kelvin, with an 85-plus color rendering index (CRI). Using easy onboard fingertip control, cycle through the temperatures with a quick tap, hold down to dim, or turn lamps off with firm suppression. Enjoy beautiful ambient illumination from these battery-operated lamps, which can be charged for up to 10-plus hours with the included power supply and USB-C cable. They are wet-listed for outdoor applications.

Input: USB-C
Dimming: Onboard
CRI: 85+

- Tap to switch between color temperatures (3CCT models) or hold to dim
- 7+ hours of illumination on a single charge
- Indoor/Outdoor use
- Power supply and USB-C cable included

		Model	Wattage	Max Lumens	Color Temp	Battery Life	Finish
		TL-W251115	2W	200	CS 2200K 2700K 3000K	10+ hours	BK Black BZ Bronze GR Green WT White
		TL-W251209	2W	160	CS 2200K 2700K 3000K	8+ hours	BK Black GR Green WT White
		TL-W251511	2W	200	CS 2200K 2700K 3000K	10+ hours	BK Black GR Green WT White
		TL-W251315	2W	220	27 2700K	7+ hours	BK Black WT White

Example: **TL-251511-CS-GR**

* Model TL-W251315 Crystal does not change CCT.



CUBIX & CYLINDER



WS-W220208-30-BK



WS-W220212-30-WT



WS-W190208-30-BZ







WS-W190212-30-WT

Available in single and double directions, Cubix and Cylinder are ideal for illuminating outdoor entrances and walkways.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Sizes: 6¾" single light, 9⅞" double lights
- Construction: die-cast aluminum
- Finish: powder coated aluminum

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	WS-W220208 Cubix Single Light	6W	285	30	3000K	80
	WS-W220212 Cubix Double Light	18W	765			
	WS-W190208 Cylinder Single Light	6W	285			
	WS-W190212 Cylinder Double Light	18W	765			

BK Black
BZ Bronze
WT White

Example: **WS-W220208-30-BK**

CYLINDER



Offered in a curvaceous single and double head configuration, the adjustable Cylinder Indoor/Outdoor Sconces provide strong energy efficient LED spot lighting precisely where you need it. Cleanly finished with no visible hardware, these stylish aluminum cylinders are available in three architectural powder coat finishes.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Construction: aluminum with TIR lens
- Finish: powder coated aluminum


	Model	Max Lumens	Wattage	Color Temp		CRI	Finish	
	WS-W230301	1085	17W	30	3000K	90	BK	Black
	WS-W230302	1085 x 2	33W				BZ	Bronze
							WT	White

Example: WS-W230301-30-BK

VUE



ALL-IN-ONE CCT SELECTABLE

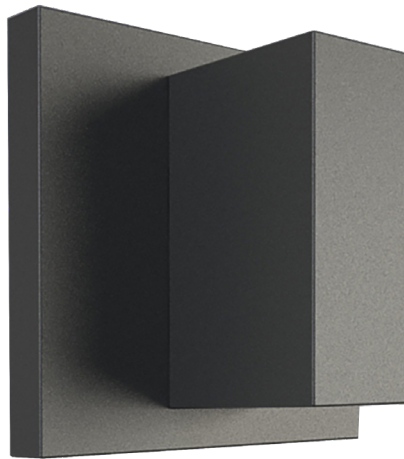

A geometric design that defines a modern aesthetic in your indoor or outdoor space. Vue is a die-cast aluminum sconce that provides up and down lighting for beautiful ambient illumination.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Size: 5"
- Construction: die-cast aluminum
- Finish: powder coated aluminum

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-W230205	250 Up 250 Down	9W	CS 3000K 3500K 4000K	90	BK WT Black White

Example: **WS-W230205-CS-BK**

CAP



ALL-IN-ONE CCT SELECTABLE




This unique scrolled design features All-in-One CCT Selectable technology that ranges from warm 2700K to cool 5000K white light for various indoor and outdoor applications. Perfect for apartment doors and hotel rooms, this aluminum-constructed sconce with an acrylic diffuser can be customized with address numbers and styles to suit your project.



Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Construction: aluminum with acrylic diffuser
- Finish: powder coated aluminum



Model	Wattage	Max Lumens	Color Temp	CRI	Finish
WS-W250212	13W	215	2700K	90	BK Black
			3000K		GHBK Graphite on Black
			3500K		WTBK White on Black
			4000K		WT White
			5000K		

Example: **WS-W250212-CS-BK**

TABLET



ALL-IN-ONE CCT SELECTABLE




A minimalistic design with sleek, curvaceous appeal. Add clean lines and a beautiful ambiance to any space. Symmetrical openings allow softly diffused upward and downward illumination on surfaces below.



Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Construction: aluminum with glass diffuser
- Finish: powder coated aluminum



Model	Wattage	Max Lumens	Color Temp	CRI	Finish
WS-W250305	17W	790	2700K	90	BK Black
			3000K		BZ Bronze
			3500K		WT White
			4000K		
			5000K		

Example: **WS-W250305-CS-BK**

LANTERN

ALL-IN-ONE CCT SELECTABLE



A classic wall fixture that incorporates vintage-style design elements and advanced LED technology. Lantern offers an elegant way to illuminate your walkway, driveway, yard, or patio. The WAC All-in-One CCT Selectable feature allows the user to shift from warm 2700K to 5000K cool white light.

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Built-in photo sensor to control light on/off
- Construction: aluminum with TIR dual layer acrylic diffusers lens
- Finish: powder coated aluminum

	Model	Wattage	Max Lumens	Color Temp	CRI	Finish
	WS-W250110	11W	470	2700K 3000K 3500K 4000K 5000K	90	BK Black BZ Bronze WT White
	WS-W250114	15W	660			

Example: **WS-W250110-CS-BK**

MIDTOWN

ALL-IN-ONE CCT SELECTABLE



A handsome tower-style fixture provides a soft glow and refined aesthetic that is pleasing to the eyes. Perfect for illuminating modern exterior and interior spaces, the LED luminaire offers versatility in a clean, contemporary look. This versatile sconce is constructed with die-cast aluminum for durability and quality while providing ambient and down lighting through its smooth, curvaceous acrylic diffuser. Customize the color temperature of your light from 2700K warm white to 5000K cool white.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Sizes: 10", 15"
- Construction: die-cast aluminum with acrylic diffuser
- Finish: powder coated aluminum

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-W241310	375	12W	CS 2700K 3000K 3500K 4000K 5000K	90	BK Black
	WS-W241315	625	15W			

Example: **WS-W241310-CS-BK**

VEGA

ALL-IN-ONE CCT SELECTABLE



Add a modern vibe and powerful illumination to your porch, deck, or garage with the sleek Vega, an ADA-compliant indoor/outdoor sconce.

Input: 120V
Dimming: 100%-10% ELV
Rated Life: 50,000 hours

- Sizes: 9", 14"
- Construction: die-cast aluminum with acrylic diffuser
- Finish: powder coated aluminum

	Model	Max Lumens	Wattage	Color Temp	CRI	Finish
	WS-W190109	665	13W	CS 2700K 3000K 3500K 4000K 5000K	90	BK Black
	WS-W190114	1375	26W			

Example: **WS-W190114-CS-BK**

120/277V STEP LIGHTS

CALIFORNIA
JA8
TITLE 24

IP66



ETL
US

WET

ADA

Input: 120V, 277V
Brightness: Up to 4 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Fluid decorative profile with full cut-off illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish or plated Brushed Nickel finish
- Title 24 compliant (120V only)





Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED110-C WL-LED110-AM	120V	3.5W	3000K Amber	90	BK Black on AL BN* Brushed Nickel BZ Bronze on AL WT White on AL
WL-LED110F-C WL-LED110F-AM	277V	3W			
Example: WL-LED110-C-WT					

Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED210-C WL-LED210-AM	120V	3.5W	3000K Amber	90	BK Black on AL BN* Brushed Nickel BZ Bronze on AL WT White on AL
WL-LED210F-C WL-LED210F-AM	277V	3W			
Example: WL-LED210-C-BK					

* BN finish is damp location listed and is not warranted for contact with harsh chemicals or exterior installations.

Input: 120V, 277V
Brightness: Up to 36 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Louvered design shields glare for visual comfort
- Die-cast aluminum construction with abrasion-resistant powder-coated finish





Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED120-C WL-LED120-AM	120V	3.5W	3000K Amber	90	BK Black on AL BZ Bronze on AL WT White on AL
WL-LED120F-C WL-LED120F-AM	277V	3W			
Example: WL-LED120-C-BK					

Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED220-C WL-LED220-AM	120V	3.5W	3000K Amber	90	BK Black on AL BZ Bronze on AL WT White on AL
WL-LED220F-C WL-LED220F-AM	277V	3W			
Example: WL-LED220-C-BZ					

120V/277V STEP LIGHTS

Input: 120V, 277V
Brightness: Up to 40 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Tempered glass diffuses light for even illumination
- Die-cast aluminum construction
- Abrasion-resistant powder-coated finish or marine grade stainless steel option available
- Title 24 compliant (120V only)

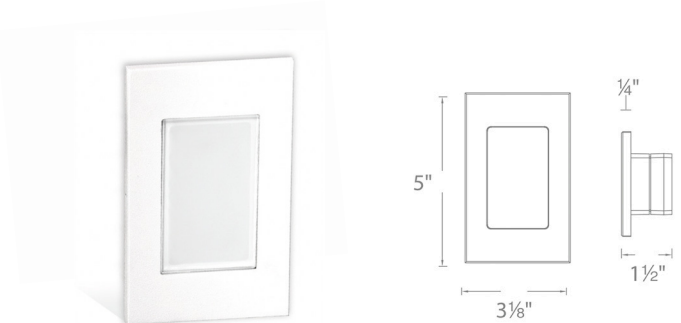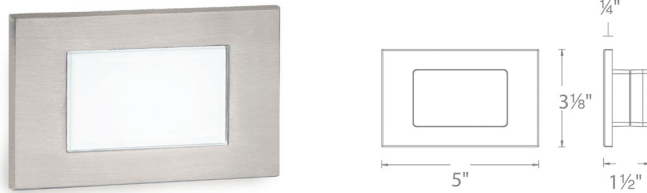


Mounts Vertically or Horizontally

Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED130-C WL-LED130-AM	120V	3.5W	3000K Amber	90	BK Black on AL
WL-LED130F-C WL-LED130F-AM	277V	3W			BZ Bronze on AL SS Stainless Steel WT White on AL
Example: WL-LED130-C-SS					

Input: 120V, 277V
Brightness: Up to 3 lm
Dimming: 100%-10% ELV (120V only)
Rated Life: 50,000 hours

- Geometric design with downward illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish
- Title 24 compliant (120V only)

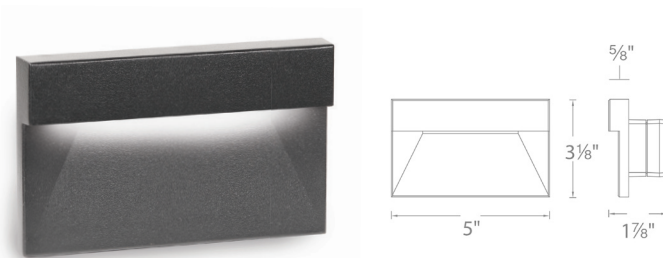


Model	Voltage	Wattage	Color Temp	CRI	Finish
WL-LED140-C WL-LED140-AM	120V	3.5W	3000K Amber	90	BK Black on AL BZ Bronze on AL WT White on AL
WL-LED140F-C WL-LED140F-AM	277V	3W			
Example: WL-LED140-C-BK					



IP66 rated self contained fixture with various face plates. Fits into a Switch Box or a 2" x 4" Junction Box with minimum inside dimensions of 3"L x 2"W x 2.5"D.

SOLO

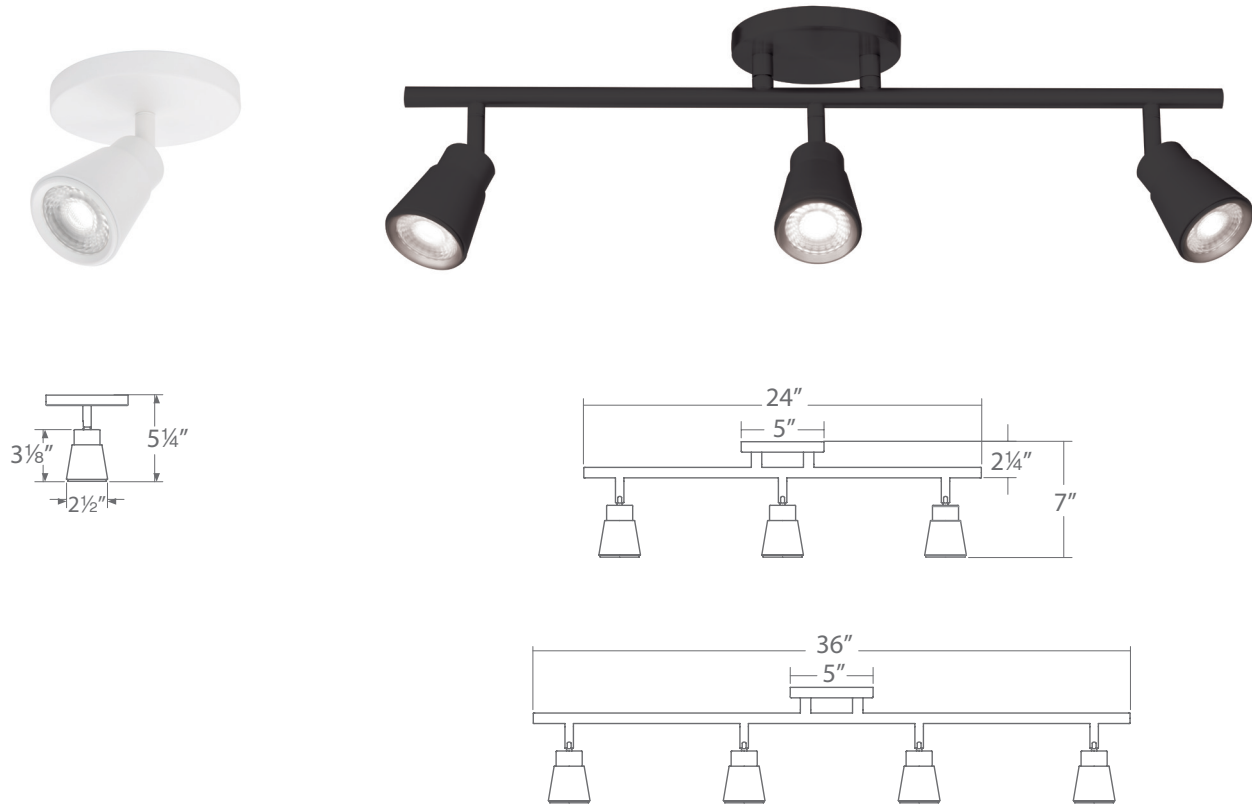

Monopoint, 3-head, or 4-head fixed track with individually adjustable LED track fixtures can be wall mounted or ceiling mounted for a wide multitude of applications. It is specifically designed for residential and low-ceiling commercial applications.

Comparable To: 65W MR16
Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Monopoint, 3-head, or 4-head fixed rails
- Sizes: 5" (Monopoint), 24", 36"
- Construction: die-cast aluminum with frosted TIR lens
- Installation: wall and ceiling
- 350° horizontal and 90° vertical aiming per head

System	Model	Lights	Beam	Max Lumens	CBCP	Wattage	Color Temp	CRI	Finish
TK	1805	01	45°	800	1095	10W	30 3000K	90	BK Black
		03		2400 (800 x3)	3285 (1095 x3)	30W			BN Brushed Nickel
		04		3200 (800 x4)	4380 (1095 x4)	40W			WT White

Example: TK-180503-30-BK



LOW VOLTAGE

Power:	7W	Color Temp:	3000K
Lumens:	450	Dimming:	ELV
CBCP:	929	LED Lamp	
Comparable:	35W MR16	Rated Life:	25,000 hours

- Integral electronic transformer
- Accepts 12V LED MR16 or halogen MR16 lamps up to 50W max
- LED MR16 included when ordered as LED
- 1 watt minimum load
- Can be wall or ceiling mounted
- Available extensions from 6 to 48 inches
- Clear lens included (see below for alternate lens options)

007

	Model	Lamp	Extension (optional)		CRI	Finish
	ME-007LED ME-007	MR16 LED 12V 7W included MR16 sold separately	X6	6"	90	BK Black WT White
			X12	12"		
			X18	18"		
			X24	24"		
			X36	36"		
			X48	48"		

Example: **ME-007LED-BK** or **ME-007LED-X6-BK** (with 6" extension)



FRAMING PROJECTOR ACCESSORY

008FP	BK WT	Black White
Example: 008FP-BK		




808

	Model	Lamp	Extension (optional)		CRI	Finish
	ME-808LED ME808	MR16 LED 12V 7W included MR16 sold separately	X6	6"	90	BK Black WT White
			X12	12"		
			X18	18"		
			X24	24"		
			X36	36"		
			X48	48"		

Example: **ME-808LED-WT** or **ME-808LED-X12-WT** (with 12" extension)



LAMPS			Finish	Wattage	Color Temp	Input	Beam	CRI	Lumens	CBCP	Average Life
	MR16	MR16LED-BAB-BK MR16LED-BAB-WT	Black White	7W	3000K	12V	35°	90	450	929	25,000 Hours
LENS ACCESSORIES											
Amber LENS-16-AMB		Blue LENS-16-BLU Green LENS-16-GRN	Red LENS-16-RED Frosted LENS-16-FR	UV Filter Spread	LENS-16-UVF LENS-16-SPR	Beam Elongating Honeycomb Louver		LENS-16-BEL LENS-16-HCL			

CHARGE 8010 & 8020


 CALIFORNIA
JA8
TITLE 24

ALL-IN-ONE CCT SELECTABLE



H-8010-CS-BN



H-8020-CS-WT

Input: 120V
 Dimming: 100%-10% ELV, 100%-5% TRIAC
 Rated Life: 50,000 hours

- Suitable for H, J or L track
- 350° horizontal and 90° vertical aiming
- Driver concealed within fixture
- Construction: die-cast aluminum with frosted TIR lens

	System	Model	Beam	Max Lumens	Max CBCP	Wattage	Color Temp	CRI	Finish
	H H Track	8010	45°	865	1006	9W	CS 2700K 3000K 3500K 4000K 5000K	90	BK Black
									BN Brushed Nickel
									DB Dark Bronze
									WT White
<p>Track Pack includes</p> <ul style="list-style-type: none"> • 4ft H Track • Floating Canopy • Three 8010 Charge Track Heads 	L L Track	8010/3	45°	865x3	1006x3	9Wx3	CS 2700K 3000K 3500K 4000K 5000K	90	BK Black
	J J/J2 Track								WT White
									BN Brushed Nickel
									DB Dark Bronze
	H H Track	8020	55°	1330	1154	15W	CS 2700K 3000K 3500K 4000K 5000K	90	BK Black
	L L Track								WT White
	J J/J2 Track								

Example: **H-8010-CS-BN**

SOLO 5010, BULLET 7010, CYN 8110



ALL-IN-ONE CCT SELECTABLE



H-5010-CS-BK



H-7010-CS-WT



H-8110-CS-BK

Input: 120V
Dimming: 100%-10% ELV, 100%-5% TRIAC
Rated Life: 50,000 hours

- Suitable for H, J or L track
- 350° horizontal and 90° vertical aiming
- Driver concealed within fixture
- Construction: die-cast aluminum with frosted TIR lens

	System	Model	Beam	Max Lumens	Max CBCP	Wattage	Color Temp	CRI	Finish
	H H Track L L Track J J/J2 Track	5010	45°	870	1016	9W	2700K 3000K 3500K 4000K 5000K	90	BK Black WT White
	H H Track L L Track J J/J2 Track	7010		890	1017	9W			BK Black WT White
	H H Track L L Track J J/J2 Track	8110		710	1567	10W			BK Black WT White

Example: **H-5010-CS-BK**

H TRACK SYSTEM



Description: Single circuit H-Track
Power per Circuit: 120V, 1920W max
Operating Current: Rated 20A max




TRACK SECTIONS

Model	Length	Finish	Description
HT H Track	2 2'	BK Black	120V 3-wire track
	4 4'	BN Brushed Nickel	
	6 6'	WT White	
	8 8'	DB Dark Bronze	

Example: **HT6-BK**

Each section includes two matching end caps



















TRACK SUSPENSION

System		Model	Finish	Description
All Track Suspension Kit		SK	18 18" 24 24" 36 36" 48 48"	Extends track from ceiling. Includes track bracket, rod and ceiling canopy. Use two per 4' length, three per 8' length.
Suspension Kit Extender		R	18 18" 24 24" 36 36" 48 48" 72 72"	Use with Rod Coupler (RI) to further extend track from ceiling.
Sloped Ceiling Adapter		SK14	BK Black BN Brushed Nickel WT White DB Dark Bronze	Use with suspension kits to accommodate sloped ceilings. Max capacity: 7A, 800W, 120V.
Rod Coupler		RI		Join two rods for suspensions longer than 48".
Suspension Adjustment Collar Kit		SK05		Includes two collars Used when suspension rod is field cut to custom lengths. One kit of two required for each rod.
Cable Suspension		SKC96	NI Nickel	Suspends track from ceiling. Includes 96" aircraft cable; may be field cut.
Cable Suspension Canopy with Feed		SKCF96	BK Black WT White	Canopy covers a standard 4" junction box. Includes 96" of aircraft cable and feed wire; may be field cut.
Low Voltage Track Head Extension		X	6 6" 12 12" 18 18" 24 24" 36 36" 48 48"	Extends low voltage track heads from track. Specify extension, fixture and finish. Only available as complete unit. Custom order example: X18-HHT-809-WT.
Line Voltage Track Head Extension (H track only)		H	18 18" 24 24" 36 36" 48 48"	Extends H System line voltage track heads.
Wall Mount Suspension Bracket		TBKT		Extends track 24" from wall. Use two per 4' length, three per 8' length.

Example: **SK24-BK**

ACCESSORIES

System		Model	Finish		Dimensions	Description
Live End Connector		HLE	BK BN WT DB	Black Brushed Nickel White Dark Bronze	4 1/4" x 1 3/8" x 3/4"	Use for direct wiring through ceiling. A canopy plate is required when using with a standard junction box.
Live End BX Connector		HBXLE			6" x 1 3/8" x 1 1/4"	Use with surface mounted BX or non-metallic sheathed cable. Also provides through the ceiling connection.
"I" Power Connector		HI-PWR			6 3/4" x 1 3/8" x 3/4"	Power entry point at the connection of 2 tracks.
"L" Connector Left		HL-LEFT			2 3/4" x 2 3/4" x 3/4"	Use to join 2 track sections to make power feedable 90° left polarity turns.
"L" Connector Right		HL-RIGHT			2 3/4" x 2 3/4" x 3/4"	Use to join 2 track sections to make power feedable 90° right polarity turns.
"T" Connector		HT			4" x 2 3/4" x 3/4"	Use to join 3 tracks sections. "T" Connector with opposite polarity can be custom ordered.
"X" Connector		HX			4 1/8" x 4 1/8" x 3/4"	Use to join 4 track sections.
"I" Connector		HI			9 3/4" x 1 3/8" x 3/4"	Use to join two sections of track with electrical continuity.
"I" Dead End Connector		HI-DEC			3" x 1 3/8" x 3/4"	Joins two sections of track without electrical continuity.
Flexible Track Connector		HFLX			9 3/4" x 1 3/8" x 3/4"	Connects two track sections at variable angles. Use as a transition from wall-to-wall, wall-to-ceiling. Power feedable.
Suspension Loop		H-LOOP			1 3/8" x 1 3/8" x 3"	3" electrical loop accepts chain hung fixtures up to 35lbs. Contains compartment for electrical connections.
15' Cord, Male Plug		HCORD	BK WT	Black White	15'	Maximim capacity: 7A, 800W, 120V.
T-Bar Drop Ceiling Attachment		T-BARCLIP		Chrome	1 1/2" x 1 1/4"	Attaches track to T-bar drop ceilings. Use two for 2' or 4' tracks, three for 6' or 8' tracks.
Monopoint Canopy Adapter		HMP	BK BN WT DB	Black Brushed Nickel White Dark Bronze	5 3/8" x 5 3/8"	Mount a single track fixture to a junction box. When used with a low voltage track head the transformer box will protrude off of the face of the monopoint.
Canopy Plate		CP			4 1/2" x 4 1/2"	Covers a standard 4" junction box. Use with any powerable connectors.
Floating Canopy Connector		HFC			4 1/2" x 4 1/2" x 1 1/2"	Connects to octagon box. Allows track to be powered anywhere along the length of the track.

H TRACK CURRENT LIMITER

WAC TRACK CURRENT LIMITERS ARE DESIGNED TO ADDRESS ENERGY ALLOWANCES

WITHOUT A CURRENT LIMITER

WATTAGE TOWARDS ENERGY ALLOWANCE

ASHRAE 90.1 AND IECC

The greater of either:

- The sum of the maximum rated wattage of the luminaires OR
- 30 watts per linear ft of track circuit

CALIFORNIA'S TITLE 24

The greater of either:

- The sum of the maximum rated wattage of the luminaires OR
- 45 watts per linear ft of track circuit

WITH A CURRENT LIMITER

WATTAGE TOWARDS ENERGY ALLOWANCE





ASHRAE 90.1 AND IECC

Wattage rating of the current limiter

CALIFORNIA'S TITLE 24

The greater of either:

- Wattage rating of the current limiter OR
- 12.5 watts per linear foot of track circuit

	Model	Circuit Breaker	Max Wattage	Finish	
 <p>Slim Single Live End</p> 	THL-HLES				
		1/2A 0.5A	60W	BK	Black
		1A 1.0A	120W	BN	Brushed Nickel
		2A 2.5A	300W	DB	Dark Bronze
		5A 5.0A	600W	WT	White
 <p>Single Live End</p> 	THL-HLE	7A 7.5A	900W		

Example: **THL-HLES-1A-BK**

MR16 TRACK LUMINAIRES

809



System	Model	Lamp (Voltage/Wattage)	Finish
 HHT H LHT L JHT J/J2	809LED 809	MR16 LED 12V 7W INCLUDED MR16 SOLD SEPARATELY	BK Black WT White
Example: LHT-809-BK			

180



System	Model	Lamp (Voltage/Wattage)	Finish
 HHT H LHT L JHT J/J2	180LED 180	MR16 LED 12V 7W Included MR16 sold separately	BK Black WT White
Example: LHT-180-BK			

007



System	Model	Lamp (Voltage/Wattage)	Finish
 HHT H LHT L JHT J/J2	007LED 007	MR16 LED 12V 7W included MR16 sold separately	BK Black WT White
Example: LHT-007-BK			Clear lens included


Available in Monopoint

Framing Projector Accessory


**008FP-BK**
008FP-WTBlack
White

808




System	Model	Lamp (Voltage/Wattage)	Finish
 HHT H LHT L JHT J/J2	808LED 808	MR16 LED 12V 7W Included MR16 sold separately	BK Black WT White
Example: LHT-808LED-BK			Clear lens included

Available in Monopoint


LED LAMPS			Finish	Wattage	Color Temp	Input	Beam	CRI	Lumens	CBCP	Average Life
	MR16	MR16LED-BAB-BK MR16LED-BAB-WT	Black White	7W	3000K	12V	35°	90	450	850	25,000 Hours
LENS ACCESSORIES											
Amber LENS-16-AMB	Blue LENS-16-BLU Green LENS-16-GRN	Red LENS-16-RED Frosted LENS-16-FR	UV Filter Spread	LENS-16-UVF LENS-16-SPR	Beam Elongating Honeycomb Louver	LENS-16-BEL LENS-16-HCL					

GU10 TRACK LUMINAIRES




	System	Model	Lamp (Voltage/Wattage)	Finish
	HTK H LTK L JTK J/J2	103LED	GU10LED 7W INCLUDED	BK Black DB* Dark Bronze WT White
Example: LTK-103LED-BK *DB Finish only available in HTK				




	System	Model	Lamp (Voltage/Wattage)	Finish
	HTK H LTK L JTK J/J2	104LED	GU10LED 7W included	BK Black WT White
Example: LTK-104LED-WT				



LED LAMPS		Finish	Wattage	Color Temp	Input	Beam	CRI	Lumens	CBCP	Average Life	
	GU10	GU10LED-BAB-BK GU10LED-BAB-WT	Black White	7W	3000K	12V	35°	90	470	850	25,000 Hours


PAR & BR TRACK LUMINAIRES

720, 730

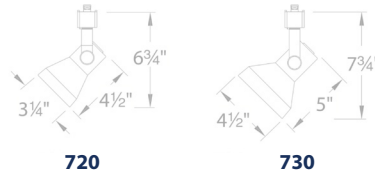**720****730**

System	Model	Lamp (Voltage/Wattage)	Finish
HTK	H	720	PAR20 50W max
LTK	L	730	PAR30 75W max
JTK	J/J2		
Example: HTK-730-WT		Order lamp separately	


763, 764, 765

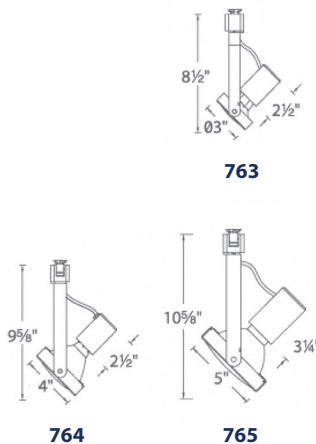**763****764****765**

System	Model	Lamp (Voltage/Wattage)	Finish
HTK	H	763	BR20, PAR20 50W max
LTK	L	764	BR30, PAR30 75W max
JTK	J/J2	765	BR40, PAR38 100W max
Example: HTK-763-WT		Order lamp separately	

PAR & BR TRACK LUMINAIRES

178 UNIVERSAL MEDIUM BASE



System	Model	Lamp (Voltage/Wattage)	Finish
HTK LTK JTK	H L J/J2	178 BR20/30/40. PAR20/30/38 120V 100W Max	BK Black WT White

Example: **LTK-178-BN**

Order lamp separately


BARN DOOR (ORDER SEPARATELY)

PAR20BD
PAR30BD
PAR38BD

BK Black
WT White



725




System	Model	Lamp (Voltage/Wattage)	Finish
HTK LTK JTK	H L J/J2	725 PAR20 / BR20 50W max	BK Black WT White

Example: **HTK-725-WT**

Order lamp separately

703




System	Model	Lamp (Voltage/Wattage)	Finish
HTK LTK JTK	H L J/J2	703 BR30 and PAR30 75W Max	BK Black WT White

Example: **LTK-703-BK**

Order lamp separately

704



System	Model	Lamp (Voltage/Wattage)	Finish
HTK LTK JTK	H L J/J2	704 120V BR30 and PAR30 75W Max	BK Black WT White





Example: **LTK-704-WT**



Order lamp separately

LOW VOLTAGE





MR16 MULTIPLE SPOTS (1 WATT MINIMUM LOAD TRANSFORMERS)



1 LIGHT

Trims (Order Housing Separately)	Model	Finish	Reflector/Trim
 	1 Light Trim MT-116 Halogen MR16 sold separately MT-116LED LED MR16 included	WT/WT	White/White
 	1 Light Invisible Trim™ MT-116TL Halogen MR16 sold separately MT-116LEDTL LED MR16 included	WT	White





Low Voltage Multiple Spot Housings (Required)	Model	Type	Wattage	Rating
 	MT-116HS	1 Light	12V 50W MAX	Non-IC



2 LIGHTS

Trims (Order Housing Separately)	Model	Finish	Reflector/Trim
 	2 Light Trim MT-216 Halogen MR16 sold separately MT-216LED LED MR16 included	WT/WT	White/White
 	2 Light Invisible Trim™ MT-216TL Halogen MR16 sold separately MT-216LEDTL LED MR16 included	WT	White

Low Voltage Multiple Spot Housings (Required)	Model	Type	Wattage	Rating
 	MT-216HS	2 Lights	12V 50W MAX	Non-IC

3 LIGHTS

Trims (Order Housing Separately)	Model	Finish	Reflector/Trim
 	3 Light Trim MT-316 Halogen MR16 sold separately MT-316LED LED MR16 included	WT/WT	White/White
 	3 Light Invisible Trim™ MT-316TL Halogen MR16 sold separately MT-316LEDTL LED MR16 included	WT	White

Low Voltage Multiple Spot Housings (Required)	Model	Type	Wattage	Rating
 	MT-316HS	3 Lights	12V 50W MAX	Non-IC

Non-IC housing require 3" of clearance from insulation on all sides. Recommended ELV dimming. Accommodates ceiling thickness of up to 1" for remodel & 3/4" for new construction.





LENSES, LOUVERS & LAMPS



Colored Lenses	Color	Lenses		LED MR16 Lamp	Finish
LENS - 16 Colored Lens	AMB Amber	LENS-16-UVF UV Filter Lens	LENS-16-SPR Spread Lens LENS-16-BEL Beam Elongating Lens	MR16LED-BAB	BK Black WT White
	BLU Blue	LENS-16-FR Frosted Lens			
	GRN Green	LENS-16-HCL Honeycomb Louver			
	RED Red				

2.5" LOW VOLTAGE MR16



- 1 watt minimum load transformers
- Non-IC housings require 3" of clearance from insulation on all sides
- Accommodates ceiling thickness of up to 3/4" for both remodel or new construction

2.5" trims (Order Housing Separately)		Model	Finish	Baffle//Trim
		HR-836 HR-836LED Metal Trim	BN WT	Brushed Nickel White/White
		HR-837 HR-837LED Gimbal Ring, 25° Adjustment from Vertical	BK BN WT	Black Brushed Nickel White






2.5" Housings (Required)	Model	Input	Transformer	Output	Type
	HR-801	120V	Electronic	12V, 50W max 1W min	Remodel Non-IC
	HR-802	120V	Electronic	12V, 50W max 1W min	New Construction Non-IC



Non-IC housings require 3" of clearance from insulation on all sides.

4" LOW VOLTAGE MR16

Accommodates Most LED MR16 Lamps

- Die-cast aluminum construction
- Steel spring clips secure trim to housing
- Abrasion-resistant powder coat paint or plated metal finish

4" Downlight Trims (Order Housing Separately)	Model	Input	Finish	Description
	Square open reflector HR-D412-S MR16 sold separately HR-D412LED-S LED MR16 included	MR16, 50W max	SC/BN SC/WT	Specular/Brushed Nickel Specular/White
	Round open reflector HR-D412 MR16 sold separately HR-D412LED LED MR16 included	35° adjustment from vertical, MR16, 50W max		
	Step baffle HR-D411 MR16 sold separately HR-D411LED LED MR16 included		WT/WT	White Baffle/White
	Gimbal ring HR-D417 MR16 sold separately HR-D417LED LED MR16 included	25° adjustment from vertical, MR16, 50W max	BN WT	Brushed Nickel White
	Directional spot HR-D425 MR16 sold separately HR-D425LED LED MR16 included	80° adjustment from vertical, MR16, 50W max	WT	White

4" Low Voltage Housings (Required)	Model	Input	Transformer	Output	Type
	HR-8402E	120V	Electronic	12V, 50W max 1W min	New Construction Non-IC
	HR-8401E	120V	Electronic	12V, 50W max 1W min	Remodel Non-IC

Non-IC housings require 3" of clearance from insulation on all sides.
Accommodates ceiling thickness of up to 3/4" for remodel and new construction.

INDEX

120/277V STEP LIGHTS	76	LINK.....	65
120V/277V STEP LIGHTS	77	LITHIUM.....	53
2.5" LOW VOLTAGE	90	LOTOS	25 - 26
4" LOW VOLTAGE	91	LOTOS	30 - 31
ACCESSORIES	83	LOTOS R	27 - 29
ATLANTIS	6	LOW VOLTAGE	79
ATLANTIS FLUSH	7	LOW VOLTAGE	89
BARLIGHT	18 - 19	METRO	54 - 55
BLAZE	33	MIDTOWN	74
BLO & FLO & GLO	45	MINI PUCK LIGHT.....	21
CAP	72	MR16 TRACK LUMINAIRES	85
CHARGE 8010 & 8020	80	OPTICAL CHANNELS AND LENS ACCESSORIES	15
CUBIX & CYLINDER	69	PAR & BR TRACK LUMINAIRES	87 - 88
CYLINDER	70	PATRIOT	37
DEMI	60	POP-IN	32
DEW	49	PORTABLE TABLE LAMPS - RECHARGEABLE	67
DISC	51	PUCK LIGHT	22 - 23
DISC II	4 - 5	QUADE	9
EDGELESS	43	RAZOR	59
FUSE	64	REMI	57
GEMINI	12	ROUND & SQUARE	46 - 47
GU10 TRACK LUMINAIRES	86	ROUND	48
H TRACK CURRENT LIMITER	84	SLIM	61
H TRACK SYSTEM	82	SOLO 5010, BULLET 7010, CYN 8110	81
HUG PULL CHAIN 44	10	SOLO	78
HUG PULL CHAIN 52	11	STUDIO	58
I CAN'T BELIEVE IT'S NOT RECESSED	50	TABLET	72
INDOOR ALUMINUM CHANNELS	14	TURBO.....	63
INDOOR MOUNTING ACCESSORIES	14	TWIST-N-LITE	38 - 41
ION	36	UNDER CABINET STRIP - PLUG & PLAY	16
KENRIC	35	VEGA	75
LANTERN	73	VUE	71

Headquarters

Tel: 800.526.2588
Fax: 800.526.5285

44 Harbor Park Dr
Port Washington, NY 11050

Distribution and Assembly Facilities

South East

1600 Distribution Ct
Lithia Springs, GA 30122

Central

1700 South J Elmer Weaver Freeway
Suite 100
Cedar Hill, TX 75104

West

1750 S Archibald Ave
Ontario, CA 91761

Consult our manufacturing facility to take advantage of our custom capabilities in large quantities. For up to date product specifications and assistance please visit wacighting.com or call **1-800-526-2588**



WAC LIMITED®

WAC LIMITED technology and designs are protected by several patents and patent applications. WAC LIMITED will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe its patents are being infringed.

Copyright © 2025 WAC LIMITED. All rights reserved. This catalog is copyrighted and WAC LIMITED will use all measures available to it under the law against anyone who copies or derives from its copyrighted work.

WAC LIMITED retains the right to modify the design of its products at any time as part of the company's continuous improvement program. Please refer to our website for the latest product specifications.

[wacighting.com](https://www.wacighting.com)