

MODERN FORMS
A WAC LIGHTING COMPANY

2016

Table of Contents

LED Bath and Interior Sconces	1-52
LED Interior Sconces	53-110
LED Interior and Exterior Sconces	111-202
LED Interior & Exterior Pendants and Flush Mounts	203-220
LED Interior Pendants, Chandeliers and Flushmounts	221-264
LED Task	265-286

LED

Bath and Interior Sconces







Margin

Crisp white ceramic glazed glass and delicate wire encased in glass are layered for depth of field and visual interest to mock an illusory two-dimensional design. Satin nickel to complement sophisticated nickel bath hardware while making a modern statement.




- Laminated glass and ceramic glazed super white glass
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

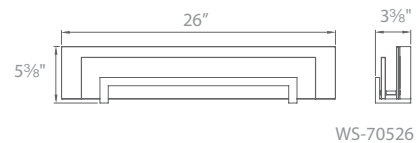

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-70526	26"	26W	120V	2123	916	SN Satin Nickel 
WS-70538	38"	45W		3503	1596	

Example: **WS-70526-SN**

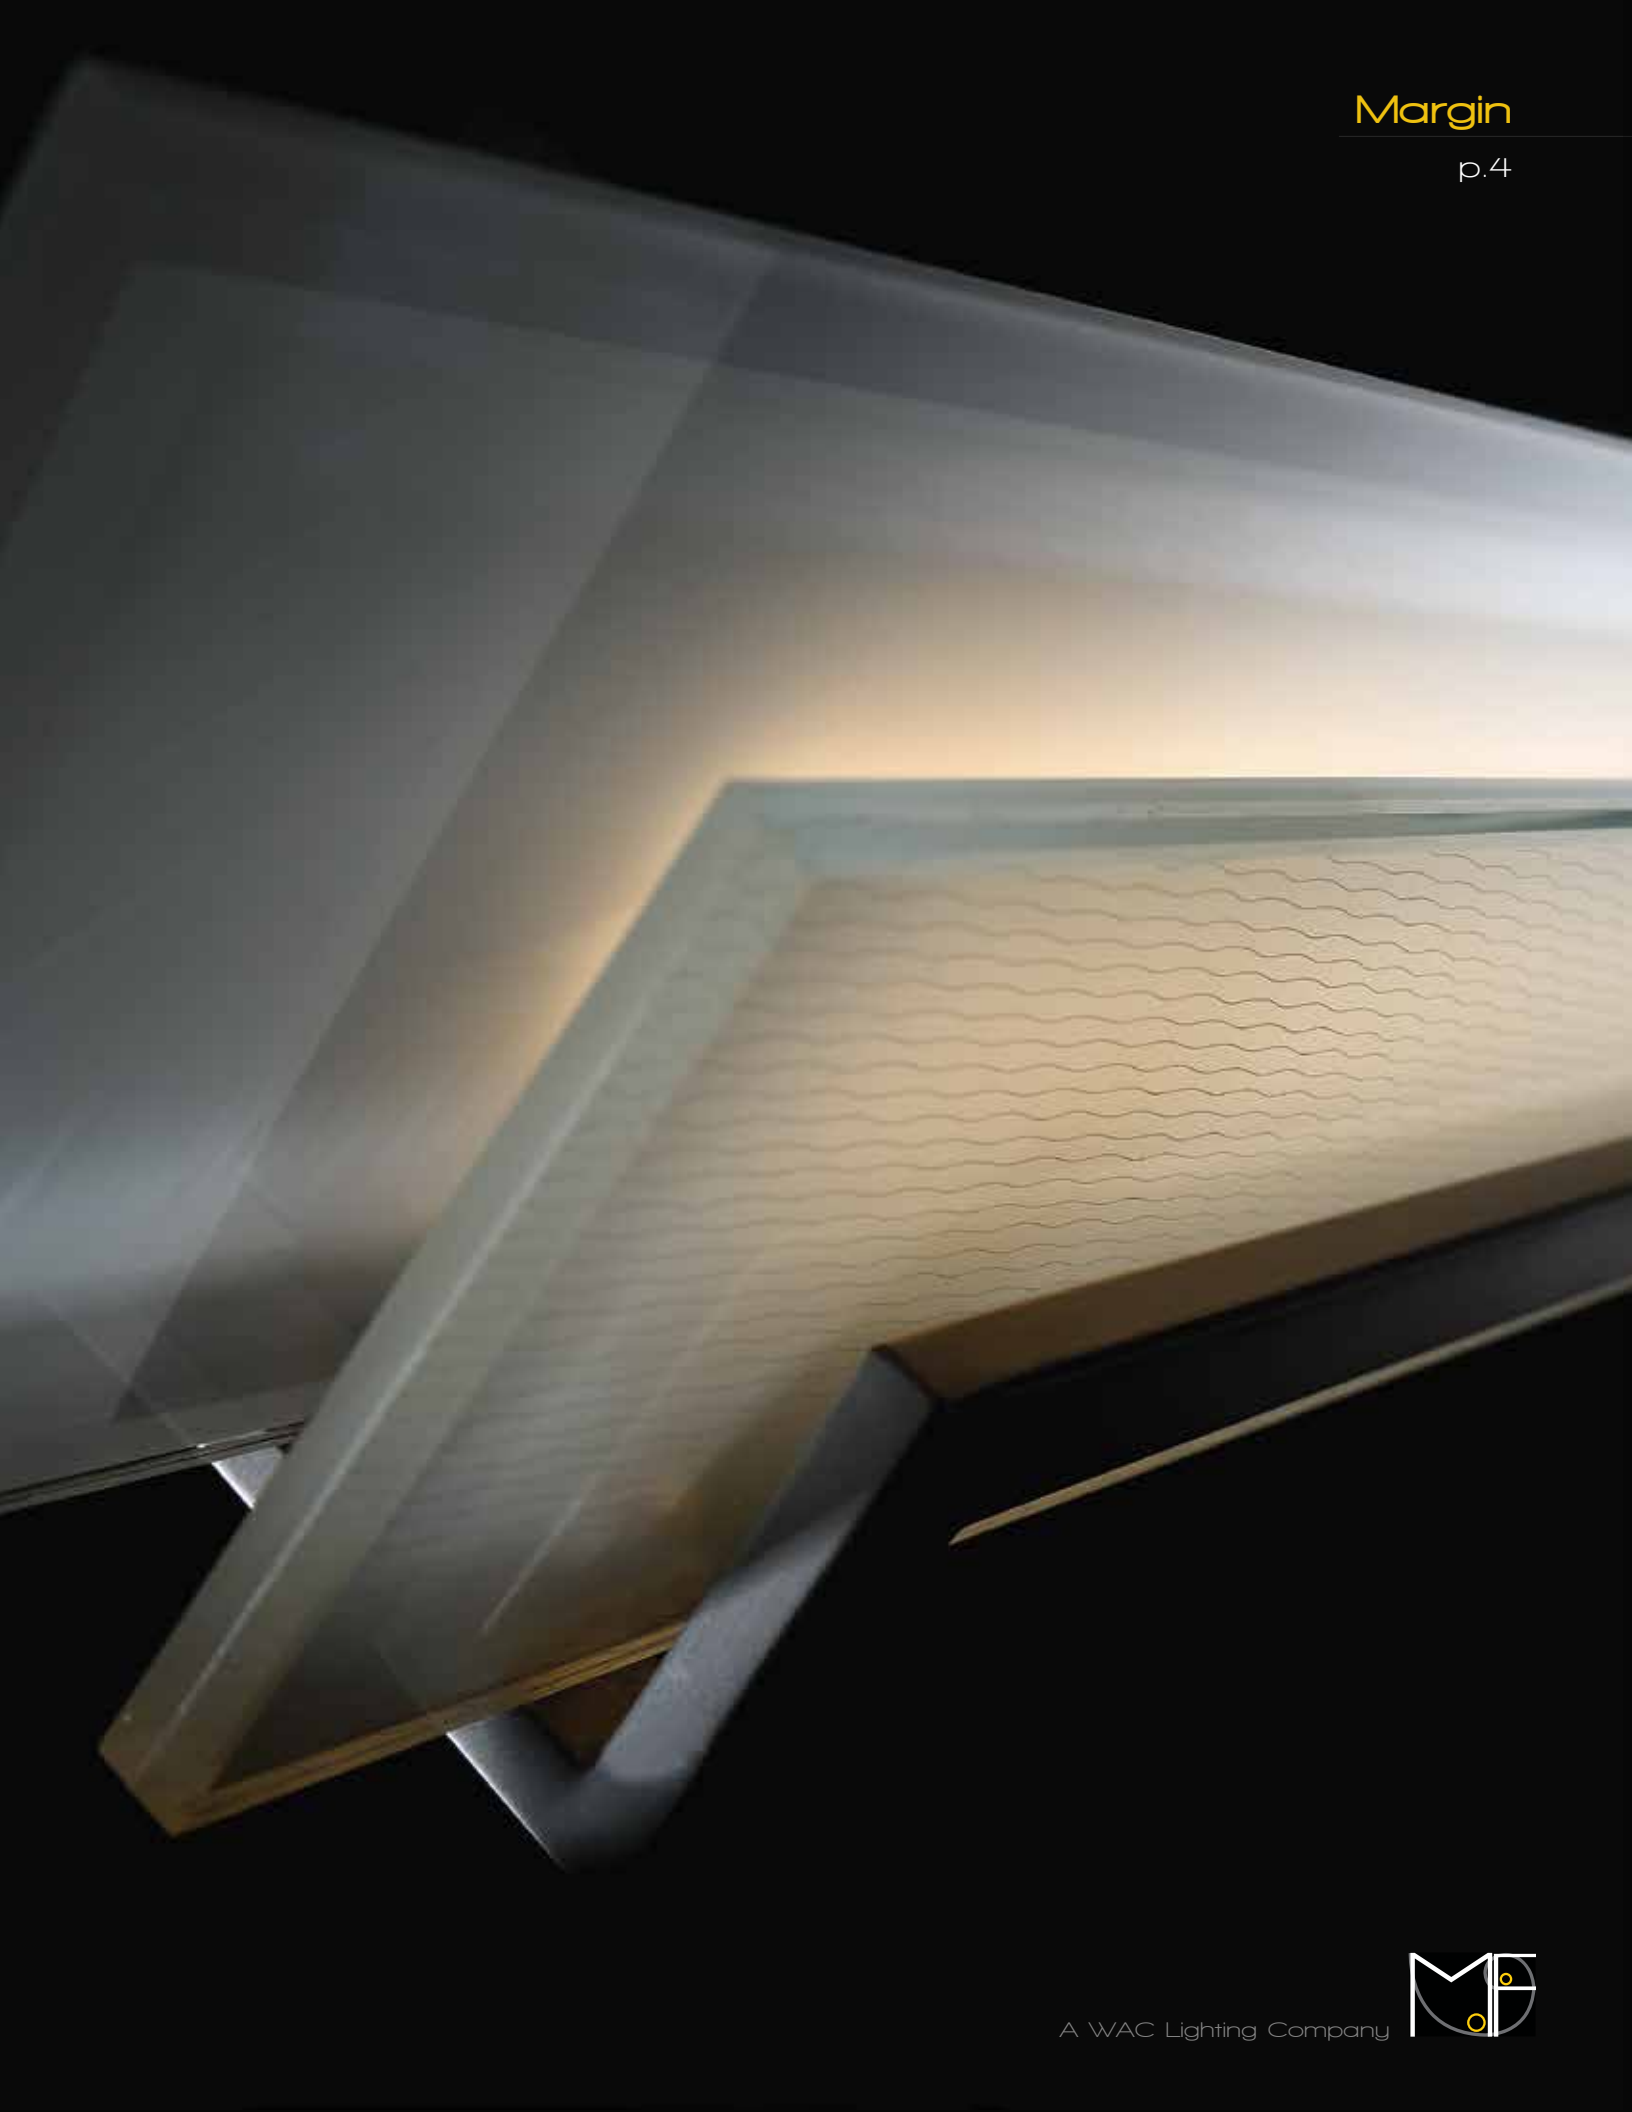

Arko


Light is reflected off of a corrugated optic white glass extrusion for a decorative wash of indirect illumination. Alternatively rotate the cylindrical light source for powerful direct illumination when used in front of a mirror as a task light. Arko easily offers two looks and two lighting scenes. Use as a wall sconce or in a bath.




- Mount vertically or horizontally
- ADA compliant, low profile design
- Rotate lighting element for direct or indirect illumination
- Co-Extruded clear and white duplex acrylic cylinder
- Textured super white borosilicate glass
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 75,000 hour rated life
- Color Temp: 3500K
- CRI: 90




WS-50526

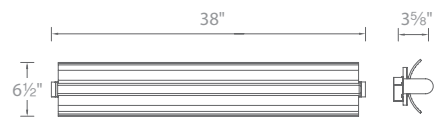

WS-50538


Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-50526	26"	20W	120V-220V-277V	1725	1350	AL Brushed Aluminum 
WS-50538	38"	30W		2560	1950	

Example: **WS-50526-AL**

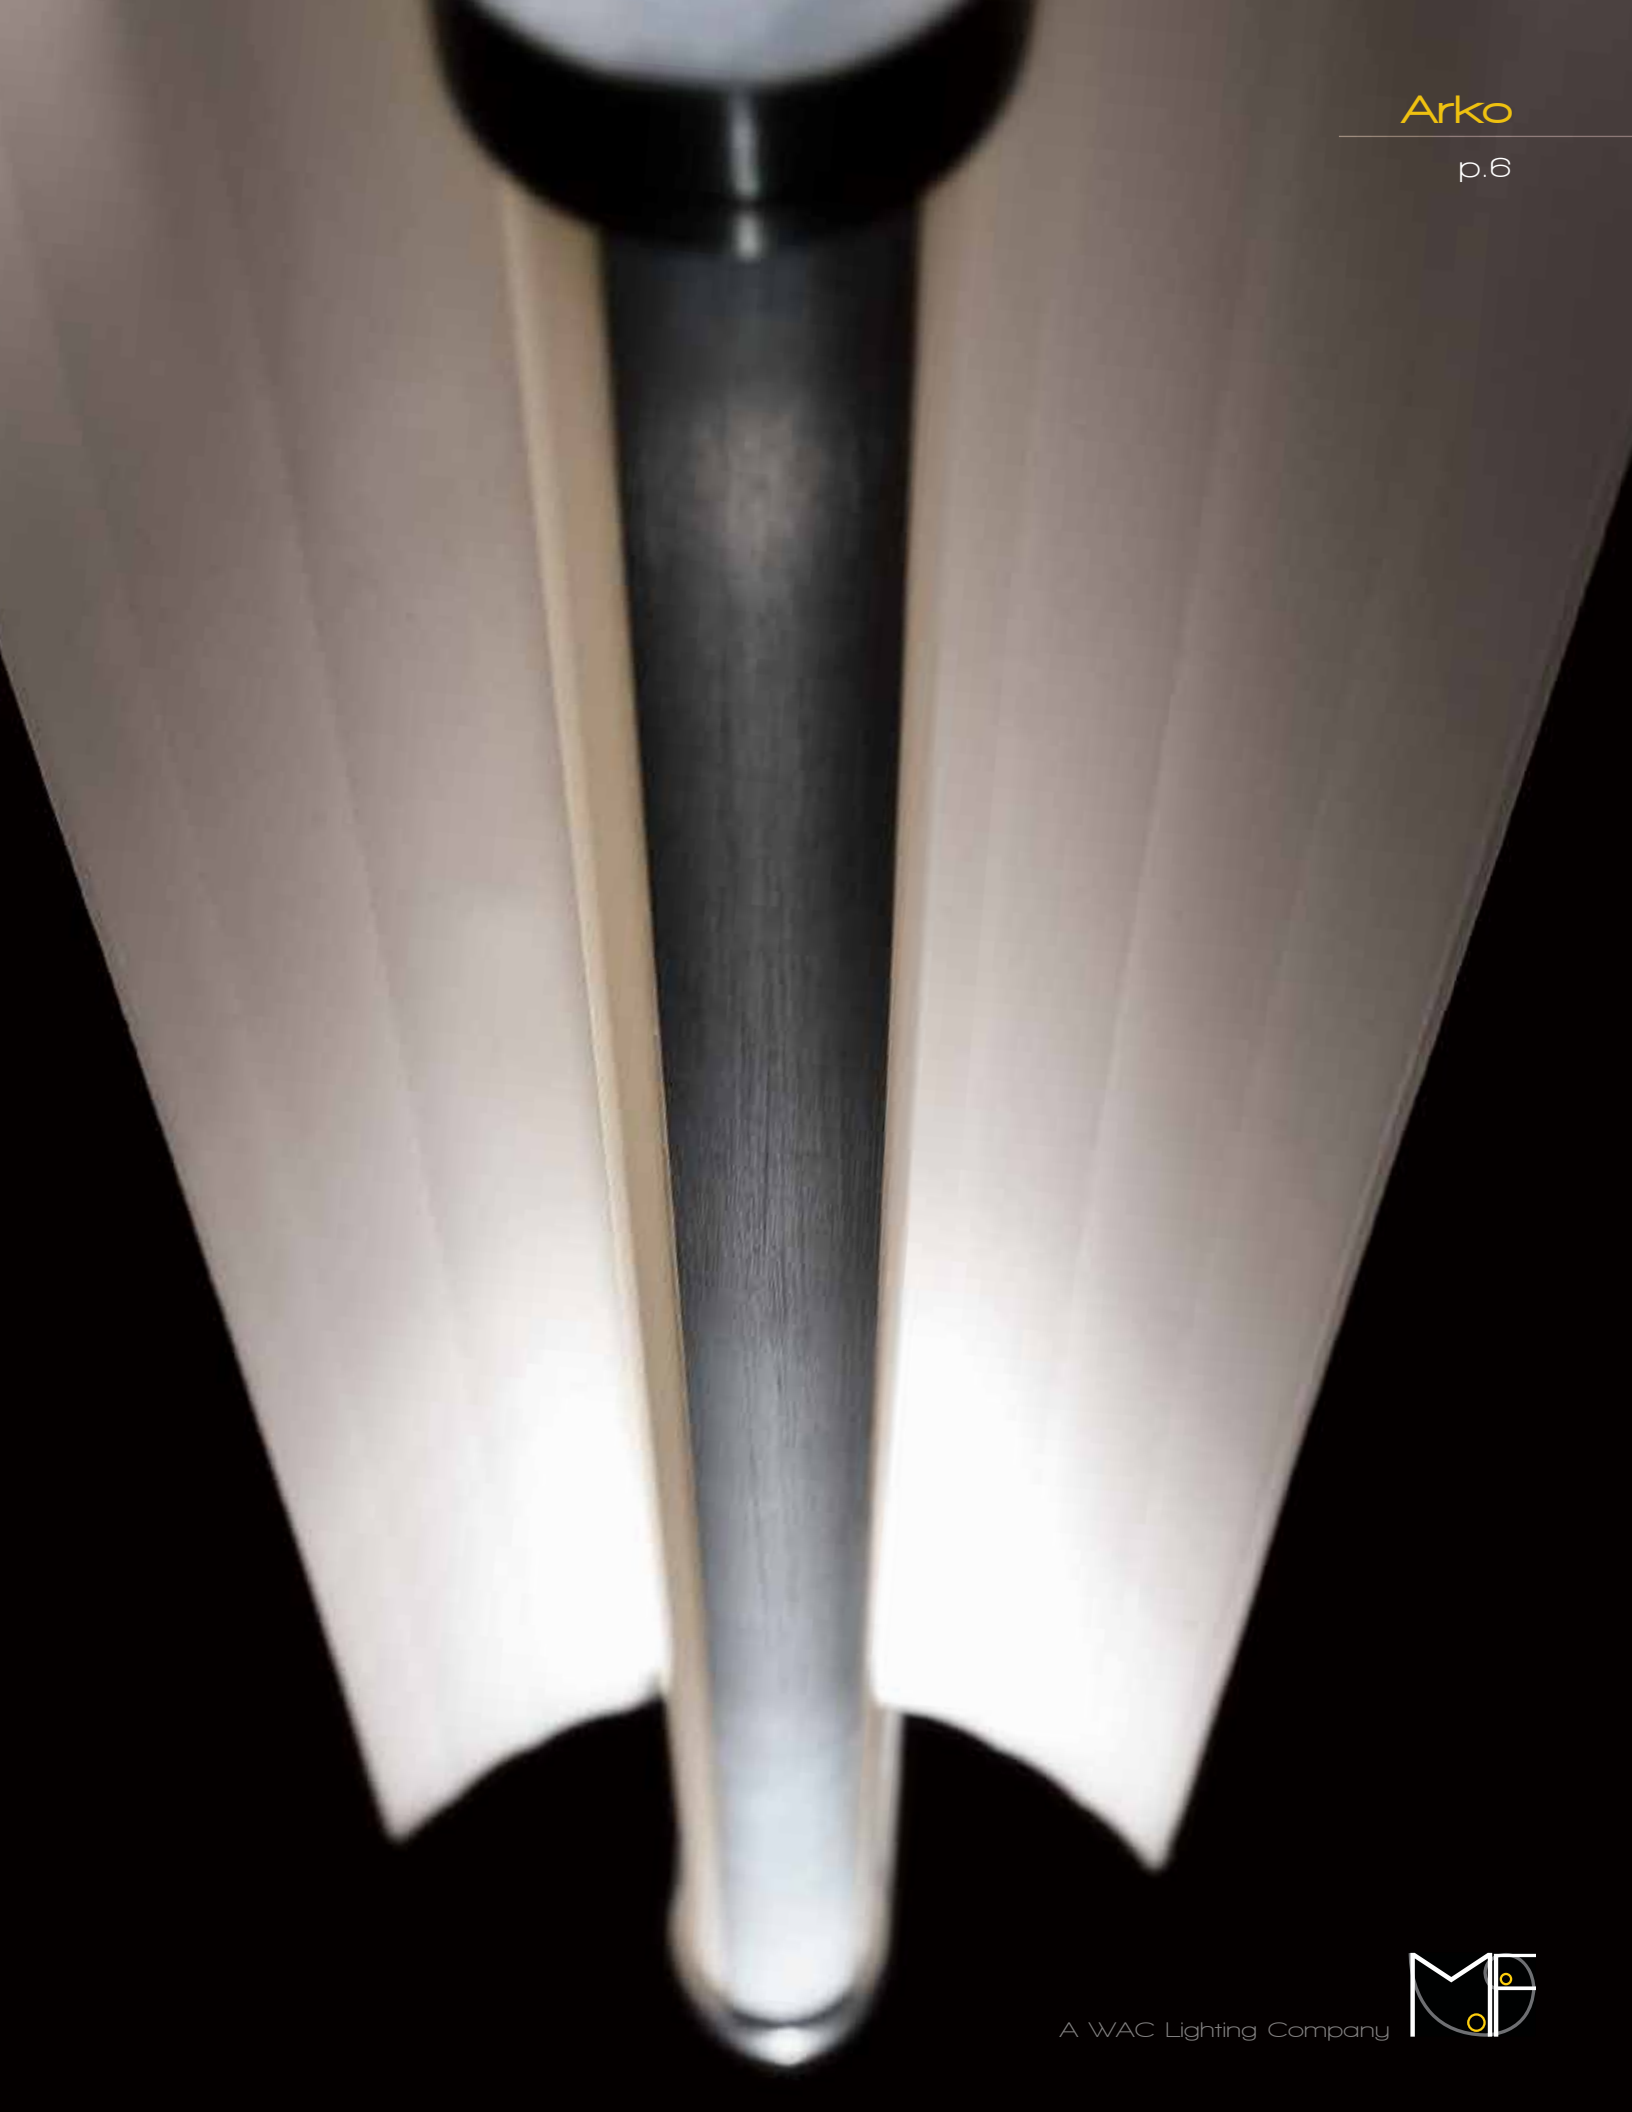


Quantum


Opulent jewelry quality crystals artfully illuminated with multipoint source LED technology for a spectacle of shimmering sparkle. Elegant design combining exquisite optic hand cut crystals with powerful LED illumination with beautiful color rendition. Ideal as a vanity luminaire for fine baths or as an elegant wall sconce in luxury hotels and fine homes. Available in four sizes.




WS-41512



WS-41518




WS-41528



WS-41536

- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90


Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-41512	12"	22.5W	120V	1278	740	PN Polished Nickel 
WS-41518	18"	37.5W		2117	1260	
WS-41528	28"	56.5W		3498	2025	
WS-41536	36"	78.5W		4439	2790	

Example: **WS-41528-PN**




Sofia


Elegant as a classic tennis bracelet. Solid hand cut faceted crystals like oversized cushion-cut diamonds in a beautiful and shiny polished setting add a resplendent fashion statement with a touch of the grace of yesteryear to beautify any room. A vision of Hollywood, redefined.

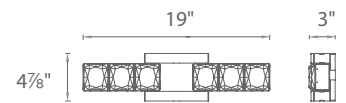

WS-13619




WS-13630



WS-13641

- Clear hand cut crystal
- Luminaire may be rotated 90° when mounting
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3500K
- CRI: 90


Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-13619	19"	18W		1600	955	PN <i>Polished Nickel</i> 
WS-13630	30"	28W	120V	2400	1422	
WS-13641	41"	37W		3200	2028	

Example: **WS-13619-PN**




Razor


Raze the standard for fine bath lighting with these cutting edge aesthetics that leave the ordinary behind. Thick walled glass is uniformly lit framed in polished stainless steel. Suited for today's interiors, from traditional to contemporary in bronze and stainless steel.




WS-47511



WS-47520



WS-47528



WS-47535

- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- Also available as flush mount for ceiling or walls. See page 261
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90


Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-47511	11"	1 light 10W	120V	679	385	BZ Bronze SS Stainless Steel
WS-47520	20"	2 lights 19.5W		1287	690	
WS-47528	28"	3 lights 29.5W		1978	1090	
WS-47535	36"	4 lights 39.5W		2613	1500	

Example: **WS-47528-SS**




Aegean

Emulating the calming effect of moving water. Elegant mouth blown white opal glass with cast metal framework. Mounts vertically or horizontally without transformer or driver as an elegant luminaire for a vanity or as an ADA sconce in a foyer or hallway. Four sizes available.



WS-45512



WS-45522




WS-45531



WS-45541

- ADA compliant, low profile design
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-45512	12" 1 light	9.5W	120V	691	505	PN Polished Nickel 
WS-45522	21" 2 lights	19W		1369	1040	
WS-45531	31" 3 lights	28.5W		2017	1535	
WS-45541	41" 4 lights	39W		2840	2050	

Example: **WS-45531-PN**



Vetri

Featuring stunning Piastra style glass, hand formed using techniques that date back to the 13th century. A clever indirect application of powerful LEDs in a linear format brings out sparkling highlights in the spaghetti glass while providing strong ambient illumination. Vetri's curvilinear profile will turn any bath or hotel corridor into an eye-popping experience.



- Mount vertically or horizontally
- ETL & cETL damp location listed
- Piastra hand made glass
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Replaceable LED module
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90




WS-3919



WS-3925



WS-3937

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3919	21"	31W		1880	1016	AL Brushed Aluminum 
WS-3925	27"	38W	120V	2500	1378	
WS-3937	39"	53W		3750	2345	

Example: **WS-3919-AL**








Glacier

The brilliance of frozen ice. LEDs sparkle and shimmer mesmerizingly through weighty blocks of Piastra glass. One, two, three and four light configurations are offered for luxury baths and powder rooms. All available with the ultimate range of dimming controllability.



- ADA compliant, low profile design
- ETL & cETL damp location listed
- WS-6509 is CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

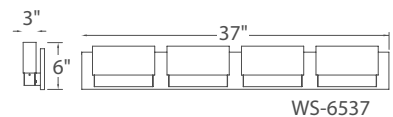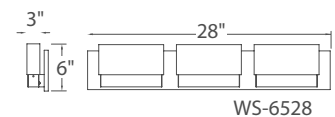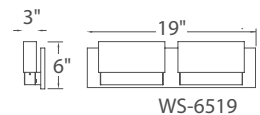


Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-6509	9"	14W	120V	1230	525	CH Chrome 
WS-6519	19"	29W		2465	1100	
WS-6528	28"	44W		3695	1820	
WS-6537	37"	58W		4925	2285	

Example: **WS-6509-CH**




Fusion


An elegant LED bath light design, mouth blown opal glass shades accented with art glass, hand formed with 13th century craftsmanship. Quality illumination from the most advanced lighting technology engineered for color rendering, superior brightness, and dimming control.



WS-6028




WS-6036



WS-6045

- CEC Title 24 Compliant
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-6028	28" 3 lights	32W		2490	1025	BN Brushed Nickel 
WS-6036	36" 4 lights	42W	120V	3320	1955	
WS-6045	45" 5 lights	52W		4150	2515	

Example: **WS-6028-BN**



Vogue


From transitional to contemporary, the Vogue family coordinates with popular bath hardware and metal finishes. An extensive range of LED wall luminaires are available for every application and environment. Crafted of mouth blown etched opal glass and designed with hidden hardware, these luminaires offer powerful lumen output and excellent color rendering.

- See page 23-24 for complementary bath vanities & sconces
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Mouth blown etched opal glass
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- 277V option available special order
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90




Brushed Nickel

Chrome

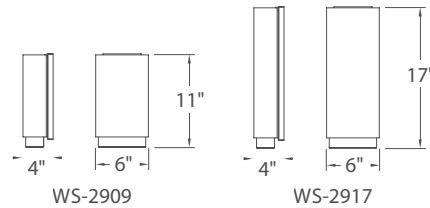

Chrome

Bronze

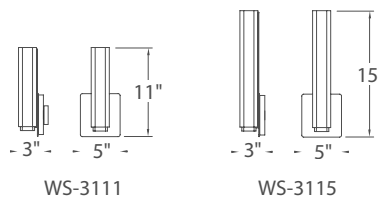

WS-3111

WS-3115

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-2909	11"	17W	120V	940	340	BN Brushed Nickel
WS-2917	17"	26W		1566	705	CH Chrome

Example: **WS-2909-BN**

For 277V special order, add an "F" before the finish: **WS-W2909F-BN**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-W2917-27-BN**

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3111	11"	16W	120V	938	410	BN Brushed Nickel
WS-3115	15"	21W		1250	590	BZ Bronze
						CH Chrome

Example: **WS-3111-BN**

For 277V special order, add an "F" before the finish: **WS-W3111F-BN**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-W3111-35-BN**



Vogue

From transitional to contemporary, the Vogue family coordinates with popular bath hardware and metal finishes. An extensive range of LED wall luminaires are available for every application and environment. Crafted of mouth blown etched opal glass and designed with hidden hardware, these luminaires offer powerful lumen output and excellent color rendering.



Brushed Nickel




Chrome




Bronze


- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Mouth blown etched opal glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available special order
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K / 2700K / 3500K available special order
- CRI: 90



WS-3120



WS-3127



WS-3139


Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3120	20"	30W		1875	970	BN <i>Brushed Nickel</i>
WS-3127	27"	38W	120V	2500	1160	BZ <i>Bronze</i>
WS-3139	39"	53W		3750	1740	CH <i>Chrome</i>



Example: **WS-3120-BN**

For 277V special order, add an "F" before the finish: **WS-3120F-BN**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-3120-27-BN**

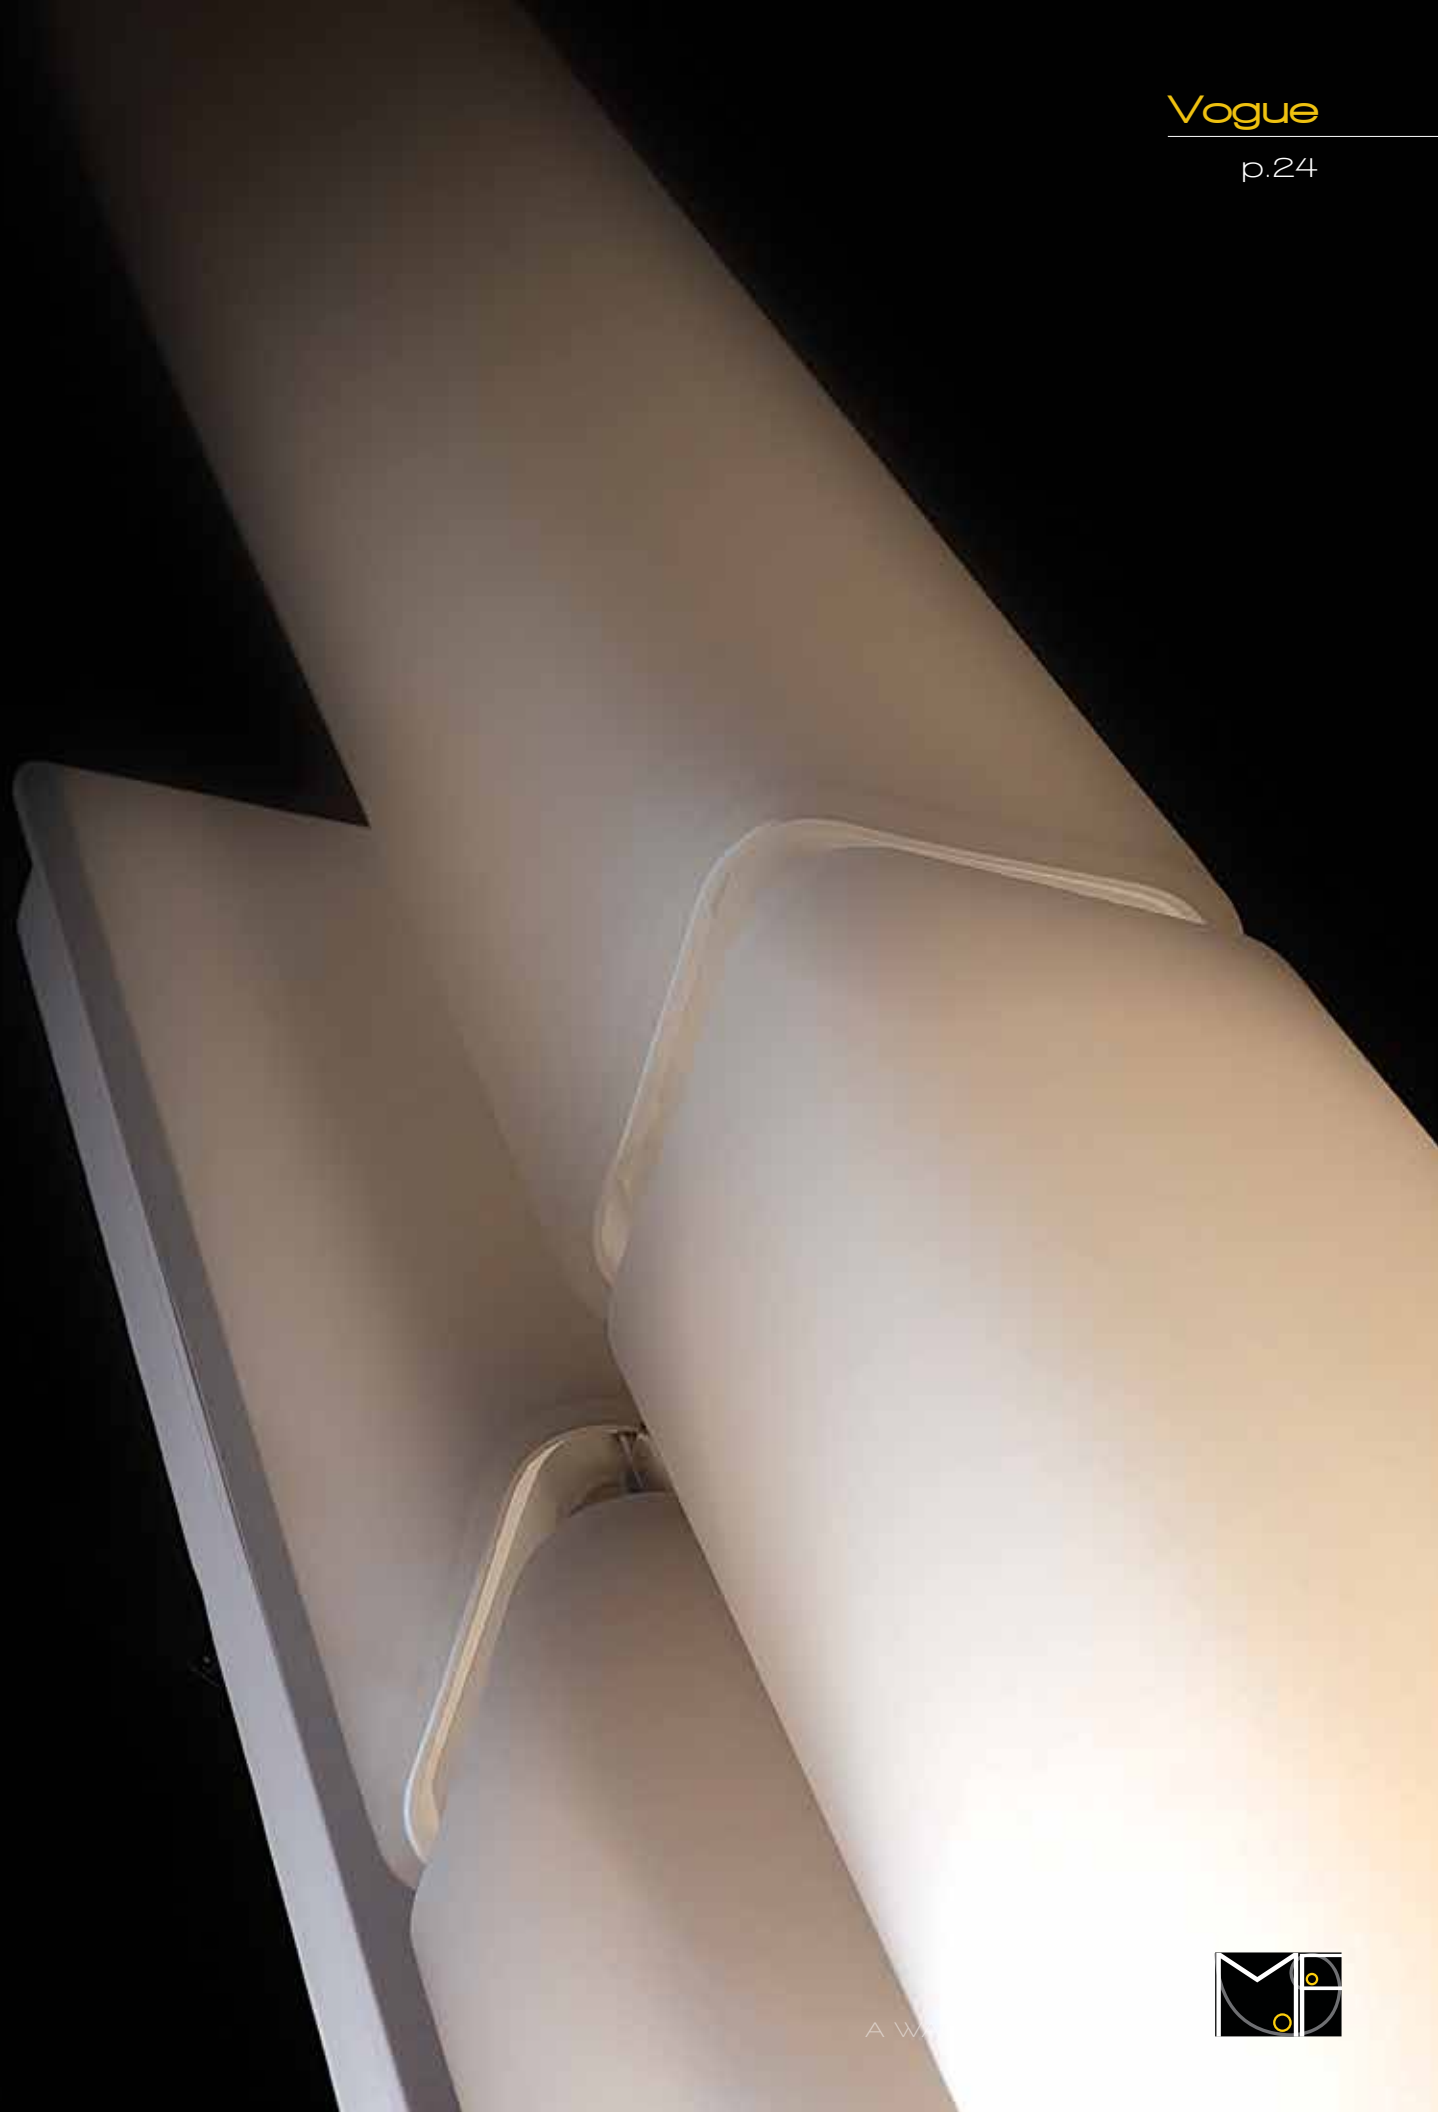

A W







Loft

This modern design is highlighted with contoured etched opal glass that creates a striking aesthetic. Ideal for installation in fine baths and hallways, as well as patios, porches and other damp locations.

- CEC Title 24 Compliant
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Mouth blown etched opal glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- Replaceable LED module
- 80,000 hour rated life
- 277V option available special order
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90



May mounted vertically or horizontally

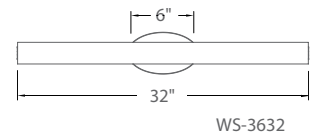

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3611	11"	9W	120V	1235	630	BN Brushed Nickel CH Chrome

Example: **WS-3611-BN**

For 277V special order, add an "F" before the finish: **WS-3611F-BN**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-3611-27-BN**

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3618	18"	30.5W		2030	1445	BN Brushed Nickel CH Chrome
WS-3624	24"	37.5W	120V	2720	1930	
WS-3632	32"	50W		3725	2905	

Example: **WS-3624-BN**

For 277V special order, add an "F" before the finish: **WS-3632F-BN**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-3632-35-CH**







Sabre

On the cutting edge of technology and aesthetics, bath lighting can now be both refined and robust. A sleek look with durable and optically enhanced coextruded acrylic diffuser, this water-tight design is complete with state of the art LED. Adapts to any space with vertical or horizontal mounting.



- Mount vertically or horizontally
- 1/4" thick wall co-extruded clear and white optical acrylic
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Conversion plate for 4" J box included
- Universal driver (120V-220V-277V)
- 85,000 hour rated life
- Color Temp: 3500K
- CRI: 90

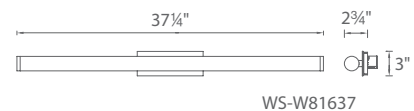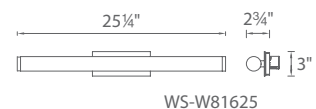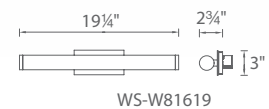


Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W81619	19"	15W		1500	1010	AL Brushed Aluminum 
WS-W81625	25"	20W	120V-220V-277V	1725	1375	
WS-W81637	37"	30W		2560	2130	

Example: **WS-W81619-AL**






Slat

A sliver of light illuminates a dressing room, bath or corridor with a soft, flattering glow. This slim and shallow design with crisp edges and a brushed aluminum frame simply modernizes any decor.

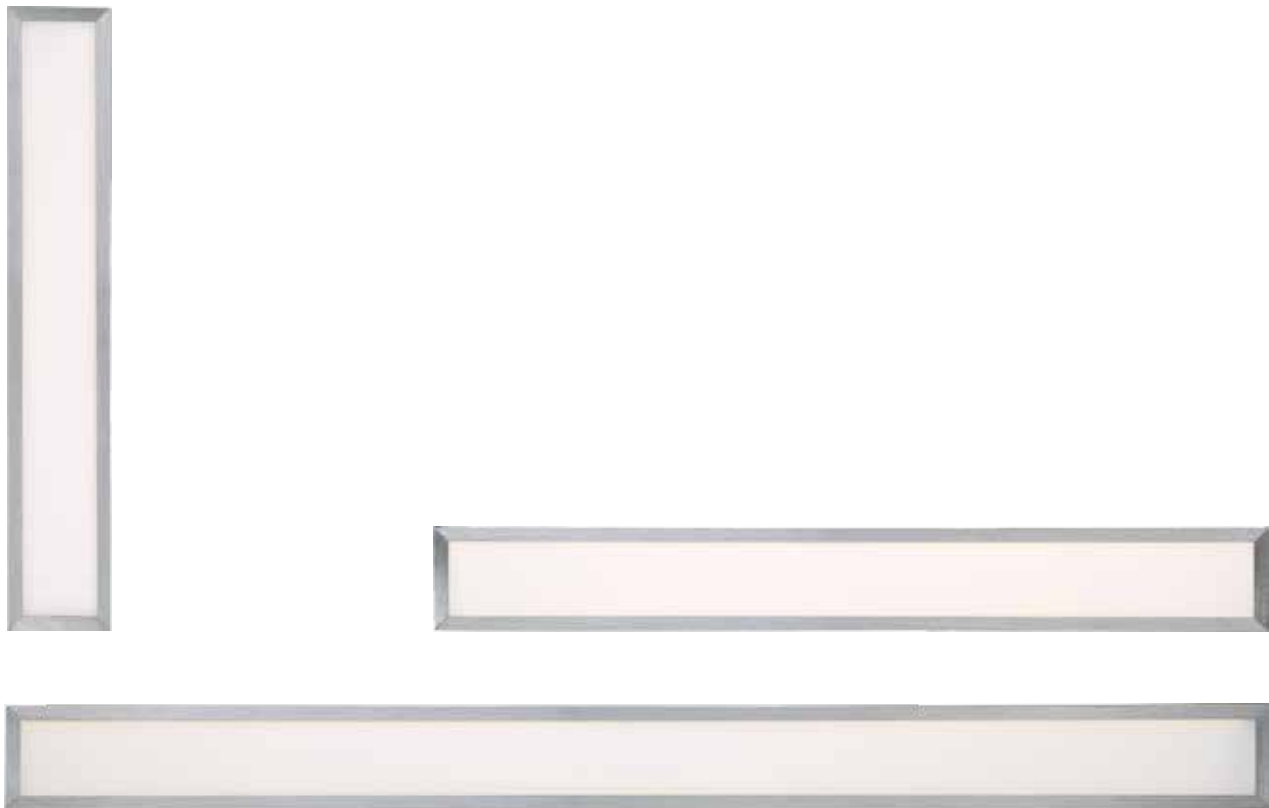

- Advanced Edge Lit Technology
- Mount vertically, horizontally, or on ceiling
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Listed for use in closets
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Conversion plate for 4" J box included
- 277V option available *special order*
- 85,000 hour rated life
- Color Temp: 3000K
- CRI: 90

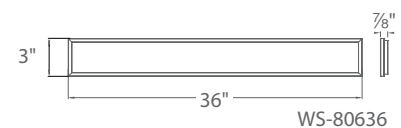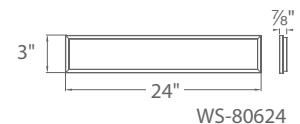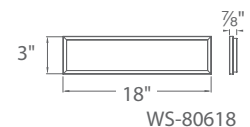

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-80618	18"	13W		1129	378	AL Brushed Aluminum
WS-80624	24"	19W	120V	1504	537	
WS-80636	36"	25W		1860	780	


Example: **WS-80618-AL**

For 277V special order, add an "F" before the finish: **WS-80624F-AL**







Neo

Marvel at this ultra-thin sconce and vanity light collection which adapts the latest technology from the television and display industry, to create phenomenal light output. This luminaire boasts a depth from the wall of less than an inch. The amazing uniform light is free from glare, hot spots and color-over-angle changes. Place above or alongside a mirror for a modern geometric display of two-dimensional rectilinear forms. Create a dramatic display of wall art with an arrangement of these modular units.

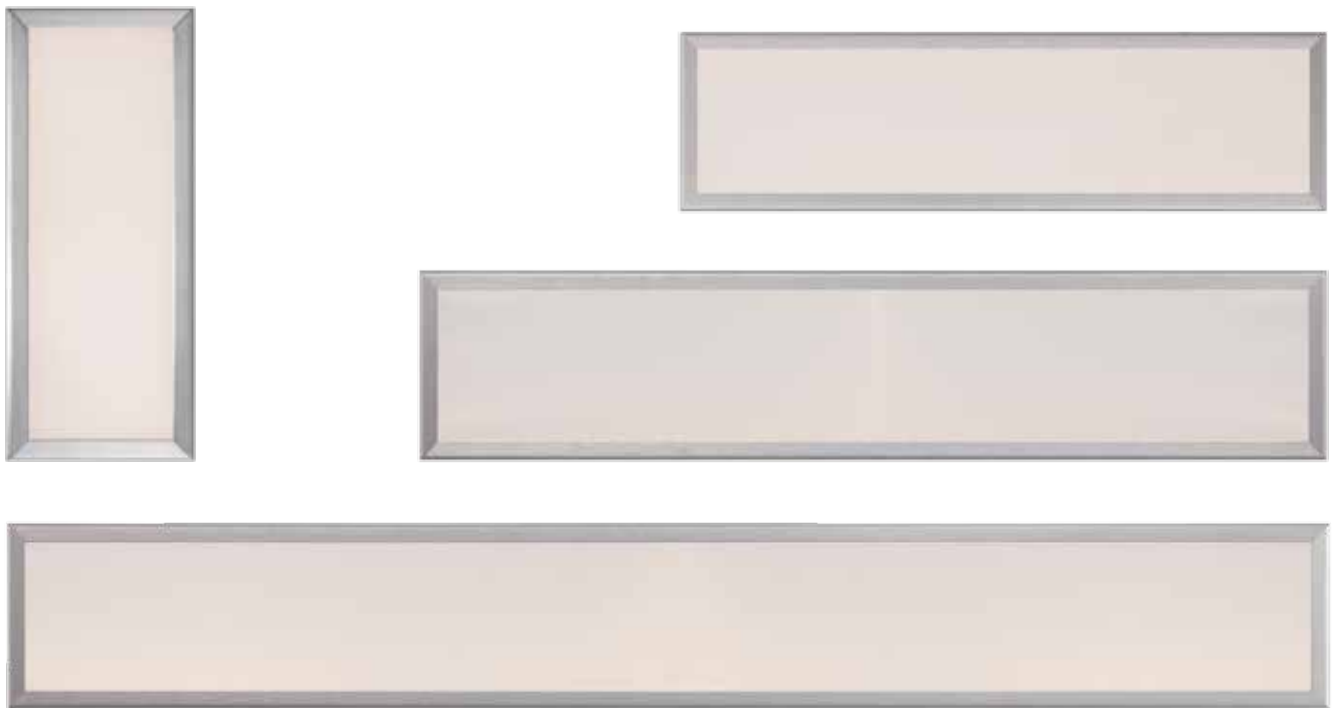

- Mount vertically, horizontally, or on ceiling
- Advanced Edge Lit Technology
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Replaceable LED module
- 277V option available *special order*
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

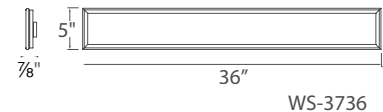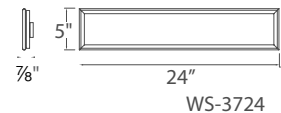

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3712	12"	13W		970	500	AL Brushed Aluminum
WS-3718	18"	24W		2258	947	
WS-3724	24"	31W	120V	3008	1220	
WS-3736	36"	41W		3720	1697	

Example: **WS-3712-AL**

For 277V special order, add an "F" before the finish: **WS-3718F-AL**



Ledge

A luminous architectural profile and superior construction make this sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Six adaptable sizes allow for cohesive specifications across residential and commercial interior and exterior applications. See pages 35, 117 and 219 for other available finishes and sizes for bath interior and exterior applications.






Bronze



Brushed Aluminum

- ADA compliant, low profile design
- ETL & cETL damp location
- WS-W1412 is IP65 wet location rated
- Aluminum construction with white mitered glass
- Full range dimming when used with compatible dimmers*
- 277V option available *special order*
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available *special order*
- CRI: 90

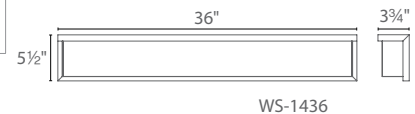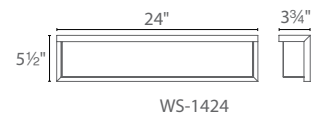

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1412	12"	29W		1200	690	AL <i>Brushed Aluminum</i> BZ <i>Bronze</i>
WS-1424	24"	55W	120V	2880	1455	
WS-1436	36"	91W		4566	2235	

Example: **WS-1436-BZ**

For 277V special order, add an "F" before the finish: **WS-1436F-BZ**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-1424-35-AL**



Ledge

A luminous architectural profile and superior construction make this sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Six adaptable sizes allow for cohesive specifications across residential and commercial interior and exterior applications. See pages 33, 117 and 219 for other available finishes and sizes for bath interior and exterior applications.






Bronze



Brushed Aluminum

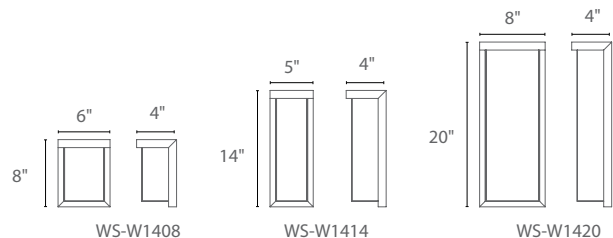- WS-W1414 & WS-W1420 are CEC Title 24 Compliant
- ETL & cETL wet location listed, IP65 rated
- ADA compliant, low profile design
- Aluminum construction with white mitered glass
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- 277V option available *special order*
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available *special order*
- CRI: 90



Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1408	8"	11.5W		525	340	AL Brushed Aluminum  BZ Bronze 
WS-W1414	14"	19.5W	120V	910	670	
WS-W1420	20"	29W		1575	1050	

Example: **WS-W1420-AL**

For 277V special order, add an "F" before the finish: **WS-W1420F-AL**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-W1414-35-AL**






Polar New 18" size

The sleek design epitomizes the use of modern materials with state of the art LED technology to create a refined urban luminaire. Features crisp edges of mitered glass and optimally engineered with a maximum amount of LEDs for a wide range of bath lighting and ambient illumination in luxury hotel corridors and other spaces.



- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Mitered glass construction
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- 277V option available *special order*
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

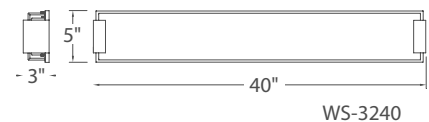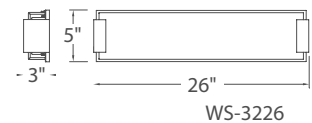

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3218	18"	38W		2139	720	
WS-3226	26"	50W	120V	3750	960	BN <i>Brushed Nickel</i>
WS-3240	40"	82W		5625	2055	

Example: **WS-3226-BN**

For 277V special order, add an "F" before the finish: **WS-3226F-BN**




Stencil


Refinement through definition. A distinctively engineered look with simple hardware lines manufactured with instrument precision. A silk-screened ceramic glazed glass diffuser cleanly conceals proprietary LED luminaires in a classic architectural design.




- 6mm silk screened ceramic glazed glass
- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Replaceable LED module
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available special order
- 50,000 hour rated life
- Color Temp: 3500K 2700K / 3000K available special order
- CRI: 90



WS-91618

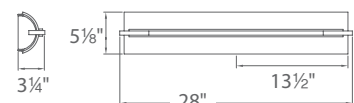

WS-91628

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-91618	18"	22W	120V	2050	850	SN <i>Satin Nickel</i> 
WS-91628	28"	35W		3270	1528	

Example: **WS-91618-SN**

For 277V special order, add an "F" before the finish: **WS-91618F-SN**

For 2700K add "-27"; 3000K add "-30" before the finish: **WS-91618-27-SN**

Stencil

p.40



Arc


On the cutting edge of fine bath lighting, Arc embodies unique contemporary styling. Illuminating from three sides for maximum functional light output as a bath vanity, or using the included chrome shield option to transition it into a chic powder room piece or home theater sconce.




shown with optional metal light shield




- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Clear and silk screened glass
- Optional chrome metal shield included
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Replaceable LED modules
- 277V option available *special order*
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

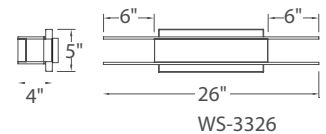

WS-3326

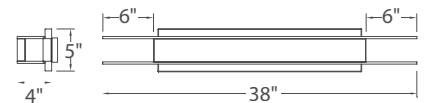

WS-3338

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens w/o shield	Delivered Lumens w/ shield	Finish
WS-3326	26"	22W	120V	1250	760	490	CH Chrome 
WS-3338	38"	38W		2500	1440	845	



Example: **WS-3326-CH**

For 277V special order, add an "F" before the finish: **WS-3338F-CH**







Cloud

Cloud combines a distinguished contemporary rectilinear profile with exaggerated proportions and concealed hardware. Designed to complement a diverse range of architectural interiors while delivering high quality functional illumination for upscale spaces.

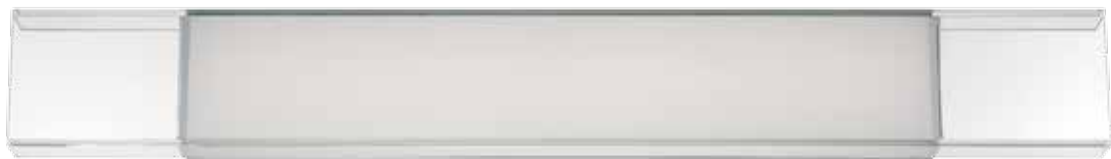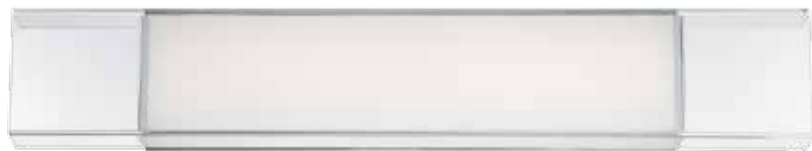

- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- When mounting as a bath light, larger sizes are recommended to maintain appropriate scale with vanities
- Mitered glass construction
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Replaceable LED module
- 277V option available *special order*
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

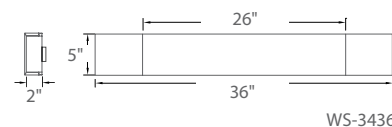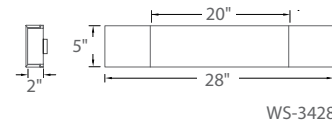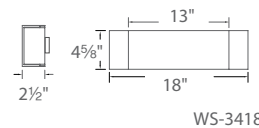

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3418	18"	15.5W		1199	655	CH Chrome 
WS-3428	28"	36.5W	120V	1982	916	
WS-3436	36"	40W		2171	1361	

Example: **WS-3428-CH**

For 277V special order, add an "F" before the finish: **WS-3428F-CH**







Seismic

Classic architectural styling and flattering light intersect in this open grid structure with an etched white glass layer. Accented with braces and struts in an elaborate design. Mounts vertically or horizontally as a vanity light in baths or as a wall sconce in corridors.



- ADA compliant, low profile design
- ETL & cETL damp location listed
- Polished stainless steel material
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

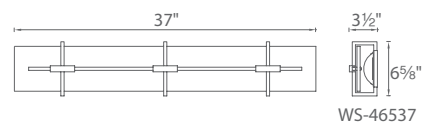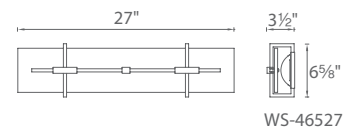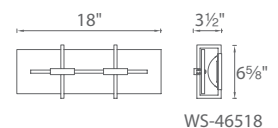

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-46518	18"	25.5W		1508	590	SS Polished Stainless Steel 
WS-46527	27"	39W	120V	2537	1215	
WS-46537	37"	53W		3637	1625	

Example: **WS-46527-SS**

For 277V special order, add an "F" before the finish: **WS-46527F-SS**




Sheridan

A signature LED design. White ceramic-screened glass and a clear glass overlay create a double-layered, dimensional effect with crisp mitered edges. Uniform illumination from every angle in every size, in a shallow form factor made possible only with cutting edge technology. Use vertically or horizontally to accommodate different layouts for upscale baths, or corridors as a wall sconce.




- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90



WS-6214



WS-6224

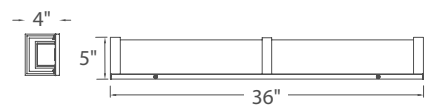

WS-6236

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-6214	14"	19W		1615	790	BN Brushed Nickel
WS-6224	24"	30W	120V	2470	1375	
WS-6236	36"	48W		4030	2155	

Example: **WS-6214-BN**

For 277V special order, add an "F" before the finish: **WS-6214F-BN**






Bahn

Clean minimalism with Euro styling and advanced technology. Straight lines and homogenous surfaces are tailored with German precision and incorporated seamlessly with the latest in LED thinking. Flattering illumination from full spectrum LEDs. Horizontal and vertical configurations for a wide variety of settings.




- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- WS-6826 is CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

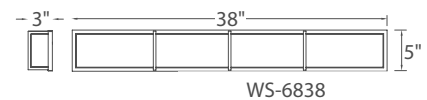

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-6826	26"	38W	120V	3230	1440	BN <i>Brushed Nickel</i> 
WS-6838	38"	58W		4845	1815	

Example: **WS-6826-BN**

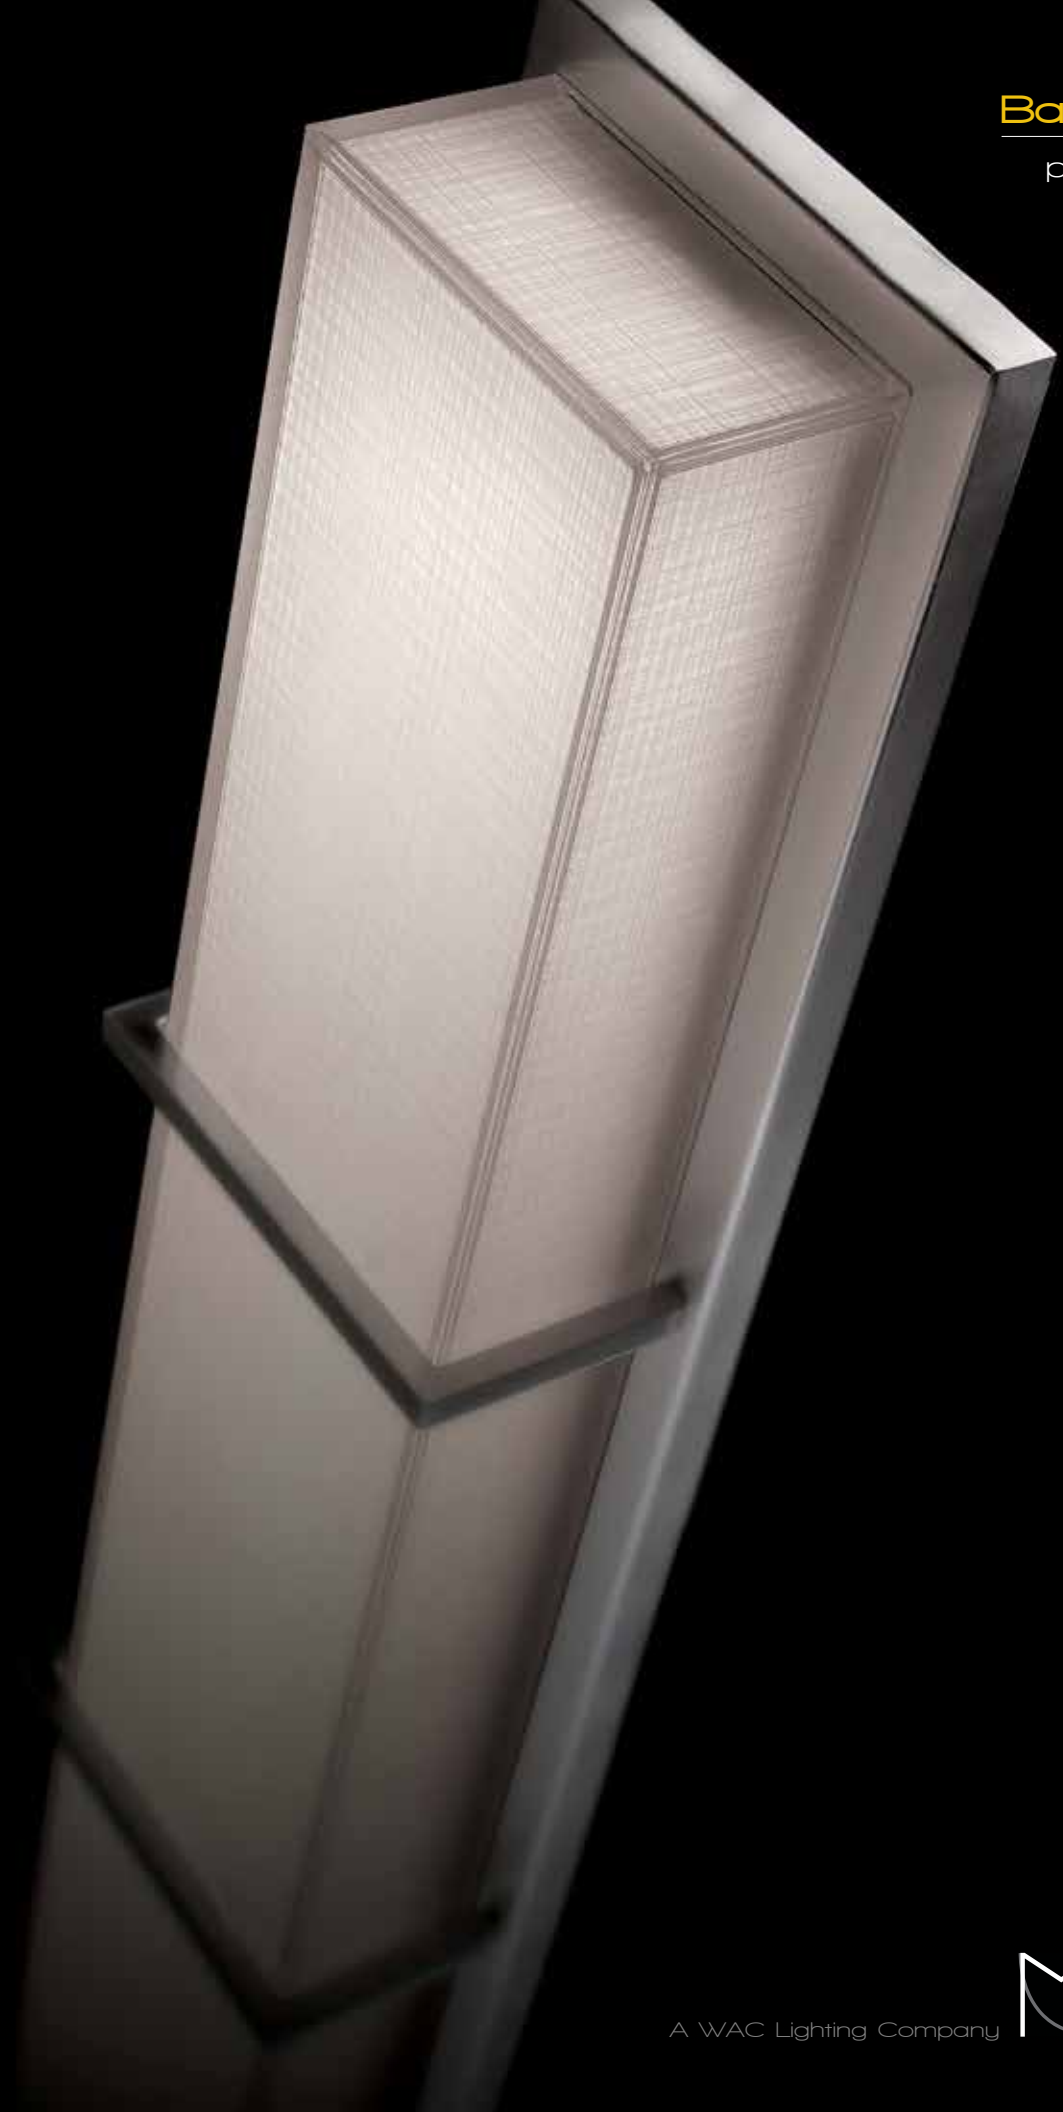



Maze

Inspired by Piet Mondrian paintings of the De Stijl art movement. Constructed of laser cut patterned stainless steel tailored to fit on a silk screen mitered glass shade. Thermally engineered for maximum LED lumens account for the shielded design to provide ample bath illumination. Impeccable tolerances in engineering details, and skillful craftsmanship speak to a truly upscale sculptural luminaire.



- Mounted vertically or horizontally
- ADA compliant, low profile design
- Damp location listed
- Stainless Steel metalwork
- Dimming with electronic low voltage (ELV) dimmer
- Transformer located in outlet box
- 277V option available special order
- Replaceable LED module
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

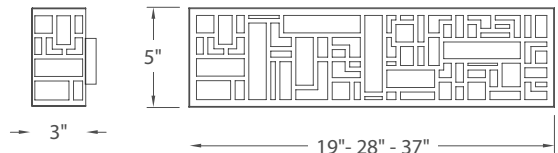

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3019	19"	47W		2820	705	SS <i>Stainless Steel</i> 
WS-3028	28"	55W	120V	3290	750	
WS-3037	37"	85W		5160	1625	

Example: **WS-3019-SS**

For 277V special order, add an "F" before the finish: **WS-3028F-SS**



LED

Interior Sconces







Lumnos

Luminous box of ambient and functional down lighting encapsulating powerful energy efficient LEDs. A crisp, simple style.



- ADA compliant, low profile design
- White mitered glass
- Up & down light
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 80,000 hour rated life
- Color Temp: 3000K / 2700K / 3500K available special order
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-92616	15½"	20W	120V-220V-277V	1409	813	SN <i>Satin Nickel</i> 



Example: **WS-92616-SN**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-92616-35-SN**

Lumnos

p.56





Avalon

Upscale appeal in mitered ceramic glazed glass and metal framing. This ADA low profile design is graciously sized to proportion well over large wall surfaces and will add distinction and sophistication.



- ADA compliant, low profile design
- White mitered glass
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90



Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-44622	22"	21W	120V-220V-277V	1658	882	SN <i>Satin Nickel</i> 

Example: **WS-44622-SN**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-44622-27-SN**





Muse

Creative expression of elements. Wood, Metal, Glass, and Technology come together in a beautifully cohesive LED sconce with a tailored wooden spike, polished nickel accents, a mitered linen glass shade and the latest advancements in LED technology. Suited for residential or commercial applications.



- ETL & cETL damp location listed
- CEC Title 24 Compliant
- ADA compliant, low profile design
- Wooden arm and mitered glass
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90



Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-12118	18"	19W	120V	1605	1040	PN Polished Nickel 

Example: **WS-12118-PN**

Muse

p.60




Glacier


The beautiful brilliance of frozen ice and polar caps crystalize into stunning wall sconce luminaires as LEDs evoke a sparkle and shimmer with mesmerizing Piastra glass, hand crafted utilizing techniques discovered in the 13th century.



- CEC Title 24 Compliant
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-12721	21"	10W	120V	830	175	CH Chrome 

Example: **WS-12721-CH**
 For 277V special order, add an "F" before the finish: **WS-12721F-CH**







Magic

A magic wand crowned with crystallized art glass illuminated by LEDs from both ends. A slim low profile ADA design perfect for modern vignettes in fine homes and hotels.



- ETL & cETL damp location listed
- ADA compliant, low profile design
- Up and down light
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Replaceable LED module
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

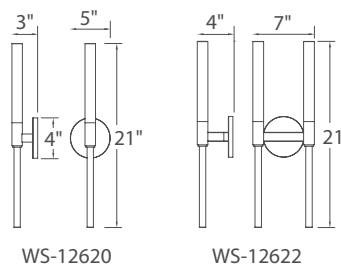

Model	# of Lights	Watt	Volt	LED Lumens	Delivered Lumens	Finish
WS-12620	1-light	6W	120V	475	295	PN Polished Nickel 
WS-12622	2-lights	10W	120V	950	435	


Example: **WS-12622-PN**

For 277V special order, add an "F" before the finish: **WS-12620F-PN**




Elessar

Magically transform a room with dramatic elegance. LEDs are thoughtfully hidden behind the striking polished stainless steel stem to provide dramatic indirect light on the wall behind and spectacularly crowned with solid crystal where the bubbles frozen within project a million sparkles upward.

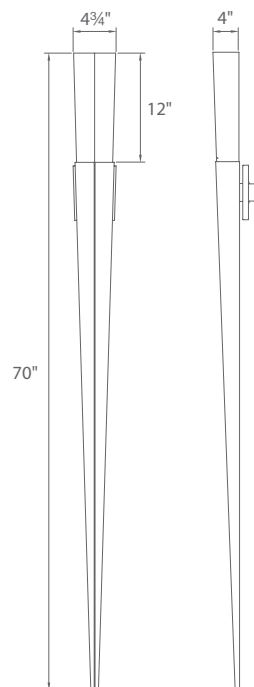

- ADA compliant, low profile design
- Clear seeded glass
- Projects up and towards the mounting surface
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-66641	70"	42W	120V-220V-277V	2585	1575	PN Polished Nickel 

Example: **WS-66641-PN**



Palladian

Tinseltown glamour. Visual drama in an LED light. Designed as a wraparound band finished in gold leaf, silver leaf or polished nickel. The sparkling, seeded crystal spear creates the perfect focal point. Perfect in a home theater or commercial venue with two looks for adaptable scaling and styling.



Gold Leaf




Polished Nickel



Silver Leaf

- ETL & cETL damp location listed
- ADA compliant, low profile design
- Clear seeded crystal
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- Transformer located in outlet box
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-11310	24"	11W	120V	625	320	GL Gold Leaf PN Polished Nickel SL Silver Leaf

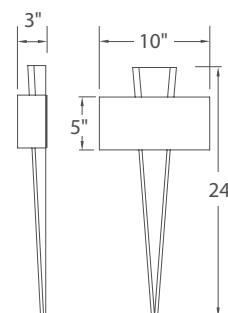

Example: **WS-11310-GL**

For 277V special order, add an "F" before the finish: **WS-11310F-GL**



Vermeil

Wrap your room in glamour with this simple, sophisticated sconce. Available in three elegant finishes; gold leaf, silver leaf and polished nickel. Flank a vanity or use as a glimmering jeweled accent to light your way through a dark hallway.

Gold Leaf



Polished Nickel




Silver Leaf



- ETL & cETL damp location listed
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- Transformer located in outlet box
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model:	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-11311	5"	11W	120V	625	370	GL <i>Gold Leaf</i> PN <i>Polished Nickel</i> SL <i>Silver Leaf</i>




Example: **WS-11311-PN**

For 277V special order, add an "F" before the finish: **WS-11311F-SL**




Blaze


A radiating spectacle of warm indirect illumination from hand applied gold leaf. Offered in three proportional sizes to design in multiples on walls or ceilings.



WS-30612

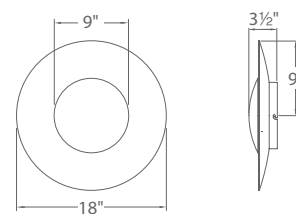

WS-30618

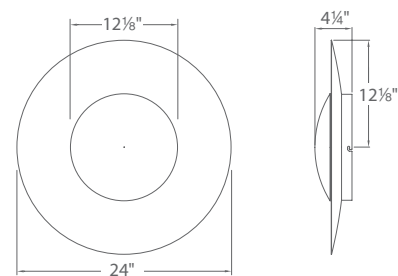

WS-30624


- Place on wall as sconce or flush mounts to ceiling
- ADA compliant, low profile design available in 12" and 18" sizes
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-30612	12"	10.5W		787	250	GL Gold Leaf/Gold Plated SL Silver Leaf/Polished Nickel
WS-30618	18"	25W	120V-220V-277V	1979	605	
WS-30624	24"	31W		2392	700	

Example: **WS-30612-GL**


Blaze

p.72

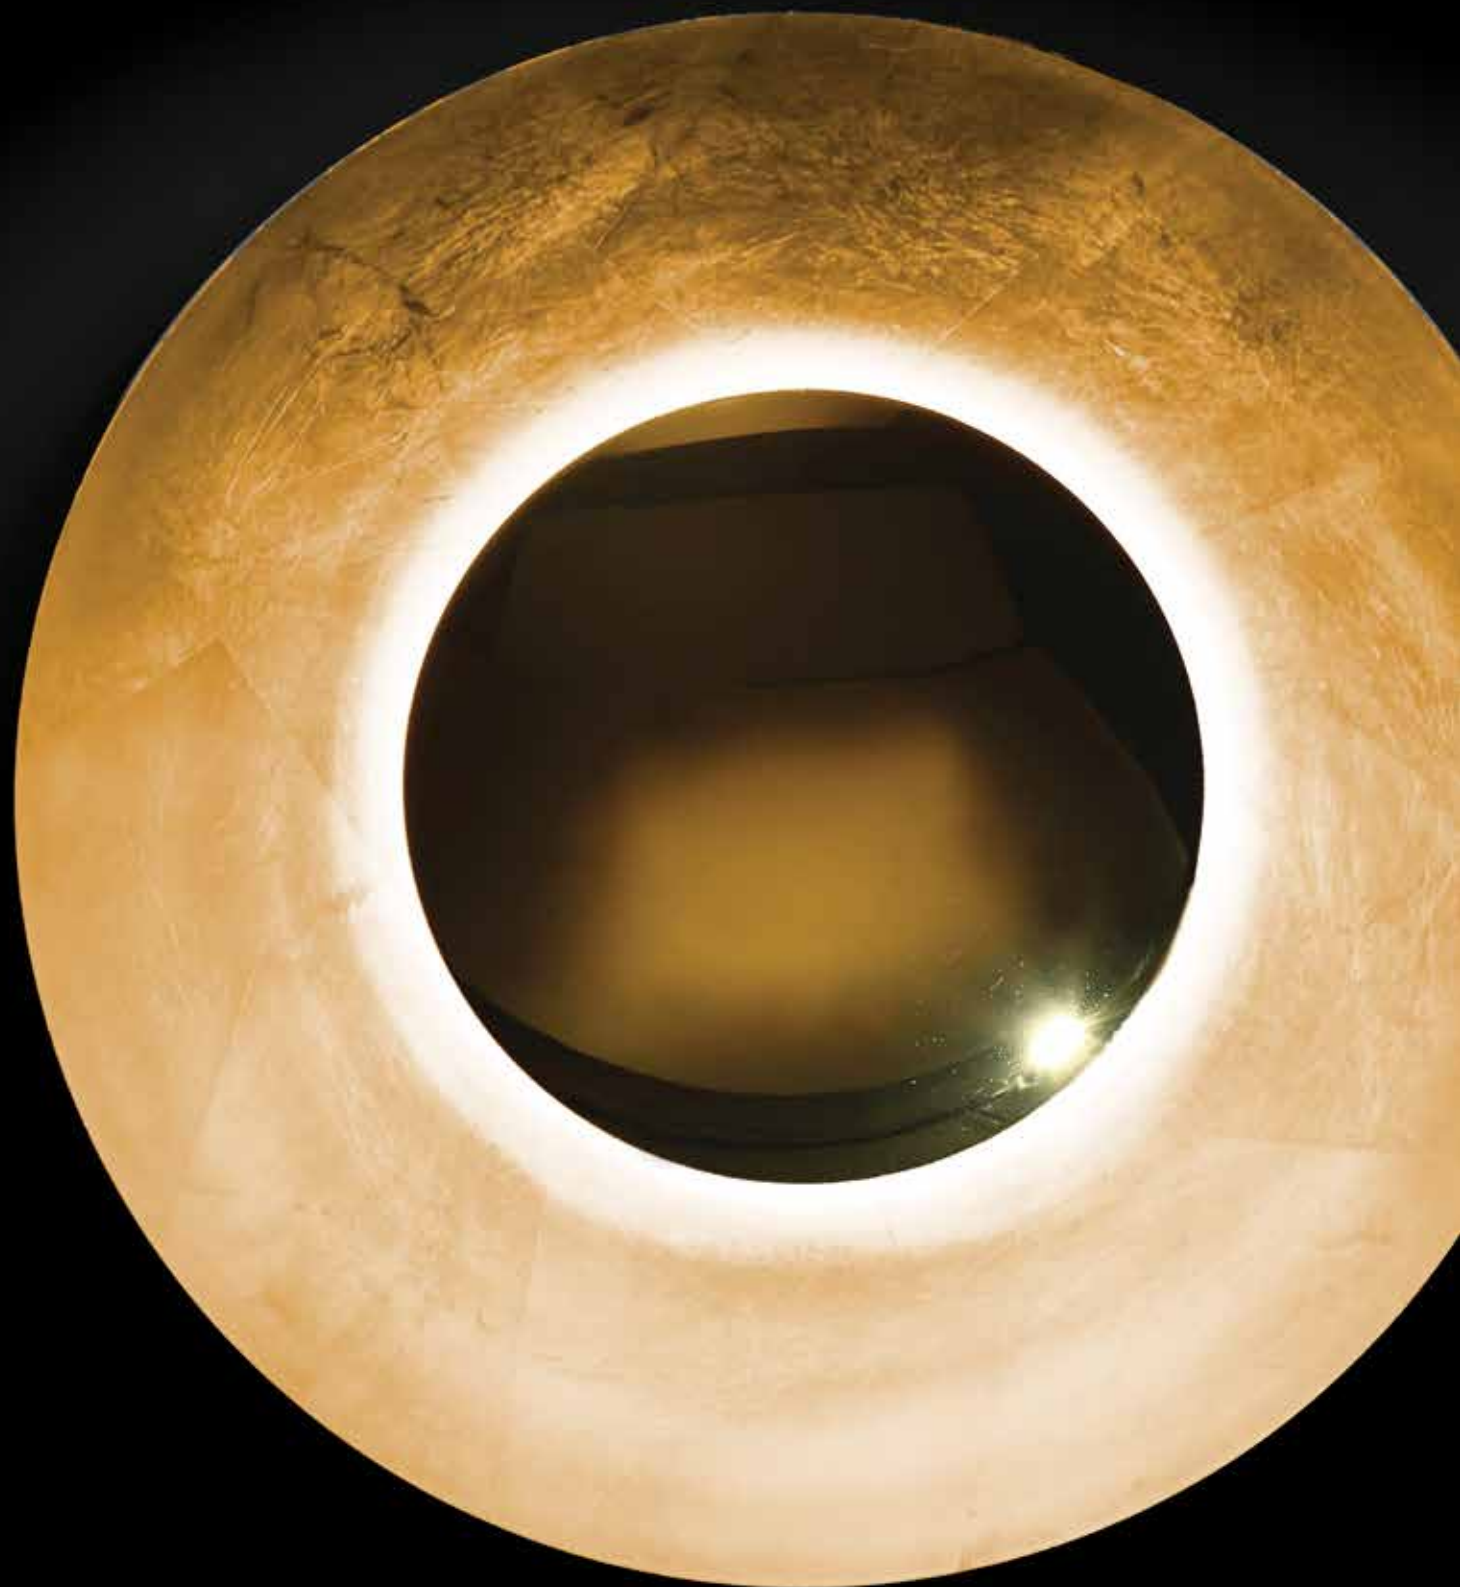


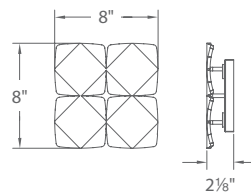
Quatrain

Four contoured square elements are aligned for a unique design that is modular both for use as individual sconces and interconnected in multiples for a dramatic pixilated effect in a custom configuration.

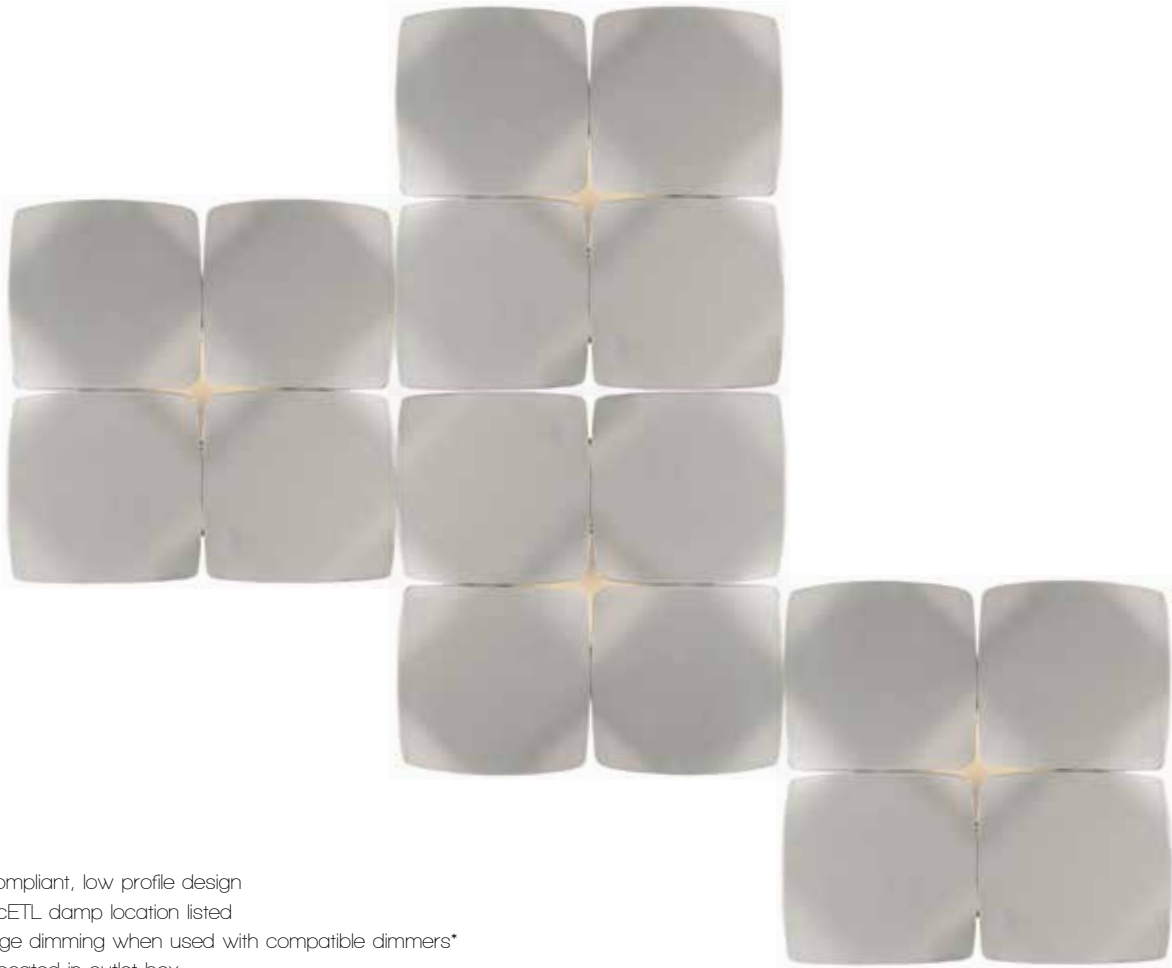

- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90


Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-98608	8"	31W	120V-220V-277V	1635	224	SN <i>Satin Nickel</i> 



Example: **WS-98608-SN**


Quatrain

p.74

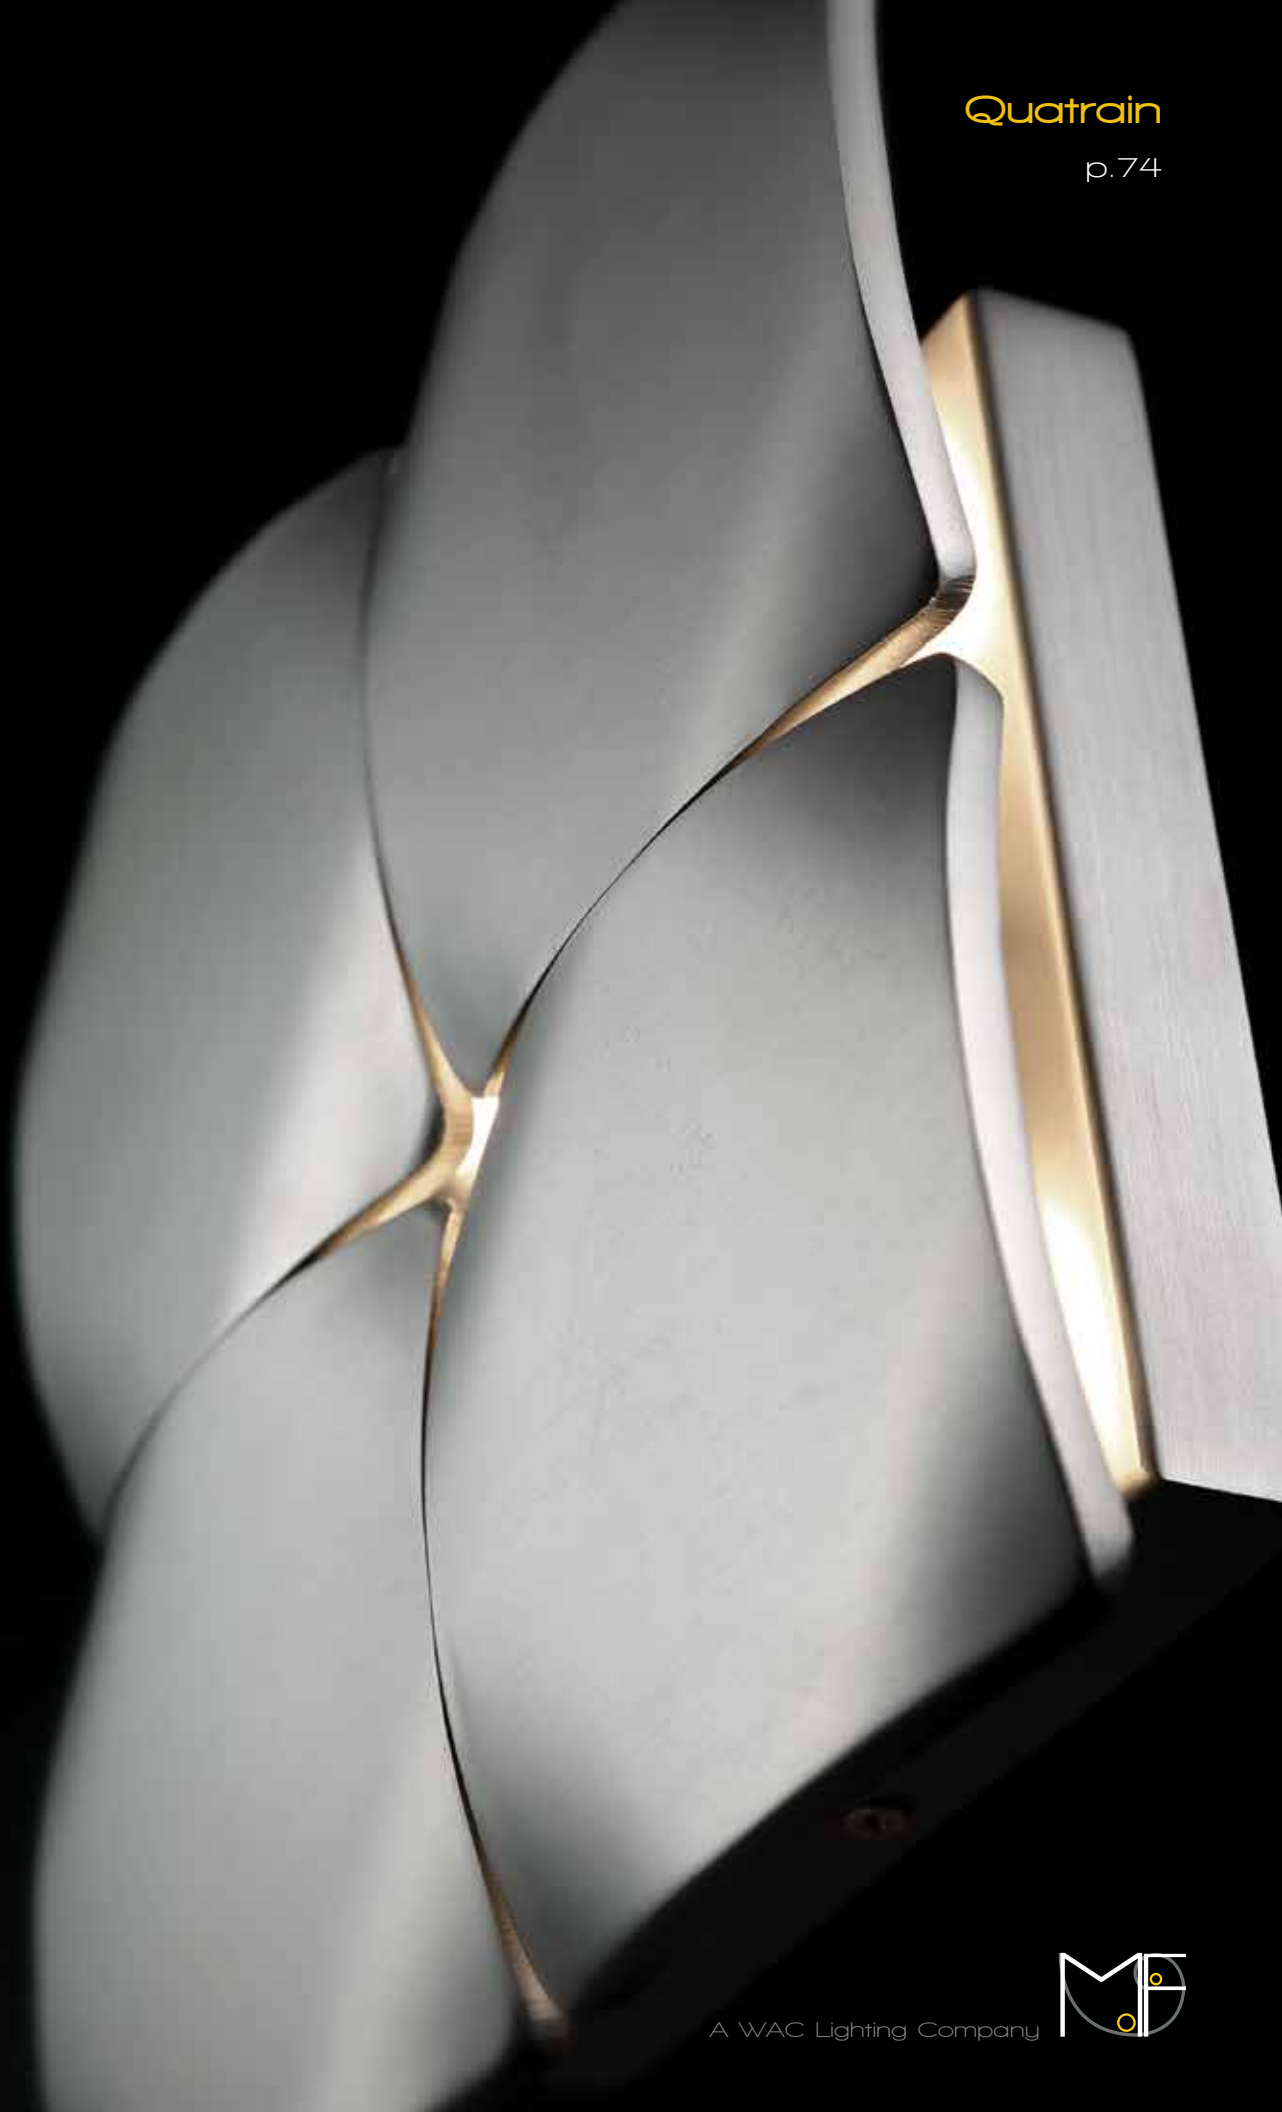

Abstract

Factions of geometric shapes combine in this modern art sconce. LEDs are hidden within the folded layers to permit the light to playfully escape through the interplay of reflectance.

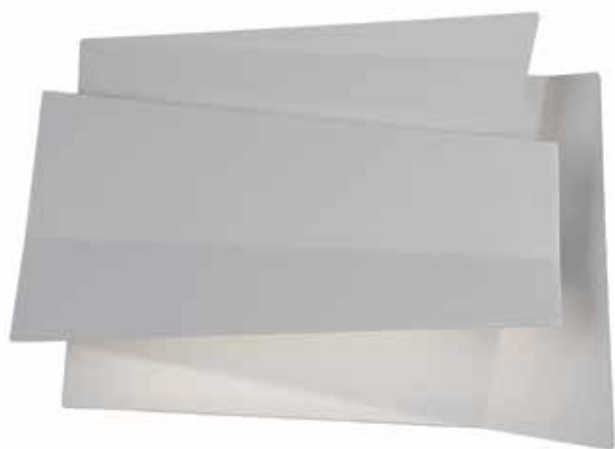


Titanium



White


- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Up & down light
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-28616	16"	30.5W	120V-220V-277V	2304	788	TT Titanium WT White

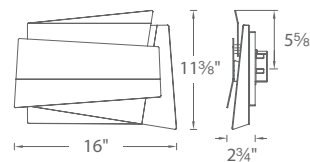

Example: **WS-28616-TT**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-28616-35-TT**

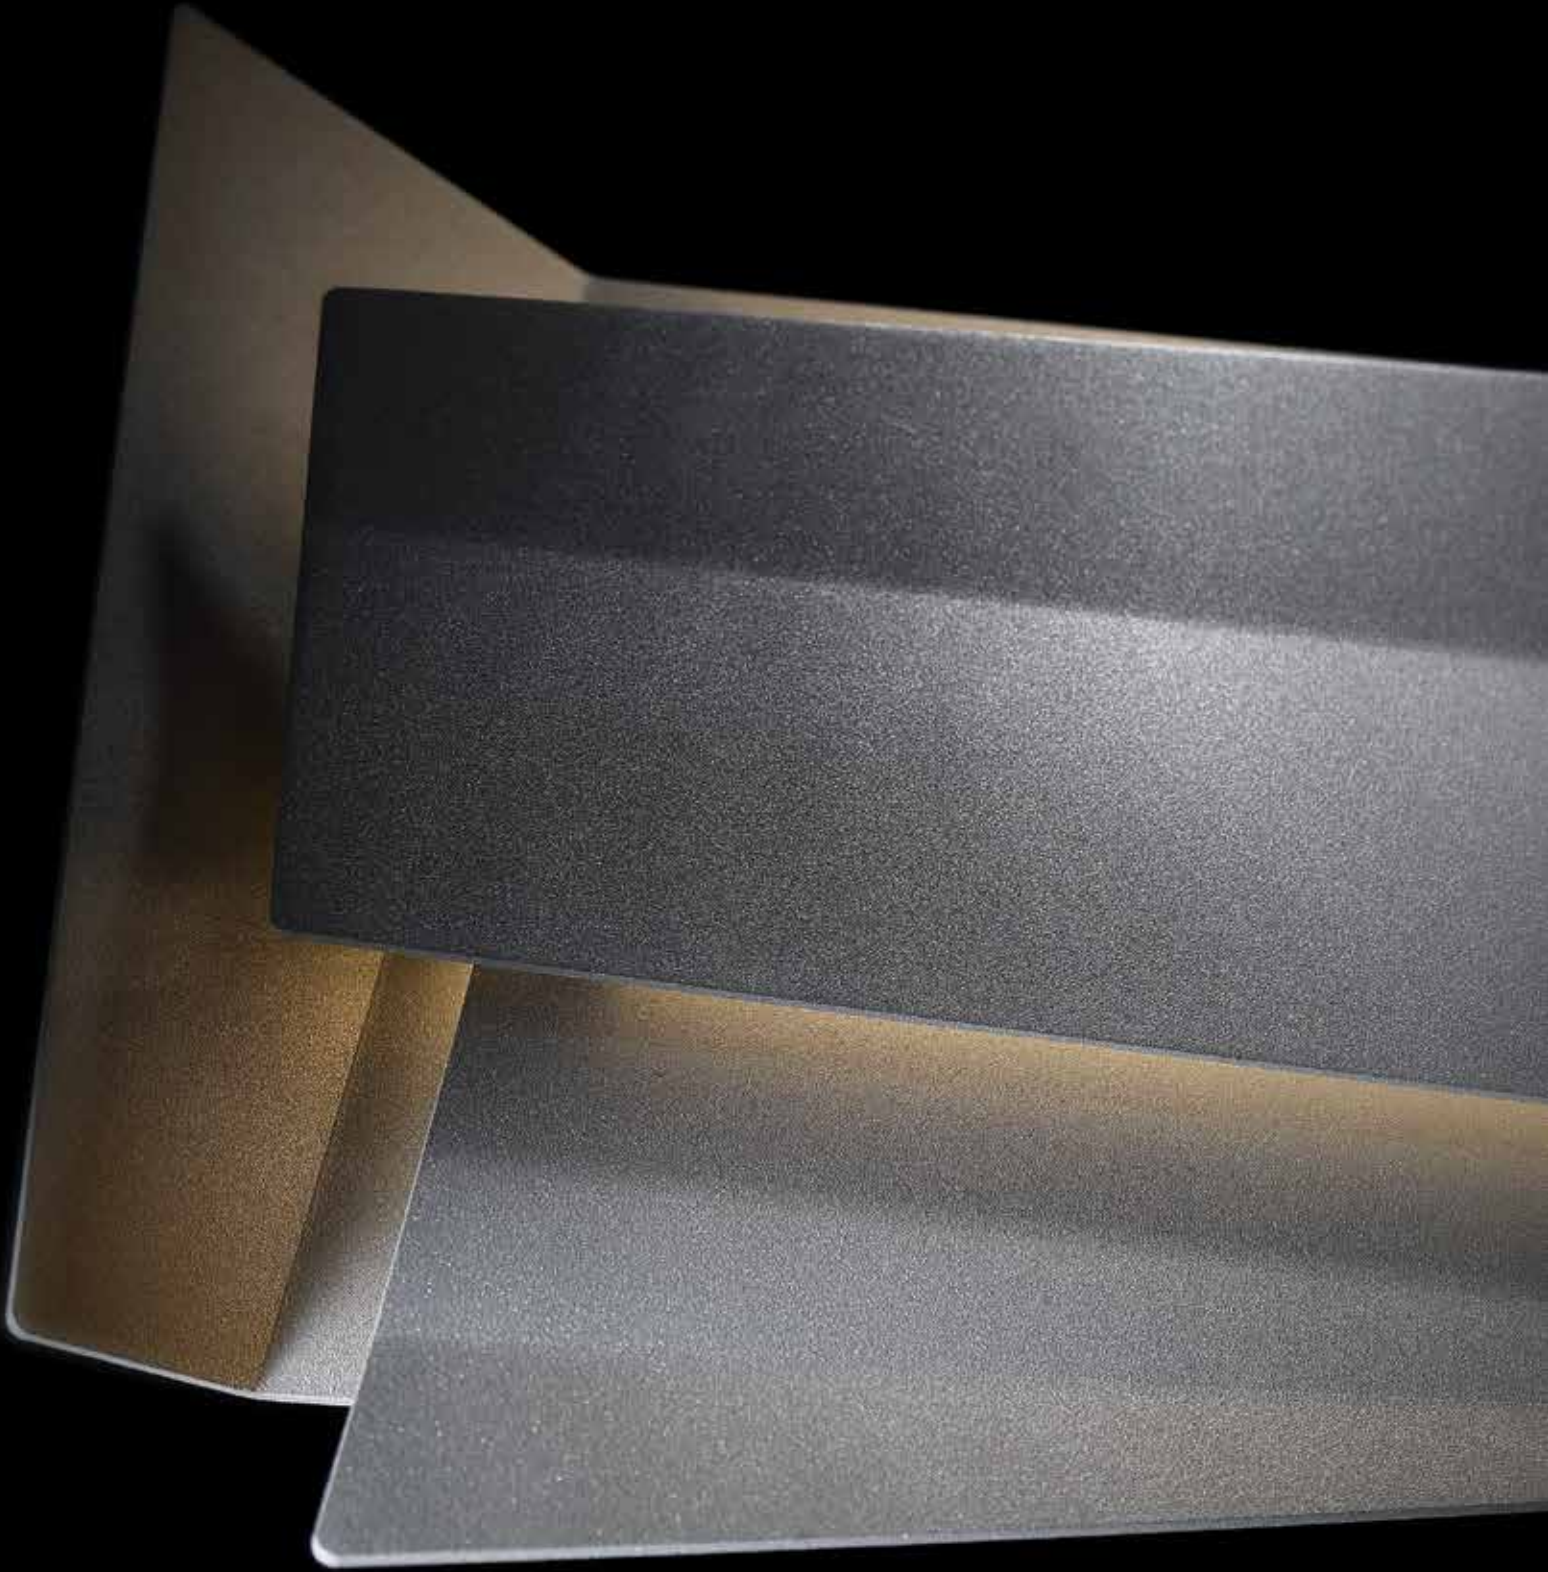

Escher

Enigmatic spatial representation of a continuum.

Different vantage points offer differing dramatic views of the entangled metal bands.




Titanium



White

- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 85,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-95614	14"	11W	120V-220V-277V	790	130	TT Titanium WT White

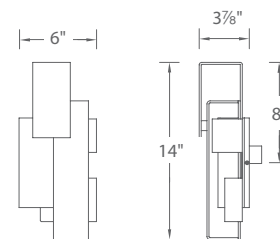

Example: **WS-95614-TT**

Escher

p.78



A WAC Lighting Company




Chill

Sparkles emit playfully from light bouncing off bubbles frozen in solid crystal. Powerful LED light sources hidden within a polished nickel frame illuminate upwards and downwards.


May be an upscale lobby sconce, a theater room sconce, or luxury bath sconce.



- ADA compliant, low profile design
- Clear seedy crystal
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 35,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-31618	18"	20W	120V-220V-277V	1433	722	PN Polished Nickel 

Example: **WS-31618-PN**



Chill

p.80




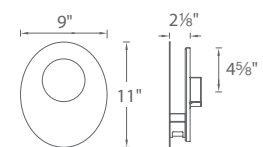
Abyss

Edgy without all the edges. An LED light is cleverly hidden between alternating layers of brushed and polished nickel. The Abyss is a soft modern wall sconce with inspiring appeal in luxury residences or hospitality commercial applications.



- ADA compliant, low profile design
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Luminaire may be rotated 180° when mounting
- Up & down light
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 85,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-22611	11"	11.5W	120V-220V-277V	736	320	SN Satin Nickel/Chrome 



Example: **WS-22611-SN**

Abyss

p.82




A WAC Lighting Company


Rush

Sensuous ripples dance with delight on this interior wall sconce. Generous uplight and downlight provide ambiance for a more intimate setting.



- Up & down light
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Listed for use in closets
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- Conversion plate for 4" J box included
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-83607	7"	18.5W	120V	1600	987	PN Polished Nickel 

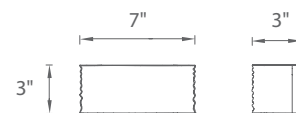

Example: **WS-83607-PN**

Rush

p.84




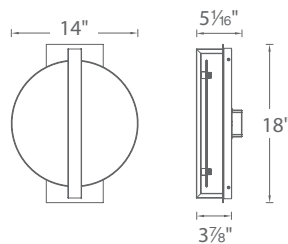
Reflectance

A versatile design with a calming appeal mounted in either orientation, as an orb reflected on the horizon, or as a balanced division of a whole.



- Mount vertically or horizontally
- ADA compliant, low profile design
- CEC Title 24 Compliant
- Ceramic glazed super white borosilicate glass shade
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3500K / 2700K / 3000K available special order
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-29621	18"	30W	120V-220V-277V	2508	743	SN <i>Satin Nickel</i> 



Example: **WS-29621-SN**

For 2700K add "-27"; 3000K add "-30" before the finish: **WS-29621-30-SN**


Reflectance

p.86




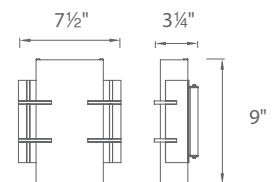
Osso

Watch out for the sharpness of this design as cutting edge technology meets precisely sliced metal and glass. A ribbed brushed aluminum bracket symmetrically embraces a mitered block of glass.

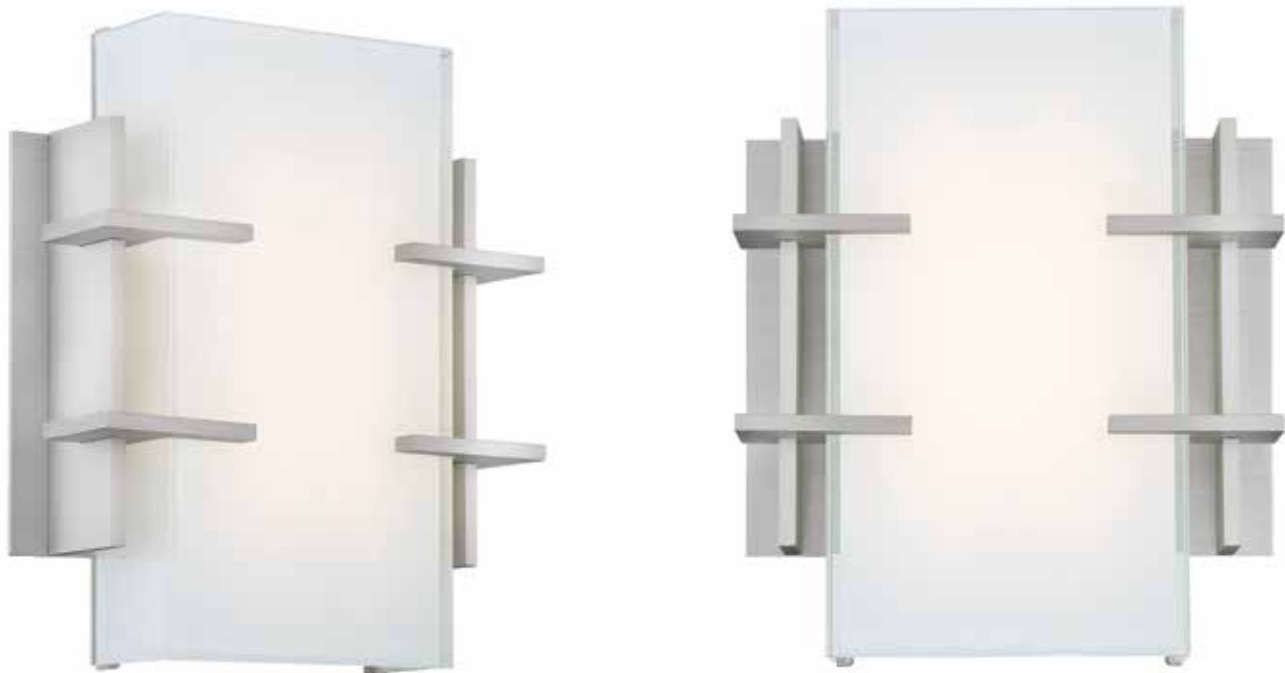

- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Ceramic glazed super white mitered glass
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-78609	9"	10W	120V-220V-277V	810	500	AL <i>Brushed Aluminum</i> 




Example: **WS-78609-AL**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-78609-27-AL**

Osso

p.88

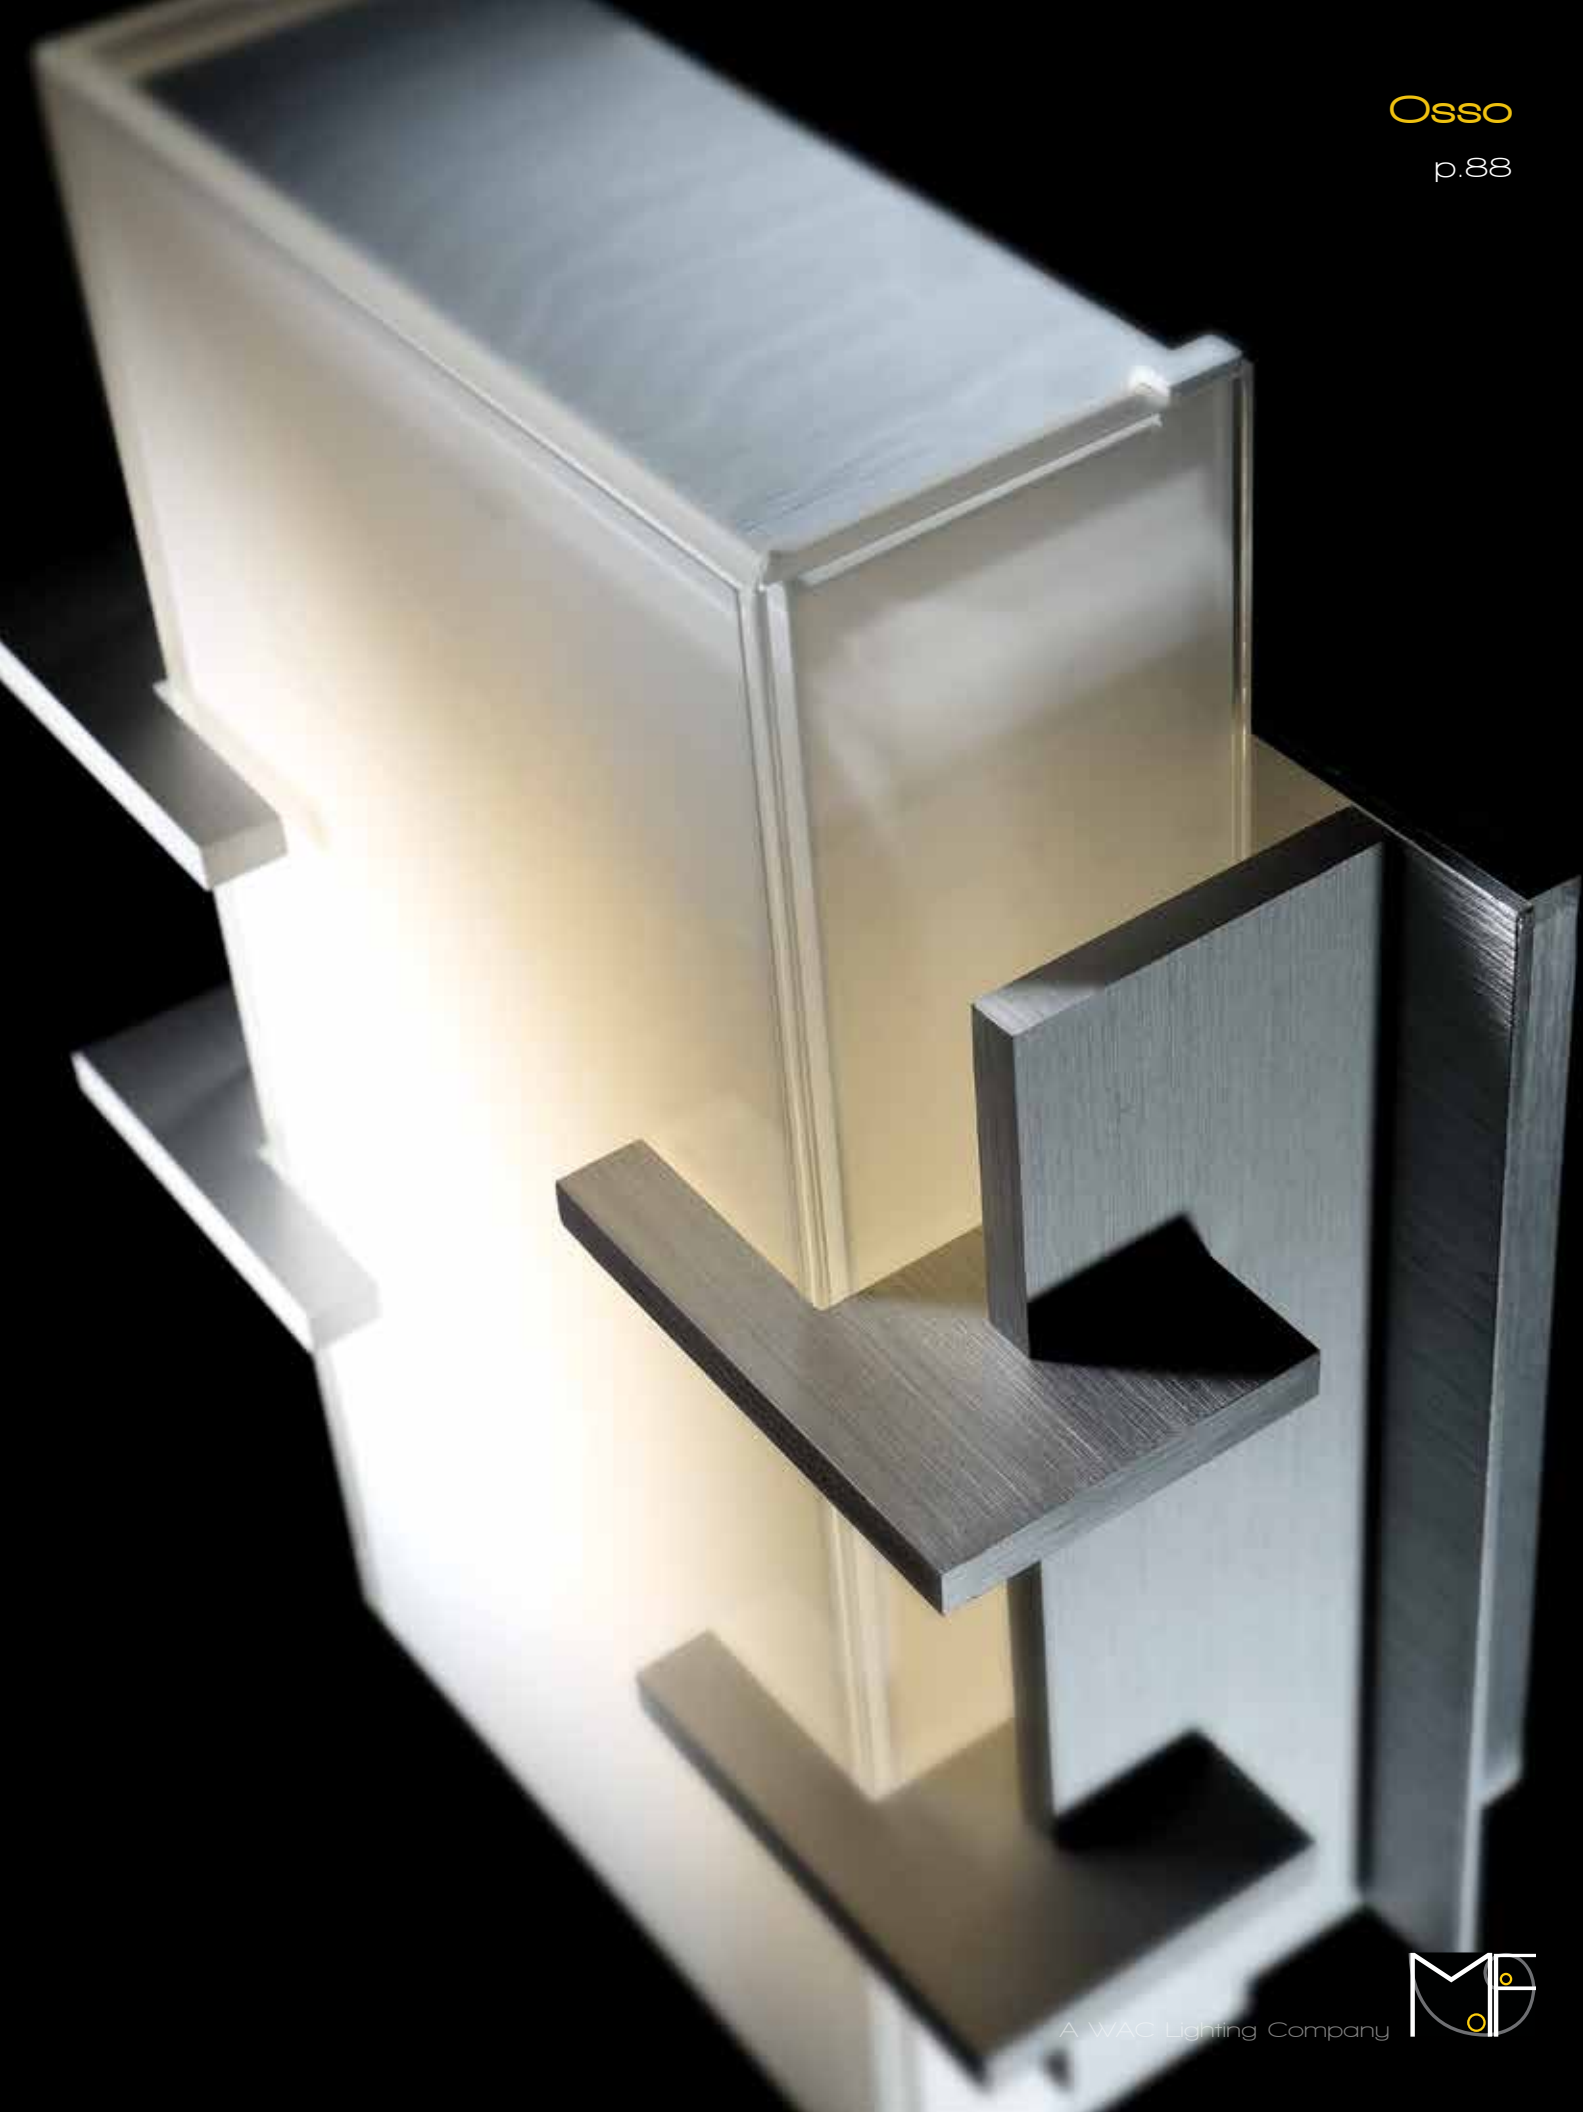




Virtue

Classically dimensional and timeless, Virtue is always in fashion. An intriguing facade representing intersecting structural planes of metal and glass inspired by architectural glass curtain wall design. Proportional scaling as a pleasing horizontal or vertical sconce further enhances design versatility.



- Mount vertically or horizontally
- ADA compliant, low profile design
- White mitered glass
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-86615	15"	20.5W	120V-220V-277V	1490	455	AL Brushed Aluminum 

Example: **WS-86615-AL**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-86615-27-AL**

Virtue

p.90




I beam


LEDs are set at an angle to illuminate the wall surrounding the sconce while minimizing glare seen from the side. An exceptional option for illuminating corridors or stairwells where it may be challenging to find an ADA sconce that looks attractive from multiple viewing angles.



- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Aluminum construction with acrylic diffuser
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 85,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-94614	14"	20.5W	120V-220V-277V	960	660	AL Brushed Aluminum 

Example: **WS-94614-AL**



I beam

p.92





Studio

A cantilevered LED wall structure. Warm upward ambient lighting from a compact form. Perfect for an architect's studio.



- Damp location listed
- ADA compliant, low profile design
- Aluminum construction
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-11606	9"	10W	120V	830	635	AL <i>Brushed Aluminum</i> 



Example: **WS-11606-AL**




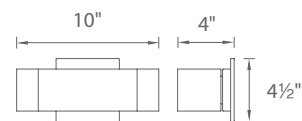
Nia

The minimalist curves of this extrusion are boldly featured in a form meets function design. Powerful LEDs provide up and down illumination for a versatile and durable luminaire ideal for upscale public spaces in multifamily high-rise corridors and stairwells.



- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Up & down light
- Full range dimming when used with compatible dimmers*
- Conversion plate for 4" J box included
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 85,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-39610	10"	16W	120V-220V-277V	1159	773	BN <i>Brushed Nickel</i> 



Example: **WS-39610-BN**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-39610-27-BN**





Rhythm

Visualized sound. Feel the pulse of light and shade in the step detail within the organic ring form indirectly illuminated with a concealed LED. Hand crafted using a centuries old sculpturing lost wax casting technique called cire perdue. Paired with state-of-the-art LED technology, this sconce is a celebration of design advancement.



- CEC Title 24 Compliant
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Replaceable LED module
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-11109	9"	12W	120V	915	415	WT White 

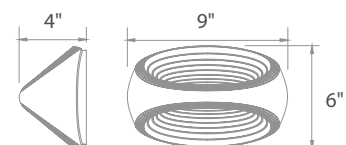

Example: **WS-11109-WT**
 For 277V special order, add an "F" before the finish: **WS-11109F-WT**



Secret

Like a slight wrinkle, the Secret wall sconce is a peek through of light designed to blend into wall surfaces. Available in two finishes including a white to easily paint over to accommodate your wall coloring. Use for functional down lighting or uplighting for walkways and accent illumination.




White



Titanium


- Luminaire may be rotated 180° when mounting
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 65,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

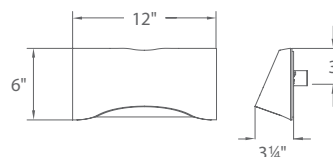

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-89612	12"	17W	120V-220V-277V	948	820	TT Titanium WT White

Example: **WS-89612-TT**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-89612-27-TT**

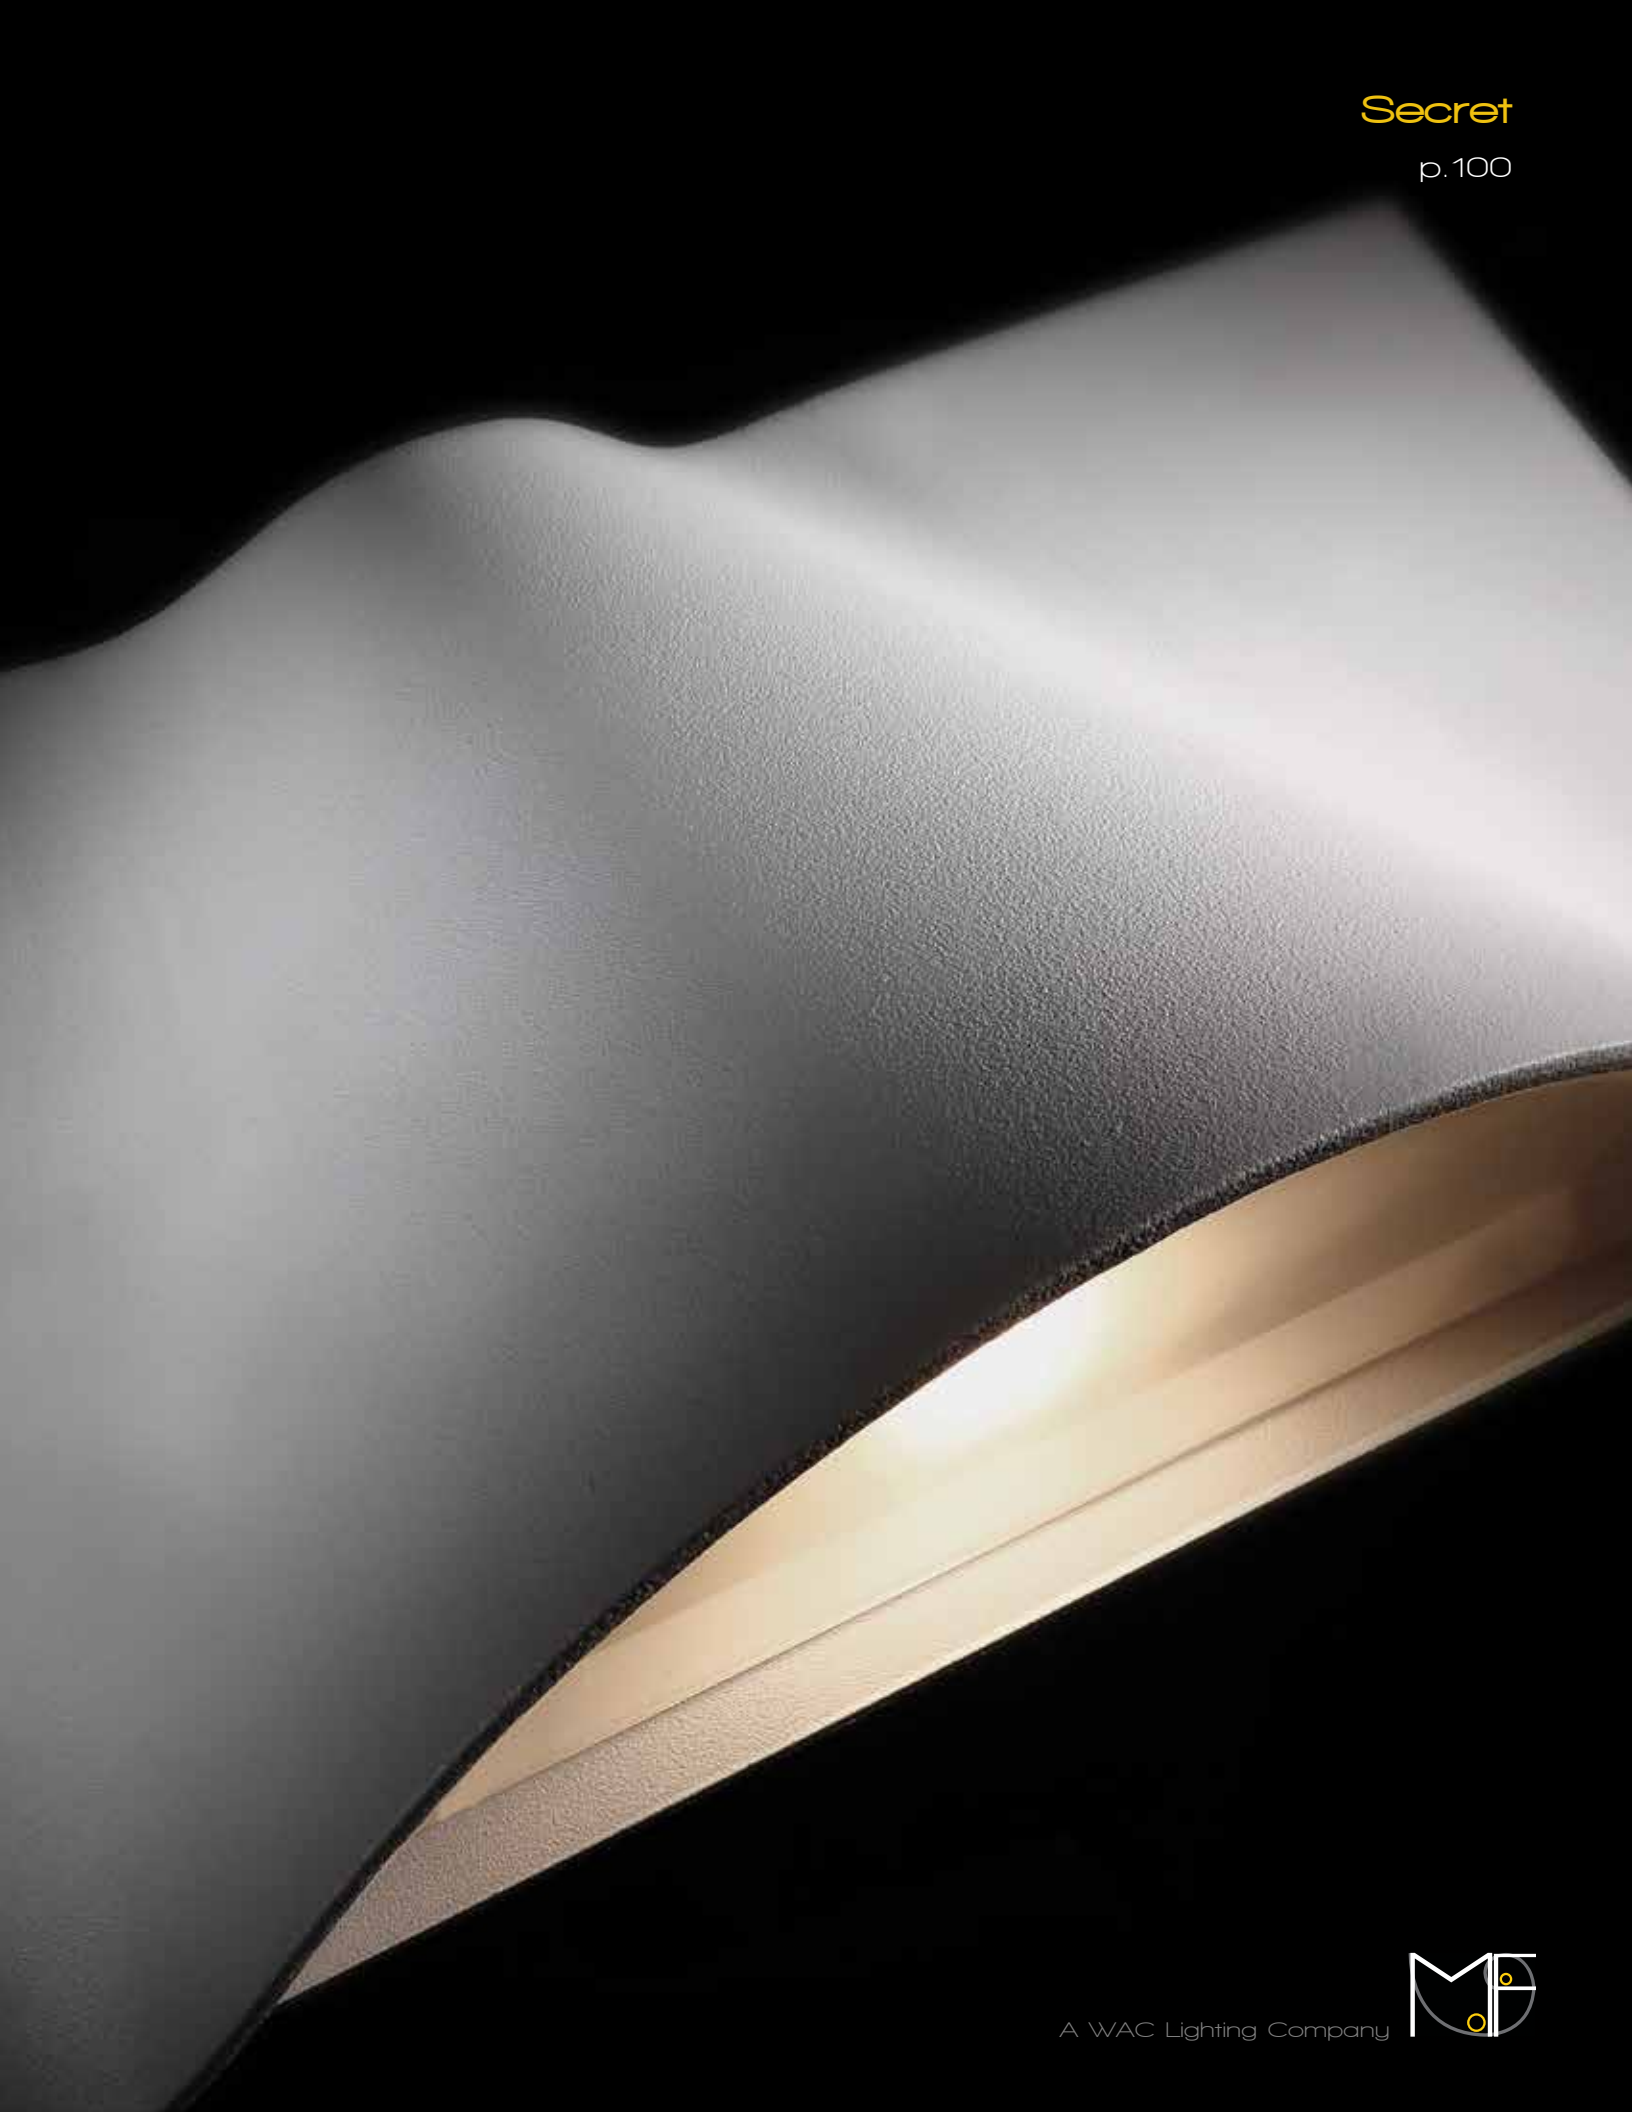


Fold

A cleverly concealed integrated LED ambient up light make this sconce an enigma when viewed front and side in this refreshing departure from the conventional pocket sconce design. Suitable for both residential and commercial requirements.




- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-96609	9"	15.5W	120V-220V-277V	713	697	WT White

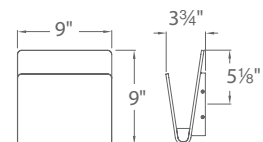

Example: **WS-96609-WT**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-96609-27-WT**

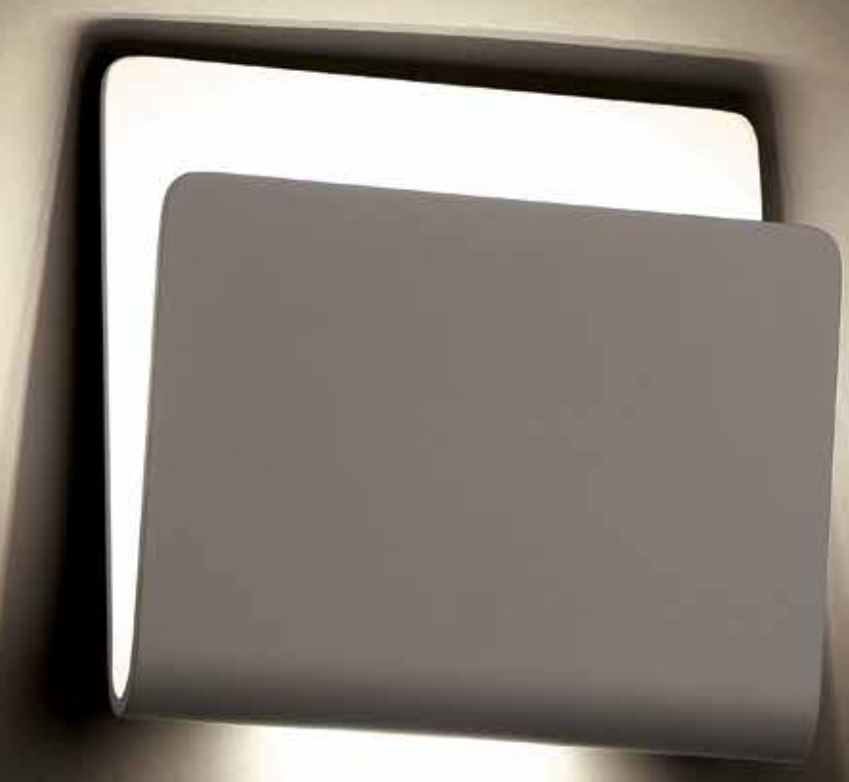


Slide

An austere form arcing up off the wall proffering illumination in both directions. Simply beautiful.




Brushed Aluminum

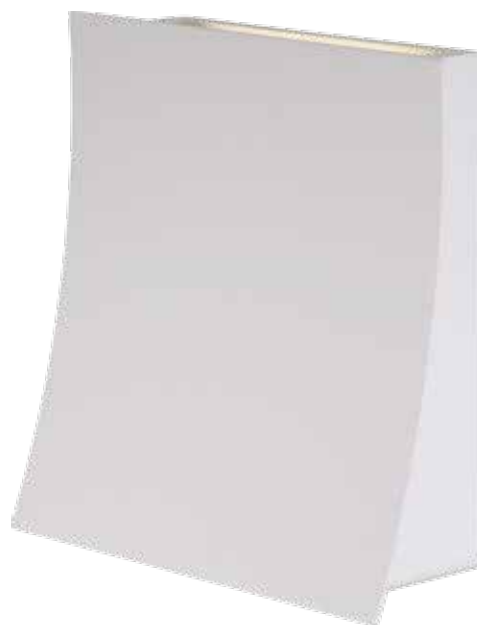

White

- Luminaire may be rotated 180° when mounting
- CEC Title 24 Compliant
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Up & down light
- Full range dimming when used with compatible dimmers*
- Driver located inside the fixture
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-27610	10"	21.5W	120V-220V-277V	1409	1124	AL <i>Brushed Aluminum</i> WT <i>White</i>




Example: **WS-27610-AL**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-27610-35-AL**



Blade

A new slant on modern lighting. This low profile angular sconce deploys robust indirect illumination of walls and surfaces in two sizes for various applications. The subtle graduated design offers a unique look and high style appeal.

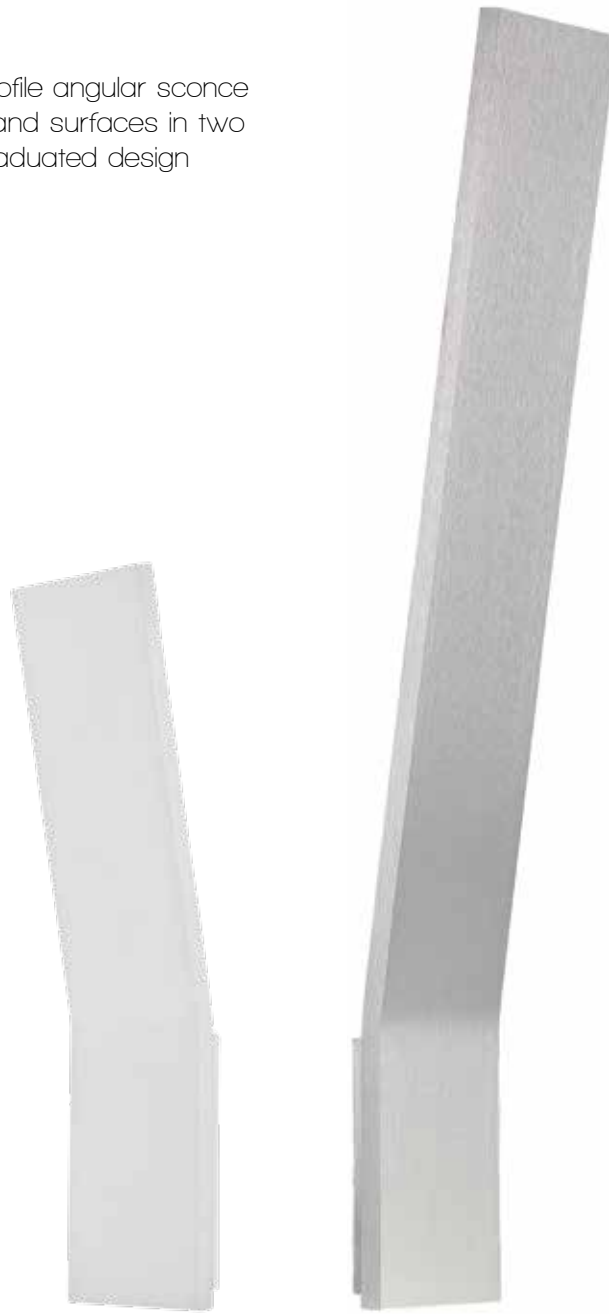


White

Brushed Aluminum

- ADA compliant, low profile design
- CEC Title 24 Compliant
- Damp location listed
- Mounts only on a 2" x 4" vertical switch box
- Conversion plate for 4" J box included
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-11511	11"	9.5W	120V	808	660	AL Brushed Aluminum
WS-11522	22"	18.5W	120V	1332	1150	WT White

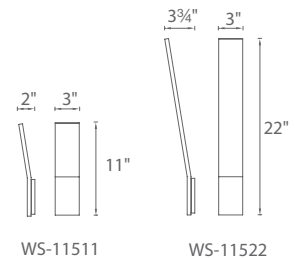

Example: **WS-11522-AL**

For 277V special order, add an "F" before the finish: **WS-11522F-WT**



Aries

Slender and graceful like a flame, this sculpted sconce is designed to conceal warm LED lighting indirectly illuminating walls and surfaces behind. Tapered curves mysteriously illuminate as does the miracle of fire.




Ebony Black



Ferrari Red




Pearl White

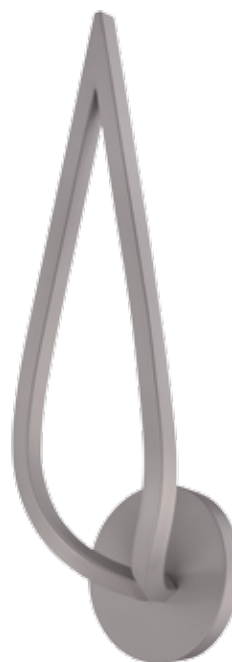

Titanium

- ETL & cETL damp location listed
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Replaceable LED module
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-11218	18"	8W	120V	625	275	EB <i>Ebony Black</i> FR <i>Ferrari Red</i> PW <i>Pearl White</i> TT <i>Titanium</i>



Example: **WS-11218-TT**

For 277V special order, add an "F" before the finish: **WS-11218F-FR**




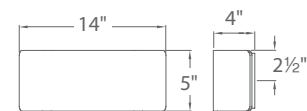
Asgard

Rectilinear shade of engineered walnut wood for a naturalistic option in a simple modern form. Illuminates beautifully up and down, imparting warm ambient light. Silk screened glass shield glare from any viewing angle to allow for specification in stairwells and open atriums.



- Walnut wood
- Emergency battery back up option special order
- ADA compliant, low profile design
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Up & down light
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-97614	14"	30.5W	120V-220V-277V	2077	1127	WAL Walnut 



Example: **WS-97614-WAL**
 For emergency battery, add **-EM** after the finish: **WS-97614-WAL-EM**

Asgard

p.110






LED

Interior & Exterior Sconces




Framed

An eminent contemporary architectural design, sleek lines embrace mitered glass. This bold ADA compliant structure accentuates wall height for a dramatic impression throughout the space. See pages 115-116 for complementary interior and exterior sconces

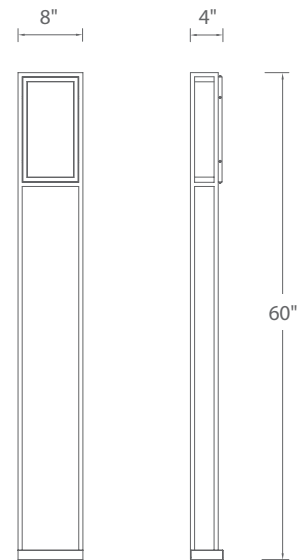

- ADA compliant, low profile design
- ETL & cETL damp location listed for WS-73660, ETL & cETL wet location listed for WS-W73660
- White mitered glass
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	ETL/cETL	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-73660 WS-W73660	<i>damp</i> <i>wet</i>	60"	21W	120V-220V-277V	1044 (Up), 375 (Down)	644 (Up), 305 (Down)	BZ Bronze 

Example: **WS-73660-BZ**



Framed

Redefine being framed. This cleanly framed out simple block of light is available in two finishes and three sizes. See pages 113-114 for complementary statement piece with exaggerated proportions which is also available to provide cohesive specification options.






Bronze



Graphite




- Can be mounted as a wall sconce or ceiling flush mount
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with white mitered glass
- Replaceable LED module
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90



Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W73608	8"	15W		1219	776	GH Graphite
WS-W73614	14"	25W	120V	2378	1183	BZ Bronze
WS-W73620	20"	38W		3058	1864	

Example: **WS-W73608-GH**

For 277V special order, add an "F" before the finish: **WS-W73608F-GH**

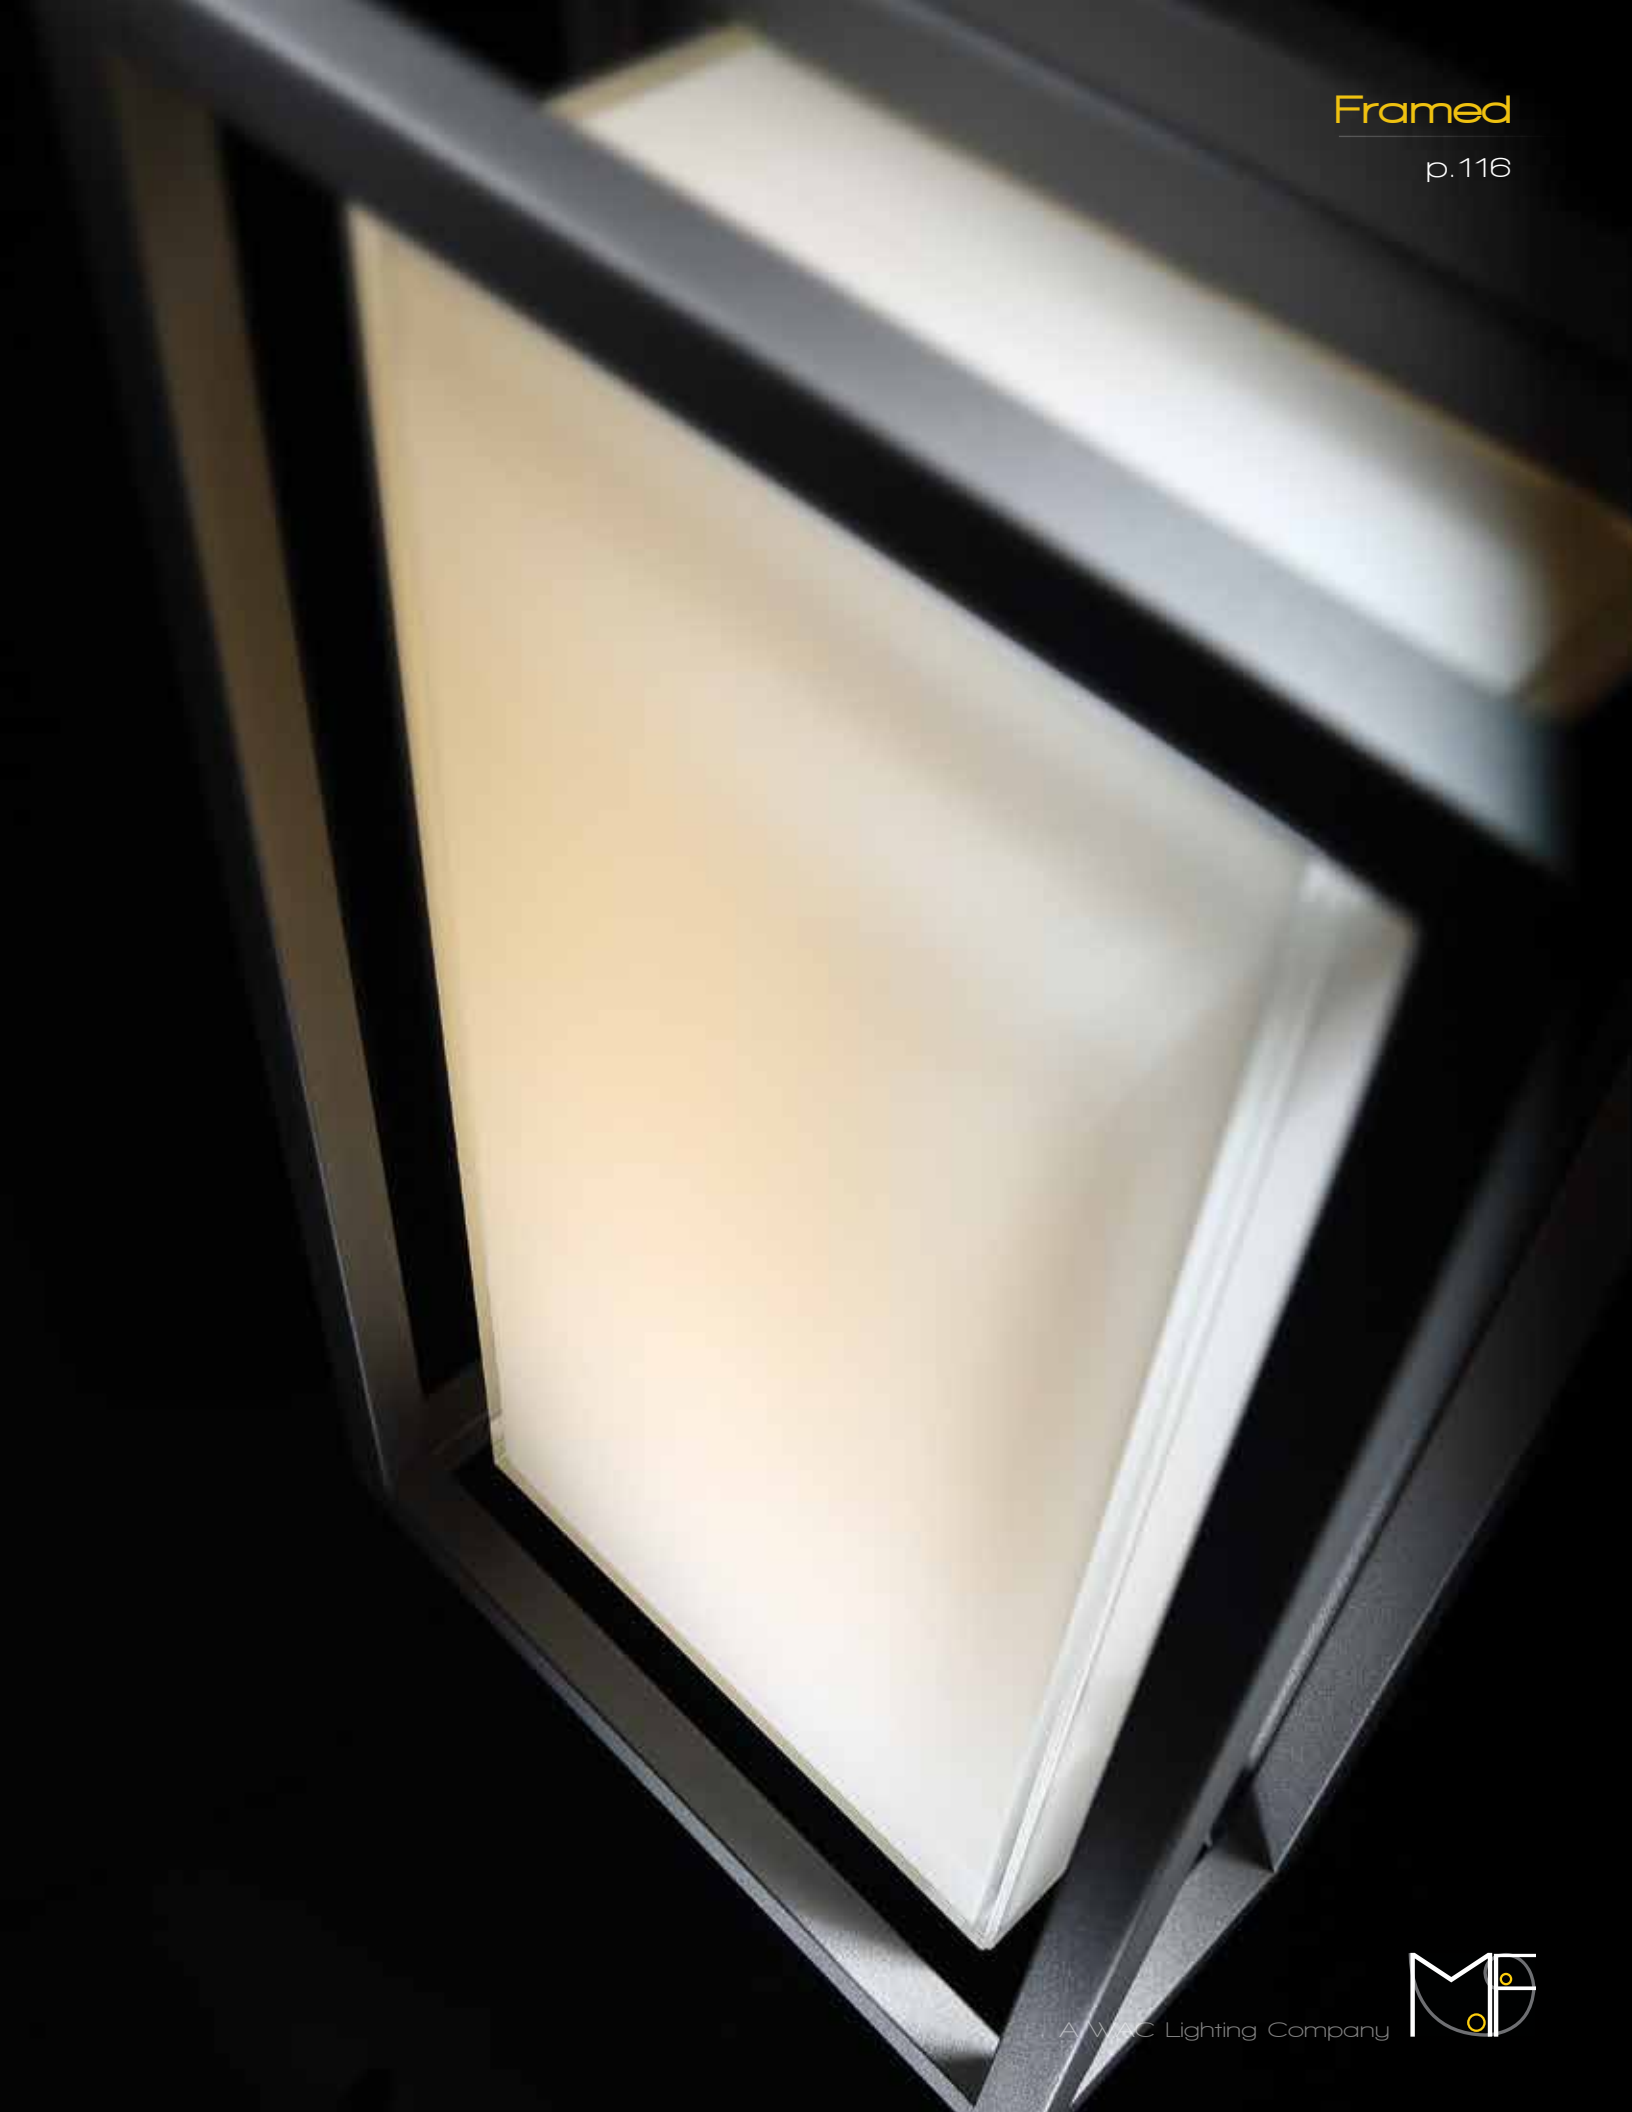

Ledge

A luminous architectural profile and superior construction make this ceiling flush mount or wall sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Allows for cohesive specifications across residential and commercial interior and exterior applications. Also available as a wall luminaire in various lengths. See pages 33, 35 and 219 for other available finishes and sizes for both interior and exterior applications.



Bronze



Graphite




Black




Brushed Aluminum

- WS-W1414 & WS-W1420 are CEC Title 24 Compliant
- ETL & cETL wet location listed, IP65 rated
- ADA compliant, low profile design
- Aluminum construction with white mitered glass
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- 277V option available for WS-W1408, W1414, W1420 special order
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

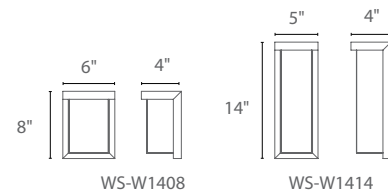

WS-W1408

WS-W1414



WS-W1420



WS-W1412

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1408	8"	11.5W		525	340	AL Brushed Aluminum
WS-W1414	14"	19.5W	120V	910	670	BK Black
WS-W1420	20"	29W		1575	1050	BZ Bronze
WS-W1412	12"	29W		1200	690	GH Graphite

Example: **WS-W1420-AL**


For 277V special order, add an "F" before the finish: **WS-W1420F-AL**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-W1420-35-AL**




Intersect

Intersecting lines and framed glass backlit with optimal LED illumination. Adapts to be mounted both horizontally and vertically in either orientation. A clean design appropriate for both commercial and residential environments as an interior or exterior wall mount fixture.

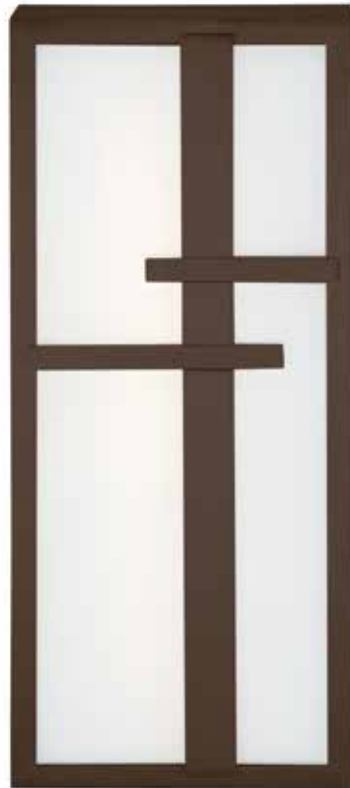

- Mount vertically or horizontally
- CEC Title 24 Compliant
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction screened white glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available *special order*
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W75618	18"	19W	120V	1609	443	AL <i>Brushed Aluminum</i> BZ <i>Bronze</i>



Example: **WS-W75618-AL**

For 277V special order, add an "F" before the finish: **WS-W75618F-AL**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-W75618-35-AL**

Intersect

p.120



A WAC Lighting Company





Irony

Capture the moon. An ironic sculpture and piece of functional wall art. Irony is both original and whimsically fitting in both transitional and eclectic settings.



- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with pressed etched opal glass
- Luminaire within the frame
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

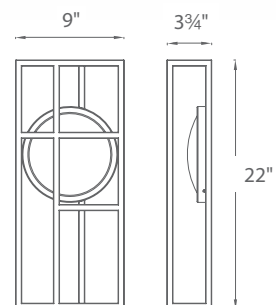

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W37622	22"	15W	120V	993	528	BZ Bronze 

Example: **WS-W37622-BZ**


Irony

p.122



Circle

An eternal shape, this simple floating metal shield mystically glows indirectly illuminating the surface behind. Exceptionally versatile as an interior or exterior wall or ceiling mount, use just one or many.

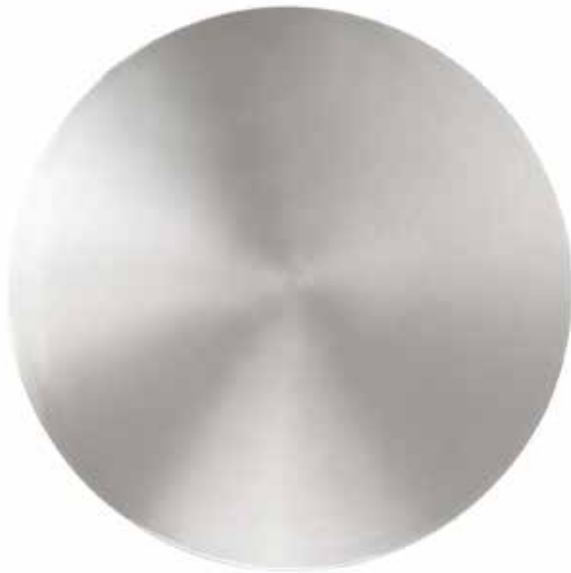


Brushed Aluminum



Bronze

- Rated to be mounted on walls and ceilings
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with mouth blown etched opal glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

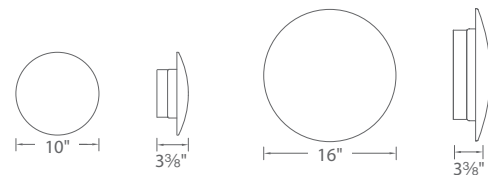

WS-W60610

WS-W60616

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W60610	10"	9W	120V	800	240	BZ Bronze
WS-W60616	16"	20W		1890	280	AL Brushed Aluminum

Example: **WS-W60610-BZ**

For 277V special order, add an "F" before the finish: **WS-W60610F-BZ**

Circle

p.124




Square

Four equal sides and a stream of light. Square artfully provides geometry to wall surfaces in the daytime when mounted in multiples while providing safe illumination of pathways and dramatic visual intrigue in the evening. Perfect for wall grazing surfaces.




Bronze

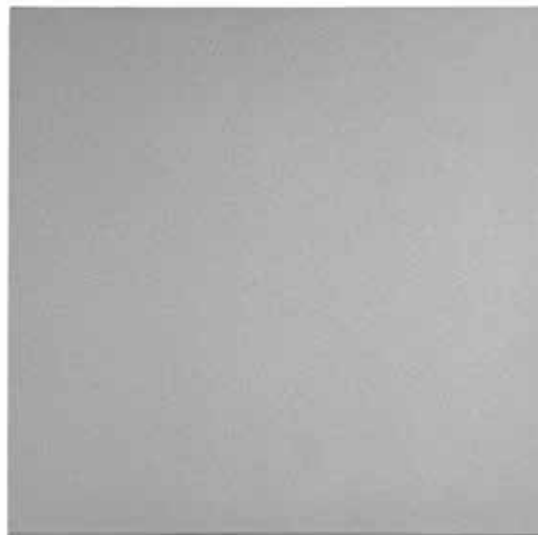

Titanium




- Dark Sky friendly
- ADA compliant, low profile design
- ETL & cETL, wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

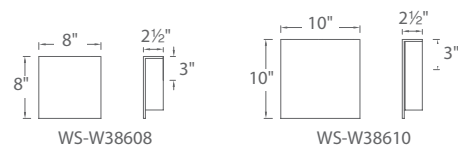

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W38608	8"	9W	120V	486	398	BZ Bronze
WS-W38610	10"	15W		836	720	TT Titanium

Example: **WS-W38608-BZ**

For 277V special order, add an "F" before the finish: **WS-W38608F-BZ**

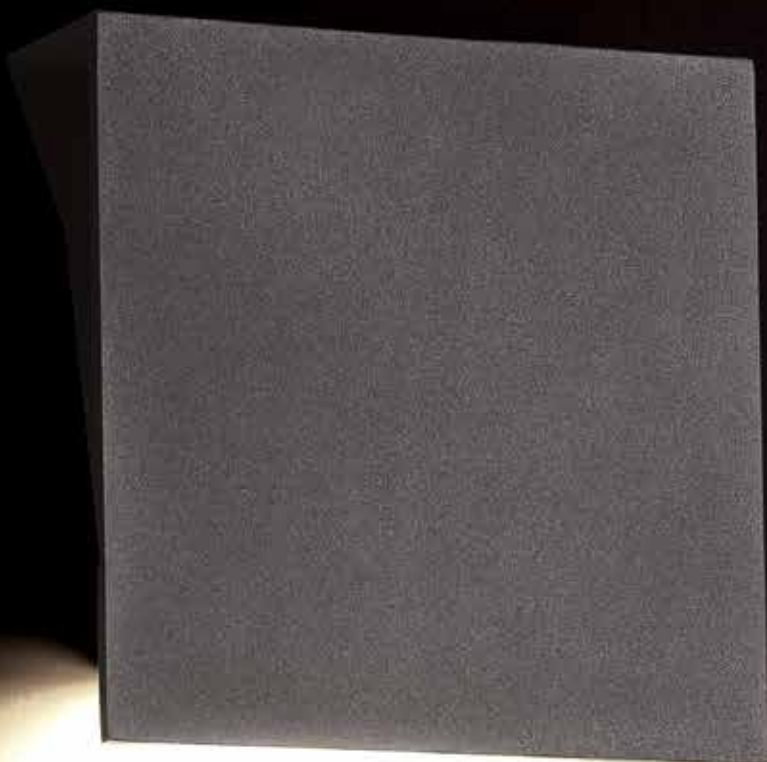


Forq

Tall and austere. A simple form presents from the wall behind it while enhancing the sense of space by drawing the eye to the wall. Rated for interior and exterior applications.



Bronze

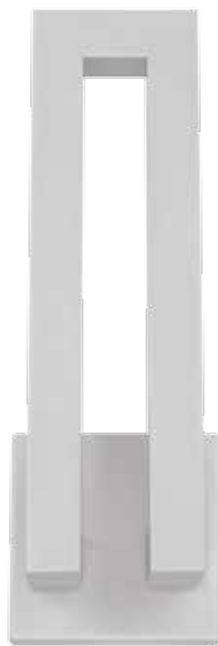

White




Black



Graphite

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP 65 rated
- Aluminum construction
- Full range dimming when used with compatible dimmers*
- Transformer located in canopy
- 277V option available special order
- Replaceable LED modules
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

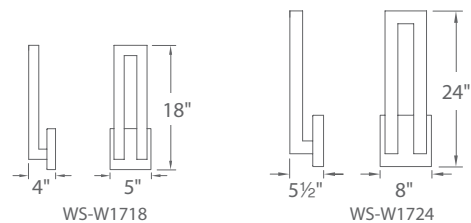

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1718	18"	22W	120V	1876	790	BK Black
WS-W1724	24"	33W		1546	1443	BZ Bronze
						GH Graphite
						WT White

Example: **WS-W1718-GH**

For 277V special order, add an "F" before the finish: **WS-W1718F-GH**



Window


Designed to display individually or in multiples to create diamond patterns and imaginative arrays on walls. Illuminated walls accentuate these geometric silhouettes and complement today's architectural elements.



Bronze

Graphite

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Integral driver in canopy
- Can be mounted in various ways to create patterns, squares or diamonds on walls
- Full range dimming when used with compatible dimmers*
- Transformer located inside the fixture
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

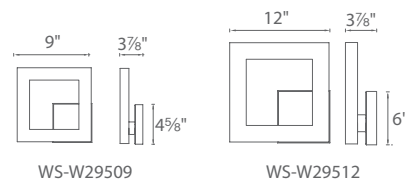


WS-W29509

WS-W29512

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W29509	9"	19.5W	120V	601	485	BZ Bronze
WS-W29512	12"	30W	120V	1212	880	GH Graphite

Example: **WS-W29509-BZ**

For 277V special order, add an "F" before the finish: **WS-W29512F-GH**

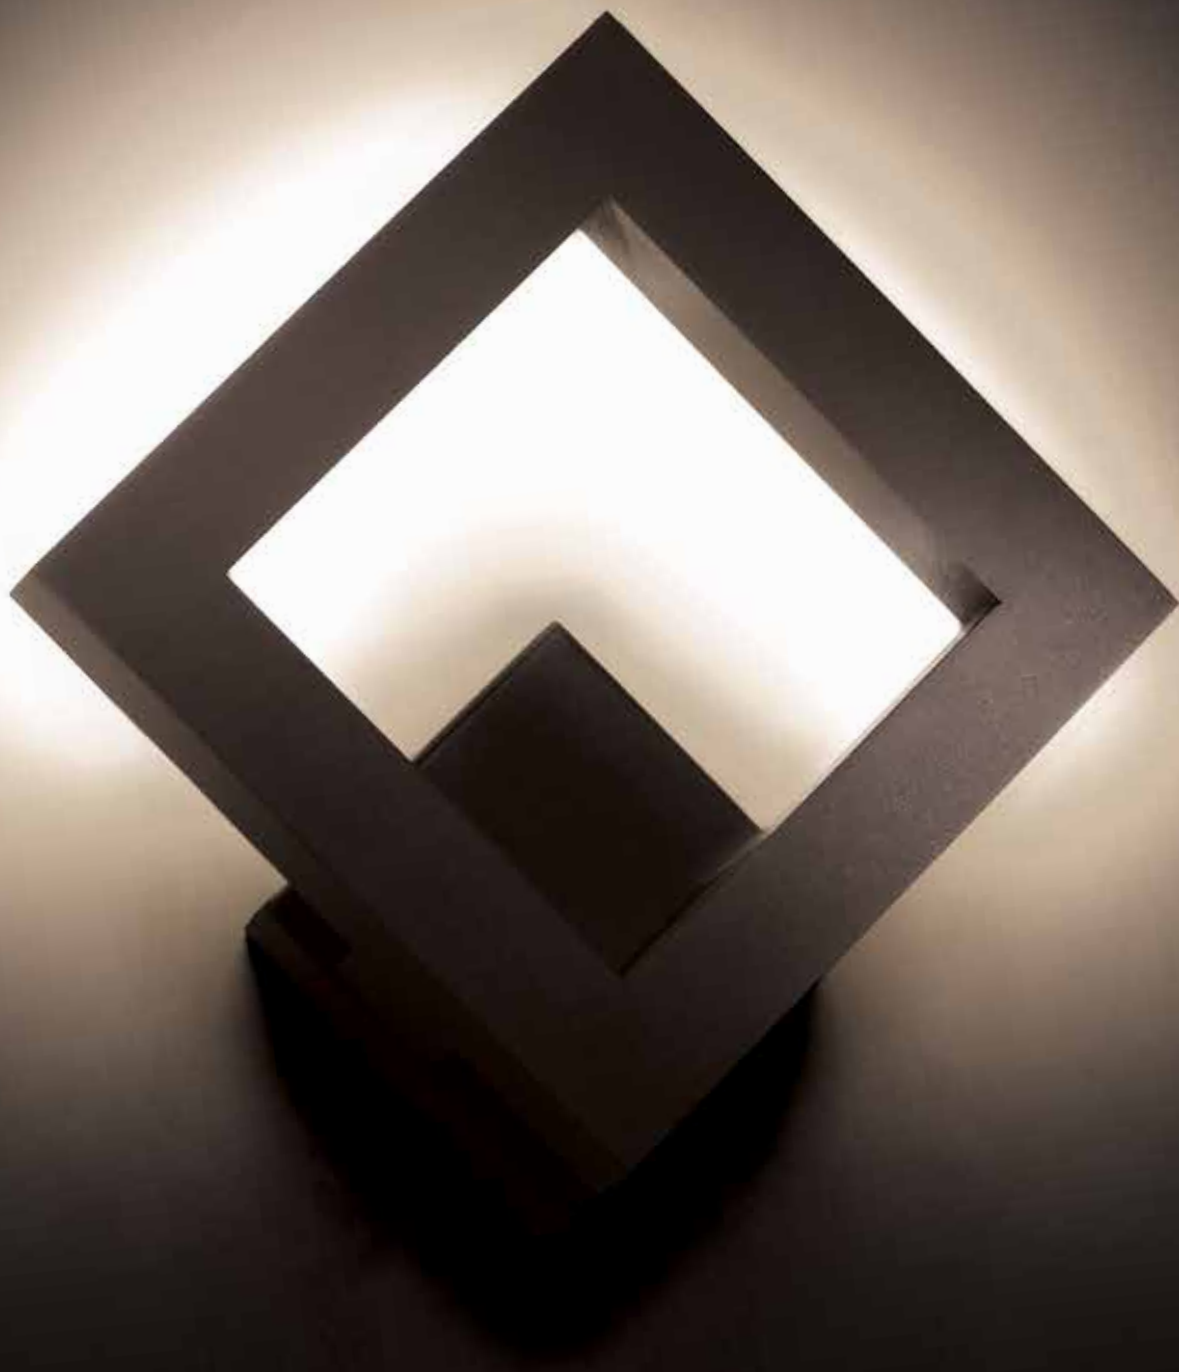


Twilight

Waning light of day. Indirect LED illumination gives the illusion of twilight. Glare free illumination with ambient and down lighting for safety, security and architectural accent.




Bronze

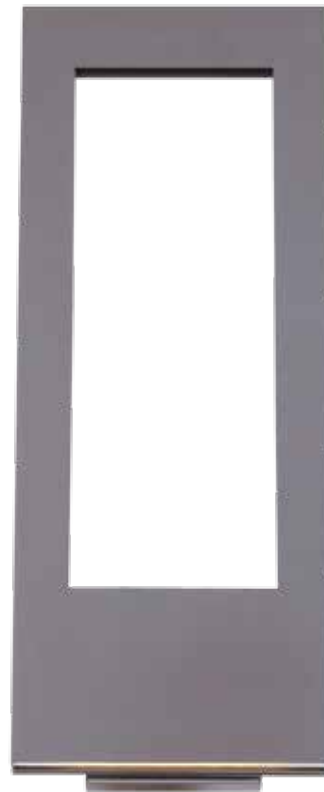


Graphite

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90



WS-W5516



WS-W5521

Model	Height	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W5516	16"	7"	25W	120V	1060	625	BZ Bronze
WS-W5521	21"	9"	28W		1241	770	GH Graphite

Example: **WS-W5516-BZ**



Void

A futuristic art interpretation of a lantern. With creative spirit, the Void sculpture draws the eye to what is absent within the circle of light and away from the structure itself. Infused with LEDs throughout, the negative expression becomes positive with an illusion of volume in a low profile design. A functional down light illuminates pathways or corridors.



Black




Graphite



White

- Illuminated ring and downlight
- ETL & cETL wet location listed, IP65 rated
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

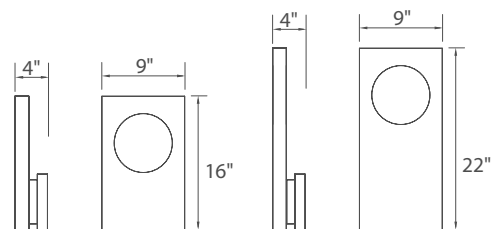

WS-W5116

WS-W5122

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W5116	16"	20W	120V	1660	350	BK Black
WS-W5122	22"					GH Graphite
						WT White

Example: **WS-W5116-BK**



Dawn

Energy efficient indirect ambient lighting and down lighting creates bright, beautiful spatial illumination for superb security and architectural accent.




Bronze



Graphite

- ETL & cETL wet location listed, IP65 rated
- Back light and down light
- Aluminum construction
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- 277V option available *special order*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

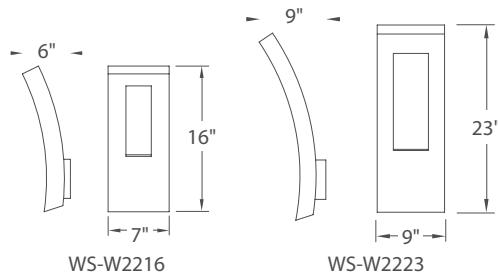

WS-W2216

WS-W2223

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W2216	16"	16W	120V	960	490	BZ Bronze
WS-W2223	23"	24W		1440	735	GH Graphite


Example: **WS-W2216-GH**

For 277V special order, add an "F" before the finish: **WS-W2216F-BZ**



Big V


Sometimes, the name says it all. More impressive in real life, this monolith of a vaulted sconce will light a façade and make a great, big, bold design statement.

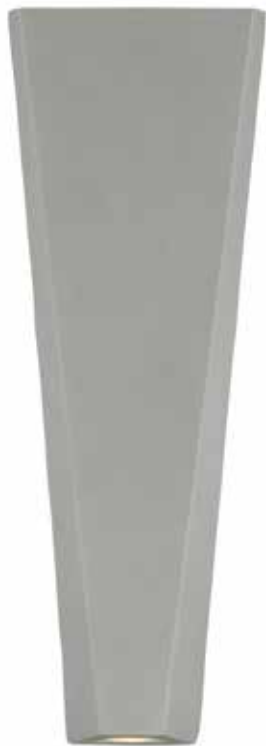


Graphite



Bronze

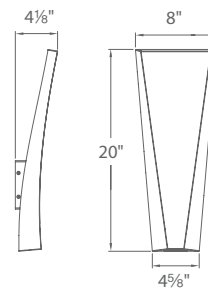

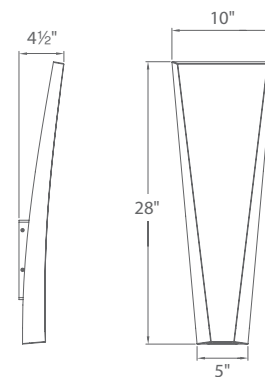

WS-W69620



WS-W69628

- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Up & down light
- Aluminum construction
- Full range dimming when used with compatible dimmers*
- Driver located in canopy
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W69620	20"	23W	120V-220V-277V	1478	1249	GH Graphite 
WS-W69628	28"	28W		1673	1344	BZ Bronze 

Example: **WS-W69620-GH**




Skyscraper

Elevate your space. A classic architectural design thoughtfully engineered for robustness to withstand commercial use for interiors or exteriors. A UV stabilized acrylic diffuser and marine grade stainless steel structure complete this specification-grade wall mount luminaire. Available in either bronze or stainless steel finish.



- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- F1 rated acrylic
- SS - 316 marine grade, stainless steel construction
BZ - Aluminum construction
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available special order
- 80,000 hour rated life
- Color Temp: 3000K / 2700K / 3500K available special order
- CRI: 90

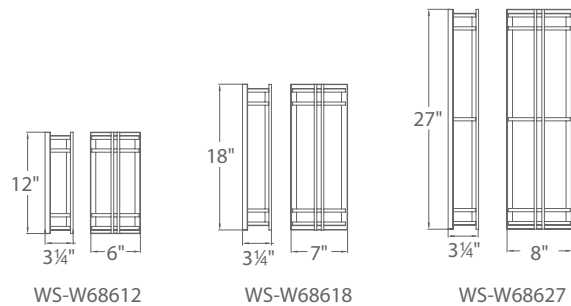


Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W68612	12"	12W		605	418	BZ Bronze
WS-W68618	18"	19W	120V	1098	741	SS Stainless Steel
WS-W68627	27"	24W		1272	880	

Example: **WS-W68612-BZ**

For 277V special order, add an "F" before the finish: **WS-W68612F-BZ**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-W68618-35-SS**

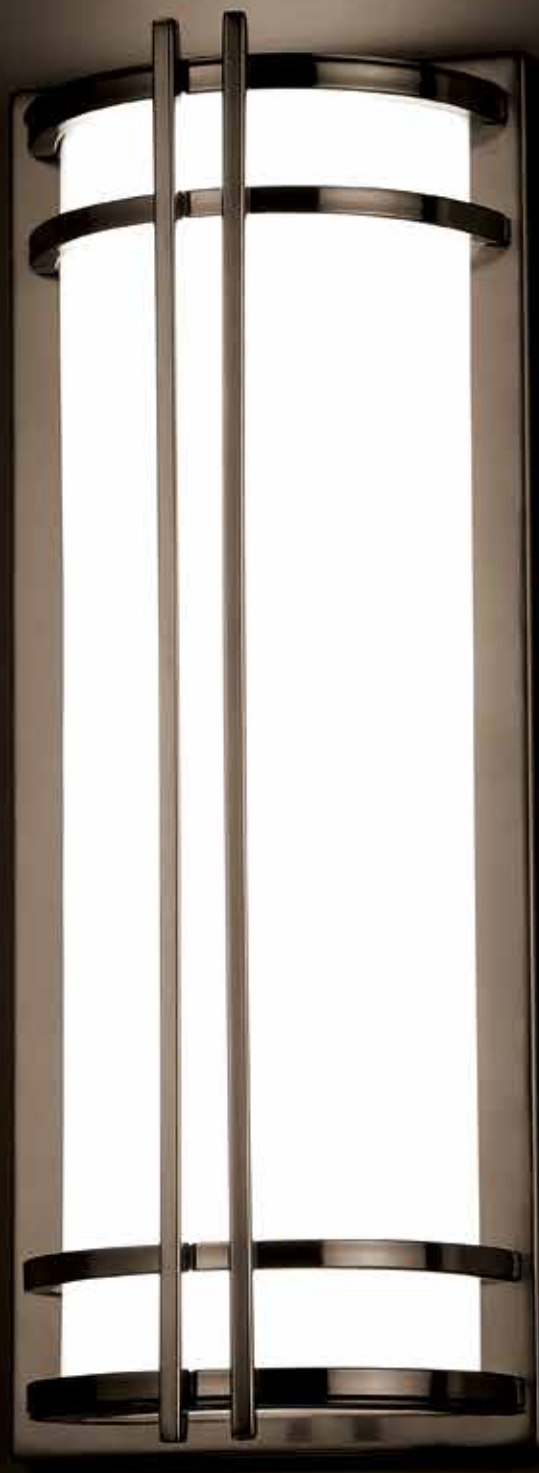

Spire

Elegant proportions and slender curves. A handsome interior or exterior LED sconce of bent glass and precise metal hardware imbues visions of cityscapes and urban architecture.




Bronze



Brushed Aluminum

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction with bent white glass
- Full range dimming when used with compatible dimmers
- Integral transformer in canopy
- Replaceable LED module
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W2712	12"	16W	120V	940	330	AL Brushed Aluminum
WS-W2717	17"	27W		1566	685	BZ Bronze

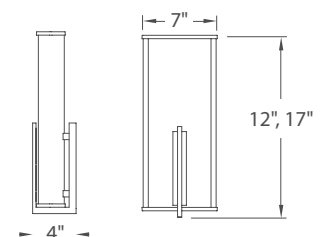

Example: **WS-W2712-BZ**

Spire

p.142



A WAC Lighting Company



Phantom

A highly polished, stylish appearance with sharp curb appeal, this stunning family of distinctive mitered glass columns exhibits a shallow depth and clean, architectural look. Constructed in bronze powder coated aluminum or marine grade stainless steel and completely sealed for waterside locations in luxury residential and commercial environments.



Graphite




Bronze



Stainless Steel Construction

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- BZ - Aluminum construction
- SS - 316 marine grade, stainless steel construction
- Mitered white silk screened glass
- Integral transformer in canopy
- Full range dimming when used with compatible dimmers*
- 277V option available *special order*
- Replaceable LED module
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

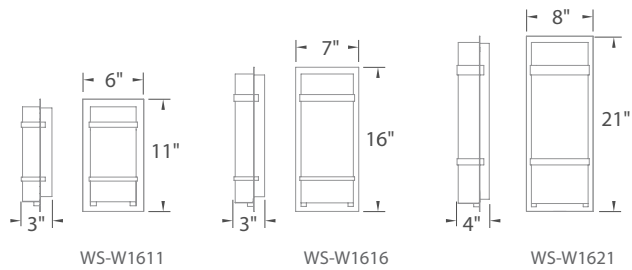

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1611	11"	12W		628	200	BZ Bronze
WS-W1616	16"	19W	120V	1250	600	GH Graphite
WS-W1621	21"	21W		1566	755	SS Stainless Steel Construction

Example: **WS-W1611-SS**

For 277V special order, add an "F" before the finish: **WS-W1611F-SS**

Phantom

p.144




A WAC Lighting Company

Elevation


Zen architecture. A sectional profile enhances the precisely drawn structural elements of the design. Silk-screened linen on glass diffuses soft ambient light while a down light delivers illumination for pathways in an all LED design. Perfectly adorns entries, columns or walls in luxury resorts, restaurants and dwellings.



- Includes downlight
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Mitered glass - screen linen white
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W5216	16"	21W	120V	1650	555	BZ Bronze 
WS-W5222	22"	25W		2030	775	

Example: **WS-W5216-BZ**

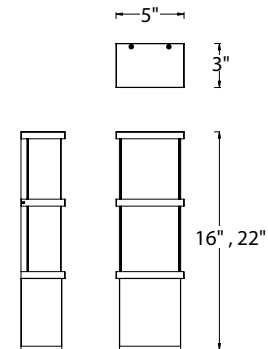

Omni

LEDs sparkle mesmerizingly through glacial glass for interior or exterior applications. Sizes and finishes are available to illuminate any space with a brilliant combination of ambient lighting and down lighting. Weather proof stainless steel or bronze finishes complete this inspiring sconce.




Stainless Steel



Bronze



- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Stainless steel or bronze aluminum
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

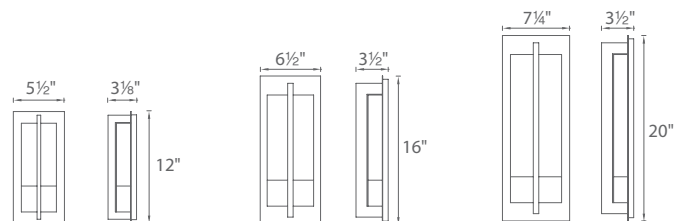

WS-W35512

WS-W35516

WS-W35520

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W35512	12"	8W	120V	145	75	SS Stainless Steel BZ Bronze
WS-W35516	16"	12W	120V	200	90	
WS-W35520	20"	16W	120V	300	150	

Example: **WS-W35520-SS**





Torch

Crowned with exquisite Plastra glass hand formed and crafted utilizing a 13th century artisanship technique, Torch illuminates with ambient interest while delivering down lighting for pathways and floors.



- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

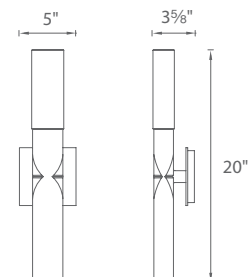

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W37520	20"	8W	120V	240	180	ORB Oil Rubbed Bronze 

Example: **WS-W37520-ORB**

Torch

p.150




Sentinel

Stately etched opal glass enhanced with a casted diamond bangle. Sumptuous aesthetics merges with advanced technology lighting for upscale spaces. Mounts upward or downward.




- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with mouth blown etched opal glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

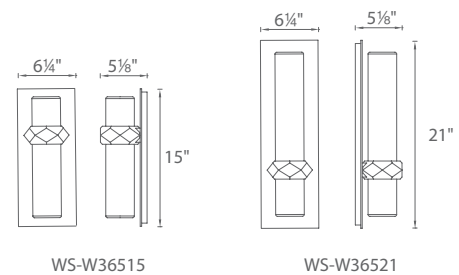

WS-W36515

WS-W36521

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W36515	15"	15W	120V	914	580	ORB Oil Rubbed Bronze 
WS-W36521	21"	24W		1488	965	

Example: **WS-W36521-ORB**



Jedi


A commanding luminaire. With high-tech single spot multi-chip LED light sources, the Jedi sconce provides ambient light while a hidden down light projects a narrow beam of light down the wall for design accent and safety. A cutting-edge solution for upscale homes and challenging hospitality and healthcare applications.



Brushed Aluminum

Bronze

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Sconce light and down light
- Etched opal glass sconce with twist lock for easy removal
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Universal driver (120V-220V-277V)
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

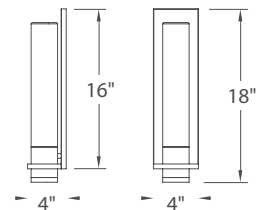


Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-2818	18"	13W	120V	835	205	AL <i>Brushed Aluminum</i> BZ <i>Bronze</i>

Example: **WS-2818-AL**



Helix


Sleek and commanding, the dramatic curves and contours define this graceful design. Interest generating illumination with up and down light.

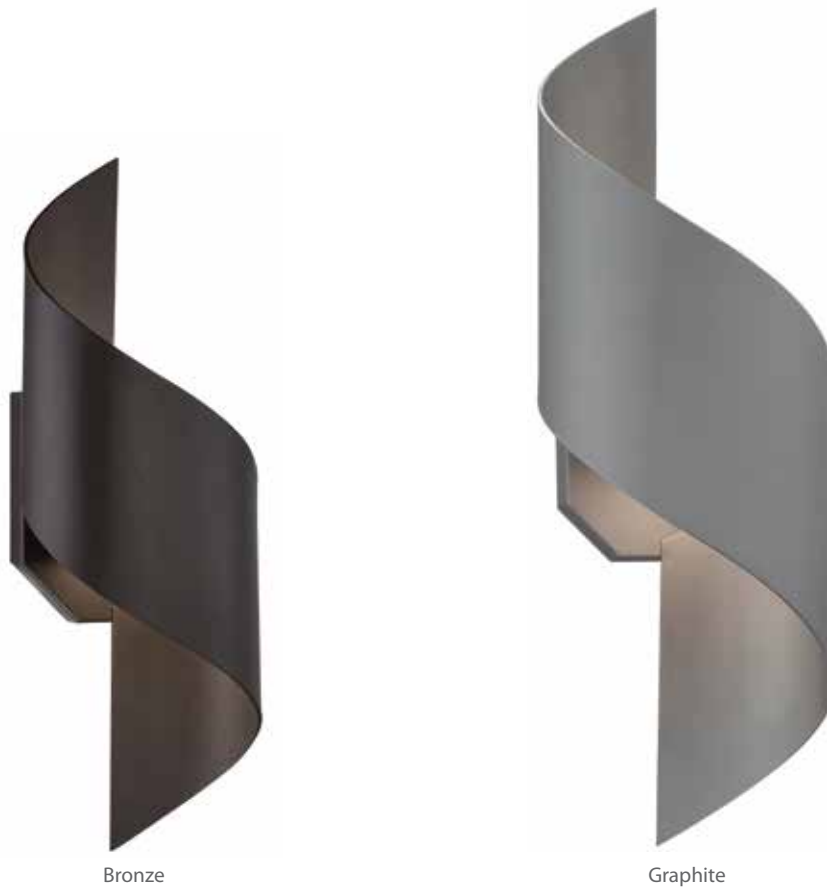

Bronze

Graphite

- ETL & cETL wet location listed, IP65 rated
- Hand formed heavy aluminum gauge
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

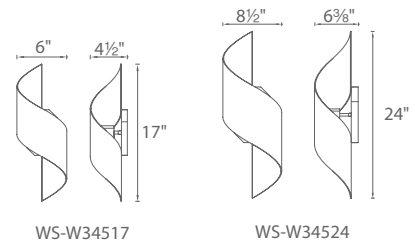

WS-W34517

WS-W34524

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W34517	17"	8W	120V	221	140	BZ Bronze
WS-W34524	24"			233	150	GH Graphite

Example: **WS-W34524-GH**

Helix

p.156




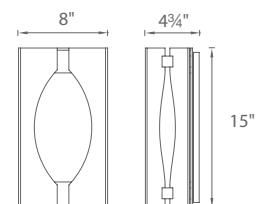
Origami

Style unfolds with this distinctive sculpted wall sconce for a shadowbox effect. A curvaceous form accents and grazes the wall while enhancing the space. Perfect for fine interiors and exteriors that require an innovative decorative accent.



- ETL & cETL wet location listed, IP65 rated
- Dark Sky Friendly
- Aluminum construction
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W27515	15"	8W	120V	210	150	BZ Bronze 



Example: **WS-W27515-BZ**



Origin

This naturalistic sconce is accentuated by curved upright panels that allow light to escape in such a way as to suggest movement. A hidden downlight projects a narrow beam of lights for designer accent and safety. Available in two finishes suitable for both interiors and exteriors.




Bronze



Graphite

- Up and down light
- Luminaire may be rotated 180° when mounting
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction with mouth blown etched opal glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W63608	8"	7.5W	120V	280	210	BZ <i>Bronze</i> GH <i>Graphite</i>

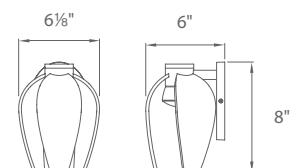

Example: **WS-W63608-BZ**

For 277V special order, add an "F" before the finish: **WS-W63608F-BZ**

Origin

p.160



Boule

Bring a timeless style element into your home. Sculptural clear hammered optic glass provides a brilliant glow and creates an exquisite textural display emulating the movement of water from within. An extraordinary design ideal for accenting doorways or foyers.




Oil Rubbed Bronze




Graphite

- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Mouth blown hammered clear glass with aluminum construction
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90



WS-W31509

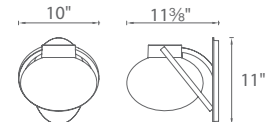

WS-W31511

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W31509	9"	10W	120V	626	585	ORB Oil Rubbed Bronze
WS-W31511	11"			626	620	GH Graphite

Example: **WS-W31509-ORB**




Lucid


A clearly defined orb gently encircles a cylinder of opal glass. Lucid is a clean and updated version of the traditional lantern that may be hung in multiples in an outdoor entertainment area or over an entryway. See pages 209-210 for coordinating pendant which is also available for cohesive specifications around upscale residential or hospitality commercial spaces both inside and out.




- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with mouth blown clear etched opal glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90



WS-W74612

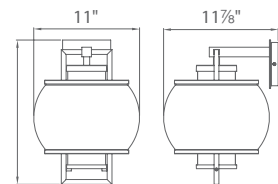

WS-W74615

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W74612	12"	8W	120V	670	460	BK Black 
WS-W74615	15"	12W	120V	980	660	

Example: **WS-W74612-BK**

Lucid

p.164




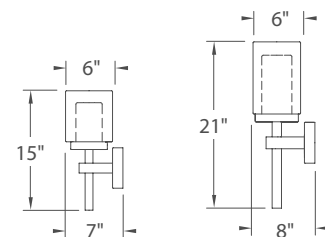
Deco

The simple design of Deco provides refuge in a complex world. Clean and understated with a clear outer layer of glass encasing an etched white opal glass shade, this upscale luminaire illuminates fine exteriors and interiors of transitional and contemporary spaces.



- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction
- Clear mouth blown outer glass and etched opal interior sconce
- Integral transformer in canopy
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1815	15"	12W	120V	625	360	BK Black 
WS-W1821	21"			625	370	



Example: **WS-W1815-BK**





Structure

A refreshing look for refined tastes. A raindrop glass cylinder suspended within an architectural frame. Beautifully illuminated with LED down lighting for a magical appearance of crystallized effervescence. Dark sky orientation preserves observation of star filled skies.



- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Clear seeded crystal
- Dark sky friendly
- Full range dimming when used with compatible dimmers*
- Universal driver (120V-220V-277V)
- Integral universal driver located in canopy
- Replaceable LED module
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

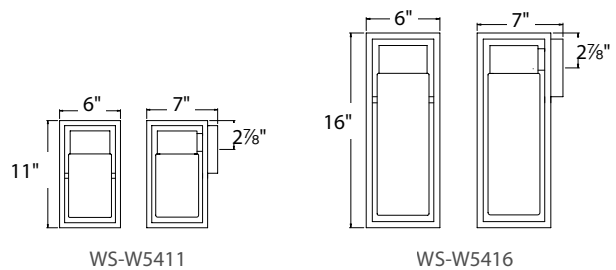

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W5411	11"	11W	120V-220V-277V	915	530	BK Black 
WS-W5416	16"				525	

Example: **WS-W5411-BK**



Burlington

Utilitarian design with a thick walled seeded glass shade reminiscent of antique glassmaking. A perfect complement to board and battens, Burlington is at home in the woods with its industrial styling.





Bronze



Graphite

- Dark Sky friendly
- CEC Title 24 Compliant
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction with mouth blown clear seeded glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

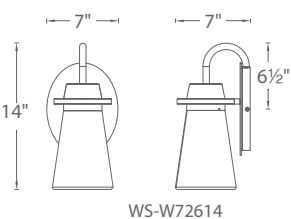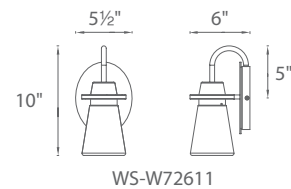

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W72611	10"	4W	120V	210	150	BZ Bronze
WS-W72614	14"	9W	120V	695	580	GH Graphite

Example: **WS-W72611-BZ**

For 277V special order, add an "F" before the finish: **WS-W72611F-BZ**

Burlington

p.170






Suspense

Giving the proverbial nod to tradition, it takes a powerful LED to pull off this look in a dark sky design. This contemporary lantern showcases a mouth blown clear glass element and is equipped with state of the art LEDs for a filament-free design. Couple your passion for living with our passion for lighting.



Brushed Aluminum

Bronze

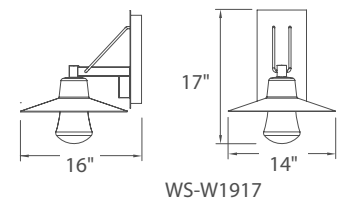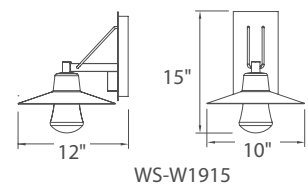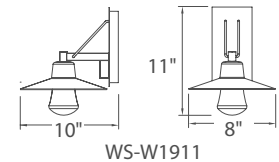

- ETL & cETL wet location listed, IP65 rated
- WS-W1917 is CEC Title 24 Compliant
- Dark sky friendly
- Twist lock glass for minimal hardware
- Aluminum construction with a thick, mouth blown clear glass element
- Integral transformer in canopy
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- WS-W1917 features universal driver (120V-220V-277V)
- 277V option available for WS-W1911 & WS-W1915 special order
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1911**	11"		120V	860	590	AL Brushed Aluminum
WS-W1915**	15"	11W	120V	860	625	BZ Bronze
WS-W1917	17"		120V-220V-277V	1050	865	

Example: **WS-W1911-AL**

For 277 special order (WS-W1911 & WS-W1915), add an "F" before the finish: **WS-W1915F-AL



Pasadena

Design inspired by the Gamble House, one of the finest examples of American bungalow style architecture. Pasadena exhibits California arts and crafts styling in an energy conscious LED design that also prevents light pollution of the night sky.




Bronze




Graphite

- ETL & cETL wet location listed, IP65 rated
- Dark Sky friendly
- Aluminum construction with mouth blown etched opal glass
- Full range dimming when used with compatible dimmers*
- Driver located in canopy
- Universal driver (120V-220V-277V)
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

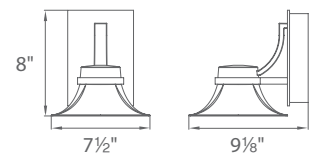

WS-W62608

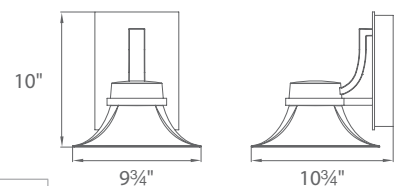

WS-W62610

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W62608	8"	8W	120V-220V-277V	425	210	BZ Bronze
WS-W62610	10"	8W	120V-220V-277V	425	210	GH Graphite

Example: **WS-W62608-BZ**

Pasadena

p.174



Balthus New 21" Size

Heavy hardware exhibits craftsman details.
Mouth blown hammered clear glass creates
resplendent sparkles on the wall.




Graphite



Oil Rubbed Bronze



- ETL & cETL wet location listed, IP65 rated
- Dark Sky Friendly
- Mouth blown hammered clear glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available for WS-W28521 special order
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

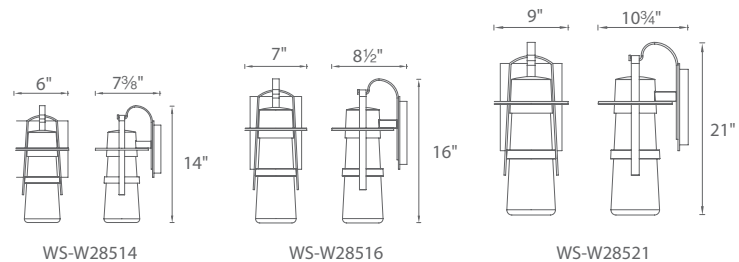

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W28514	14"	10W		478	455	GH Graphite ORB Oil Rubbed Bronze
WS-W28516	16"	10W	120V	481	465	
WS-W28521**	21"	10W		475	470	

Example: **WS-W28514-ORB**

For 277V special order, add an "F" before the finish: **WS-W28521F-ORB

Balthus

p.176



Vitrine

Raindrops falling gently on the window pane. This stunning effect is the result of concealed LEDs illuminating from above while casting a warm beam through clear hammered seeded, mouth blown optic glass. The durable body and minimalist design complement a multiplicity of architectural styles. Perfect for indoor and outdoor settings in luxury homes and resorts.




Bronze





Graphite

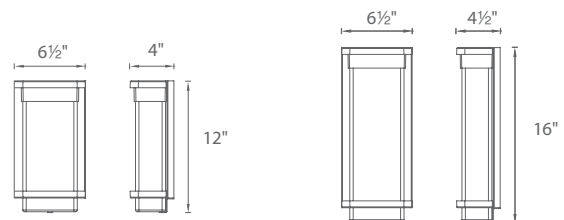- ETL & cETL wet location listed, IP65 rated
- Clear hammered seeded mouth blown glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90



WS-W32512

WS-W32516

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W32512	12"	5W	120V	230	205	BZ Bronze 
WS-W32516	16"	10.5W	120V	380	365	GH Graphite 

Example: **WS-W32516-BZ**





Pandora

A multi-dimensional and versatile design. The sculpted sconce with a tiered design is hand finished in Oil Rubbed Bronze. Three sizes available.



- ETL & cETL wet location listed, IP65 rated
- Aluminum construction
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

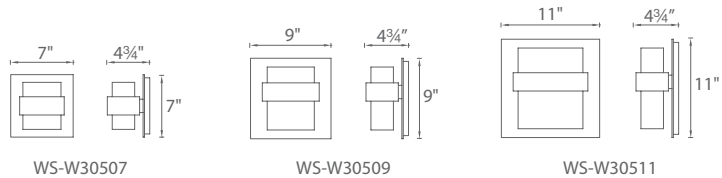

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W30507	7"	12W		270	200	ORB Oil Rubbed Bronze 
WS-W30509	9"	20W	120V	546	410	
WS-W30511	11"	28W		550	415	

Example: **WS-W30509-ORB**





Kyoto

A Shinto inspired architectural design. Miter cut and joined white glass provides crisp lines to complement the hardware.



- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Mitered glass and aluminum construction
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

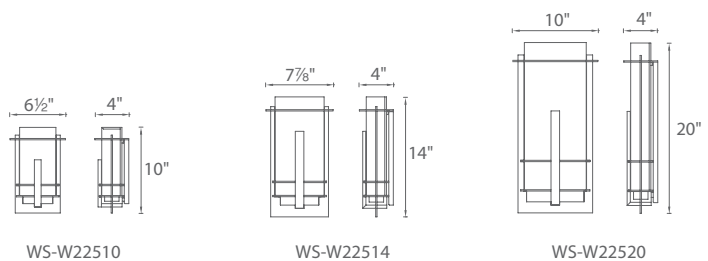

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W22510	10"	10W		616	330	BZ Bronze 
WS-W22514	14"	15.5W	120V	918	465	
WS-W22520	20"	26.5W		1620	840	

Example: **WS-W22520-BZ**





Berkeley

Arts and crafts styling with a refreshing twist. The enduring look of forged iron over mouth blown etched opal glass. A handsome addition to any setting.



- ADA compliant for WS-W21511, WS-W21516, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant for WS-W21511
- Weather resistant powder coated finish
- Solid aluminum construction
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

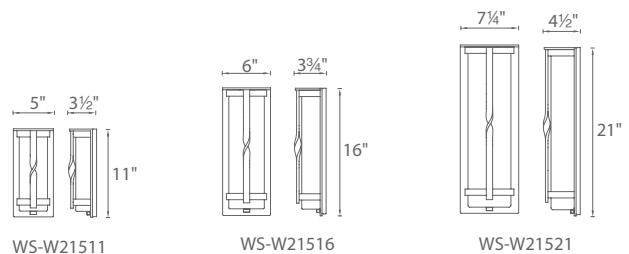

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W21511	11"	15.5W		674	370	BZ Bronze 
WS-W21516	16"	19.5W	120V	1062	555	
WS-W21521	21"	26.0W		1443	985	

Example: **WS-W21516-BZ**

Berkley

p.184



Twist

Dramatically illuminated curvature. A multi-dimensional metal wall sculpture captivates from various directions in luxurious exterior and interior environments. The fluid hardware reveals a beautiful play of light and shadow within and architectural wall grazing without.



Bronze




Graphite



- Up and down light
- ETL & cETL wet location listed, IP65 rated
- ADA compliant, low profile design
- Up and down light
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W5620	20"	16W	120V	960	260	BZ Bronze GH Graphite

Example: **WS-W5620-BZ**

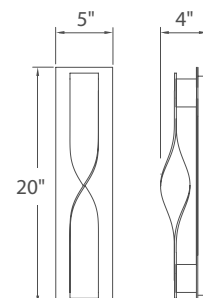

Twist

p.186




Digitus


A vertical illuminating element highlights the hand crafted qualities of this wall sconce design. The artistic represented wood grain lends an arts and crafts appeal to this unique sconce. Perfect for indoor and outdoor applications. The ADA design mounts in any orientation.



- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Backlit wall bracket with sand cast back plate
- Aluminum construction
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

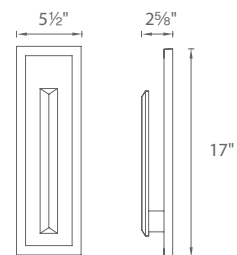

WS-W33518

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W33518	17"	15W	120V	94	85	ORB Oil Rubbed Bronze 

Example: **WS-W33518-ORB**




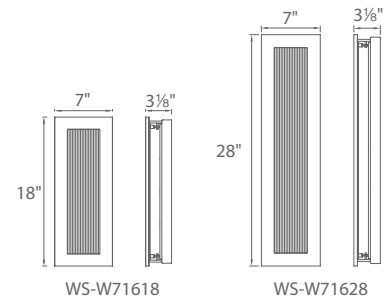
Oath

Bronze framed art glass becomes a simple but clever transitional wall sconce for both interiors and exteriors. With the warmth of natural elements, the Oath promises continuity across American architectural styles from prairie to saltbox to craftsman.



- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction with laminated glass
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W71618	18"	12W	120V	576	161	BZ Bronze 
WS-W71628	28"	36W		2094	586	



Example: **WS-W71618-BZ**

For 277V special order, add an "F" before the finish: **WS-W71618F-BZ**



Rain

Evoking an image of gentle rainfall, this Zen luminaire uses LED technology to highlight the clear seeded glass in a dark sky and ADA compliant sconce. Two finishes and two sizes are available for various interior and exterior applications.




Bronze



Graphite



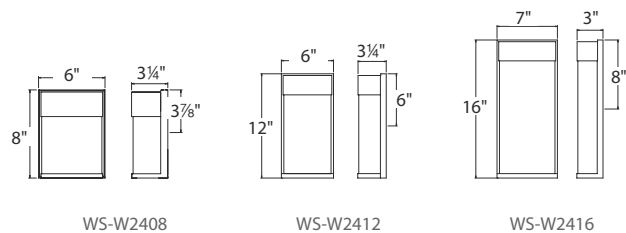

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Dark Sky friendly
- Aluminum construction with clear seeded glass
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85



WS-W2408

WS-W2412

WS-W2416

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W2408	8"					BZ Bronze  GH Graphite 
WS-W2412	12"	8W	120V	215	145	
WS-W2416	16"					

Example: **WS-W2416-BZ**



Hiline

The Hiline luminaire features a sealed LED housing and clean, versatile Dark Sky and ADA design. This functional design is ideal for showing off multi-tiered decks, stone patios or illuminating entry ways in luxury hotels and homes.



White



Black




Graphite




Bronze


- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Dark Sky friendly
- Aluminum construction with etched glass light shield
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85



WS-W2308



WS-W2312



WS-W2316

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W2308	8"					BK Black
WS-W2312	12"	8W	120V	280	245	BZ Bronze
WS-W2316	16"					GH Graphite
						WT White


Example: **WS-W2312-GH**

For 277V special order, add an "F" before the finish: **WS-W2312F-GH**




Urban

Like urban renewal, this sconce gives new life to the conventional step baffle. Form follows function in this simplified indirect wall sconce. Clean styling and robust LED performance are combined in this modern dark sky luminaire.

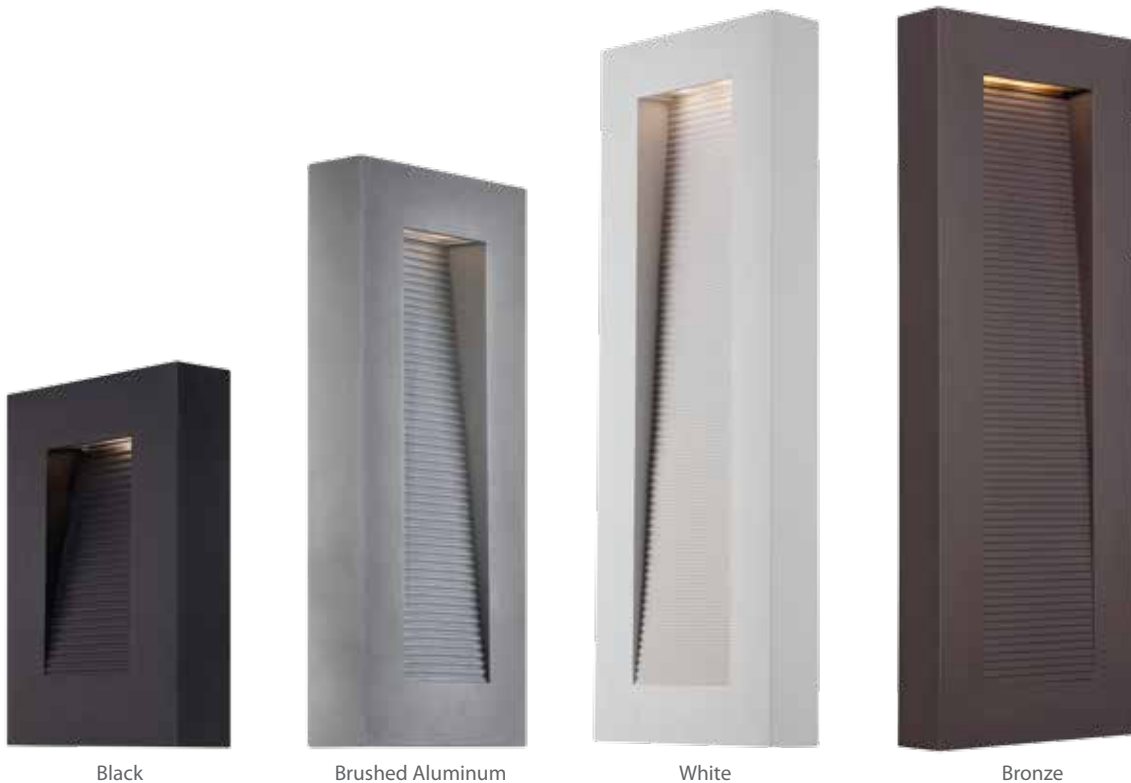

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Dark Sky friendly
- Interior light and down light
- Aluminum construction
- No transformer or driver required
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

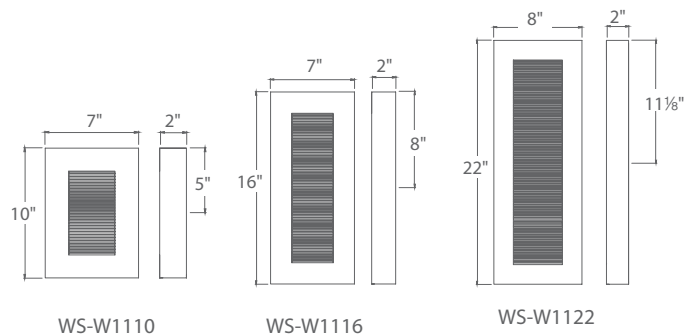

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1110	10"	12W		720	370	BK Black
WS-W1116	16"	16W	120V	960	490	BZ Bronze
WS-W1122	22"	20W		1200	610	GH Graphite
						WT White

Example: **WS-W1110-BK**

For 277V special order, add an "F" before the finish: **WS-W1110F-BK**



Mega

A purposeful asymmetrical wall mounted downlight design brightly illuminates walkways and provides security with an attractive simple architectural form.



Bronze




Graphite

- Luminaire may be rotated 180° when mounting
- ADA compliant for, low profile design
- ETL & cETL wet location listed, IP65 rated
- Dark Sky friendly
- Aluminum construction
- Full range dimming when used with compatible dimmers*
- Driver located in inside fixture
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W70612	11"	25W	120V-220V-277V	845	610	BZ Bronze GH Graphite

Example: **WS-W70612-BZ**

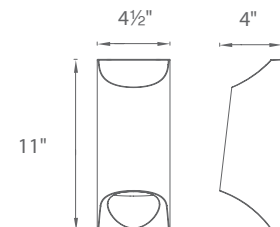



Vessel

A sleek, minimalist profile supported by precision engineering using advanced proprietary LED technology. Integral reflectors ensure high performance optics for accent and wall wash lighting, pathway and facade illumination and building security.

Dark Sky Friendly



Brushed Aluminum

Up & Down Light



Bronze



Black




Graphite




White




- Up & down light
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP66 rated
- WS-W9101 is Energy Star® rated & Dark Sky Friendly
- Full range dimming when used with compatible dimmers*
- Mounts in any direction
- Driver located inside fixture
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K 2700K / 4000K available special order
- CRI: 90



WS-W9101



WS-W9102

	Type	Model	Wattage	LED Lumens	Delivered Lumens	Finish
	Down Light	WS-W9101	16.5W	1167	860	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White 
	Up & Down Light	WS-W9102	29W	2334	1610	

Example: **WS-W9101-AL**
 For 2700K add "-27"; 4000K add "-40" before the finish: **WS-W9102-40-BZ**

Vessel

p.200



Bloc

Bold geometry and seamless forms with robust illumination for today's modern interiors and exteriors. Sleek die-cast aluminum construction reveals a silk-screened glass diffuser that renders upward and downward illumination. Also available for ceiling flush mounted luminaires, see pages 213.

Dark Sky Friendly

Up & Down Light



Black



Brushed Aluminum



White




Graphite






Bronze

- ETL & cETL wet location listed, IP66 rated
- WS-W9201 is Energy Star® rated & Dark Sky Friendly
- Listed for use in closets
- Driver located inside fixture
- Mounts in any direction
- Full range dimming when used with compatible dimmers*
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K / 2700K / 4000K available special order
- CRI: 90



WS-W9201 / WS-W9202

Type	Model	Wattage	LED Lumens	Delivered Lumens	Finish
 Down Light	WS-W9201	16.5W	1167	945	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White 
 Up & Down Light	WS-W9202	30.5W	2334	1930	

Example: **WS-W9202-GH**

For 2700K add "-27"; 4000K add "-40" before the finish: **WS-W9201-40-WT**





LED

Interior & Exterior
Pendants & Flush Mounts





Warlock

Commanding in its presence and the powerful way it dramatically illuminates spaces below. This imposing metal pendant is apposite for both interior and exterior spaces in either a brushed aluminum finish or bronze.




Graphite




Bronze

- All Aluminum construction
- ETL & cETL wet location listed, IP44 rated
- Full range dimming when used with compatible dimmers*
- Dark Sky friendly
- Hang straight swivel
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

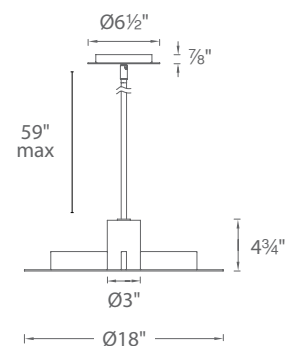

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-W99620	18"	18W	120V-220V-277V	846	305	GH Graphite BZ Bronze

Example: **PD-W99620-GH**

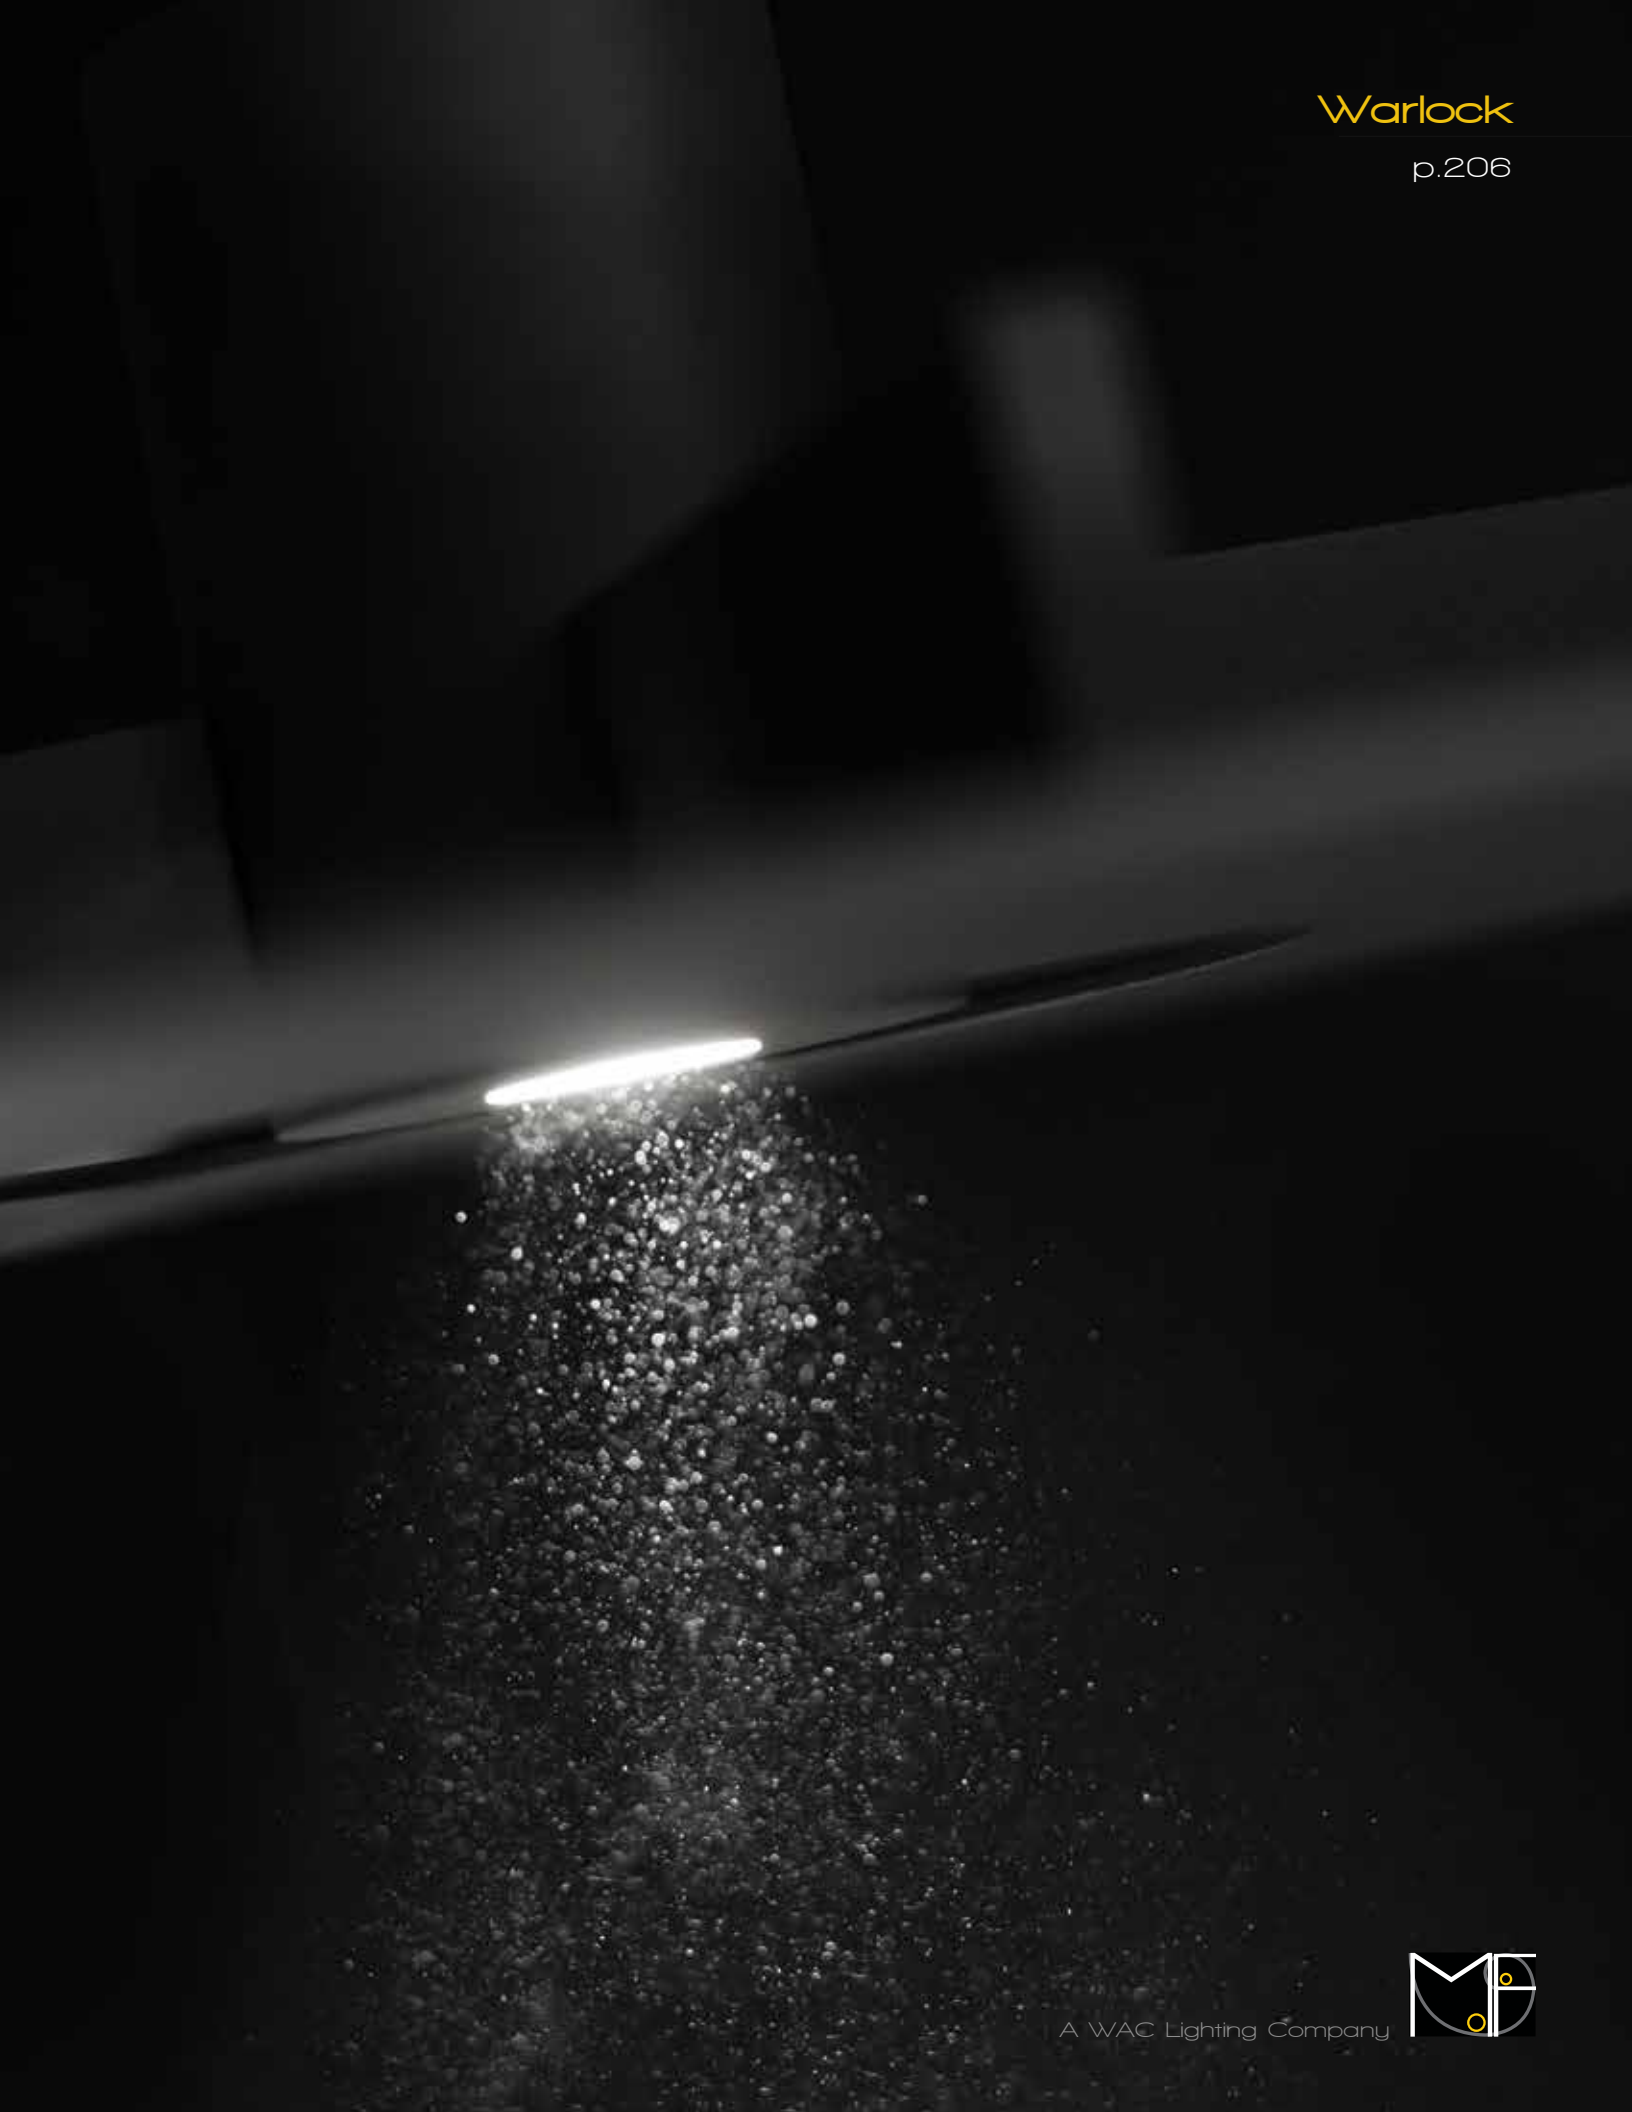

Suspense


Giving the proverbial nod to tradition, it takes a powerful LED to pull off this look in a dark sky design. This contemporary lantern showcases a mouth blown clear glass element and is equipped with state of the art LEDs for a filament-free design.



Brushed Aluminum

Bronze

- ETL & cETL wet location listed, IP65 rated
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- CEC Title 24 Compliant
- Dark Sky friendly
- Twist lock glass for minimal hardware
- Aluminum construction with a thick, mouth blown clear glass element
- Integral transformer in canopy
- Universal driver (120V-220V-277V)
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- 50,000 hour potential life
- Color Temp: 3000K
- CRI: 90

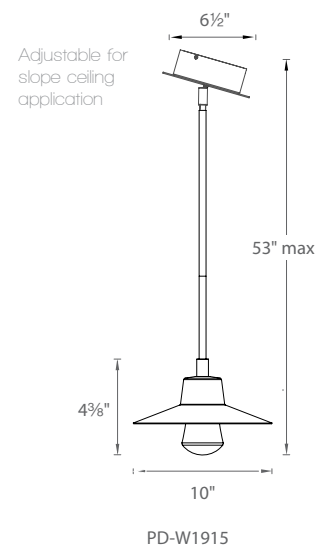

Model	Diameter	Watt	LED Lumens	Delivered Lumens	Finish
PD-W1915	10"	12W	722	677	AL <i>Brushed Aluminum</i> BZ <i>Bronze</i>

Example: **PD-W1915-AL**

Suspense

p.208





Lucid

A clearly defined orb gently encircles a cylinder of opal glass. Lucid is a clean and updated version of the traditional lantern. The pendant is available for cohesive specifications throughout upscale residential or hospitality commercial spaces. See pages 163-164 for coordinating wall sconces.



- See page 163-164 for wet rated interior & exterior wall sconce
- ETL & cETL wet location listed, IP65 rated
- Full range dimming when used with compatible dimmers*
- Mouth blown clear etched opal glass
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

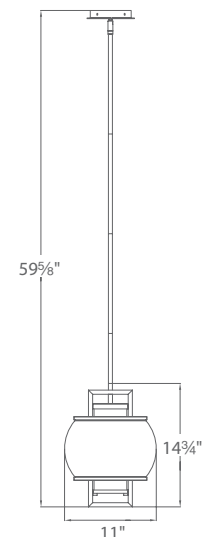

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-W74615	15"	12W	120V	960	660	BK Black 

Example: **PD-W74615-BK**

Lucid

p.210



A WAC Lighting Company

Vessel

A sleek, minimalist profile supported by precision engineering using advanced proprietary LED technology. Integral reflectors ensure high performance optics for accent and wall wash lighting, pathway and facade illumination and building security.



Brushed Aluminum



White



Bronze




Black




Graphite

- Wall or ceiling mount
- ETL & cETL wet location listed, IP66 rated
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- Driver located in fixture
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K 2700K / 4000K available special order
- CRI: 90



FM-W9100

Type	Model	Wattage	LED Lumens	Delivered Lumens	Finish
 Flush Mount	FM-W9100	16.5W	1167	956	AL <i>Brushed Aluminum</i> BK <i>Black</i> BZ <i>Bronze</i> GH <i>Graphite</i> WT <i>White</i>

Example: **FM-W9100-BK**

For 2700K add "-27"; 4000K add "-40" before the finish: **FM-W9100-40-AL**



Bloc

Bold geometry and clean lines echo robust illumination for today's modern interiors and exteriors. Sleek die-cast aluminum construction reveals a silk-screened glass diffuser that renders upward and downward illumination. Can be mounted as a ceiling or wall luminaire, with five architectural finishes.



Brushed Aluminum



White



Bronze




Black



















Graphite

- Wall or ceiling mount
- ETL & cETL wet location listed, IP66 rated
- Available in five architectural finishes
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers*
- Driver located in fixture
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K 2700K / 4000K available special order
- CRI: 90



FM-W9200

Type	Model	Wattage	LED Lumens	Delivered Lumens	Finish															
 Flush Mount	FM-W9200	16.5W	1167	945	<table border="0"> <tr> <td>AL</td> <td>Brushed Aluminum</td> <td></td> </tr> <tr> <td>BK</td> <td>Black</td> <td></td> </tr> <tr> <td>BZ</td> <td>Bronze</td> <td></td> </tr> <tr> <td>GH</td> <td>Graphite</td> <td></td> </tr> <tr> <td>WT</td> <td>White</td> <td></td> </tr> </table>	AL	Brushed Aluminum		BK	Black		BZ	Bronze		GH	Graphite		WT	White	
AL	Brushed Aluminum																			
BK	Black																			
BZ	Bronze																			
GH	Graphite																			
WT	White																			

Example: **FM-W9200-WT**

For 2700K add "-27"; 4000K add "-40" before the finish: **FM-W9200-27-GH**





Circa

Bright ambient illumination evokes from a clean, round white glass that fits perfectly into handsome finished hardware to match seamlessly with nearly any décor in residential and commercial settings. Advanced LED technology delivers high output and CRI.



- Illuminates evenly without hot spots or shadowing
- Wall or ceiling mount available
- ETL & cETL wet location listed, IP44
- ADA compliant, low profile design
- Listed for use in closets
- CEC Title 24 Compliant
- Replaceable LED module
- Transformer located in outlet box
- Full range dimming when used with compatible dimmers*
- 50,000 hour rated life
- Color Temp: 3000K / 2700K / 3500K available special order
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-2115-30	14"	25W	120V	2355	1050	TT Titanium 




Example: **FM-2115-30-TT**

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-2115-35-TT**




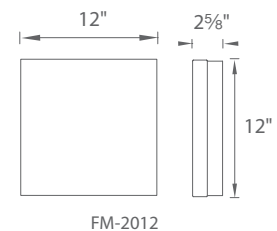
Matrix

Designed and crafted with clean square geometric styling, this sleek and simple ceiling luminaire blends with any residential or commercial setting. Optimal LED illumination delivers uniform bright lighting in nearly any room. Smooth thick wall etched glass is complemented with a stunning new Titanium finish.

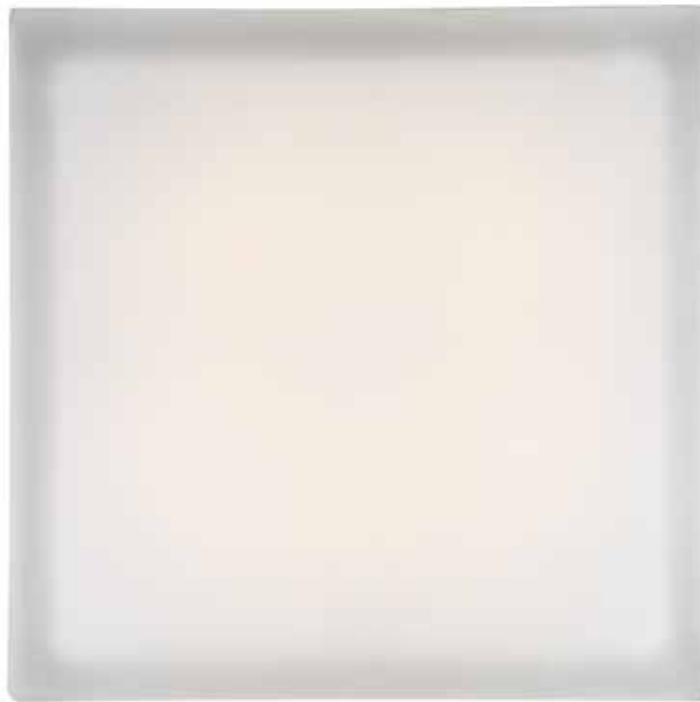

- Illuminates evenly without hot spots or shadowing
- Durable stamping aluminum canopy, with thick opal glass
- Wall or ceiling flush mount
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Listed for use in closets
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-2012-30	12"	25W	120V	2200	985	TT Titanium 



Example: **FM-2012-30-TT**

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-2012-35-TT**




Ledge

A luminous architectural profile and superior construction make this ceiling flush mount or wall sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Allows for cohesive specifications across residential and commercial interior and exterior applications.

Also available as a wall luminaire in various lengths. See pages 33, 35 and 117.



Brushed Aluminum

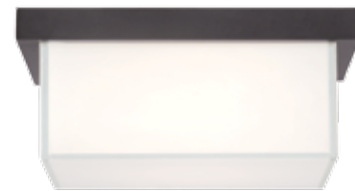

Bronze




Graphite



Black

- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Listed for use in closets
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available *special order*
- CRI: 90

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-1410	8"	17W	120V	1104	750	AL <i>Brushed Aluminum</i>
FM-1414	14"	38W		2772	1475	BK <i>Black</i> BZ <i>Bronze</i> GH <i>Graphite</i>

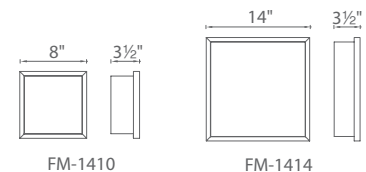

Example: **FM-1414-AL**

For 277V special order, add an "F" before the finish: **FM-1410F-GH**

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-1414-35-BK**





LED

Interior
Pendants, Chandeliers
& Flush Mounts








Tango

Rhythmic beats reverberate in a dramatic larger than life pendant. A luxuriously cinched drum design carefully adorned in gold leaf or silver leaf and thinly lacquered for a lustrous matte finish. Tango is simple made sexy.



- ETL & cETL damp location listed
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- Full range dimming when used with compatible dimmers*
- 85,000 hour potential life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-34620	20"	41	120V-220V-277V	2400	1192	GL Gold Leaf  SL Silver Leaf 

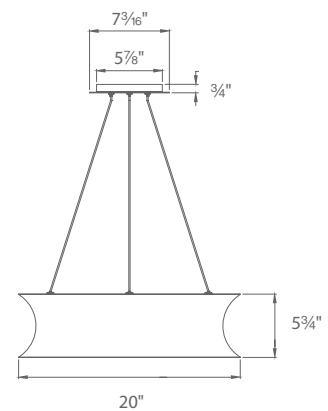

Example: **PD-34620-GL**

Tango

p.224



Marimba New 24" Size

Percussion perfection. This extraordinary cluster of seven LED luminaires, each delivering generous diffused illumination, transforms into a state-of-the-art chandelier. Custom LED modules provide high quality lumens and dimming control. Hand finished with a stunning dark bronze and gold leaf or white and silver leaf. Now also available as a 24" pendant with overstated proportions for a grand statement.




Silver Leaf/White



Gold Leaf/Dark Bronze

- ETL & cETL damp location listed
- Twist lock glass inside
- Full range dimming when used with compatible dimmers*
- Transformer located in canopy
- Replaceable LED module
- 277V option available *special order*
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

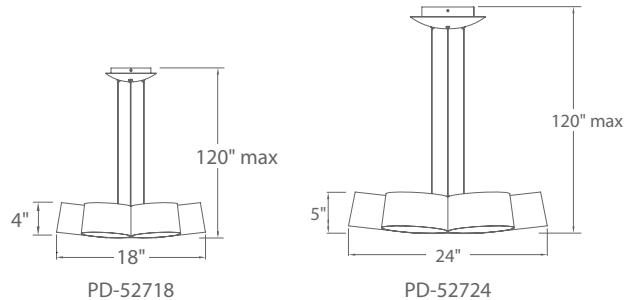

Model	Diameter	Watt	Voltage	LED Lumens	Delivered Lumens	Finish	Canopy-Interior/Exterior
PD-52718	18"	55W	120V	2885	1255	GL	Gold Leaf/Dark Bronze
PD-52724	24"	59W		3755	1395	SL	Silver Leaf/White

Example: **PD-52718-GL**
 For 277V special order, add an "F" before the finish: **PD-52718F-GL**

Marimba

p.226




A WAC Lighting Company




Gilt

A modern medallion glows above from LEDs lighting upward from the pendant while concealed down lighting delivers perfect illumination on tabletops and surfaces below. Hand finished in dark bronze with gold leaf interior or white with silver leaf interior for an opulent textured appeal.

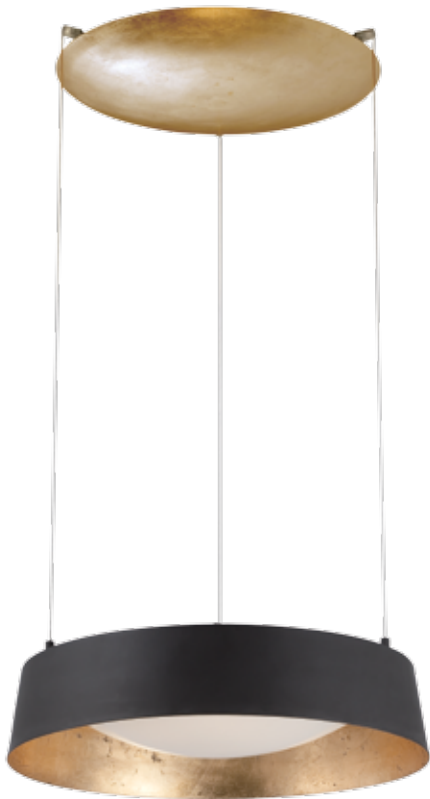


Gold Leaf/Dark Bronze

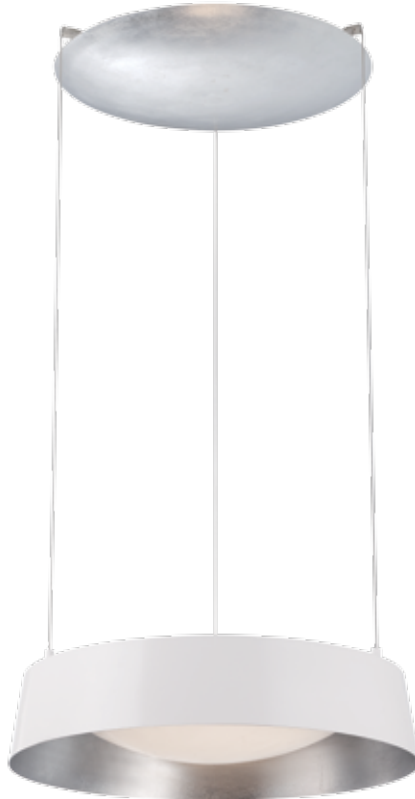

Silver Leaf/White

- ETL & cETL damp location listed
- Up & down lights
- Full range dimming when used with compatible dimmers*
- Transformer located in canopy
- Replaceable LED module
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

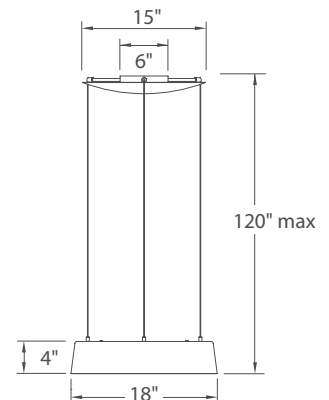

Model	Diameter	Watt	Voltage	LED Lumens	Delivered Lumens	Finish	Canopy-Interior/Exterior
PD-51318	18"	52W	120V	4050	1190	GL SL	Gold Leaf/Dark Bronze Silver Leaf/White



Example: **PD-51318-SL**

For 277V special order, add an "F" before the finish: **PD-51318F-GL**




Blaze


A radiating spectacle of warm indirect illumination from hand applied gold leaf. Offered in three proportional sizes to design in multiples on walls or ceilings.

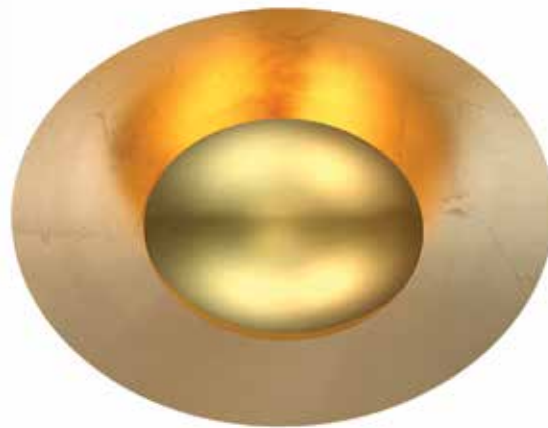

WS-30612

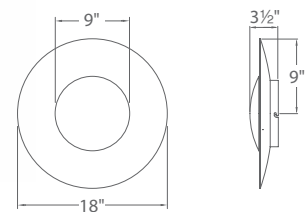

WS-30618

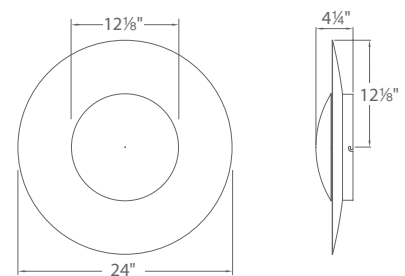

WS-30624

- Flush mounts to ceiling or wall as sconce
- ADA compliant, low profile design in WS-30612, WS-30618
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90


Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-30612	12"	10.5W		787	250	GL Gold Leaf/Gold Plated SL Silver Leaf/Polished Nickel
WS-30618	18"	25W	120V-220V-277V	1979	605	
WS-30624	24"	31W		2393	700	

Example: **WS-30612-GL**




BDSM

Leather-bound luxury and control. Designed with handsome vintage black or white leather and clean styling, this unique linear LED pendant is the perfect complement to an executive office. A thin streamlined profile conceals robust LED down lighting with cutting edge full-range dimming controllability.

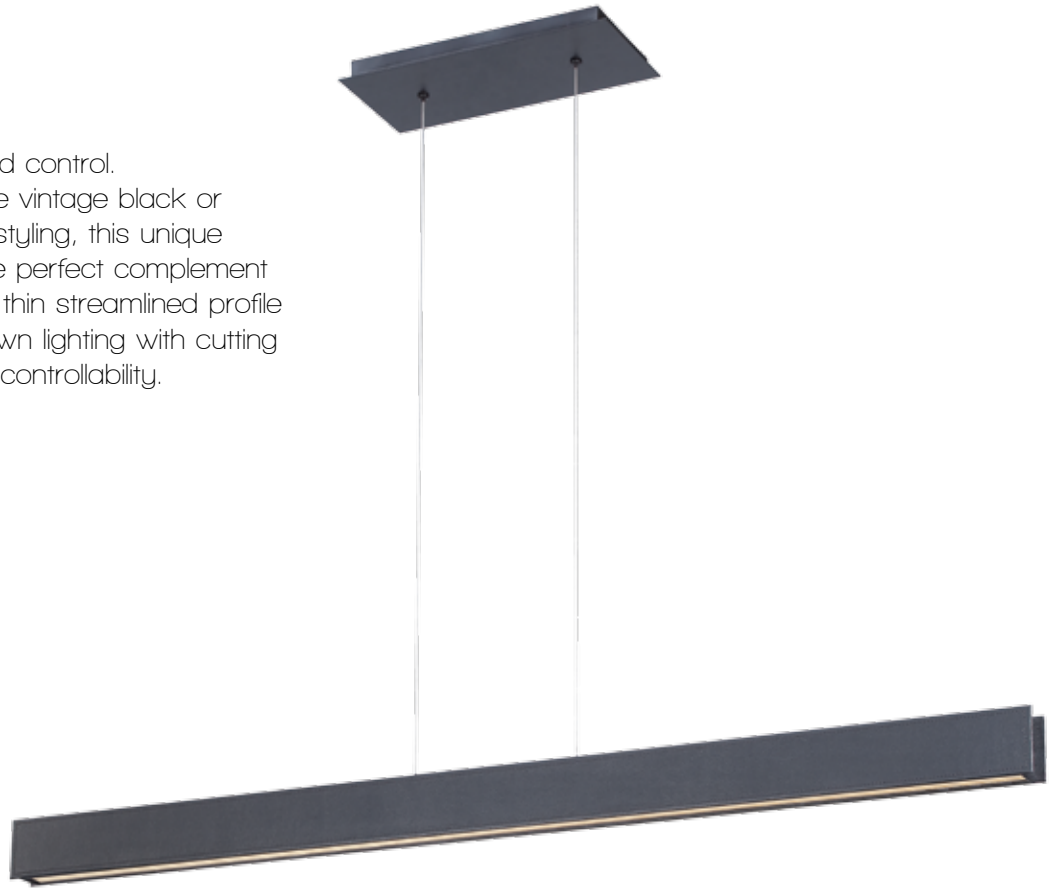



Black

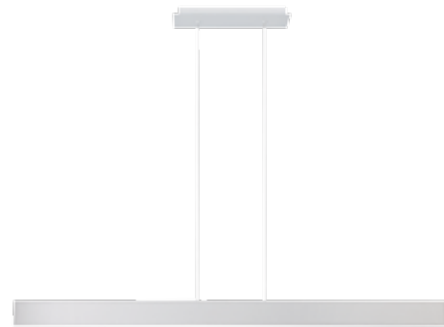


White

- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Transformer located in canopy
- Replaceable LED module
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-51542	42"	49W	120V	3750	1700	BK Black  WT White 

Example: **PD-51542-WT**

For 277V special order, add an "F" before the finish: **PD-51542F-BK**

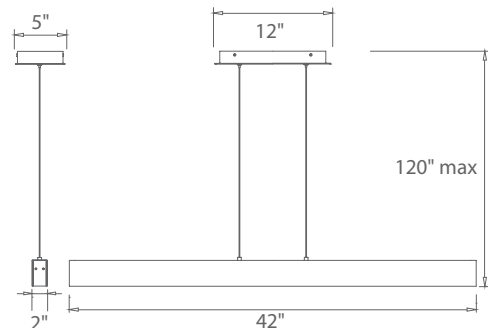




Davos

A modern work of art. The sleek LED design in an ultra-thin profile and automotive gloss finishes balances cutting-edge style and substance. Destined to become a recognizable icon that astonishes.



- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers*
- Transformer located in canopy
- Replaceable LED module
- 277V option available special order
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-51645	45"	49W	120V	3750	1700	EB Ebony Black FR Ferrari Red PW Pearl White TT Titanium

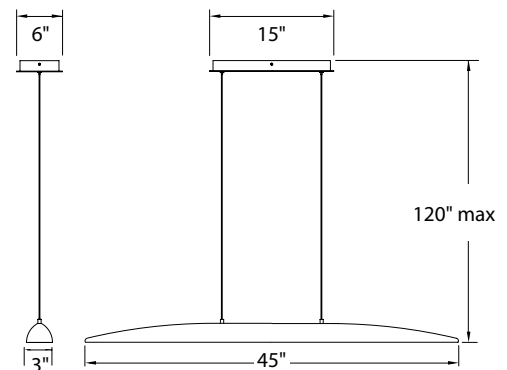

Example: **PD-51645-EB**
 For 277V special order, add an "F" before the finish: **PD-51645F-PW**





Acid

Surrealistic droplets of metallic liquid artfully suspended. Powerful LED downlights concealed within these chrome-plated metal shades provide functional illumination comparable to halogen MR16s. String individually or drop them in clusters for the full mind-blowing experience.



- ETL & cETL damp location listed
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- Full range dimming when used with compatible dimmers*
- 70,000 hour potential life
- Color Temp: 3000K
- CRI: 90

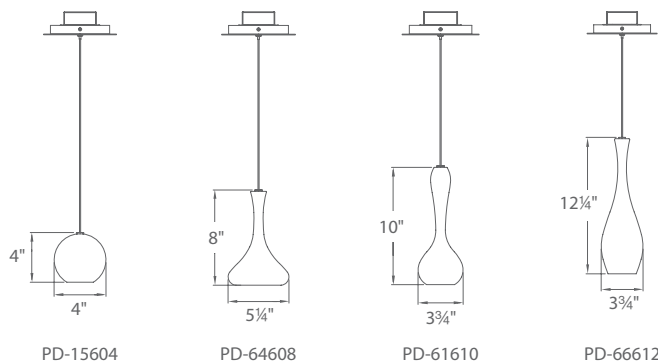


Model	Wattage	LED Lumens	Delivered Lumens	Finish
PD-15604	11W	640	485	PN Polished Nickel 
PD-64608		690	580	
PD-61610		670	495	
PD-66612		665	490	

Example: **PD-15604-PN**

ACID

p.236

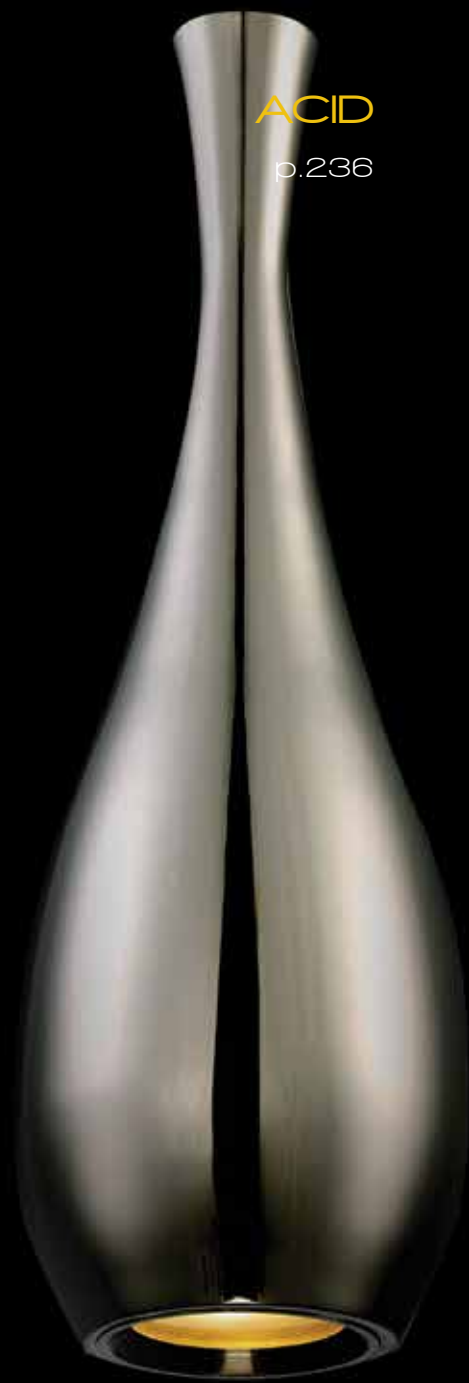



Magic

Gloriously sparkly stalks of Piastra crystal alluringly remarkable both as a slender, individual pendant or as a 21-light chandelier with customizable proportions.




- See pages 63-64 for complementary 1 light & 2 light sconces
- Cylindrical crystalized art glass shade
- ETL & cETL damp location listed
- Driver located in canopy
- Universal driver (120V-220V-277V)
- Cylindrical crystalized art glass shade
- Full range dimming when used with compatible dimmers*
- 75,000 hour potential life
- Color Temp: 3000K
- CRI: 90

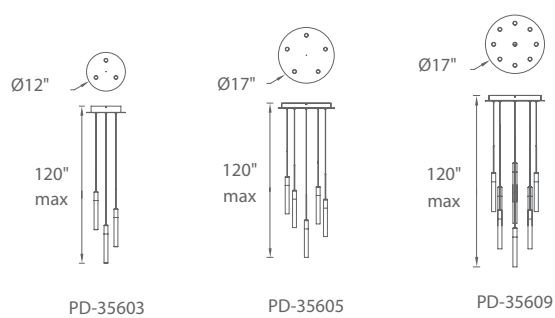


Model	# of lights	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-35603	3 lights	16.5W		673	620	PN Polished Nickel 
PD-35605	5 lights	26.5W	120V-220V-277V	1122	1033	
PD-35609	9 lights	47.5W		2020	1858	


Example: **PD-35603-PN**

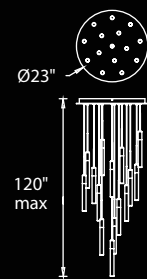

PD-35615

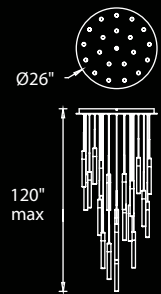

PD-35621

Model	# of lights	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-35615	15 lights	79.5W	120V-220V-277V	3366	3097	PN Polished Nickel 
PD-35621	21 lights	110W		4713	4336	


Example: **PD-35615-PN**


Magic

Gloriously sparkly stalks of Piastra crystal alluringly remarkable both as a slender, individual pendant or as a 21-light chandelier with customizable proportions.




- See page 63-64 for complementary 1 light & 2 light sconces
- Cylindrical crystalized art glass shade
- ETL & cETL damp location listed
- Driver located in canopy
- Universal driver (120V-220V-277V)
- Cylindrical crystalized art glass shade
- Full range dimming when used with compatible dimmers*
- 75,000 hour potential life
- Color Temp: 3000K
- CRI: 90

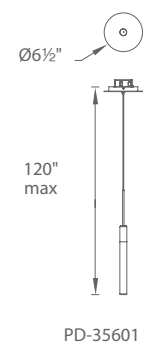


Model	# of lights	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-35601	1 light	5.5W	120V-220V-277V	225	207	PN Polished Nickel 


Example: **PD-35601-PN**

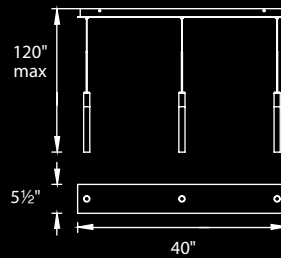

PD-35603L

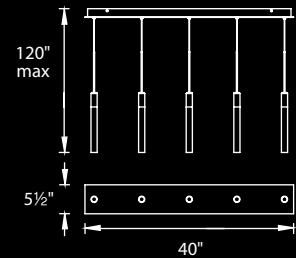

PD-35605L

Model	# of lights	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-35603L	3 linear	16.5W	120V-220V-277V	673	620	PN Polished Nickel 
PD-35605L	5 linear	26.5W		1122	1033	

Example: **PD-35603L-PN**

Soleil

Old world craftsmanship embraces modern aesthetics. An oversized medallion of Piastra art glass illuminated from within a spun metal frame of striking finishes for an incomparable designer look.



Light Bronze




White



Brushed Nickel

- ETL & cETL damp location listed
- Piastra glass diffuser
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Replaceable LED module
- 277V option available special order
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-51418	18"	28W	120V	2025	770	BN <i>Brushed Nickel</i> LB <i>Light Bronze</i> WT <i>White</i>

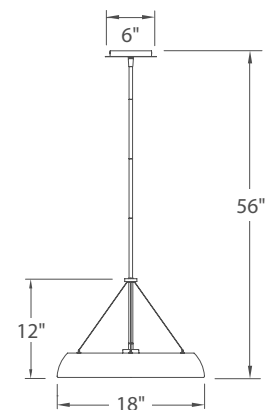

Example: **PD-51418-LB**

For 277V special order, add an "F" before the finish: **PD-51418F-LB**

Soleil

p.242




A WAC Lighting Company




Ethereal

Capturing your imagination and fulfilling dreams, this striking pendant appears lighter than its volume implies. Designed with mouth blown clear glass and an intricately detailed Piastra glass insert that illuminates with energy efficient LEDs for beautiful ambience.

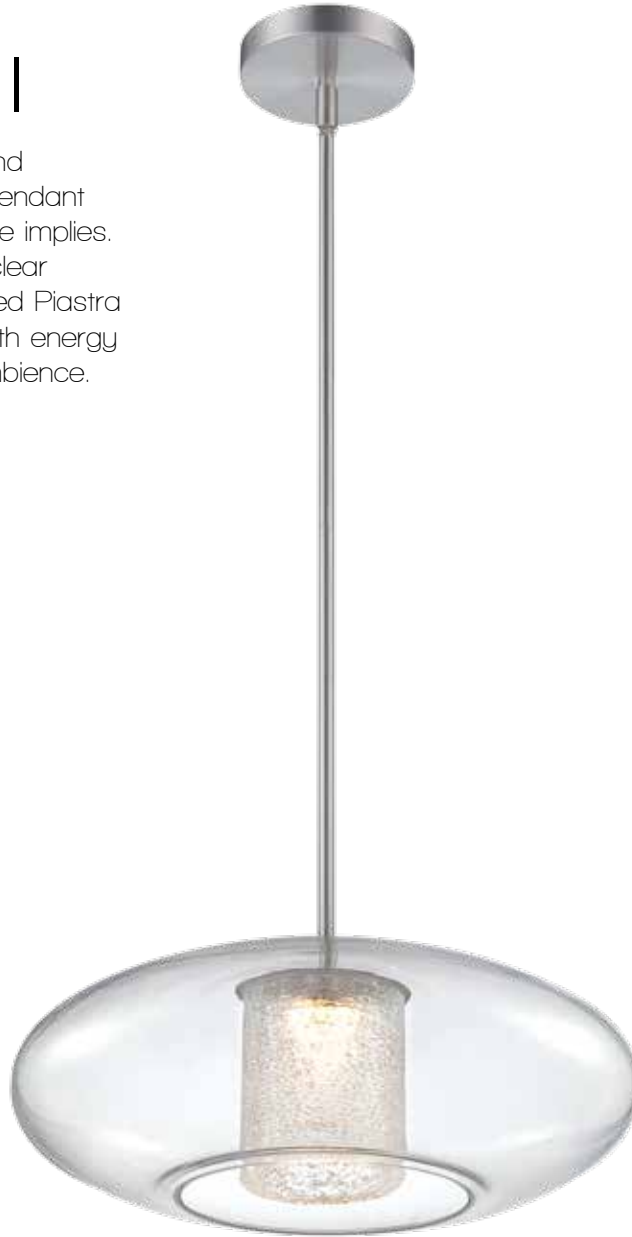


- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Hang straight swivel
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- Full range dimming when used with compatible dimmers*
- Transformer located in canopy
- Replaceable LED module
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-51218	18"	9W	120V	625	405	AL <i>Brushed Aluminum</i> 

Example: **PD-51218-AL**

For 277V special order, add an "F" before the finish: **PD-51218F-AL**

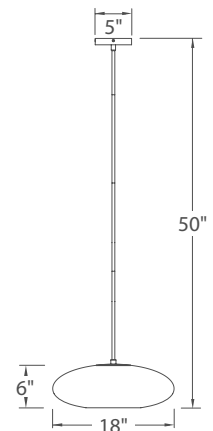





Swing

A playful swing. Creative application of LED technology and luminaire design sparkle in a chrome framed multi-faceted block of art glass. Suspend in multiples over a bar or counter to make a dramatic statement.



- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Up & down light
- Hang straight swivel
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- Full range dimming when used with compatible dimmers*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

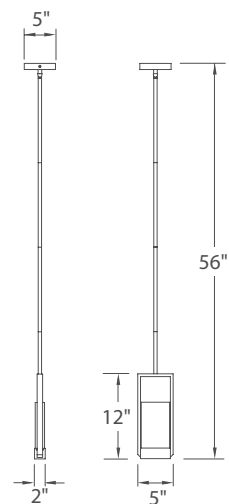

Model	Width	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-52512	5"	11W	120V	830	535	CH Chrome 

Example: **PD-52512-CH**





Punk

Modern with a slight edge. Punk orbs combine shiny chrome with soft opal glass in a variety of sizes. Simple to incorporate and endure the test of time.



- See page.249 for complementary flush mount & wall sconces
- ETL & cETL damp location listed
- Hang straight swivel
- CEC Title 24 Compliant
- Mouth blown etched opal glass
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- Full range dimming when used with compatible dimmers*
- 50,000 hour potential life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

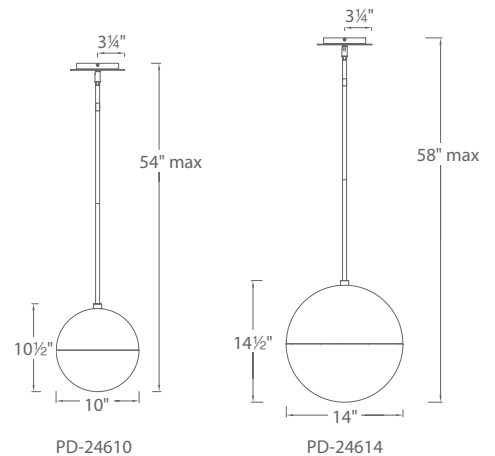

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-24610	10"	18W	120V-220V-277V	1451	758	PN Polished Nickel 
PD-24614	14"	30W		2527	1563	

Example: **PD-24610-PN**

For 2700K add "-27"; 3500K add "-35" before the finish: **PD-24610-35-PN**

Punk



A WAC Lighting Company




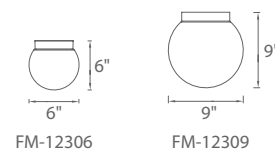
Punk

Half empty or half full. Punk orbs combine shiny chrome with soft opal glass in a variety of sizes and coordinating flush mounts or sconces. Simple to incorporate and endure the test of time.



- Wall or ceiling mount available
- ETL & cETL damp location
- CEC Title 24 Compliant
- Aluminum construction with mouth blown etched opal glass
- Full range dimming when used with compatible dimmers*
- Listed for use in closets
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available *special order*
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-12306	6"	9.5W	120V	800	680	PN Polished Nickel 
FM-12309	9"	18W		1600	1428	



Example: **FM-12306-PN**

For 277V special order, add an "F" before the color temperature: **FM-12306F-PN**

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-12306-35-PN**






Loft

Understated simplicity and versatility to complement a broad range of interior schemes. Streamlined opal glass diffusers and fashionable back plates epitomize a polished aesthetic and contemporary design for baths and hallways.



- Flush mounts to ceiling or wall as sconce
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Mouth blown etched opal glass
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Replaceable LED module
- 277V option available *special order*
- 60,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available *special order*
- CRI: 90

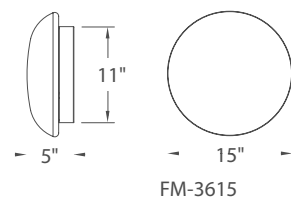

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
FM-3610	10"	21W	120V	1350	585	WT <i>White</i> 
FM-3615	15"	28W		2025	880	

Example: **FM-3610-WT**

For 277V special order, add an "F" before the finish: **FM-3615F-WT**

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-3610-27-WT**





Dune

A luminous centerpiece for any room. Mouth blown etched opal glass with an intriguing subtle profile. Perfect for wall and ceiling illumination. Full range dimming control. Available in two sizes.



- Wall or ceiling mount
- ETL & cETL damp location listed
- Transformer located in outlet box
- Listed for use in closets
- Full range dimming when used with compatible dimmers*
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available *special order*
- CRI: 90

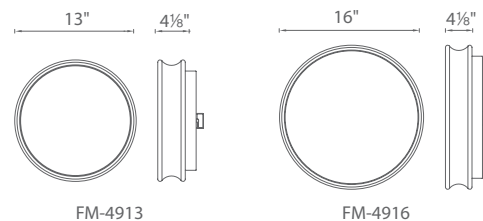

Model	Diameter	Wattage	Voltage	LED		Finish
				Lumens	Delivered Lumens	
FM-4913	13"	26.5W	120V	1400	880	BN Brushed Nickel 
FM-4916	16"	31W		1573	1085	

Example: **FM-4916-BN**

For 277V special order, add an "F" before the finish: **FM-4913F-BN**

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-4916-27-BN**

Dune

p.254




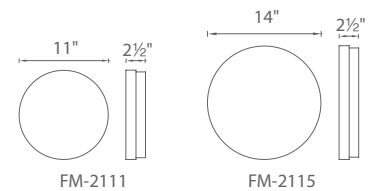
Circa

Bright ambient illumination evokes from a clean, round white glass that fits perfectly into handsome finished hardware to match seamlessly with nearly any décor in residential and commercial settings. Advanced LED technology delivers high output and CRI.



- Illuminates evenly without hot spots or shadowing
- Wall or ceiling mount available
- ETL & cETL wet location listed, IP44
- ADA compliant, low profile design
- Listed for use in closets
- CEC Title 24 Compliant
- Replaceable LED module
- Transformer located in outlet box
- Full range dimming when used with compatible dimmers*
- 277V option available for FM-2111 special order
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-2111-30**	11"	31W	120V	1635	940	TT Titanium 
FM-2115-30	14"	25W		2355	1050	



Example: **FM-2111-30-TT**

For 277V special order, add an "F" before the color temperature: **FM-2111F-30-TT

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-2115-27-TT**

Circa

p.256




Sprocket


Scalloped pressed glass acid etched in soft white. A ceramic white interior ensures even illumination. Low profile design dims beautifully and renders exquisite color with extended life.




- Illuminates evenly without hotspots or shadowing
- Wall or ceiling mount
- Damp location listed
- Transformer located in outlet box
- Listed for use in closets
- Full range dimming when used with compatible dimmers*
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available *special order*
- CRI: 90



FM-4809



FM-4812

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-4809-30	9"	27W	120V	1392	695	BN <i>Brushed Nickel</i> 
FM-4812-30	12"	31W	120V	1646	1085	

Example: **FM-4812-30-BN**



For 277V special order, add an "F" before the color temperature: **FM-4812F-30-BN**

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-4812-27-BN**




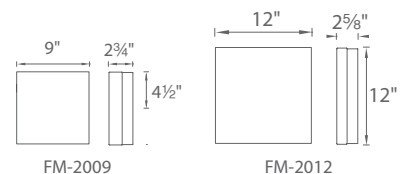
Matrix

Designed and crafted with clean square geometric styling, this sleek and simple ceiling luminaire blends with any residential or commercial setting. Optimal LED illumination delivers uniform bright lighting in nearly any room. Smooth thick wall etched glass is complemented with a stunning new Titanium finish.

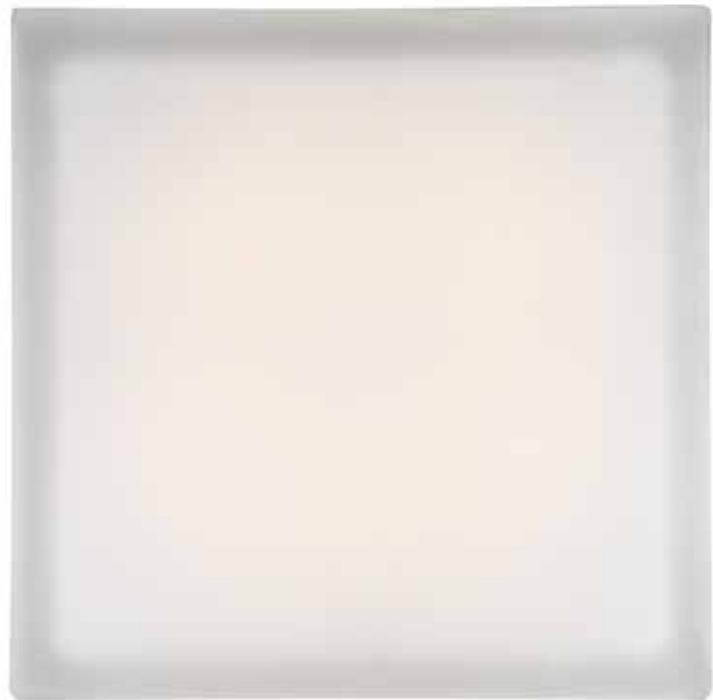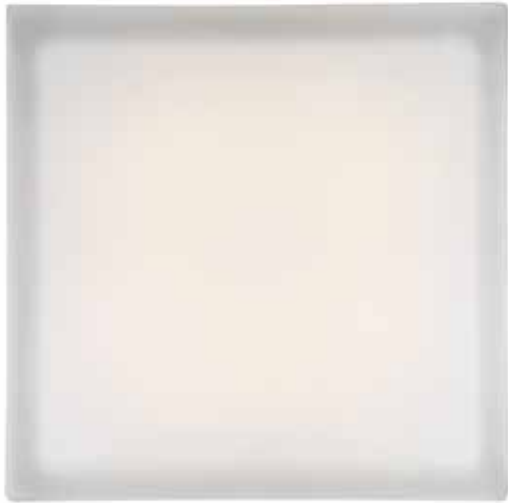

- Illuminates evenly without hot spots or shadowing
- Durable stamping aluminum canopy, with thick opal glass
- Wall or ceiling flush mount
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Listed for use in closets
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- Replaceable LED module
- 277V option available for FM-2009 special order
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-2009-30**	9"	31W	120V	1376	910	TT Titanium 
FM-2012-30	12"	25W		2200	985	



Example: **FM-2009-30-TT**

For 277V special order, add an "F" before the color temperature: **FM-2009F-30-TT

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-2009-27-TT**



Razor

A matching complement to the family of Razor LED wall luminaires, this impressive flush mount provides bright and beautiful lighting for task and general applications in residential and hospitality environments. Thick walled glass enhanced with detailed crosshatch metal hardware also works well as an ADA sconce.




Bronze



Stainless Steel

- ADA compliant when mounted on walls
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Listed for use in closets
- Full range dimming when used with compatible dimmers*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

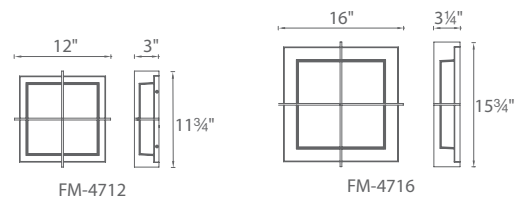

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-4712	12"	21.5W	120V	1560	725	BZ Bronze
FM-4716	16"	40W		2800	1160	SS Stainless Steel

Example: **FM-4712-SS**




Neo

Marvel at this ultra-thin flush mount/sconce collection which adapts the latest technology from the television and display industry, to create phenomenal light output from a half inch deep luminaire. The amazing uniform light is free from glare, hot spots and color-over-angle changes.



- See pages 31-32 for complementary linear sconces or vanities
- ETL & cETL damp location listed
- Flush mounts to ceiling or wall as sconce
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers*
- Transformer located in outlet box
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Width	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
FM-3712	12"	25W	120V	1940	1135	AL <i>Brushed Aluminum</i> 



Example: **FM-3712-AL**

For 277V special order, add an "F" before the finish: **FM-3712F-AL**



LED Task





Disc

Inspired by the sense of balance and stability of the well-rounded. The high-tech LED luminaire features a simple fingertip touch dimmer at the base for ease and convenience, staying true to its style.



- ETL & cETL damp location listed
- CEC Title 20 Compliant
- Fingertip touch dimming
- Universal voltage (120V-220V)
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85


Ferrari Red

Brushed Aluminum

Black

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1610	12W	120V-220V	780	624	AL <i>Brushed Aluminum</i> BK <i>Black</i> FR <i>Ferrari Red</i>

Example: **TL-1610-BK**

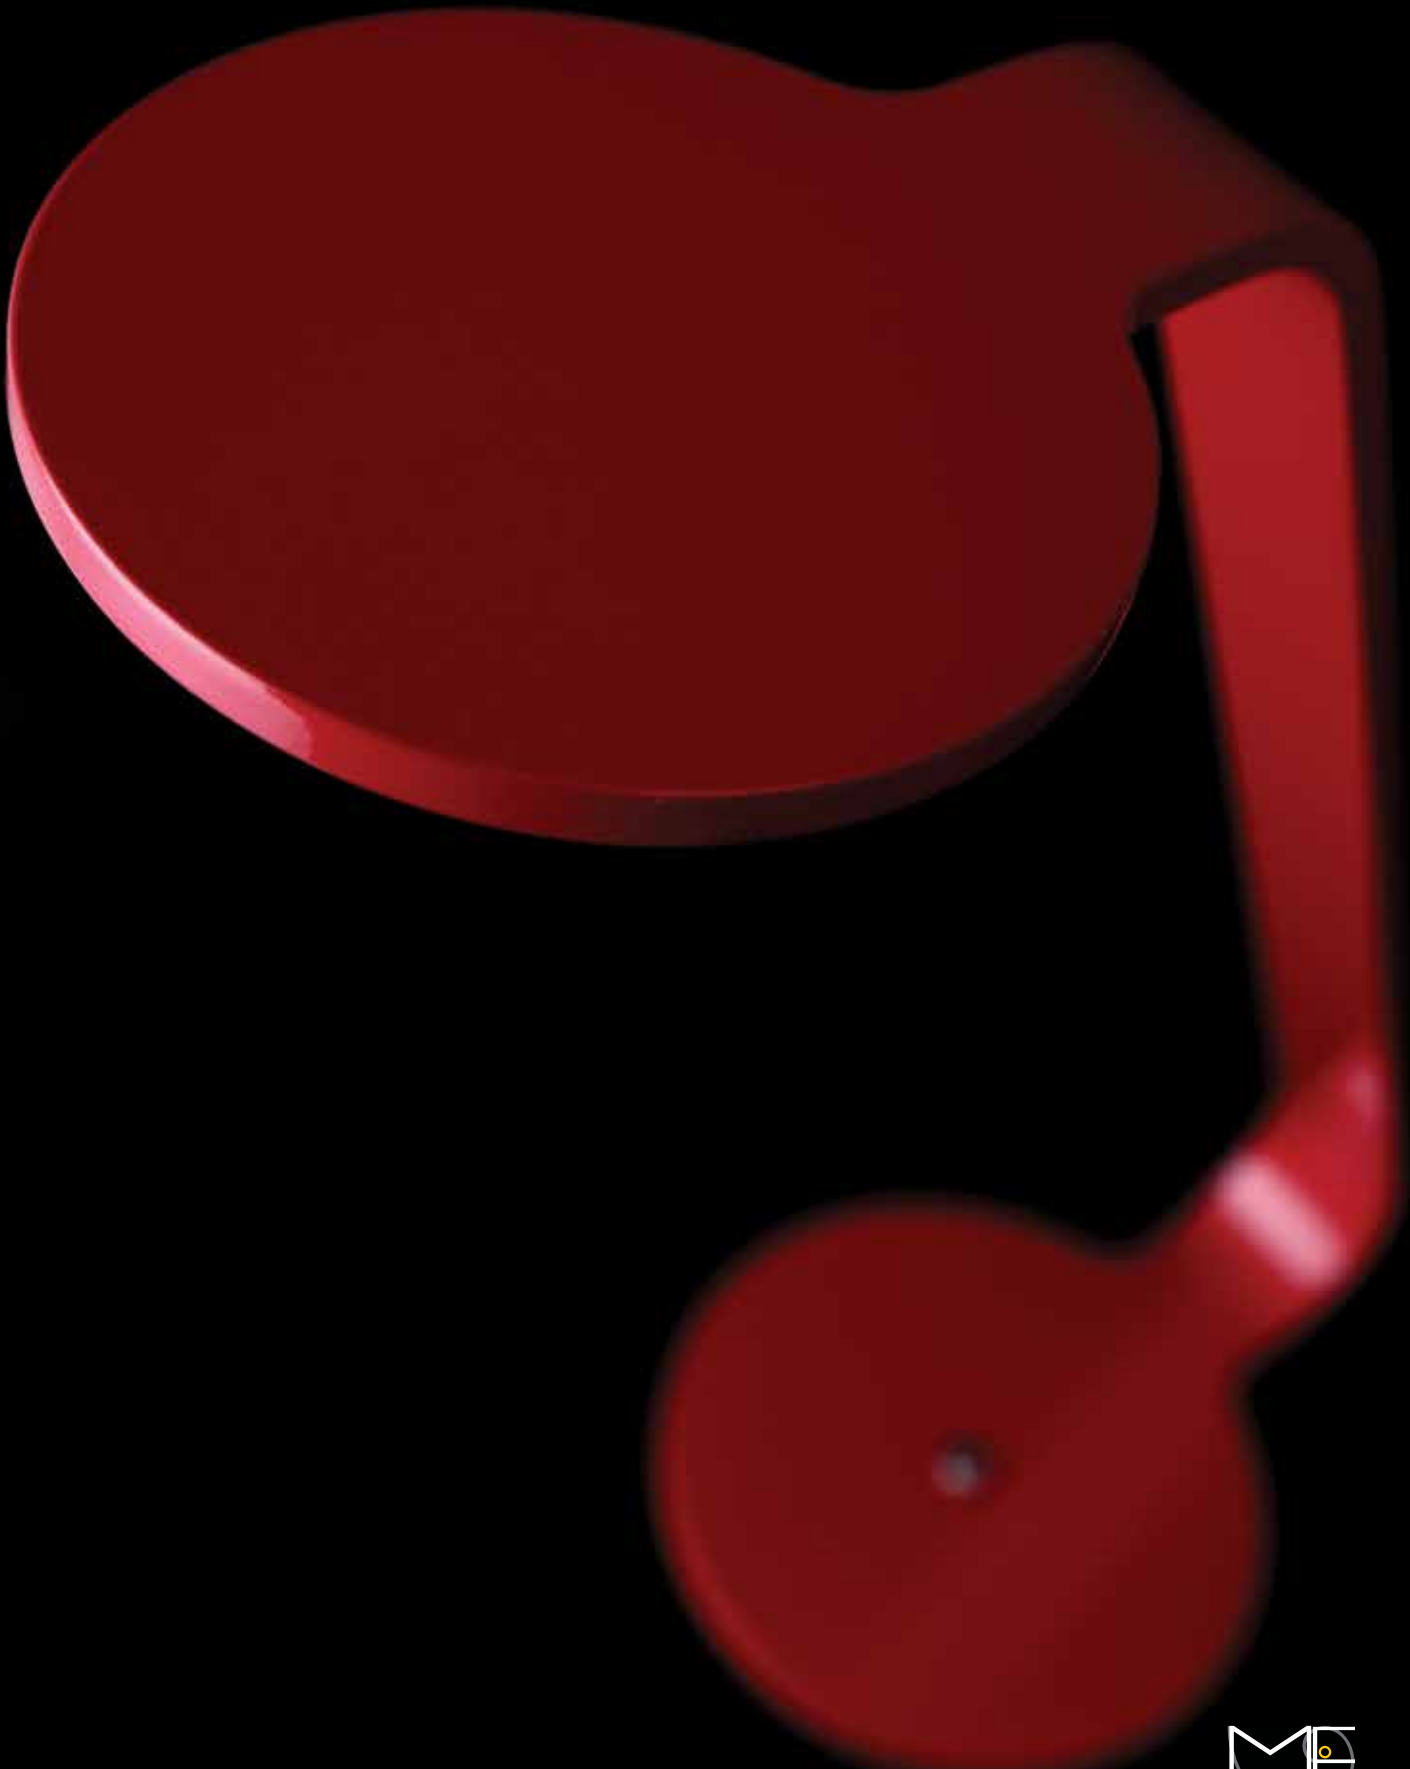

Boxie

Minimalism as an art form. This modern task light adjusts smoothly and easily with grace and sophistication while integrating an LED module and movable arm. Dimming is easy with a fingertip touch dimmer. Perfect for reading and other task applications.



- Damp location listed
- Fingertip touch dimming
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1210	12W	120V	900	815	AL <i>Brushed Aluminum</i> BK <i>Black</i> FR <i>Ferrari Red</i>

Example: **TL-1210-BK**

Boxie

p.270



Suspension

A progressive design reminiscent of suspension bridges, cranes and levers. The Suspension task lamp performs with a 180 degree adjustable arm with high powered LED module, and features both a simple fingertip touch dimmer at the base and a USB power connector that enables you to recharge accessories.



- Built-in USB charging outlet
- ETL & cETL damp location listed
- CEC Title 20 Compliant
- Fingertip touch dimming
- Universal voltage (120V-220V)
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85


Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1710	12W	120V-220V	485	352	TT <i>Titanium</i> BK <i>Black</i>

Example: **TL-1710-TT**



Suspension

A progressive design reminiscent of suspension bridges, cranes and levers. The Suspension floor lamp features a 180 degree adjustable arm with high powered LED module and a conveniently located fingertip touch dimmer.

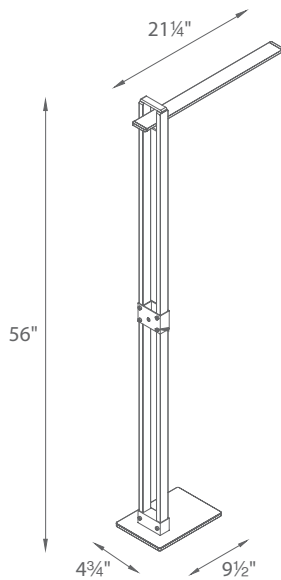

- ETL & cETL damp location listed
- CEC Title 20 Compliant
- Fingertip touch dimming
- Universal voltage (120V-220V)
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85



Black



Titanium

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FL-1750	12W	120V-220V	485	352	TT <i>Titanium</i> BK <i>Black</i>

Example: **FL-1750-TT**


Suspension

p.274




Dove

A peaceful simple folded form transformed into a lovely modern task light. The adjustable head with high powered LEDs provide functional lighting, and features both fingertip touch dimmer and USB power connector at the base.

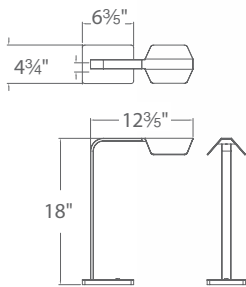

- Built-in USB charging outlet
- ETL & cETL damp location listed
- CEC Title 20 Compliant
- Fingertip touch dimming
- Universal voltage (120V-220V)
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

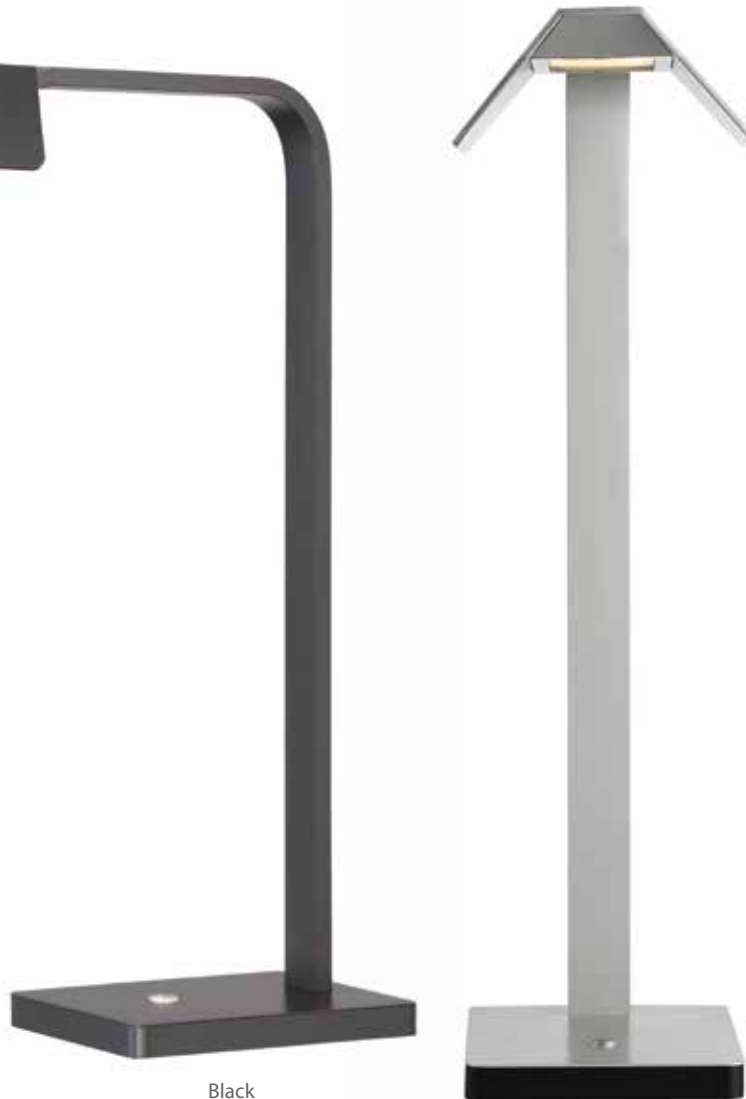

Black


Titanium

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1510	10W	120V-220V	464	402	TT <i>Titanium</i> BK <i>Black</i>

Example: **TL-1510-TT**


Dove

p.276

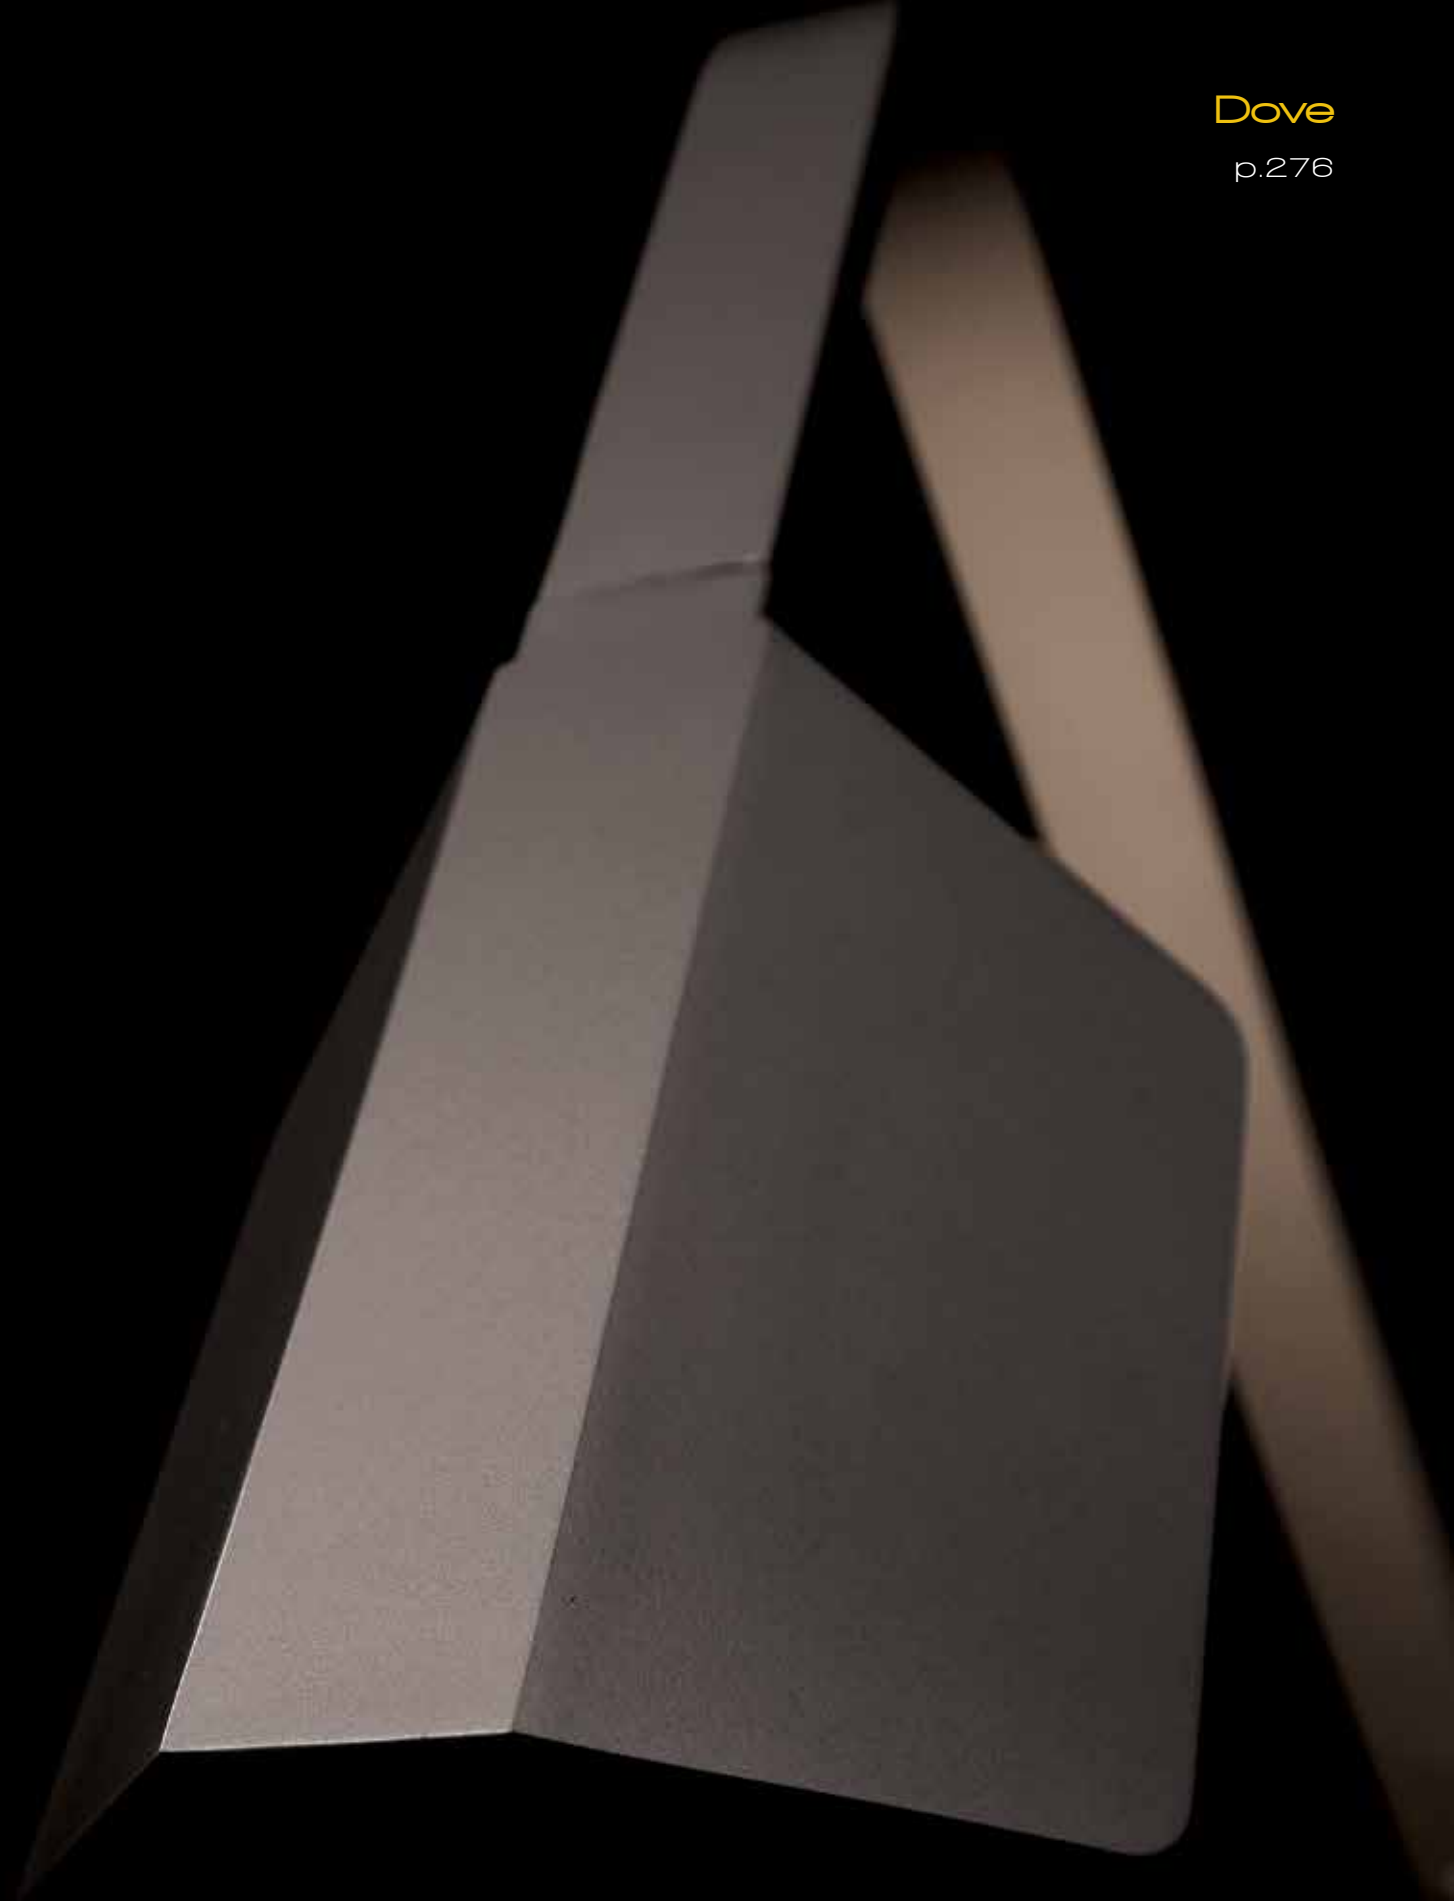

Dove

A peaceful simple folded form transformed into a lovely modern task floor lam. The adjustable head with high powered LEDs provide functional lighting, and features a conveniently located fingertip touch dimmer.

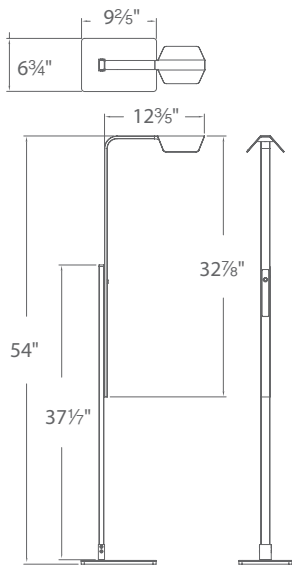

- ETL & cETL damp location listed
- CEC Title 20 Compliant
- Fingertip touch dimming
- Universal voltage (120V-220V)
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85



Black



Titanium

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FL-1550	10W	120V-220V	464	402	TT Titanium BK Black

Example: **FL-1550-TT**

Dove

p.278



Balance

Flexible versatility greets a chic composition. The adjustable swing arm fully dimmable LED luminaire blends function with vibrant aesthetics. With fingertip touch dimming, precision adjustment is available with easy access and control for desk and table tops.



- CEC Title 20 Compliant
- ETL & cETL damp location listed
- Fingertip touch dimming on base
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85


Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1010	11W	120V	630	455	AL <i>Brushed Aluminum</i> BK <i>Black</i> MC <i>Multicolor</i>

Example: **TL-1010-MC**



Balance

Flexible versatility greets a chic composition. The adjustable swing arm fully dimmable LED luminaire blends function with vibrant aesthetics. With fingertip touch dimming, precision floor lamp adjustment is available with easy access and control. Balance delivers robust illumination and remains cool to the touch.

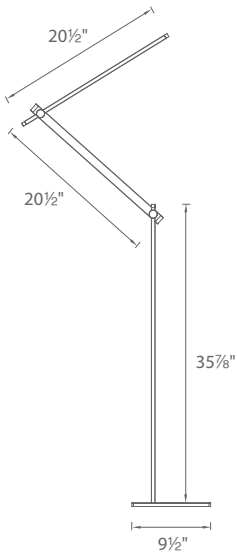


- CEC Title 20 Compliant
- ETL & cETL damp location listed
- Fingertip touch dimming on base
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85



Brushed Aluminum

Multicolor

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FL-1050	11W	120V	630	455	AL <i>Brushed Aluminum</i> BK <i>Black</i> MC <i>Multicolor</i> 

Example: **FL-1050-BK**


Balance

p.282



Flat

This minimalist, modern task lamp incorporates an LED module with an adjustable arm that makes it the ideal luminaire for desktops, countertops and other work and reading surfaces. Ideal for small spaces, this lamp folds neatly out of the way. This compact, high-tech luminaire is fully dimmable, with a fingertip touch dimmer and ease of operation.



- CEC Title 20 Compliant
- ETL & cETL damp location listed
- Fingertip touch dimming on base
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Brushed Aluminum

Black

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1110	12W	120V	943	785	AL <i>Brushed Aluminum</i> BK <i>Black</i>


Example: **TL-1110-BK**

Flat
p.284



Flat

This minimalist, modern floor lamp flips up with an LED module utilizing an adjustable arm while staying true to its style. Great for small spaces, this lamp folds up for storage. The compact, high-tech luminaire operates optimally on floors in fine homes and boutique hotels. Fully dimmable, with a fingertip touch dimmer conveniently located for ease and convenience.

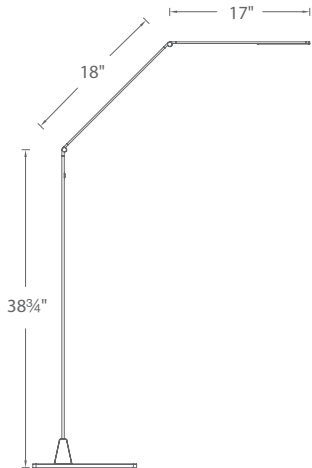

- CEC Title 20 Compliant
- ETL & cETL damp location listed
- Fingertip touch dimming
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85



Brushed Aluminum


Black

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FL-1150	12W	120V	943	785	AL Brushed Aluminum BK Black

Example: **FL-1150-BK**

Flat

p.286

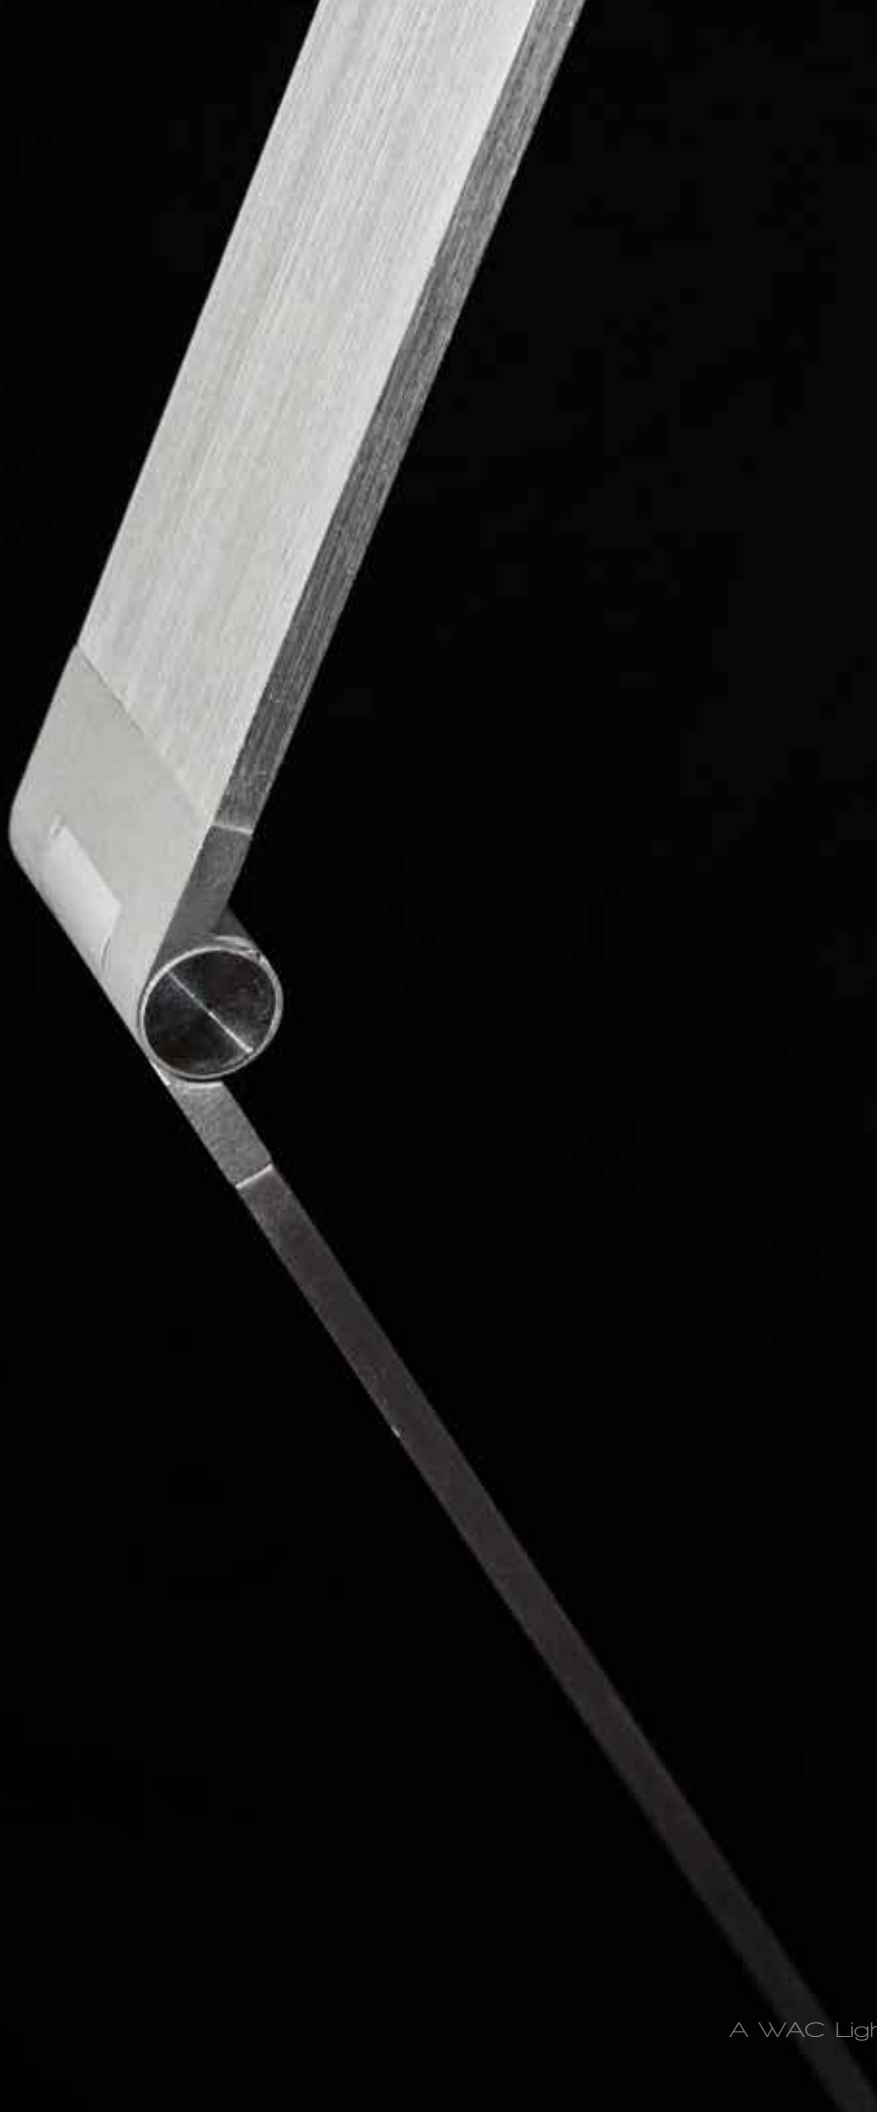

Numerical Index

F			
FL-1050	281	WS-2818	153
FL-1150	285	WS-2909	21
FL-1550	277	WS-2917	21
FL-1750	273	WS-3019	51
FM-1410	219	WS-3028	51
FM-1414	219	WS-3037	51
FM-2009	259	WS-3111	21
FM-2012	217, 259	WS-3115	21
FM-2111	255	WS-3120	23
FM-2115	215, 255	WS-3127	23
FM-3610	251	WS-3139	23
FM-3615	251	WS-3218	37
FM-3712	263	WS-3226	37
FM-4712	261	WS-3240	37
FM-4716	261	WS-3326	41
FM-4809	257	WS-3338	41
FM-4812	257	WS-3418	43
FM-4913	253	WS-3428	43
FM-4916	253	WS-3436	43
FM-12306	249	WS-3611	25
FM-12309	249	WS-3618	25
FM-W9100	211	WS-3624	25
FM-W9200	213	WS-3632	25
		WS-3712	31
		WS-3718	31
		WS-3724	31
		WS-3736	31
		WS-3919	15
		WS-3925	15
		WS-3937	15
		WS-6028	19
		WS-6036	19
		WS-6045	19
		WS-6214	47
		WS-6224	47
		WS-6236	47
		WS-6509	17
		WS-6519	17
		WS-6528	17
		WS-6537	17
		WS-6826	49
		WS-6838	49
		WS-11109	97
		WS-11218	107
		WS-11310	67
		WS-11311	69
		WS-11511	105
		WS-11522	105
		WS-11606	93
		WS-12118	59
		WS-12620	63
		WS-12622	63
		WS-12721	61
		WS-13619	9
		WS-13630	9
		WS-13641	9
		WS-22611	81
		WS-27610	103
		WS-28616	75
		WS-29621	85
		WS-30612	71, 229
		WS-30618	71, 229
		WS-30624	71, 229
		WS-31618	79
		WS-39610	95
		WS-41512	7
P			
PD-15604	235		
PD-24610	247		
PD-24614	247		
PD-34620	223		
PD-35601	239		
PD-35603	237		
PD-35603L	240		
PD-35605	237		
PD-35605L	240		
PD-35609	237		
PD-35615	238		
PD-35621	238		
PD-51218	243		
PD-51318	227		
PD-51418	241		
PD-51542	231		
PD-51645	233		
PD-52512	245		
PD-52718	225		
PD-52724	225		
PD-61610	235		
PD-64608	235		
PD-66612	235		
PD-W1915	207		
PD-W74615	209		
PD-W99620	205		
T			
TL-1010	279		
TL-1110	283		
TL-1210	269		
TL-1510	275		
TL-1610	267		
TL-1710	271		
W			
WS-1424	33		
WS-1436	33		



WS-41518	7	WS-W5222	145
WS-41528	7	WS-W5411	167
WS-41536	7	WS-W5416	167
WS-44622	57	WS-W5516	131
WS-45512	13	WS-W5521	131
WS-45522	13	WS-W5620	185
WS-45531	13	WS-W9101	199
WS-45541	13	WS-W9102	199
WS-46518	45	WS-W9201	201
WS-46527	45	WS-W9202	201
WS-46537	45	WS-W21511	183
WS-47511	11	WS-W21516	183
WS-47520	11	WS-W21521	183
WS-47528	11	WS-W22510	181
WS-47535	11	WS-W22514	181
WS-50526	5	WS-W22520	181
WS-50538	5	WS-W27515	157
WS-66641	65	WS-W28514	175
WS-70526	3	WS-W28516	175
WS-70538	3	WS-W28521	175
WS-73660	113	WS-W29509	129
WS-78609	87	WS-W29512	129
WS-80618	29	WS-W30507	179
WS-80624	29	WS-W30509	179
WS-80636	29	WS-W30511	179
WS-83607	83	WS-W31509	161
WS-86615	89	WS-W31511	161
WS-89612	99	WS-W32512	177
WS-91618	39	WS-W32516	177
WS-91628	39	WS-W33518	187
WS-92616	55	WS-W34517	155
WS-94614	91	WS-W34524	155
WS-95614	77	WS-W35512	147
WS-96609	101	WS-W35516	147
WS-97614	109	WS-W35520	147
WS-98608	73	WS-W36515	151
WS-W1110	195	WS-W36521	151
WS-W1116	195	WS-W37520	149
WS-W1122	195	WS-W37622	121
WS-W1408	35, 117	WS-W38608	125
WS-W1412	33, 117	WS-W38610	125
WS-W1414	35, 117	WS-W60610	123
WS-W1420	35, 117	WS-W60616	123
WS-W1611	143	WS-W62608	173
WS-W1616	143	WS-W62610	173
WS-W1621	143	WS-W63608	159
WS-W1718	127	WS-W68612	139
WS-W1724	127	WS-W68618	139
WS-W1815	165	WS-W68627	139
WS-W1821	165	WS-W69620	137
WS-W1911	171	WS-W69628	137
WS-W1915	171	WS-W70612	197
WS-W1917	171	WS-W71618	189
WS-W2216	135	WS-W71628	189
WS-W2223	135	WS-W72611	169
WS-W2308	193	WS-W72614	169
WS-W2312	193	WS-W73608	115
WS-W2316	193	WS-W73614	115
WS-W2408	191	WS-W73620	115
WS-W2412	191	WS-W73660	113
WS-W2416	191	WS-W74612	163
WS-W2712	141	WS-W74615	163
WS-W2717	141	WS-W75618	119
WS-W5116	133	WS-W81619	27
WS-W5122	133	WS-W81625	27
WS-W5216	145	WS-W81637	27



Alphabetical Index

Abstract	75	Muse	59
Abyss	81	Neo	31, 263
Acid	235	Nia	95
Aegean	13	Oath	189
Arc	41	Omni	147
Aries	107	Origami	157
Arko	5	Origin	159
Asgard	109	Osso	87
Avalon	57	Palladian	67
Bahn	49	Pandora	179
Balance	279	Pasadena	173
Balthus	175	Phantom	143
BDSM	231	Polar	37
Berkley	183	Punk	247
Big V	137	Quantum	7
Blade	105	Quatrain	73
Blaze	71, 229	Rain	191
Bloc	201, 213	Razor	11, 261
Boule	161	Reflectance	85
Boxie	269	Rhythm	97
Burlington	169	Rush	83
Chill	79	Sabre	27
Circa	123, 215, 255	Secret	99
Circle	123	Seismic	45
Cloud	43	Sentinel	151
Davos	233	Sheridan	47
Dawn	135	Skyscraper	139
Deco	165	Slat	29
Digitus	187	Slide	103
Disc	267	Sofia	9
Dove	275	Soleil	241
Dune	253	Spire	141
Elessar	65	Sprocket	257
Elevation	145	Square	125
Escher	77	Stencil	39
Ethereal	243	Structure	167
Flat	283	Studio	93
Fold	101	Suspense	171, 207
Forq	127	Suspension	271
Framed	113	Swing	245
Fusion	19	Tango	223
Gilt	227	Torch	149
Glacier	17, 61	Twilight	131
Helix	155	Twist	185
Hiline	193	Urban	195
i Beam	91	Vermeil	69
Intersect	119	Vessel	199, 211
Irony	121	Vetri	15
Jedi	153	Virtue	89
Kyoto	181	Vitrine	177
Ledge	33, 117, 219	Vogue	21
Loft	25, 251	Void	133
Lucid	163, 209	Warlock	205
Lumnos	55	Window	129
Magic	63, 237		
Margin	3		
Marimba	225		
Matrix	217, 259		
Maze	51		
Mega	197		



Notes



Notes



