


WAC LIGHTING

2016 JUNE NEW PRODUCT

S U P P L E M E N T

SILO LED





See page 14 for
monopoint option

SILO X10 LED

Power: 10W
Delivered Lumens: Up to 790
CBCP: Up to 2575
Comparable to: 65W MR16
Dimming: 100% - 5% ELV
Input: 120V
Rated Life: 50,000 hours

- Die-cast aluminum construction in a small, and clean design
- Performance luminaire with integral LED and driver
- Powder-coated finishes
- Accommodates one lens or one glare control accessory
- Field replaceable TIR lens for beam control (25° & 35° included)
- ETL & cETL listed

	Track	Model	Beam	Color Temp	CRI	Lumens	CBCP	Finish
	H H Track	2010-930	25°	3000K	90	790	2575	BK Black WT White
	L L Track		AND			790	1545	
	J J/J2 Track		35°					
	HM1 Flexrail1™	2010-930	25°	3000K	90	790	2575	PT Platinum
			AND			790	1545	
			35°					

Example: H-2010-930-WT for 120V Track system HM1-2010-930-PT for Flexrail1™ system

LENS ACCESSORIES


Amber	LENS-11-AMB
Blue	LENS-11-BLU
Green	LENS-11-GRN
Red	LENS-11-RED
Yellow	LENS-11-YEL
Frosted	LENS-11-FR
Spread	LENS-11-SPR
Beam Elongating	LENS-11-BEL

GLARE CONTROL ACCESSORIES

Cross Louver	LENS-11P-CRL-BK
	LENS-11P-CRL-WT
	LENS-11P-CRL-PT
Snoot	LENS-11-SNOOT-BK
	LENS-11-SNOOT-WT
	LENS-11-SNOOT-PT





Adjustable between 15° - 50°

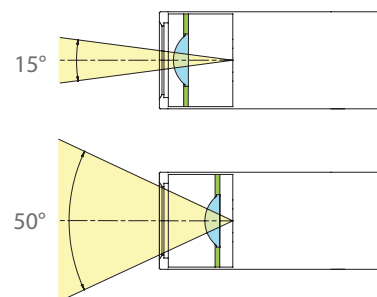

SILO X20 LED

Power: 20W
Delivered Lumens: Up to 920
CBCP: Up to 5715
Comparable to: 75W MR16
Dimming: 100% - 5% ELV
Input: 120V
Rated Life: 50,000 hours

- Continuously adjustable beam angles from 15° to 50°
- Die-cast aluminum construction with rotatable front face
- Performance luminaire with integral LED and driver
- Powder-coated finishes
- Accommodates one lens and one glare control accessory
- ETL & cETL listed

Track		Model	Color Temp		CRI	Beam Position	Lumens	CBCP	Finish	
	H	H Track	2020-930	20W	3000K	90	15°	580	5715	BK Black
	L	L Track					50°	920	1120	WT White
	J	J/J2 Track								
	HM1	Flexrail1™	2020-930	20W	3000K	90	15° 50°	580 920	5715 1120	PT Platinum

Example: H-2020-930-WT for 120V Track system HM1-2020-930-PT for Flexrail1™ system

LENS ACCESSORIES

Amber	LENS-16-AMB
Blue	LENS-16-BLU
Green	LENS-16-GRN
Red	LENS-16-RED
Yellow	LENS-16-YEL
Frosted	LENS-16-FR
Spread	LENS-16-SPR
Beam Elongating	LENS-16-BEL

GLARE CONTROL ACCESSORIES

Cross Louver	LENS-16P-CRL-BK LENS-16P-CRL-WT LENS-16P-CRL-PT
Snoot	LENS-16-SNOOT-BK LENS-16-SNOOT-WT LENS-16-SNOOT-PT



WALL WASH LED

Power: 20W
Delivered Lumens: Up to 925
Comparable to: 20W HID
Dimming: 100% - 5% ELV
Input: 120V
Rated Life: 50,000 hours

- Die-cast aluminum construction
- Powder-coated finishes
- Asymmetrical beam distribution for even wall illumination
- Economical performance luminaire with integral LED and driver
- ETL & cETL listed

	Track	Model		Color Temp	CRI	Lumens	Finish	
	H	H Track	3020W-30	Wall Wash	3000K	90	925	BK Black
	L	L Track						
	J	J/J2 Track						
								WT White
	HM1	Flexrail1	3020W-30	Wall Wash	3000K	90	925	PT Platinum

Example: **H-3020W-30-BK** for 120V Track system **HM1-3020W-30-PT** for Flexrail1™ system


VOLTA 4.5" ARCHITECTURAL LED RECESSED

TITLE 24
California Energy
Commission



Delivered Lumens: Up to 3005
CBCP: Up to 13,410
Comparable to: 70W HID PAR30
ELV Dimming: 100%-5% (120V Only)
0-10V Dimming: 100%-0%
Input: 120-277V
Rated Life: 50,000 hours

- Universal input voltage ranging from (120V-220V-277V)
- Choice of 36W, 25W and 15W power
- Wet location listed standard
- Vertical and horizontal adjustment for accenting and slope ceiling applications
- Optimized cut-off for superior glare control
- Wide range of accessories, including glare control, optic and color lenses
- Field interchangeable optics
- Beam spreads from 15° spot to 60° wide flood

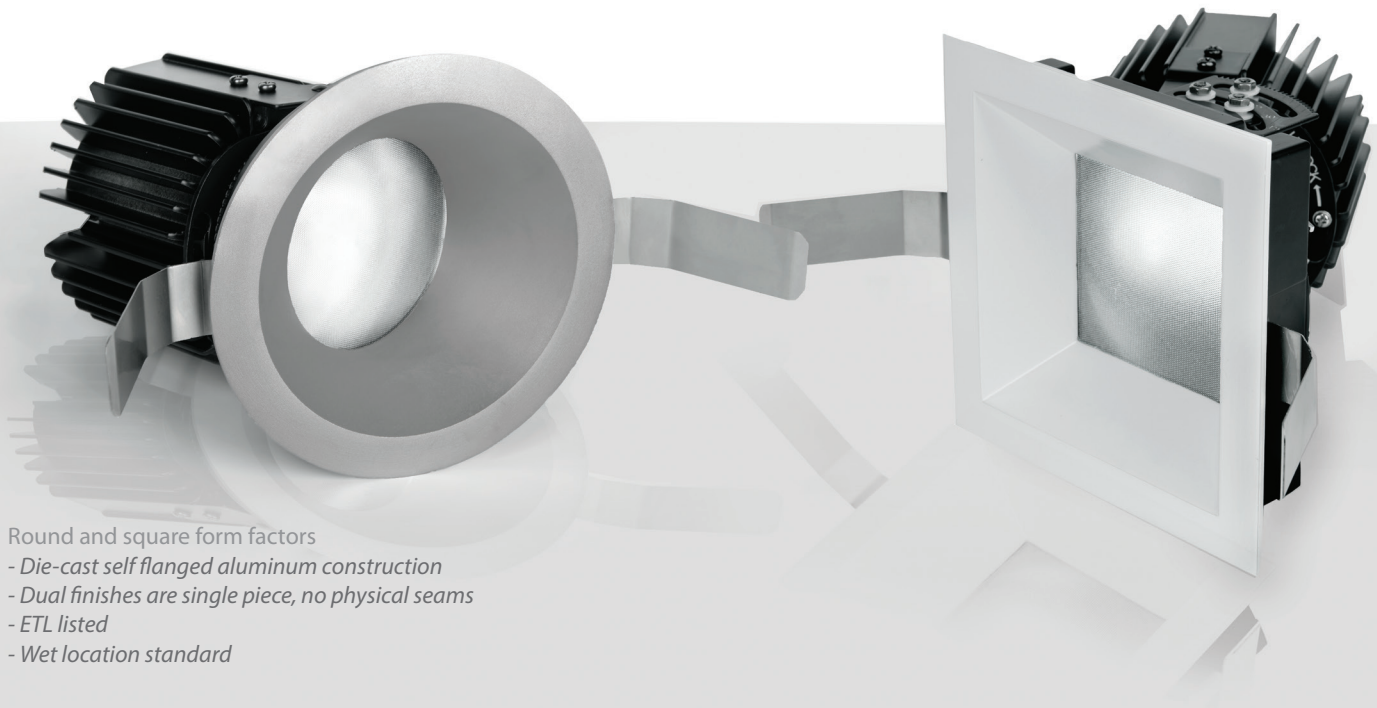


Round and square form factors
 - Die-cast self flanged aluminum construction
 - Dual finishes are single piece, no physical seams
 - ETL listed
 - Wet location standard


Available in five architectural grade finishes




White



Haze



Haze / White



Black / White



Black

DOWNLIGHT



- Maximum lumen delivery
- Superior glare control

SHALLOW REGRESSED DOWNLIGHT



- Increased field angle for reduced scalloping
- Low ceiling and close to wall applications

VOLTA 4.5" ARCHITECTURAL LED RECESSED

ADJUSTABLE



0° position



45° position

- Center beam alignment retained throughout adjustment range
- 0-45° vertical and 365° horizontal lockable hot aiming

WALL WASH



- Innovative bi-directional spread lens
- Engineered for even wall illumination both horizontally and vertically
- Patent Pending design

PRECISION AIMING




0 - 45° vertical lockable hot aiming




365° horizontal lockable hot aiming

BI-DIRECTIONAL SPREAD LENS

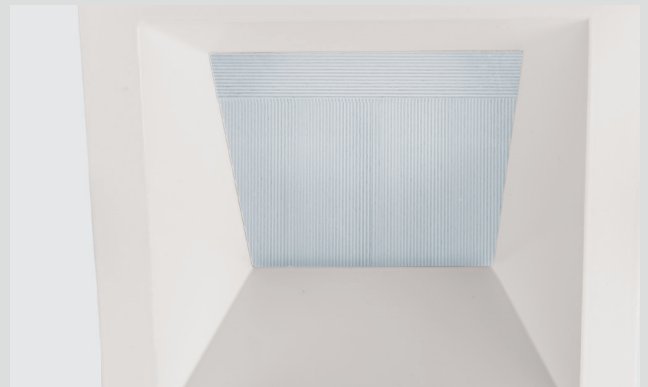

Horizontal spread
Even coverage for
greater fixture spacing

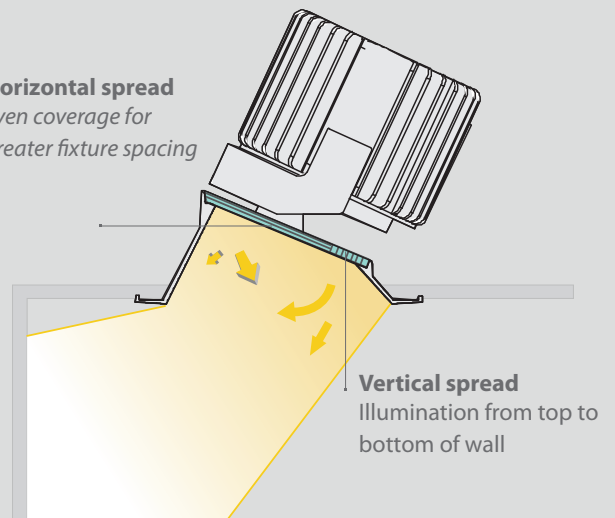

Vertical spread
Illumination from top to
bottom of wall




FIELD CHANGEABLE GLARE CONTROL AND OPTIC SYSTEM

Accessory holder
Holds up to two lenses or
One lens and one glare control



Optical cartridge
Allows tool-less exchange of reflectors

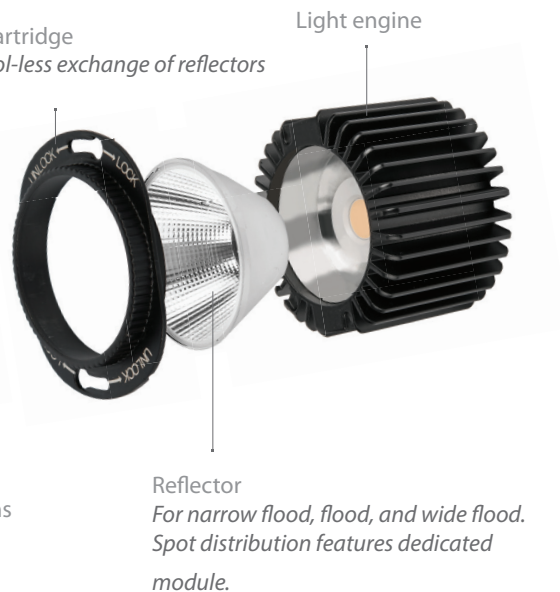

ACCESSORY HOLDER sold separately

LENS-73-HLD Required for use with any lens or accessory

GLARE CONTROL ACCESSORIES

LENS-73	HCL	Honeycomb Louver
	CRL	Cross Louver
	SNOOT	Snoot

LENS ACCESSORIES





LENS-73	AMB	Amber lens
	RED	Red lens
	FR	Frosted lens
	SPR	Spread lens
	BEL	Beam Elongating

INTERCHANGEABLE REFLECTORS

REF-R4-N	Narrow beam reflector
REF-R4-F	Flood beam reflector
REF-R4-W	Wide beam reflector

VOLTA 4.5" ARCHITECTURAL LED RECESSED

Lumens CBCP

TRIM	Model	Beam	@ 36W, 830	Color Temp	CRI	Finishes	Reflector/Trim					
Downlight 	R4RD2T Round Trim	S 15°	Round	1390	12280	BK Charcoal	Charcoal					
			Square	1400	12725							
	R4SD2T Square Trim	N 25°	Round	2695	7980			BKWT Charcoal/White	Charcoal/White			
			Square	2850	7635							
		F 45°	Round	2610	4350			HZ Haze	Haze			
			Square	2785	4295							
	R4RD2L Round Invisible Trim	W 60°	Round	2415	2680	HZWT Haze/White	Haze/White					
			Square	2430	2420							
	R4SD2L Square Invisible Trim						WT White	White				
								BK Charcoal	Charcoal			
						HZ Haze	Haze					
							WT White	White				
Shallow Regressed Downlight 	R4RD1T Round Trim	S 15°	Round	1390	12200	827 2700K 85	85	BK Charcoal	Charcoal			
			Square	1435	12665							
	R4SD1T Square Trim	N 25°	Round	2680	8865					BKWT Charcoal/White	Charcoal/White	
			Square	2800	8555							
		F 45°	Round	2420	4260					HZ Haze	Haze	
			Square	2760	4780							
	R4RD1L Round Invisible Trim	W 60°	Round	2320	2505	HZWT Haze/White	Haze/White					
			Square	2565	2445							
	R4SD1L Square Invisible Trim						WT White	White				
								BK Charcoal	Charcoal			
						HZ Haze	Haze					
							WT White	White				
Adjustable Round shown 	R4RAT Round Trim	S 15°	Round	1250	11865	927 2700K 90	90	BK Charcoal	Charcoal			
			Square	1210	12465							
	R4SAT Square Trim	N 25°	Round	2365	7175					BKWT Charcoal/White	Charcoal/White	
			Square	1650	8310							
		F 45°	Round	2200	3945					HZ Haze	Haze	
			Square	1340	2315							
	R4RAL Round Invisible Trim						HZWT Haze/White	Haze/White				
								WT White	White			
	R4SAL Square Invisible Trim						BK Charcoal	Charcoal				
								HZ Haze	Haze			
						WT White	White					
Wall Wash 	R4RWT Round Trim		Round	1970	1495	930 3000K 85	85	BK Charcoal	Charcoal			
	R4SWT Square Trim	A Asym									BKWT Charcoal/White	Charcoal/White
											HZ Haze	Haze
											HZWT Haze/White	Haze/White
											WT White	White
	R4RWL Round Invisible Trim						BK Charcoal	Charcoal				
							HZ Haze	Haze				
	R4SWL Square Invisible Trim						WT White	White				

Example: R4RAT-S930-BK

PHOTOMETRIC MULTIPLIER TABLE

Photometric data above is representative for 3000K, 85 CRI, 36W housing. Multiplier chart below may be use to determine relative lumen data for additional CRI, color temperature, and wattage offerings.

		CRI and Color Temp					
		827	927	830	930	835	840
Hsg Model	36	0.937	0.764	1.000	0.815	1.045	1.054
	25	0.685	0.558	0.731	0.596	0.764	0.770
	15	0.456	0.371	0.486	0.396	0.508	0.512


WATTAGE TABLE

Spot distribution trim uses dedicated module. Refer to table below for fixture power consumption

		Beam Spread	
		S	A, N, F, W
Hsg Model	36	23W	36W
	25	15W	25W
	15	10W	15W

HOUSING (Required)

New Construction Airtight IC

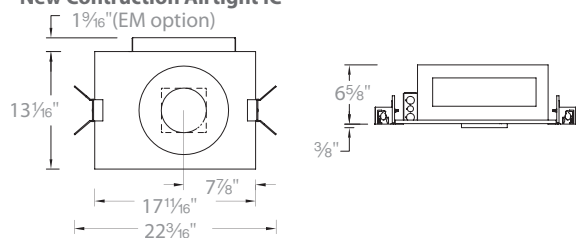

Model

R4RN Round
R4RC Round Chicago Plenum
R4SN Square
R4SC Square Chicago Plenum

Trim

T Trim
L Invisible Trim


Power

15 15W
25 25W
36 36W Non-IC

Emergency Backup

EM Optional

Remodel Non-IC



Model

R4BR

Trim

T Trim

15 15W Non-IC
25 25W Non-IC
36 36W Non-IC

N/A

Example: R4RNT-15 or R4RNT-15EM (with Emergency backup)



COMFORT HAZE

An architectural finish unveiled in our
4.5" Volta and Aether IC-rated LED down light reflectors.

The warm semi specular finish reduces glare at the ceiling plane while delivering uniform,
high performance illumination, optimal beam control and color rendition.


Visual appeal and comfort that will enhance any application.

AETHER 3.5" SHALLOW IC LED DOWNLIGHT


Upgraded universal housing accommodates
all the following trims:

- **Downlight**
- **Wall Wash**
- **Adjustable**
- **Invisible**

- Designed to fit in tight plenum
- Universal input voltage (120V-220V-277V)
- Ceiling thickness 1/2 to 1 1/2"

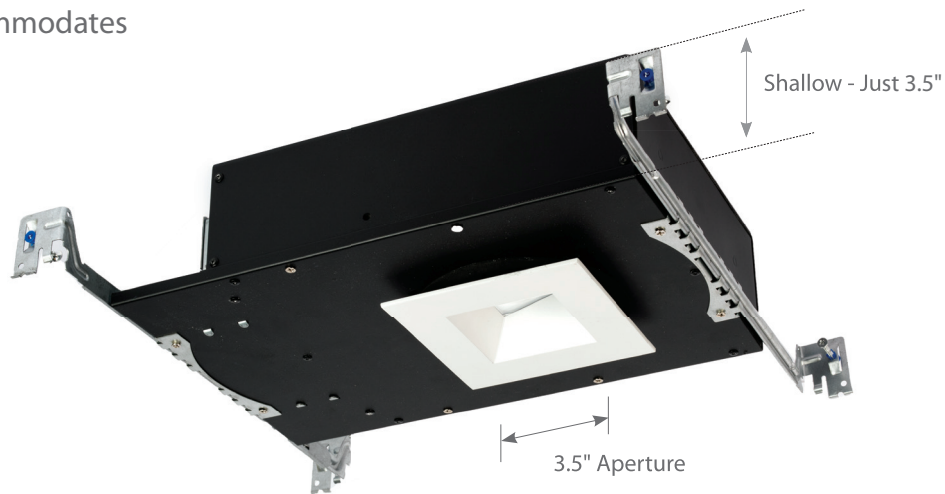

Housing (Order Trim Separately)



Model

HR-3LED-H17A

*New Construction
IC-rated, Airtight*

HR-3LED-H17AC

*New Construction
IC-rated, Airtight
Chicago Plenum*

AETHER 3.5" SHALLOW IC LED DOWNLIGHT

Delivered Lumens: Up to 1335
 Comparable to: 75W MR16
 ELV Dimming: 100%-5% (120V Only)
 0-10V Dimming: 100%-0%
 Input: 120-277V
 Rated Life: 50,000 hours

- 3.5" trim aperture and 3.5" housing height
- 35° cut-off angle for downlight



Trim (Order Housing Separately)

Trim (Order Housing Separately)	Model	Beam	Max CBCP	Max Lumen	Color Temp	CRI	Finish
DOWNLIGHT TRIM 	R3ARDT Round	N 25° F 40°	4775	1335	827 2700K 927 2700K 830 3000K 930 3000K 835 3500K 840 4000K	85 90 85 90 85 85	HZWT Haze/White WT White BKWT Charcoal/White
	R3ASDT Square						
INVISIBLE TRIM™ 	R3ARDL Round	N 25° F 40°	4775	1335	827 2700K 927 2700K 830 3000K 930 3000K 835 3500K 840 4000K	85 90 85 90 85 85	HZ Haze WT White
	R3ASDL Square						
ADJUSTABLE 	R3ARAT Round	S 15° N 25° F 50°	6560	1045	827 2700K 927 2700K 830 3000K 930 3000K 835 3500K 840 4000K	85 90 85 90 85 85	HZWT Haze/White WT White BKWT Charcoal/White
	R3ASAT Square						
WALL WASH 	R3ARWT Round	A Asymmetrical		880	827 2700K 927 2700K 830 3000K 930 3000K 835 3500K 840 4000K	85 90 85 90 85 85	HZWT Haze/White WT White BKWT Charcoal/White
	R3ASWT Square						

Example: **R3ARWT-A930-HZWT**

TUBE ARCHITECTURAL
ULTRA NARROW BEAM WALL MOUNT



TUBE ARCHITECTURAL

ULTRA NARROW BEAM WALL MOUNT

Power:

11W

Delivered Lumens:

Up to 155

CBCP:

Up to 1530

CRI:

85

Dimming:

100% – 10% ELV, 0-10V

Input:

120V - 277V

Rated Life:


80,000 hours

- High performance facade LED wall mount light**
 - IP65 rated, ETL & cETL wet location listed
 - Solid aluminum construction
 - Universal driver (120V-220V-277V)




Single

Double

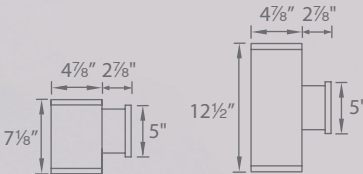








DS-WS05

DS-WD05

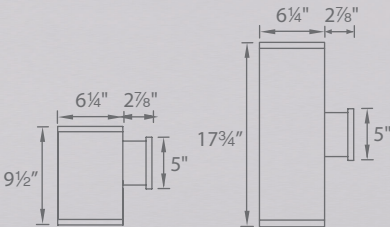

DS-WS06

DS-WD06

Distribution	Diameter	Watt	Max Delivered Lumens	CBCP	Beam	Color Temp	CRI	Light Direction	Finish
Single	DS-WS	05 5"	11W	155	1460	U 6°	27 2700K 85	B Towards the wall 	BK Black  WT White  BZ Bronze  GH Graphite 
		06 6"	11W	135	1530		30 3000K 85		
							35 3500K 85		
							40 4000K 85		
Double	DS-WD	05 5"	22W	155 x 2	1460 x 2	U 6°	27 2700K 85	B Towards the wall 	BK Black  WT White  BZ Bronze  GH Graphite 
		06 6"	22W	135 x 2	1530 x 2		30 3000K 85		
							35 3500K 85		
							40 4000K 85		

Example: DS-WD05-U30B-WT

DISPLAY MONOPOINT SPOT

SILO X10

Power: 10W
Lumen: Up to 790
CBCP: Up to 2575
Comparable: 65W MR16
CRI: 90
Dimming: 100%-5% ELV
Input: 120-277V
Rated Life: 50,000 hours

	Model	Beam	Color Temp	Finish
	MO-2010	25°	930 3000K	BK Black
		AND		WT White
		35°		

Example: MO-2010-930-BK



Accommodates one lens accessory or one glare control accessory

LENS ACCESSORIES

Amber	LENS-11-AMB
Blue	LENS-11-BLU
Green	LENS-11-GRN
Red	LENS-11-RED
Yellow	LENS-11-YEL
Frosted	LENS-11-FR
Spread	LENS-11-SPR
Beam Elongating	LENS-11-BEL

GLARE CONTROL ACCESSORIES

Cross Louver	LENS-11P-CRL-BK LENS-11P-CRL-WT
Snoot	LENS-11-SNOOT-BK LENS-11-SNOOT-WT

EXTENSIONS Sold as a complete unit

X6	6"	MO	2010N930 2010F930	BK WT
X12	12"			
X18	18"			
X24	24"			
X36	36"			

Example: X12-MO2010N930WT

SILO X20

Power: 20W
Lumen: Up to 920
CBCP: Up to 5715
Comparable: 75W MR16
CRI: 90
Dimming: 100%-5% ELV
Input: 120-277V
Rated Life: 50,000 hours

	Model	Color Temp
	MO-2020-930-WT	3000K
	MO-2020-930-BK	
		White Black

Example: MO-2020-930-WT



Accommodates one lens accessory and one glare control accessory

LENS ACCESSORIES

Amber	LENS-16-AMB
Blue	LENS-16-BLU
Green	LENS-16-GRN
Red	LENS-16-RED
Yellow	LENS-16-YEL
Frosted	LENS-16-FR
Spread	LENS-16-SPR
Beam Elongating	LENS-16-BEL

GLARE CONTROL ACCESSORIES

Cross Louver	LENS-16P-CRL-BK LENS-16P-CRL-WT
Snoot	LENS-16-SNOOT-BK LENS-16-SNOOT-WT

EXTENSIONS Sold as a complete unit

X6	6"	MO	2020930	BK WT
X12	12"			
X18	18"			
X24	24"			
X36	36"			

Example: X6-MO2020N930BK

DISPLAY MONOPOINT SPOT

14W EXTERMINATOR II

Power: 14W
Lumen: Up to 980
CBCP: Up to 4585
Comparable: 20W HID
CRI: Up to 90
Dimming: 100%-5% ELV
Input: 120V
Rated Life: 100,000 hours



	Model	Beam	Color Temp	CRI	Finish
	MO-1014	N 20°	827 2700K	85	BK Black WT White
			927 2700K	90	
		F 40°	830 3000K	85	
			930 3000K	90	
			835 3500K	85	
			840 4000K	85	

Example: MO-1014F-830-WT

Accommodates one lens accessory and one glare control accessory

LENS ACCESSORIES

Amber	LENS-11-AMB
Blue	LENS-11-BLU
Green	LENS-11-GRN
Red	LENS-11-RED
Yellow	LENS-11-YEL
Frosted	LENS-11-FR
Spread	LENS-11-SPR
Beam Elongating	LENS-11-BEL

GLARE CONTROL ACCESSORIES

Cross Louver	LENS-11P-CRL-BK LENS-11P-CRL-WT
Snoot	LENS-11-SNOOT-BK LENS-11-SNOOT-WT

REFLECTORS

20°	SL-REF-CXA1310-N
40°	SL-REF-CXA1310-F

EXTENSIONS Sold as a complete unit

Extension	Length	Model	Beam	Color Temp	CRI	Finish
X6	6"	MO1014	N F	827	85	BK WT
X12	12"			927	90	
X18	18"			830	85	
X24	24"			930	90	
X28	28"			835	85	
X36	36"			840	85	

Example: X12-MO1014N930WT

35W EXTERMINATOR II

Power: 35W
Lumen: Up to 2828
CBCP: Up to 9748
Comparable: 50W HID
CRI: Up to 90
Dimming: 100%-5% ELV, 0-10V
Input: 120-277V
Rated Life: 60,000 hours



	Model	Beam	Color Temp	CRI	Finish
	MO-1035	N 25°	827 2700K	85	BK Black WT White
			927 2700K	90	
		F 55°	830 3000K	85	
			930 3000K	90	
			835 3500K	85	
			840 4000K	85	

Example: MO-1035F-930-BK

Accommodates one lens accessory and one glare control accessory

LENS ACCESSORIES

Amber	LENS-20-AMB
Blue	LENS-20-BLU
Green	LENS-20-GRN
Red	LENS-20-RED
Yellow	LENS-20-YEL
Frosted	LENS-20-FR
Spread	LENS-20-SPR
Beam Elongating	LENS-20-BEL

GLARE CONTROL ACCESSORIES

Cross Louver	LENS-20P-CRL-BK LENS-20P-CRL-WT
Snoot	LENS-20-SNOOT-BK LENS-20-SNOOT-WT

REFLECTORS

25°	SL-REF-BL18-N
55°	SL-REF-BL18-F

DISPLAY MONOPOINT SPOT

PALOMA LED512

Power: 11.5W
Lumen: Up to 780
CBCP: Up to 3430
Comparable: 50W MR16
CRI: Up to 90
Dimming: 100%-5% ELV
Input: 120-277V
Rated Life: 50,000 hours



	Model	Beam	Color Temp	CRI	Finish
	MO-LED512	S 19°	827 2700K	85	BK Black WT White
		N 24°	927 2700K	90	
		F 36°	830 3000K	85	
			930 3000K	90	
			835 3500K	85	
			840 4000K	85	

Example: MO-LED512S-927-WT

Accommodates one lens accessory or one glare control accessory

LENS ACCESSORIES

Amber	LENS-16-AMB
Blue	LENS-16-BLU
Green	LENS-16-GRN
Red	LENS-16-RED
Yellow	LENS-16-YEL
Frosted	LENS-16-FR
Spread	LENS-16-SPR
Beam Elongating	LENS-16-BEL

GLARE CONTROL ACCESSORIES

Honeycomb	LENS-16-HCL
Louver	

EXTENSIONS Sold as a complete unit

X	Extension	Model	Beam	Color Temp	Finish
X6	6"	MOLED512	S	827	BK WT
X12	12"		N	927	
X18	18"		F	830	
X24	24"			930	
X36	36"			835	
				840	

Example: X12-MOLED512N930WT

PALOMA LED522

Power: 23.5W
Lumen: Up to 1310
CBCP: Up to 5780
Comparable: 100W Halogen
CRI: Up to 90
Dimming: 100%-5% ELV
Input: 120-277V
Rated Life: 50,000 hours



	Model	Beam	Color Temp	CRI	Finish
	MO-LED522	S 19°	827 2700K	85	BK Black WT White
		N 24°	927 2700K	90	
		F 36°	830 3000K	85	
			930 3000K	90	
			835 3500K	85	
			840 4000K	85	

Example: MO-LED522F-835-BK

Accommodates one lens accessory or one glare control accessory

LENS ACCESSORIES

Amber	LENS-20-AMB
Blue	LENS-20-BLU
Green	LENS-20-GRN
Red	LENS-20-RED
Yellow	LENS-20-YEL
Frosted	LENS-20-FR
Spread	LENS-20-SPR
Beam Elongating	LENS-20-BEL

GLARE CONTROL ACCESSORIES

Honeycomb	LENS-20-HCL
Louver	

EXTENSIONS Sold as a complete unit

X	Extension	Model	Beam	Color Temp	Finish
X6	6"	MOLED522	S	827	BK WT
X12	12"		N	927	
X18	18"		F	830	
X24	24"			930	
X36	36"			835	
				840	

Example: X12-MOLED522S927BK

DISPLAY MONOPOINT SPOT

WALL WASH

Power:	20W
Lumen:	Up to 925
Comparable:	20W HID
CRI:	90
Dimming:	100%-5% ELV
Input:	120V
Rated Life:	50,000 hours



	Model	Color Temp
	MO-3020W-930-WT	3000K
	MO-3020W-930-BK	White Black

Example: MO-3020W-930-WT

IMPULSE

	LED 810	LED 820
Power:	14W	23W
Lumen:	Up to 980	Up to 1390
CBCP:	Up to 4585	Up to 6335
Comparable:	20W HID	35W HID
CRI:	Up to 90	Up to 90
Dimming:	100%-10% ELV	100%-10% ELV
Input:	120V	120V
Rated Life:	60,000 hours	60,000 hours

MO-LED810



MO-LED820



	Model	Beam	Color Temp	CRI	Finish
	MO-LED810	14W	S 20°	827 2700K 927 2700K 830 3000K 930 3000K 835 3500K 840 4000K	85 90 85 90 85 85
	MO-LED820	23W	F 40°		BK Black DB Dark Bronze WT White

Example: MO-LED820F-930-DB

Accommodates one lens accessory and one framing projector or barn door accessory

LENS ACCESSORIES

Amber	LENS-16-AMB
Blue	LENS-16-BLU
Green	LENS-16-GRN
Red	LENS-16-RED
Yellow	LENS-16-YEL
Frosted	LENS-16-FR
Spread	LENS-16-SPR
Beam Elongating	LENS-16-BEL

ACCESSORIES

Framing Projector	008FP-BK 008FP-DB 008FP-WT
Barn Door	801BD-BK 801BD-DB 801BD-WT

EXTENSIONS Sold as a complete unit

X6 6"	MOLED810 MOLED820	S F	827	BK DB WT
X12 12"			927	
X18 18"			830	
X24 24"			930	
X36 36"			835	
			840	


Example: X24-MOLED820S927BK






2" HONEYCOMB LOUVERED INGROUND LANDSCAPE LIGHTING

Input 9-15VAC
Power 4.1W / 6.6VA
Brightness 155 lm
Color Temp 3000K
CRI 85
Beam Angle 25°
Rated Life 70,000 hours

- Integrated honeycomb louver for reduced glare
- Landscape transformer required (sold separately)
- 6' lead wire included for exterior applications
- 30° visual cutoff



		Model	Color Temp	Finishes
 2 1/16"	 3 3/8" 1 7/8"	Slim Round 2012-30SS 2012-30BS	3000K	Stainless Steel Bronzed Stainless Steel
 2 3/4"	 3 3/8" 1 7/8"	2" Round Optional spring clip accessory included 2022-30SS 2022-30BS	3000K	Stainless Steel Bronzed Stainless Steel
 2 3/4"	 3 3/8" 1 7/8"	2" Square Optional Spring Clip accessory included 2052-30SS 2052-30BS	3000K	Stainless Steel Bronzed Stainless Steel

6' lead wire included

		Model	Finishes
		2000-CON-PVC 2" Concrete Pour Kit	For installation in concrete. Use with a 4" outdoor rated junction box and a trade size 2" schedule 80 PVC pipe.

DECK AND PATIO LANDSCAPE LIGHTING




- Landscape transformer required (sold separately)
- 6' lead wire included for exterior applications



3031

Input 9 - 15VAC
Power 2.8W 4.6VA
Brightness 75 lm
CRI 90
Rated Life 50,000 hours

Model

	3031	27	2700	BK	Black on Aluminum	New
		30	3000	BBR	Bronze on Brass	
				BZ	Bronze on Aluminum	
				WT	White on Aluminum	


Example: 3031-30-BK




3011

Input 9 - 15VAC
Power 2.8W 4.6VA
Brightness 60 lm
CRI 90
Rated Life 50,000 hours

Model

	3011	27	2700	BK	Black on Aluminum	New
		30	3000	BBR	Bronze on Brass	
				BZ	Bronze on Aluminum	
				WT	White on Aluminum	


Example: 3011-27-BK

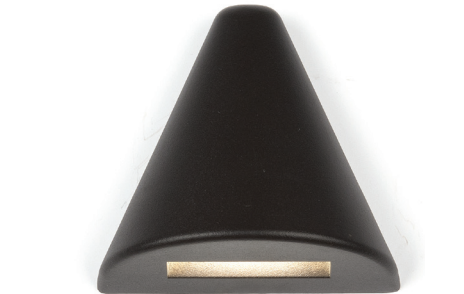

3021

Input 9 - 15VAC
Power 2.8W 4.6VA
Brightness 60 lm
CRI 90
Rated Life 50,000 hours

Model

	3021	27	2700	BK	Black on Aluminum	New
		30	3000	BBR	Bronze on Brass	
				BZ	Bronze on Aluminum	
				WT	White on Aluminum	

Example: 3021-30-BK

STEP LIGHTS LANDSCAPE LIGHTING

- Corrosion resistant aluminum alloy, or cast stainless steel construction
- Fits into 2" x 4" J-Box with minimum inside dimensions of 3" x 2" x 2"
- IP66 rated, Protected against high-pressure water jets
- Constant output for 9V-15V input
- 100 - 10% MLV dimming
- Landscape transformer required (sold separately)
- 6' lead wire included



4011



4021

Input 9 - 15VAC
Power 2W 3.1VA
Brightness Up to 38 lm
CRI 90+
Rated Life 60,000 hours


	Voltage	Model	Color Temp	Finishes
	12V	4011-27	2700K Warm White	BBR Bronze on Brass
		4011-30	3000K Pure White	BZ Bronze on Aluminum
		4011-AM	Amber	BK Black on Aluminum
				WT White on Aluminum
	12V	4021-27	2700K Warm White	SS* Cast Stainless Steel
		4021-30	3000K Pure White	BZ Bronze on Aluminum
		4021-AM	Amber	BK Black on Aluminum
				WT White on Aluminum
				SS* Cast Stainless Steel

Example: 4011-30BK


**Cast Stainless Steel finish is only available in 3000K and Amber Color*

Spacing Recommendations for Optimal Light Distribution


Corridors / Hallways



Stairs - Wall Mount



Stairs - Step Mount



Mount in center of stair as close to the upper tread as possible. For best results use one light per step for steps narrower than 5 feet


DISC DIRECT MOUNT TO JUNCTION BOX



- Dimming:** 100% - 10% ELV


Input: 120V

Rated Life: 35,000 hours
- Energy Star® rated
 - Wet Location Listed
 - CEC Title 24 Compliant
 - ADA compliant
 - Wall or Ceiling Mount
- Translucent acrylic diffuser
 - Multiple LED array for uniform illumination
 - 120VAC - no driver needed

	Model		LED Lumen	Delivered Lumen	CRI	Color Temp	Finish	
	FM-306-930JB-WT	6"	15W	1110	865	90	3000K	White

Accessories now available in white

- Compatible to all 24V indoor INVISILED® Tape family

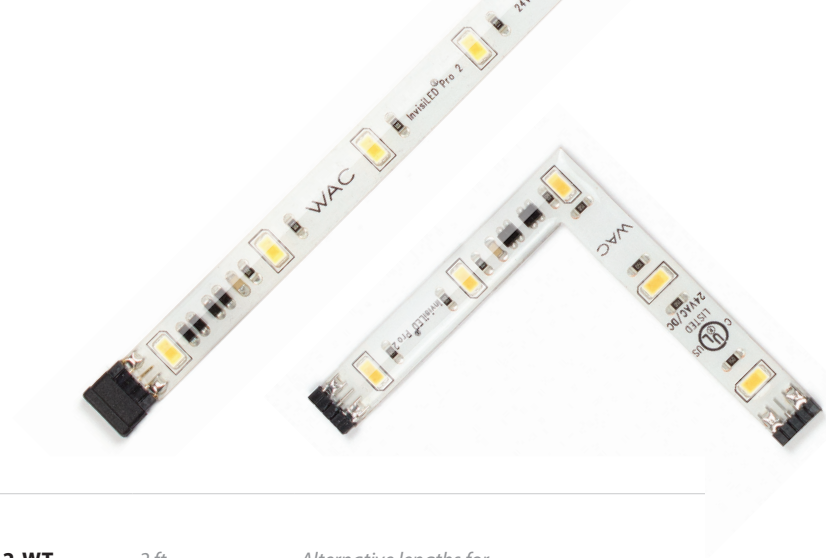

Type		Model		
Lead Wire		LED-TC-P-2-WT LED-TC-P-12-WT	2 ft 12 ft	Alternative lengths for plug-in power supplies
Extension Cable		LED-TC-EXT-144-WT	12 ft	Extends distance between a hard wired power supply or wiring box to a tape section
Low Voltage Wiring Box With Feed		LED-TC-B-2-WT	L: 12 in W: 3/4 in H: 7/8 in	Neatly houses up to two wires with new 12" female feed wire
Joiner Cable		LED-TC-IC2-WT LED-TC-IC6-WT LED-TC-IC12-WT LED-TC-IC36-WT LED-TC-IC72-WT	2 in 6 in 12 in 36 in 72 in	Connects tape sections
3-Way "Y" Connector		LED-TC-Y-WT	Connects tape sections	
4-Way "X" Connector		LED-TC-X-WT	Connects tape sections	
"L" Connector		LED-TC-L-WT	Connects tape sections	
End cap		LED-TC-EC-WT	1 cut end cap 1 male end cap	
Male to male connector		LED-TC-MM	50 Qty	
Clear Channel		LED-TO24-CH5	5 feet Includes mounting hardware	

WAC LIGHTING
Responsible Lighting®

Many LED luminaire designs within contain patent pending features.

WAC Lighting will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe the patents are being infringed upon.

waclighting.com 1-800-526-2588

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. Please refer to our website for the latest product specifications. Copyright 2016